
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

AN159201 THRU AN159500

FSC 5307

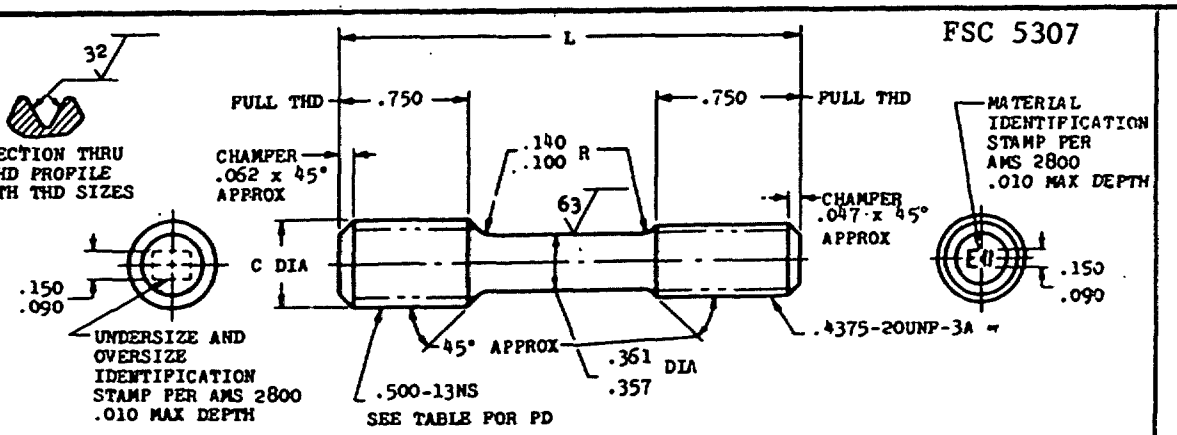

UNDERSIZE AND OVERSIZE IDENTIFICATION	-.003 (-3)	STANDARD	+.003 (3)	+.006 (6)	+.009 (9)	+.012 (12)
C PD BEFORE PLATING PD AFTER PLATING PD LEAD THREAD	.495- .500 .4518-.4528 .4523-.4538 .4450-.4470	.495- .500 .4548-.4558 .4553-.4568 .4480-.4500	.495- .500 .4578-.4588 .4583-.4598 .4510-.4530	.495- .500 .4608-.4618 .4613-.4628 .4540-.4560	.504- .509 .4638-.4648 .4643-.4658 .4570-.4590	.504- .509 .4668-.4678 .4673-.4688 .4600-.4620
L	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
1.750	AN159213	AN159214	AN159215	AN159216	AN159217	AN159218
1.812	AN159219	AN159220	AN159221	AN159222	AN159223	AN159224
1.875	AN159225	AN159226	AN159227	AN159228	AN159229	AN159230
1.938	AN159231	AN159232	AN159233	AN159234	AN159235	AN159236
2.000	AN159237	AN159238	AN159239	AN159240	AN159241	AN159242
2.062	AN159243	AN159244	AN159245	AN159246	AN159247	AN159248
2.125	AN159249	AN159250	AN159251	AN159252	AN159253	AN159254
2.188	AN159255	AN159256	AN159257	AN159258	AN159259	AN159260
2.250	AN159261	AN159262	AN159263	AN159264	AN159265	AN159266
2.312	AN159267	AN159268	AN159269	AN159270	AN159271	AN159272
2.375	AN159273	AN159274	AN159275	AN159276	AN159277	AN159278
2.438	AN159279	AN159280	AN159281	AN159282	AN159283	AN159284
2.500	AN159285	AN159286	AN159287	AN159288	AN159289	AN159290
2.625	AN159291	AN159292	AN159293	AN159294	AN159295	AN159296
2.750	AN159297	AN159298	AN159299	AN159300	AN159301	AN159302
2.875	AN159303	AN159304	AN159305	AN159306	AN159307	AN159308
3.000	AN159309	AN159310	AN159311	AN159312	AN159313	AN159314
3.125	AN159315	AN159316	AN159317	AN159318	AN159319	AN159320
3.250	AN159321	AN159322	AN159323	AN159324	AN159325	AN159326
3.375	AN159327	AN159328	AN159329	AN159330	AN159331	AN159332
3.500	AN159333	AN159334	AN159335	AN159336	AN159337	AN159338
3.625	AN159339	AN159340	AN159341	AN159342	AN159343	AN159344
3.750	AN159345	AN159346	AN159347	AN159348	AN159349	AN159350
3.875	AN159351	AN159352	AN159353	AN159354	AN159355	AN159356
4.000	AN159357	AN159358	AN159359	AN159360	AN159361	AN159362
4.125	AN159363	AN159364	AN159365	AN159366	AN159367	AN159368
4.250	AN159369	AN159370	AN159371	AN159372	AN159373	AN159374
4.375	AN159375	AN159376	AN159377	AN159378	AN159379	AN159380
4.500	AN159381	AN159382	AN159383	AN159384	AN159385	AN159386
4.625	AN159387	AN159388	AN159389	AN159390	AN159391	AN159392
4.750	AN159393	AN159394	AN159395	AN159396	AN159397	AN159398
4.875	AN159399	AN159400	AN159401	AN159402	AN159403	AN159404
5.000	AN159405	AN159406	AN159407	AN159408	AN159409	AN159410
5.125	AN159411	AN159412	AN159413	AN159414	AN159415	AN159416
5.250	AN159417	AN159418	AN159419	AN159420	AN159421	AN159422

NOTE: PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR.
MATERIAL: STEEL AMS 6322 (AMS 6320 MATERIAL MAY ALSO BE USED FOR THIS PART UNTIL JANUARY 1, 1957).
HARDNESS: ROCKWELL C26-32.
FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
SURFACE ROUGHNESS: AS 107.
MANUFACTURING SPECIFICATION: AMS 7456. PARTS SUBJECT TO MAGNETIC INSPECTION PER AMS 2640.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010.

(2) INACTIVE FOR DESIGN AFTER 26 OCTOBER 1972. NO SUPERSEDING STANDARD.

DO NOT USE UNASSIGNED PART NUMBERS. (3) CANCELED AS OF 9 OCT 87

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED May 25 REVISED (1) 25 Mar 55 (2) 26 Oct 72 (3) 9 OCT 87

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN159201 THRU AN159500
NONE	STUD-STEPPED, NECKED, 1.5 DIA ENGAGEMENT, .500-13 x .4375-20	

E-25-121

PROJECT 5307-0394

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:28Z
Check the source to verify that this is the current version before use.