
NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

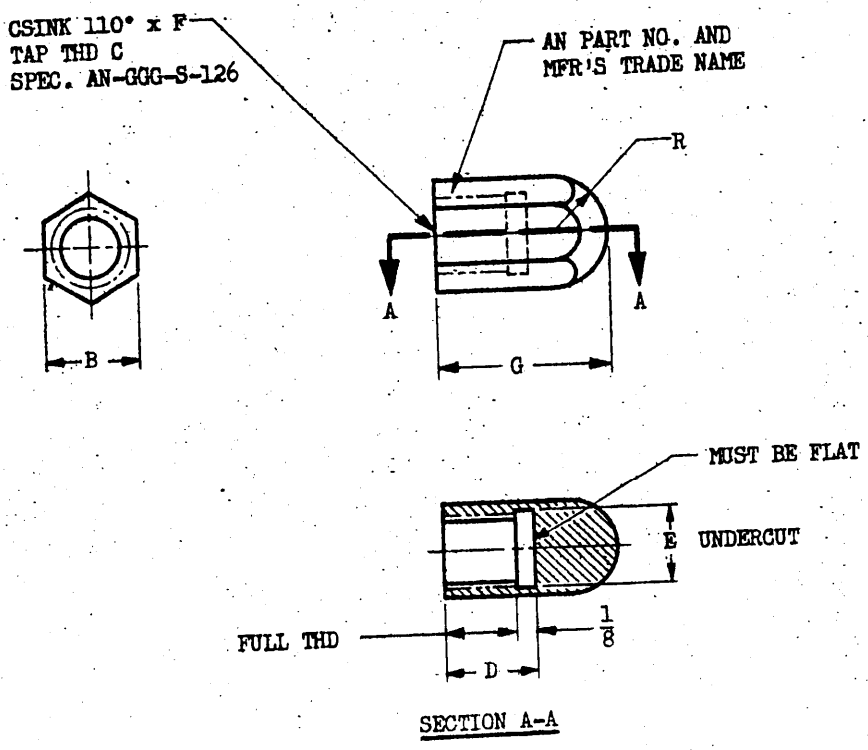

SECTION A-A

AN PART NO.	B	THREAD C	D	E DIA	F DIA	G	R SPHER RAD APPROX
AN8510-3	3/8	NO. 10-32 NF-2	25/64	7/32	13/64	13/16	7/32
AN8510-4	3/8	1/4 -28 NF-2	27/64	9/32	1/4	15/16	7/32
AN8510-5	7/16	5/16-24 NF-2	29/64	11/32	5/16	15/16	1/4
AN8510-6	1/2	3/8 -24 NF-2	31/64	13/32	3/8	1	9/32
AN8510-7	9/16	7/16-20 NF-2	31/64	15/32	7/16	1	21/64
~~AN8510-8~~	~~5/8~~	~~(2) 1/2 -18 NS-2~~	~~19/32~~	~~17/32~~	~~1/2~~	~~1- 1/8~~	~~23/64~~
(2)(a) AN8510-8a	5/8	1/2 -20 NF-2	17/32	17/32	1/2	1- 1/8	23/64
(2)(a) AN8510-9	11/16	9/16-18 NF-2	19/32	19/32	9/16	1- 1/8	25/64
AN8510-12	7/8	3/4 -16 NF-2	43/64	25/32	3/4	1- 5/16	1/2
AN8510-14	1	7/8 -14 NF-2	47/64	29/32	7/8	1- 3/8	37/64

(2) (a) PART NO. AN8510-8 INACTIVE FOR NEW DESIGN AND IS NOT INTERCHANGEABLE WITH AN8510-8a.

MATERIAL: STEEL, SPEC. AN-S-16.
HEAT TREAT: HEAT TREAT 180,000 TO 200,000 PSI TENSILE STRENGTH IN ACCORDANCE WITH SPEC. AN-QQ-H-201.
FINISH: CADMIUM OR ZINC PLATE IN ACCORDANCE WITH SPECS. AN-P-61 OR AN-P-32, RESPECTIVELY, OR AS OTHERWISE SPECIFIED.
BREAK SHARP EDGES .010 MAX.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64.

NOTE: This drawing was approved by Joint action of the War and Navy Departments as an Army-Navy standard for this product. This drawing supersedes all existent standard drawings for the same product and shall become effective after the latest date of approval shown. It may be put into effect, however, at an earlier date after promulgation.

PROCUREMENT SPECIFICATION	ARMY-NAVY AERONAUTICAL STANDARD	AN8510
NONE	KNOCKOUT - THREADED TAPER PIN	

APPROVED 21 Oct 44 REVISED (1) 19 Feb 45 (2) 24 Feb 47

SUPERSEDES AAF DRAWINGS 44A19828, 44A19829, 44A5550, 44A5551, 44A5552, 44A5553,

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:23Z
Check the source to verify that this is the current version before use.