
FED SUP CLASS
4730

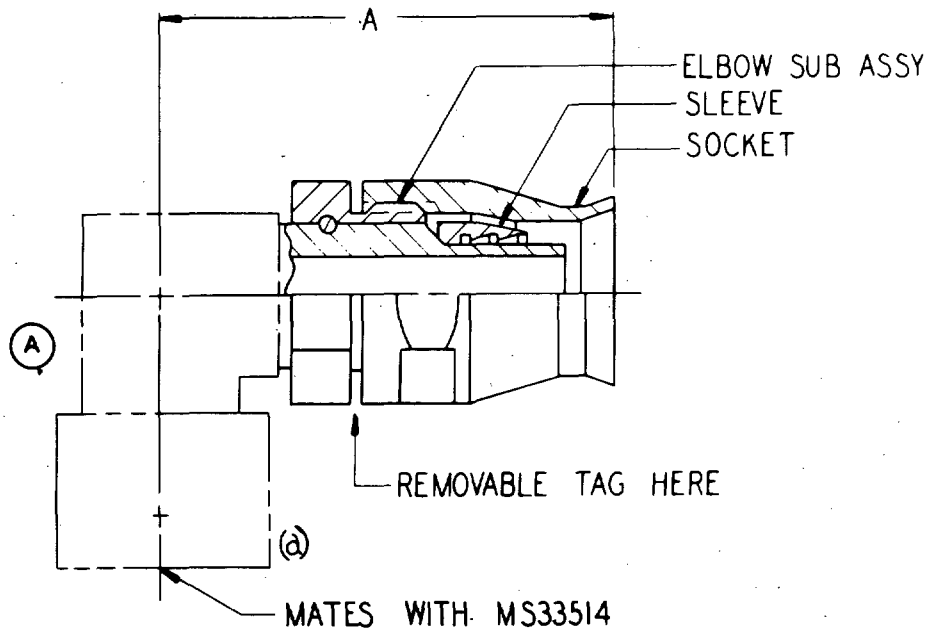

MS PART NO.	ELBOW SUB ASSEMBLY	SLEEVE	SOCKET	A MAX
(b) (A) MS27385-3/-4C	MS27390-3/-4C	MS27070-4C	MS27069-4C	1.54
MS27385-4C	MS27390-4C			
MS27385-5C	MS27390-5C	MS27070-5C	MS27069-5C	1.63
MS27385-6C	MS27390-6C	MS27070-6C	MS27069-6C	1.71
MS27385-8C	MS27390-8C	MS27070-8C	MS27069-8C	2.09
MS27385-8	MS27390-8			

THE MS PART NUMBER AND MANUFACTURER'S PART NUMBER SHALL BE MARKED ON A REMOVABLE TAG SECURELY ATTACHED TO THE FITTING.

MATERIAL: SUFFIX "C": CORROSION RESISTING STEEL. NO SUFFIX: COMBINATION OF ALUMINUM ALLOY AND CORROSION RESISTING STEEL. SEE MS STANDARDS LISTED ABOVE FOR MATERIAL SPECIFICATIONS.

THESE PARTS ARE FOR USE WITH MIL-H-27267 HOSE.

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON THE DATE OF INVITATION FOR BID.

(a) IF REQUIRED, LOCKWIRE HOLES TO BE DRILLED IN ACCORDANCE WITH AS1043 AND SUFFIX "L" ADDED TO PART NUMBER. EXAMPLE: MS27385-8CL

(b) SWIVEL NUT AND SEALING SURFACE OF ELBOW SHALL MATE WITH MS33514-3 FITTING. THE REMAINING PORTION OF THE ASSEMBLY SHALL MATE WITH MIL-H-27267-4 HOSE.

(A) "A" IS THE DIMENSION BETWEEN THE HOSE END OF THE SOCKET AND THE CENTERLINE OF THE INSER WHEN THE SOCKET IS ASSEMBLED ON ON THE NIPPLE.

APPROVED 2 May 66 REVISED (A) 30 Jun 72

NOTE: The Government has a royalty free license under the following listed patents for the benefit of Manufacturers of the item either for the Government or for use in equipment to be delivered to the Government. (U.S. Patent Nos. 2,833,567; 3,044,163; 3,055,682)

User Activities: Army-WC, ME, MI

Activities: Army-AV Navy-AS Air Force-82

Air Force-11 (A) Army-AV Navy-AS	ADAPTER ASSEMBLY, FLARELESS, 90° FORGED ELBOW, TUBE TO HOSE-WITH SWIVEL NUT	MILITARY STANDARD MS27385
Preparing Specification MIL-F-27272	SUPERSEDES	SHEET 1 OF 1

DD FORM 672

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:22Z
Check the source to verify that this is the current version before use.

DRAWN BY _____ DATE _____