MILITARY SPECIFICATION

COVER, MATTRESS PAD

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a cotton duck cover for a mattress pad to be used with an adjustable, field-hospital folding bed.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-T-276	- Thread, Cotton.
V-T-285	- Thread, Polyester.
CCC-C-419	- Cloth, Duck, Cotton, Unbleached, Plied-yarns, Army and numbered.
CCC-D-950	- Dyeing and Aftertreating Processes for Cotton Cloth.
PPP-B-636	- Boxes, Shipping, Fiberboard.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Headquarters, Defense Personnel Support Center, ATTN: Directorate of Medical Materiel, DPSC-ATT, 2800 South 20th Street, Philadelphia, PA 19101, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:23Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-W-530 - Webbing, Textile, Cotton, General Purpose, Natural or in Colors.
MIL-T-3530 - Thread and Twine, Mildew Resistant or Water Repellent Treated.

STANDARDS

FEDERAL

FED-STD-NO. 751 - Stitches, Seams, and Stitching

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.

MIL-STD-129 - Marking for Shipment and Storage.

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3 REQUIREMENTS

3.1 First article. When specified in the procurement document, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.1.2.1 and 6.2).

3.2 Materials

3.2.1 Cotton duck. Cotton duck shall be 9.85 ounces per square yard, pre-shrunk, conforming to CCC-C-419, type III, vat dyed C.D. No. 7, treated for water repellency and for mildew resistance by 2,2' methylene-bis-(4-chlorophenol) or by copper 8-quinolinolate in accordance with CCC-D-950, type I, class B.

3.2.2 Webbing. Webbing shall be 2 inches in width and shall conform to MIL-W-530, type II or IIb, class 4 or 7, dyed C.D. No. 7.

3.2.3 Thread. Thread shall be cotton, conforming to V-T-276, type IA3 or IB3, 4-ply, Ticket No. 12, dyed C.D. Shade S-1. Cotton thread shall be mildew-resistant treated in accordance with type I, class 1 of MIL-T-3530. As an alternate, polyester thread, conforming to V-T-285, type I, class 1, size FF, C.D. Shade S-1, may be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:23Z
Check the source to verify that this is the current version before use.

3.3 Design and construction. The cover shall be constructed of cotton duck and cotton webbing. It shall be in accordance with figure 1 and as specified herein. Warp shall be parallel to long axis.

3.3.1 Stitching. Stitching shall be type 301 or type 401 of FED-STD-751. There shall be 7 to 9 stitches per inch. Any break shall be backstitched at least 1/2 inch, and each end shall be backstitched at least 1/4 inch.

3.3.2 Edges. Ends of webbing shall be dipped in, or sprayed with, clear lacquer, resin, or plastic.

3.4 Identification marking. Each cover shall have the following information marked upon it in clear and legible letters at least 1/8 inch high. Marking shall be on the underside of the cover, and shall be done with dark indelible ink or stencil paint.

Contract or purchase order number.
Name or registered trademark of manufacturer
National Stock Number.

3.5 Workmanship. Workmanship shall be first class throughout. Cover shall be free from defects which detract from its appearance or which impair its serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government, upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of three years after delivery of the supplies to which such records relate.

4.1.2 Inspection. Inspection, as used in this specification, is defined as both examination (such as visual and auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:23Z
Check the source to verify that this is the current version before use.

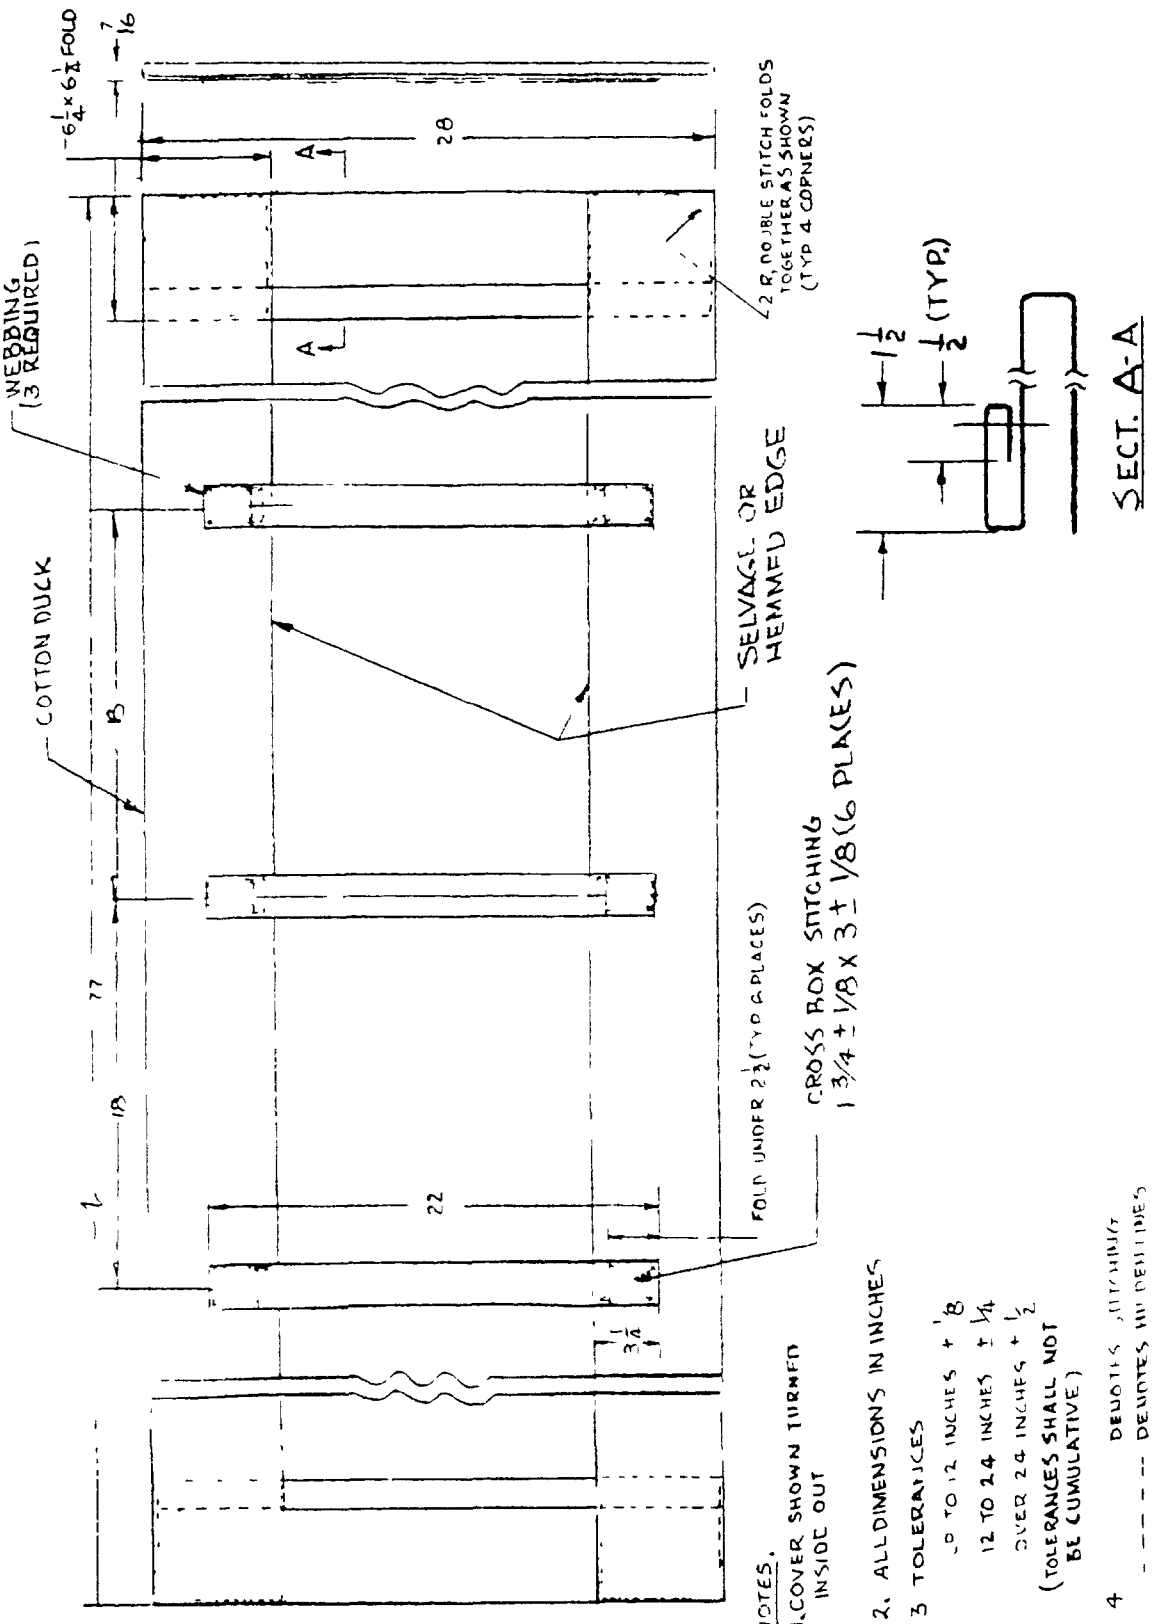


FIGURE 1. Cover, mattress pad.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:23Z
Check the source to verify that this is the current version before use.

4.1.2.1 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection.
b. Quality conformance inspection.

4.1.2.1.1 First article inspection. First article inspection shall be performed on the cover when a first article sample is required (see 3.1). This inspection shall include examination of 4.4 and tests of 4.6.

4.1.2.1.2 Quality conformance inspection. Quality conformance inspection shall include the examination of 4.4 and tests of 4.6.

4.1.3 Certificates of quality. Certificates of quality, supplied by the manufacturer of the materials may be furnished in lieu of actual performance of such testing by the contractor, provided lot identity has been maintained and can be demonstrated to the Government. The certificate shall include the name of the contractor, the contract number, the name of the manufacturer or supplier, the NSN, the Item Identification, the name of the component/material, the lot number, the lot size, the sample size, the date of testing, the test method, individual test results, and the specification requirements.

4.2 Inspection lot.

4.2.1 Raw materials. An inspection lot for raw material inspection shall be all material produced under the same conditions and controlled to the degree that uniformity of product within the designated lot can be assured. Lot identification of the raw material by the manufacturer is one method of control, as cited above, which is considered acceptable.

4.2.2 End product. An inspection lot for inspection of end product shall consist of all covers of the same type produced under essentially the same conditions and offered for inspection at one time.

4.3 Sampling.

4.3.1 For examination. Sampling for examination shall be conducted in accordance with MIL-STD-105, and table I. The unit of product for sampling purposes shall be one cover.

TABLE I. Sampling for examination.

	Inspection level	AQL (percent defective)
For visual examination		
Major defects	II	4.0
Total defects (Major and Minor combined)	II	10.0
For dimensional examination	S-2	4.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:23Z
Check the source to verify that this is the current version before use.

4.3.2 For tests. Sampling for tests shall be conducted in accordance with the specifications referenced in 3.2.1, 3.2.2 and 3.2 3 and with table II.

TABLE II. Sampling for tests.

Component (unit of product)	Require-ment	Test procedure
Cotton duck	3.2.1	4.6
Webbing	3.2.2	4.6
Thread	3.2.3	4.6

4.4 Examination. The cover shall be examined to determine compliance with all requirements contained in this specification

4.4 1 Classification of defects. Examination shall be conducted in accordance with the classification of defects listed in table III. Examination shall not be restricted to the classified possible defects listed below.

TABLE III Classification of defects

Categories	Defects
Major:	
101	Cover has cut, tear, hole, or rupture.
102	Any edge not selvage or hemmed as specified.
103	Stitching not the type specified
104	Stitching not backstitched at least 1/2 inch at each break
105	Stitching not backstitched at least 1/4 inch at each end
106	Any material not as specified
107	Cover not constructed so that warp runs parallel to the long axis
Minor:	
201	Cover has dirt, oil, grease, or other foreign matter
202	Identification not correct complete legible or permanent
203	Identification not located on underside of cover
204	Less than 7 stitches per inch
205	Turnunders, seams and stitch lines not straight, or evenly spaced.
206	Cover not free of loose or ravelled edges.

4.4.2 Dimensional examination The cover shall be examined for defects in dimensions. Any dimension not within the tolerances specified herein shall be classified as a defect

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:23Z
Check the source to verify that this is the current version before use.

4.5 Packaging inspection. The inspection of the unit packaging, packing and marking for shipment and storage shall be in accordance with quality assurance provisions of the applicable container specification and the marking requirements of MIL-STD-129.

4.6 Tests. Tests shall be conducted, as necessary, to determine compliance with specification requirements.

5. PACKAGING

5.1 Packaging. Packaging shall be level A or C, as specified (see 6.2).

5.1.1 Unit of issue. One cover, as specified, constitutes one unit of issue.

5.1.2 Level A.

5.1.2.1 Unit packaging. Each cover shall be clean, dry and neatly folded and inserted into a clear polyethylene bag having a minimum thickness of .003 inch. Closure of the bag may be effected by heat sealing.

5.1.3 Level C Each cover shall be clean, dry, neatly folded and packaged in a manner that will afford adequate protection against deterioration and physical damage during shipment from the supply source to the first receiving activity

5.2 Packing. Packing shall be level A, B or C, as specified (see 6.2)

5.2.1 Level A. Four unit packages shall be packed in an exterior container designed for a type 2 load and conforming to PPP-B-636, class weather-resistant. Closure, strapping and waterproofing shall be as specified in the appendix of the box specification.

5.2.2 Level B Four unit packages shall be packed in an exterior container designed for a type 2 load and conforming to PPP-B-636, class domestic. Closure shall be as specified in the appendix of the box specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:23Z
Check the source to verify that this is the current version before use.

5.2.3 Level C. The packaged covers shall be packed in shipping containers in a manner that will afford adequate protection against physical damage during direct shipment from the supply source to the first receiving activity. These packs shall conform to the applicable carrier's rules and regulations.

5.3 Marking. Each unit package and exterior container shall be marked as specified in MIL-STD-129.

6. NOTES

6.1 Intended use. This cover is intended for use with adjustable field hospital folding beds NSN 6530-00-935-4184 and NSN 6530-01-015-5189 and Mattress Pad NSN 7210-00-118-0009.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents

a. Title, number and date of this specification
b. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
c. When a first article is required (see 3.1, 4.1.2.1 and 6.3)

6.3 First article. When a first article is required, it shall be tested and approved under the appropriate provisions of the Armed Services Procurement Regulations. The contract or purchase order specifies the quantity, procedure for delivery and other specific instructions for inspection and approval of the first article.

6.4 This specification covers the following item appearing in the Federal Supply Catalog:

National Stock Number	Item Identification
7210-00-118-0010	COVER, MATTRESS PAD, Cotton Duck, 28 by 77 inches.

Custodians
Army - MD
Navy - MS
Air Force - 02

Preparing activity
DLA-DM

Project No. 7210-0225

Review activity:
DoD - MB

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:23Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No 22 R255

INSTRUCTIONS The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay or will otherwise enhance use of the document DoD contractors government activities, or manufacturers vendors who are prospective suppliers of the product are invited to submit comments to the government Fold on lines on reverse side staple in corner and send to preparing activity Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements Attach any pertinent data which may be of use in improving this document If there are additional papers attach to form and place both in an envelope addressed to preparing activity

DOCUMENT IDENTIFIER AND TITLE
MIL-C-37734 COVER, MATTRESS PAD

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3 IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO (If "Yes" in what way?

4 REMARKS

SUBMITTED BY (Printed or typed name and address Optional)

TELEPHONE NO

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

GPO 1974— 603 680 6126 2 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:23Z
Check the source to verify that this is the current version before use.

FOLD

DEFENSE PERSONNEL SUPPORT CENTER
2800 SOUTH 20TH STREET
PHILADELPHIA, PA 19101

POSTAGE AND FEES PAID
DEFENSE SUPPLY AGENCY
DoD 304

U.S. MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

HEADQUARTERS, DEFENSE PERSONNEL SUPPORT CENTER
ATTN: DIRECTORATE OF MEDICAL MATERIEL, CODE ATT
2800 SOUTH 20TH STREET
PHILADELPHIA, PA. 19101

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:23Z
Check the source to verify that this is the current version before use.