
INCH-POUND
MIL-C-28754/54A
25 October 1988
SUPERSEDING
MIL-C-28754/54
13 December 1982

MILITARY SPECIFICATION SHEET

EXTRACTOR, ELECTRICAL CARD MODULE, SINGLE AND DOUBLE SPAN STYLES I AND II

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation: MIL-C-28754.

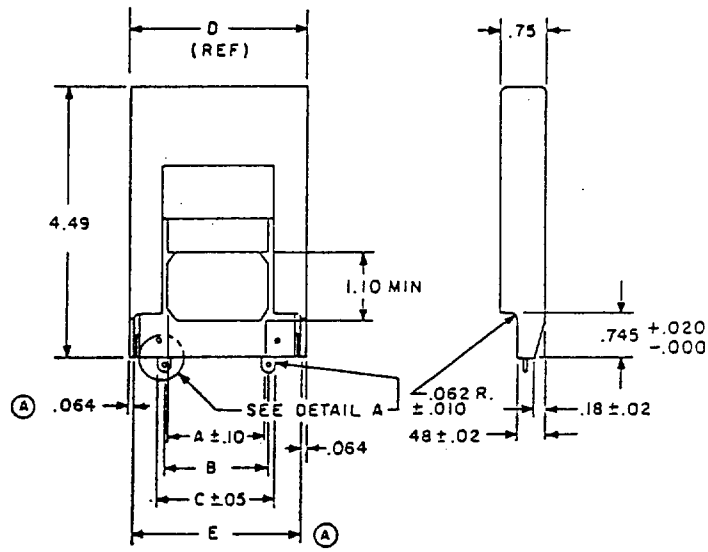

Dimensions	Single span -01	Double span -02
A	1.75	4.75
B	1.890	4.890
C	2.27	5.27
D (REF)	3.12	6.12
Ⓐ E	2.96	5.96

SH 13231887


FIGURE 1. Module extractor (type 1A).

Ⓐ denotes change


AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:46Z
Check the source to verify that this is the current version before use.

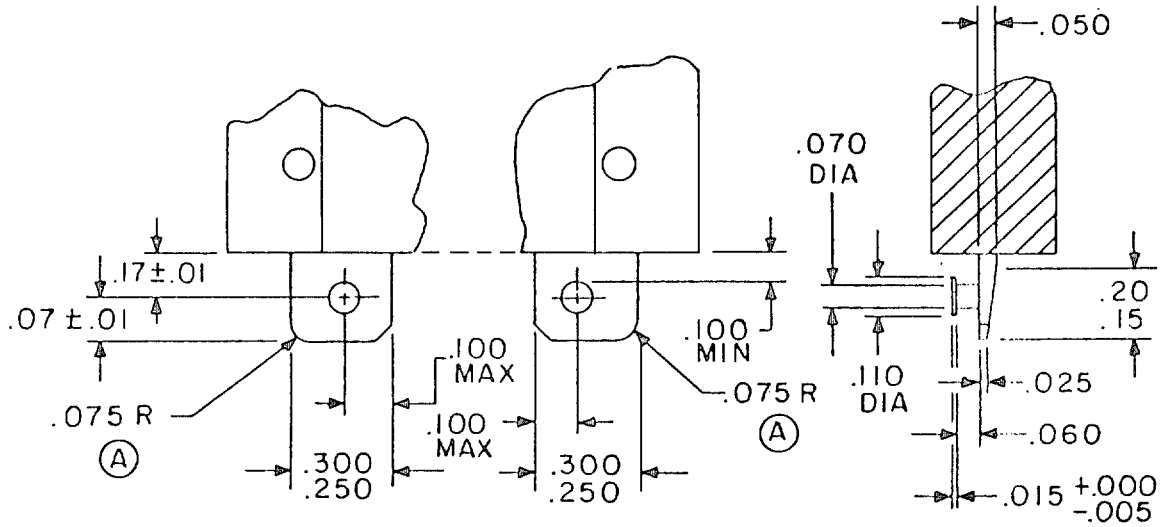

DETAIL A

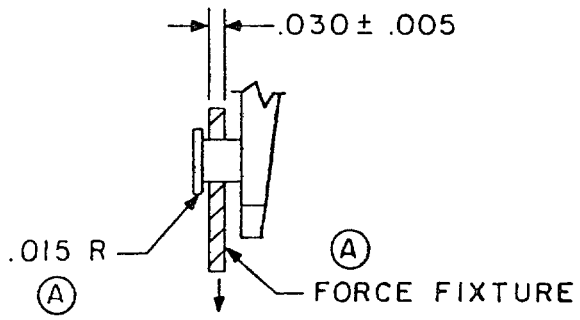

60 LB MIN


Inches	mm	Inches	mm	Inches	mm
0.005	0.13	0.100	2.54	1.75	44.45
.010	0.25	.110	2.79	1.89	48.01
.015	0.38	.15	3.81	2.27	57.66
.02	0.51	.17	4.32	2.96	75.18
.025	0.61	.18	4.57	3.12	79.25
.030	0.76	.20	5.08	4.75	114.05
.050	1.27	.250	6.35	4.89	120.65
.060	1.52	.300	7.62	5.27	124.21
.062	1.57	.48	12.19	5.96	133.86
.064	1.63	.745	18.92	6.12	155.45
.070	1.78	1.10	27.94		
.075	1.91				

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is plus or minus 0.010 for three place decimals, plus or minus 0.030 for two place decimals.

FIGURE 1. Module extractor (type 1A) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:46Z
Check the source to verify that this is the current version before use.

TYPICAL DURABILITY FIXTURE

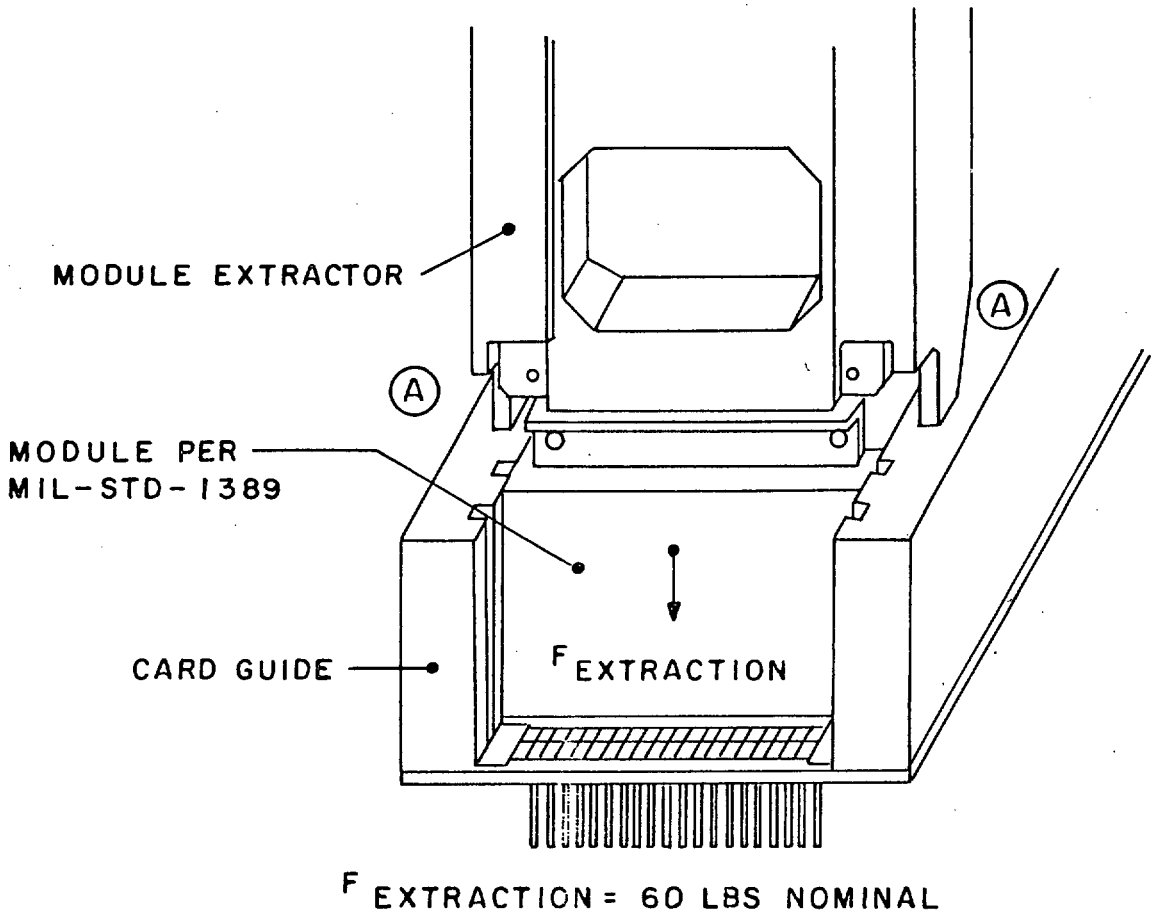

SH 13231888

FIGURE 2. Typical durability fixture.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:46Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration: See figure 1.

(A) Extractor pins: Extractor shall return to the extended position by means of one or more springs.

Material:

Body: Polycarbonate, gray.

(A) Spring: Steel or equivalent.

(A) Extractor pins: 303 stainless steel in accordance with ASTM A 582.

(A) Plate material: 304 stainless steel in accordance with ASTM A 240.

Marking: Part number to be molded in or supplied as raised marking in 0.12 inch (approximate) high characters.

Extraction travel: 0.75 inch minimum.

Structural integrity: Individual module extractor pins and plate shall withstand a 60 pound load applied in accordance with figure 1. There shall be no evidence of damage or deterioration that will affect its normal operation.

Durability: The extractor shall meet the following durability requirements:

(A) (a) The extractor shall meet all dimensional requirements and there shall be no evidence of damage or deterioration that will affect its normal operation after 500 extraction cycles in an appropriate fixture similar to figure 2 that provides a 30 $\pm$ 2 pound force per module extraction pin.
(b) The module configuration shall be in accordance with MIL-STD-1389.

Corrosion: The extractor shall show no evidence of corrosion, blistering, deterioration, and so forth, indicative of poor plating when exposed to test method 101 of MIL-STD-202, test condition B. The corrosion test shall be done on a sample not submitted to the durability test.

(A) Qualification: Two samples of M28754/54-01 and M28754/54-02 shall be subjected to visual and mechanical examination (including marking and extraction travel), structural integrity, durability and corrosion tests. To retain qualification, the test shall be repeated every 12 months.

Military part number: M28754/54 (dash number from table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:46Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers.

Dash no.	Span	Supersedes
-01	Single	MIL-C-28754/26-01
-02	Double	MIL-C-28754/27-01

(A) Operation: Operating instructions shall be packed with each extractor.

Custodians:
Army - CR
Navy - SH
Air Force - 85

Review activities:
Navy - MC
Air Force - 11, 99
DLA - ES

User activities:
Army - AR, MI
Navy - AS, YD

Preparing activity:
Navy - SH

Agent:
DLA - ES

(Project 5935-3540)

☆U.S. GOVERNMENT PRINTING OFFICE: 1989 - 604-033/10885

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:46Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-28754/54A	Extractor, Electrical Card Module, Single And Double Span Styles I And II

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:46Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

COMMANDER
NAVAL SEA SYSTEMS COMMAND (SEA 55Z3)
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20362

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL SEA SYSTEMS COMMAND (SEA 55Z3)
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20362

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:46Z
Check the source to verify that this is the current version before use.