This document has been approved for public release and sale; its distribution is unlimited.

MIL-STD-102B
1 September 1970
SUPERSEDING
MIL-STD-102A
1 May 1955

MILITARY STANDARD

ANTI-FRICTION BEARING IDENTIFICATION CODE

FSC 3110

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF DEFENSE

WASHINGTON, D.C. 20301

Anti-Friction Bearing Identification Code
MIL-STD-102B

1. This Military Standard is mandatory for use by all Departments and Agencies of the Department of Defense.

2. Recommended corrections, additions or deletions should be addressed to the Naval Ship Engineering Center, Center Building, Prince George's Center, Hyattsville, Maryland 20782.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

FOREWARD

1. This standard is comprised of 10 groups as follows:

Group 0 - Miniature and Instrument Ball Bearings.
1 - Annular Ball Bearings
2 - Cylindrical and Self Aligning Roller Bearings
3 - Journal and Needle Roller Bearings
4 - Pure Thrust Bearings
5 - Aircraft Control and Pulley Bearings
6 - Industrial Power Transmission Ball and Roller Bearings; and Mounted Units Complete with Bearings
7 - Tapered Roller Bearings
8 - General Purpose Unground and Ground Non-Precision Bearings
9 - Special Items

2. The page numbers of this standard will run consecutively with group preceding page number; for example, 2-75, means group 2, page 75 of standard.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CONTENTS

Paragraph			Page
	1.	SCOPE	1
	2.	REFERENCED DOCUMENTS	1
	3.	STRUCTURE OF SYSTEM	1
	3.1	Composition of number	1
	3.1.1	First section	1
	3.1.2	Second section	1
	3.1.3	Third section	1
	3.1.4	References	1
	4.	OVERALL NUMBERING SYSTEM	2
	4.1	How the numbers work.	2
	4.2	Application	2
	4.3	Interpretation	2
		GROUP 0	
	1.	SCOPE	0-3
	2.	REFERENCED DOCUMENTS	0-3
	3.	NUMBER STRUCTURE	0-3
	3.1	Digit positions	0-3
	4.	CLASSIFICATION	0-3
	4.1	Miniature bearings.	0-3
	4.2	Instrument bearings	0-3
	4.3	Bore sizes	0-4
	5.	GROUP AND TYPE CODES	0-4
	5.1	Digit positions	0-4
	5.2	Group code	0-4
	5.3	Type code	0-4
	5.3.1	Single row radial types	0-4
	5.3.4	Pivot bearings	0-5
	6.	BORE SIZE - O.D. AND WIDTH CODE (EXCLUDES PIVOT BEARINGS (SEE SECTION 8)).	0-6
	6.1	Digit positions	0-6
	6.2	Bore size (4,5 and 6th positions)	0-6
	6.2.1	Metric	0-6
	6.2.2	Decimal	0-6
	6.3	O.D. and width code (7 and 8th positions)	0-6
	6.3.1	Application	0-6
	6.3.2	Interpretation of O.D. and width code	0-7
	7.	VARIATIONS OF THE GROUP 0 BASE BEARING NUMBER (EXCLUDES PIVOT BEARINGS - SEE SECTION 9)	0-7
	7.1	Digit positions	0-7
	7.2	Additional variations	0-7
	7.2.1	Significant codes	0-7
	7.2.2	Special codes	0-7
	8.	O.D., PIVOT AND WIDTH CODE	0-7
	8.1	Digit position	0-7
	8.2	O.D. (4, 5 and 6th positions)	0-7
	8.3	Pivot and width code (7 and 8th positions)	0-7
	8.3.1	Flanged pivot diameter	0-8
	8.3.3	Application	0-8
	8.3.4	Interpretation of pivot and width code	0-8
	9.	VARIATIONS OF THE GROUP 0 BASE BEARING NUMBER FOR PIVOT BEARINGS	0-8
	9.1	Digit positions	0-8
	9.2	Additional variations	0-8
	9.2.1	Significant codes	0-8
	9.2.2	Special codes	0-8
	10.	BOUNDARY DIMENSION TABLES	0-9
	10.1	Use	0-9
	10.2	Internal fit up	0-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CONTENTS (Cont'd)

		Page
	GROUP 1	
1.	SCOPE	1-25
2.	REFERENCED DOCUMENTS	1-25
3.	NUMBER STRUCTURE	1-25
3.1	Digit positions	1-25
4.	CLASSIFICATION	1-25
4.1	Standard tolerances	1-25
4.2	Standard values	1-25
5.	GROUP AND TYPE CODES	1-25
5.1	Digit positions	1-25
5.2	Group code	1-25
5.3	Type code	1-26
5.3.1	Single row radial types	1-26
5.3.2	Self-aligning types	1-26
6.	BORE SIZE - O.D. AND WIDTH CODE	1-27
6.1	Digit positions	1-27
6.2	Bore size (4, 5 and 6th positions)	1-27
6.2.1	Metric	1-27
6.2.2	Inch	1-27
6.3	O.D. and width code (7 and 8th positions)	1-28
6.3.1	Application	1-28
6.3.2	Interpretation of O.D. and width code	1-28
7.	VARIATIONS OF THE GROUP 1 BASE BEARING NUMBER	1-28
7.1	Digit position	1-28
7.2	Additional variations	1-28
7.2.1	Significant codes	1-28
7.2.2	Special codes	1-28
8.	BOUNDARY DIMENSION TABLES	1-28
8.1	Use	1-28 and 1-29
8.2	Internal fit up	1-29
8.2.1	Standard	1-29
8.2.2	Loose	1-29
8.2.3	Tight	1-29
	GROUP 2	
1.	SCOPE	2-73
2.	REFERENCED DOCUMENTS	2-73
3.	NUMBER STRUCTURE	2-73
3.1	Digit positions	2-73
4.	CLASSIFICATION	2-73
4.1	Standard values	2-73
5.	GROUP AND TYPE CODES	2-73
5.1	Digit positions	2-73
5.2	Group code	2-73
5.3	Type code	2-73
5.3.8	Self-aligning roller bearings	2-75
6.	BORE SIZE - O.D. AND WIDTH CODE	2-75
6.1	Digit positions	2-75
6.2	Bore size (4, 5 and 6th positions)	2-76
6.2.1	Metric	2-76
6.2.2	Inch	2-76
6.3	O.D. and width code (7 and 8th positions)	2-76
6.3.1	Application	2-76
6.3.2	Interpretation of O.D. and width code	2-76
7.	VARIATION OF THE GROUP 2 BASE BEARING NUMBER	2-76
7.1	Digit positions	2-76
7.2	Additional variations	2-76
7.2.1	Significant codes	2-76
7.2.2	Special codes	2-76
8.	BOUNDARY DIMENSION TABLES	2-77
8.1	Use	2-77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Page

GROUP 3

1.	SCOPE	3-121
2.	REFERENCED DOCUMENTS	3-121
3.	NUMBER STRUCTURE	3-121
3.1	Digit positions	3-121
4.	CLASSIFICATION	3-121
4.1	Standard tolerance values	3-121
4.2	Definition of journal bearings	3-121
4.3	Standard features	3-121
4.3.1	Cam followers	3-121
4.3.2	Additional variations	3-121
5.	GROUP AND TYPE CODES	3-121
5.1	Digit positions	3-121
5.2	Group code	3-122
5.3	Type codes	3-122
5.3.6	Drawn shell needle bearings	3-123
5.3.7	Hardened and ground needle bearings	3-123
5.3.8	Cam followers	3-124
6.	BORE SIZE - O.D. AND WIDTH CODES	3-124
6.1	Digit positions	3-124
6.2	Bore size (4, 5 and 6th positions)	3-124
6.2.1	Metric	3-124
6.2.2	Inch	3-124
6.3	O.D. and width code (7 and 8th positions)	3-124
6.4	Application	3-124
6.5	Interpretation of O.D. and width codes	3-125
7.	VARIATIONS OF THE GROUP 3 BASE BEARING NUMBER	3-125
7.1	Digit positions	3-125
7.2	Additional variations	3-125
7.2.1	Significant codes	3-125
7.2.2	Special codes	3-125
8.	BOUNDARY DIMENSION TABLES	3-125
8.1	Use	3-125

GROUP 4

1.	SCOPE	4-205
2.	REFERENCED DOCUMENTS	4-205
3.	NUMBER STRUCTURE	4-205
3.1	Digit positions	4-205
4.	CLASSIFICATION	4-205
4.1	Standard types	4-205
4.2	Tolerances	4-205
5.	GROUP AND TYPE CODES	4-205
5.1	Digit positions	4-205
5.2	Group code	4-205
5.3	Type codes	4-205
5.3.1	Single direction inch types	4-205 and 4-206
5.3.2	Double direction - inch type	4-206
5.3.3	Single direction metric types	4-206
5.3.4	Double direction metric types	4-206
5.3.5	Cylindrical rollers - inch types	4-206
5.3.6	Tapered rollers - inch types	4-207
5.3.7	Spherical rollers - metric types	4-207
6.	BORE SIZE - O.D. AND HEIGHT CODE	4-207
6.1	Digit Position	4-207
6.2	Bore size (4, 5 and 6th positions)	4-207
6.2.1	Metric	4-207
6.2.2	Inch	4-207
6.3	O.D. and height code (7 and 8th positions)	4-207
6.3.1	Application	4-207
6.3.2	Interpretation of O.D. and height codes	4-207
7.	VARIATIONS OF THE GROUP 4 BASE BEARING NUMBER	4-208
7.1	Digit position	4-208
7.2	Additional variations	4-208
7.2.1	Significant codes	4-208
7.2.2	Special codes	4-208
8.	BOUNDARY DIMENSION TABLES	4-208
8.1	Use	4-208

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Page

GROUP 5

1.	SCOPE	5-247
2.	REFERENCED DOCUMENTS	5-247
3.	NUMBER STRUCTURE	5-247
3.1	Digit positions	5-247
4.	CLASSIFICATION	5-247
4.1	Specialized types	5-247
4.2	Standard features	5-247
4.3	Tolerances	5-248
5.	GROUP AND TYPES CODES	5-248
5.1	Digit positions	5-248
5.2	Group code	5-248
5.3	Type codes	5-248
6.	BORE SIZE - O.D. AND WIDTH CODE	5-250
6.1	Digit positions	5-250
6.2	Bore size (4, 5 and 6th positions)	5-250
6.3	O.D. and width code (7 and 8th positions)	5-250
6.3.1	Application	5-250
6.3.2	Interpretation of O.D. and width codes	5-250
7.	VARIATION OF THE GROUP 5 BASE BEARING NUMBER.	5-250
7.1	Digit positions	5-250
7.2	Additional variations	5-251
7.2.1	Significant codes	5-251
7.2.2	Special codes	5-251
8.	BOUNDARY DIMENSION TABLES	5-251
8.1	Use	5-251

GROUP 6

1.	SCOPE	6-263
2.	REFERENCED DOCUMENTS	6-263
3.	NUMBER STRUCTURE	6-263
3.1	Digit positions	6-263
4.	GROUP AND TYPE CODES	6-263
4.1	Digit positions	6-263
4.2	Group code	6-263
4.3	Type codes 00 through 69.	6-263
4.4	Type codes 70 through 99 (2nd and 3rd positions).	6-265
5.	BORE SIZE - O.D. AND WIDTH CODE	6-265
5.1	Digit positions	6-265
5.2	Bore size (4, 5 and 6th positions)	6-265
5.2.1	Inch	6-265
5.2.2	Metric	6-265
5.3	O.D. and width code (7 and 8th positions)	6-265
5.3.1	Application	6-265
5.3.2	Interpretation of O.D. and width code	6-266
5.4.1	Application	6-266
5.4.2	Interpretation of bearing mounting code	6-266
6.	VARIATIONS OF THE GROUP 6 BASE BEARING NUMBER	6-266
6.1	Digit positions	6-266
6.2	Variations	6-266
6.2.1	Significant codes	6-266
6.2.2	Special codes	6-266
7.	BOUNDARY DIMENSION TABLE	6-267
7.1	Use	6-267
8.	MANUFACTURERS SERIES CODE (NUMERICAL)	6-267
9.	MANUFACTURER'S SERIES CODE (ALPHABETICAL)	6-283
9.1	Mounted units complete with bearings.	6-283

GROUP 7

1.	SCOPE	7-311
2.	REFERENCED DOCUMENTS	7-311
3.	NUMBER STRUCTURE	7-311
3.1	Digit positions	7-311
3.1.1	Tolerances	7-311
4.	GROUP AND TYPE CODES	7-311
4.1	Digit positions	7-311

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

		Page
4.2	Group code	7-311
4.3	Type codes 00 through 29 (second and third positions)	7-311
4.4	Type codes 51 through 89 (second and third positions)	7-311
4.4.1	Single row	7-311
4.4.2	Double row	7-312
4.5	Complete bearings	7-312
5.	SEPARATE BEARING PARTS AND COMPLETE BEARINGS	7-312
5.1	Digit positions	7-312
5.2	Types 00 through 29 (cones and cups)	7-312
5.2.1	Application	7-312
5.3	Types 51 through 89 (complete bearings) series code (4, 5, 6, 7 and 8th positions)	7-312
6.	VARIATIONS OF THE GROUP 7 BASE BEARING NUMBER	7-313
6.1	Digit positions	7-313
6.2	Additional variations	7-313
6.2.1	Significant codes	7-313
6.2.1.1	Type codes 00 through 29 separate bearing parts	7-313
6.2.1.2	Type codes 51 through 89 (complete bearings)	7-313

GROUP 8

1.	SCOPE	8-325
2.	REFERENCED DOCUMENTS	8-325
3.	NUMBER STRUCTURE	8-325
3.1	Digit positions	8-325
4.	CLASSIFICATION	8-325
4.1	Standard features	8-325
5.	GROUP AND TYPE CODES	8-325
5.1	Digit positions	8-325
5.2	Group code	8-325
5.3	Type codes (2nd and 3rd positions)	8-325
6.	BORE SIZE - O.D. AND WIDTH CODE	8-326
6.1	Digit positions	8-326
6.2	Bore size (4, 5 and 6th positions)	8-326
6.2.1	Application	8-326
6.3	O.D. and width code (7 and 8th positions)	8-327
6.3.1	Application	8-327
6.3.2	Interpretation of O.D. and width code	8-327
7.	VARIATIONS OF THE GROUP 8 BASE BEARING NUMBER	8-327
7.1	Digit positions	8-327
7.2	Additional variations	8-327
7.2.1	Significant codes	8-327 and 8-328
7.3	Special codes	8-328
7.3.1	Special codes	8-328
8.	BOUNDARY DIMENSION TABLES	8-328
8.1	Use	8-328

GROUP 9

1.	SCOPE	9-357
1.2	Definition	9-357
2.	REFERENCED DOCUMENTS	9-357
3.	NUMBER STRUCTURE	9-357
3.1	Digit positions	9-357
4.	GROUP AND SUB-GROUP CODES	9-357
4.1	Digit positions	9-357
4.2	Group code (1st position)	9-357
4.3	Sub-group codes (second and third positions)	9-357
5.	TYPE CODES AND ARBITRARY ITEM NUMBERS	9-358
5.1	Digit positions	9-358
5.2	Type codes (fourth and 5th positions) for sub-groups 90 through 98	9-358
5.2.1	Application of type code	9-358
5.3	Type codes (4th and fifth positions) for for sub-group 99	9-358

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Page

5.3.1 Code 999X. . . . . 9-358 and 9-359
6. ARBITRARY SUB-NUMBERS 9-359
6.1 Digit positions 9-359
6.2 Significant codes -(section 3) (1st, 2nd, 3rd and 4th positions). 9-359

TABLES

GROUP 0

Table I Tolerances for instrument precision ball bearing ABEC5P 0-10
II Tolerances for instrument precision ball bearing - ABEC7P. 0-11
III Tolerances for instrument precision ball bearings - ABEC9P 0-12
IV Tolerances for instrument semi-precision ball bearings - ABEC 3 0-13
V Significant codes for variations of group 0 base bearing numbers. 0-14
VI Signifiant codes for variations of group 0 pivot bearing base numbers. 0-15
VII Starting torque valves for instrument ball bearings. 0-16
VIII Boundary dimensions - DA 0-17
IX Boundary dimensions - DB 0-18
X Boundary dimensions - DC 0-19
XI Boundary dimensions - DD 0-20
XII Boundary dimensions - DE 0-21
XIII Boundary dimensions - DF 0-22
XIV Boundary dimensions - MB 0-22

GROUP 1

XV ABEC 1 tolerance limits for metric and inch dimension radial ball bearings. 1-30
XVI ABEC 3 tolerance limits for metric and inch dimension radial ball bearings (excludes magneto bearings) 1-31
XVII ABEC 5 tolerance limits for metric and inch diminsion radial ball bearings 1-32
XVIII ABEC 7 tolerance limits for metric and inch dimension radial ball bearings 1-33
XIX ABEC 9 tolerance limits for metric and inch dimension radial ball bearings 1-34
XX Standard tolerance values for radial internal clearance of single row, radial contact ball bearings 1-35
XXI Significant codes for variations of group 1 base bearing numbers . . . . . 1-36 through 1-3
XXII Additional significant codes for variations of group 1 base bearing numbers. . . . . 1-39 through 1-4
XXIII Boundary dimensions-IA . . . . . 1-41 through 1-4
XXIV Boundary dimensions-MA . . . . . 1-46 through 1-6
XXV Boundary dimensions-MB . . . . . 1-65 through 1-6
XXVI Boundary dimensions-MC . . . . . 1-68 through 1-7

GROUP 2

XXVII Tolerance limits for group 2 metric annular roller bearings 2-78
XXVIII Tolerance limits for internal radial clearance in self-aligning roller bearings under no load . . 2-79
XXIX Tolerance limits for internal radial clearance in cylindrical roller bearings. 2-80
XXX Significant codes for variations of group 2 base bearing numbers 2-81

Source: https://assist.dla.mil -- Downloaded: 20260-26T07:25Z
Check the source to verify that this is the current version before use.

Page

XXXI	Additional significant codes for variations of group 2 base bearing numbers	2-82
XXXII	Boundary dimensions-IA	2-83 through 2-87
XXXIII	Boundary dimensions-IQ	2-88 through 2-92
XXXIV	Boundary dimensions-MA	2-93 through 2-111
XXXV	Boundary dimensions-MB	2-112 through 2-114
XXXVI	Boundary dimensions-MC	2-115 through 2-118
	GROUP 3	
XXXVII	Standard tolerance limits for industrial needle bearings	3-126
XXXVIII	Standard tolerance limits for airframe needle bearings	3-127
XXXIX	Significant codes for variations of group 3 base bearing numbers	3-128 through 3-133
XL	Additional significant codes for variations of group 3 base bearing numbers	3-134
XLI	First and second position codes for variations of group 3 base bearing numbers "partial tabulated listing"	3-135 through 3-136
XLII	Boundary dimensions-IB	3-137 through 3-139
XLIII	Boundary dimensions-ID	3-140 through 3-141
XLIV	Boundary dimensions-IE	3-142 through 3-164
XLV	Boundary dimensions-IF	3-165 through 3-169
XLVI	Boundary dimensions-IG	3-170 through 3-195
XLVII	Boundary dimensions-MD	3-196 through 3-202
	GROUP 4	
XLVIII	Standard tolerance limits for thrust ball bearings	4-209 through 4-210
XLIX	Standard tolerance limits for roller thrust bearings - inch dimensions	4-211
L	Significant codes for variations of group 4 base bearing numbers	4-212
LI	Boundary dimensions-IH	4-213 through 4-228
LII	Boundary dimensions-ME	4-229 through 4-244
	GROUP 5	
LIII	Standard tolerance limits for airframe ball bearings	5-252
LIV	Significant codes for variations of group 5 base bearing numbers	5-253
LV	Boundary dimensions-IJ	5-254 through 5-257
LVI	Boundary dimensions-IN	5-258 and 5-259
LVII	Boundary dimensions-IP	5-260
	GROUP 6	
LVIII	Significant codes for variations of group 6 base bearing numbers	6-301 through 6-302
LIX	Boundary dimensions-IC	6-303 through 6-309
	GROUP 7	
LX	Tolerance limits for tapered roller bearings and self-aligning roller bearings inch dimensions	7-314
LXI	Tolerance limits for Timken J-line, tapered roller bearings	7-315 through 7-316
LXII	Tapered roller bearings, section 2 series code for group 7	7-317 through 7-320
LXIII	Section 3 - significant digit codes for group 7	7-321

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

GROUP 8

		Page
LXIV	Boundary dimensions-IH	8-329 through 8-346
LXV	Boundary dimensions-IL	8-347 through 8-350
LXVI	Boundary dimensions-IM	8-351 through 8-355/356

GROUP 9

LXVII	Master table of ball grades and tolerance values	9-360

FIGURES

Figure	1	Group 0, number structure	0-3
	2	Group 0, section 1	0-4
	3	Group 0, section 2	0-6
	4	Group 0, section 3	0-7
	5	Group 0, section 2	0-7
	6	Group 0, flange pivot diameter	0-8
	7	Group 0, section 3	0-8
	8	Illustrations of group 0 bearing types	0-23/24
	9	Group 1, number structure	1-25
	10	Group 1, section 1	1-25
	11	Group 1, section 2	1-27
	12	Group 1, section 3	1-28
	13	Illustrations of group 1 bearing types	1-72
	14	Group 2, number structure	2-73
	15	Group 2, section 1	2-73
	16	Group 2, section 2	2-75
	17	Group 2, section 3	2-76
	18	Illustrations of group 2 bearing types	2-119/120
	19	Group 3, number structure	3-121
	20	Group 3, section 1	3-122
	21	Group 3, section 2	3-124
	22	Group 3, section 3	3-125
	23	Illustrations of group 3 bearing types	3-203/204
	24	Group 4, number structure	4-205
	25	Group 4, section 1	4-205
	26	Group 4, section 2	4-207
	27	Group 4, section 3	4-208
	28	Illustrations of group 4 bearing types	4-245/246
	29	Group 5, number structure	5-247
	30	Group 5, section 1	5-248
	31	Group 5, section 2	5-250
	32	Group 5, section 3	5-250
	33	Illustrations of group 5 bearing types	5-261/262
	34	Group 6, number structure	6-263
	35	Group 6, section 1	6-263
	36	Group 6, section 2	6-265
	37	Group 6, section 3	6-266
	38	Illustrations of group 6 bearing types	6-310
	39	Group 7, number structure	7-311
	40	Group 7, section 1	7-311
	41	Group 7, section 2	7-312
	42	Group 7, section 3	7-313
	43	Illustration of group 7 bearing types	7-322 and 7-323/324
	44	Group 8, number structure	8-325
	45	Group 8, section 1	8-325
	46	Group 8, section 2	8-326
	47	Group 8, section 3	8-327
	48	Group 9, number structure	9-357
	49	Group 9, section 1	9-357
	50	Group 9, section 2	9-358
	51	Group 9, section 3	9-359

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Group 1

Annular ball bearings

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Group 2

Cylindrical and Self Aligning Roller Bearings

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Group 3

Journal and Needle Roller Bearings

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Group 4

Pure Thrust Bearings

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

GROUP 5

Aircraft control and pulley bearings

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Group 6

Industrial Power Transmission Ball and
Roller Bearings; and Mounted Units
Complete with Bearings.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Group 7

Tapered Roller Bearings

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Group 8

General Purpose Unground and Ground Non-Precision Bearings

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Group 9

Special Items

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 This standard covers a common code for identification of anti-friction bearings. The standard is for reference purposes and may be used by military and civil agencies in design, procurement, stocking, supply and maintenance matters, depending upon the individual need of the activity or agency concerned.

2. REFERENCED DOCUMENTS

2.1 This section is not applicable.

3. STRUCTURE OF SYSTEM

3.1 Composition of number. This code provides in a uniform manner, a significant number to all bearings, which is descriptive as far as all the major points of engineering importance are concerned. The number is comprised of twelve digits, divided into three sections of three, five and four digits, respectively. The first two sections represent the "Base Number". The third section represents variations of the base number.

3.1.1 First section. The first digit indicates "Group"; the whole field of anti-friction bearings being composed of ten main groups.

Group
0 - Miniature and instrument ball bearings
1 - Annular ball bearings
2 - Cylindrical and self-aligning roller bearings
3 - Journal and needle roller bearings
4 - Pure thrust bearings (ball + roller)
5 - Aircraft control and pulley bearings
6 - Industrial power transmission ball and roller bearings and mounted units complete with bearings
7 - Tapered roller bearings
8 - General purpose unground, and ground, non-precision bearings
9 - Special purpose bearings not conforming to accepted basic standards as set up for groups 0 through 8, inclusive.

The second and third digits together form the "Type Code", distinctive for each group.

3.1.2 Second section. This section identifies a particular size bearing of the coded type. The size of a bearing is shown, in general, as follows:

(a) 4th, 5th and 6th digit positions indicate the "Bore Diameter" in millimeters (mm), decimal, 1/16 or 1/8 of an inch.
(b) 7th and 8th digit positions indicate "Outside Diameter" and "Width" code.

3.1.2.1 The outside diameter (O.D.) and width dimensions are expressed by a code as shown in the various "Boundary Dimension Tables". These tables, show the various O.D. and width or height combinations for each given bore size.

Example: 02502
025 - is a bore size of 25 mm
02 - is a code for O.D. and width as shown in boundary dimension table MA. Reference to table MA, bore size 025; O.D. and width code 02 will show the dimensions to be: bore 25mm, O.D. 52mm and width 15mm.

3.1.3 Third section. This section represents "Variations of a Base Bearing". It gives additional information required for complete identification. This additional information may vary somewhat between one group and another because of the nature of the bearings and it may be either "Significantly Coded" as in the case of frequent, highly repetitive modifications of design, retainers, tolerances and fits and lubricants. If not covered this way, the condition is coded in the form of an arbitrary "Special Code". This latter special code can always be distinguished as a number in the 8000 or 9000 series. Each group description carries a detailed synopsis of this section.

3.1.4 References. In all references, spoken or written, except mechanical tabulating operations, the sections are separated by the letter "X" in order to obtain standardized reading and writing. The structure is fixed; each code position in the number always gives

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.


a definite type of information. It is descriptive to the extent possible within the limits of the fixed form, length and number of digits in each position. For the purpose of reference and description, of the numbering system, the 8 digits or code positions in the 1st and 2nd sections (i.e., base number) are numbered from 1 through 8, inclusive. The positions or digits of section 3 are numbered 1 through 4, inclusive.

4. OVERALL NUMBERING SYSTEM

4.1 How the numbers work. A detailed explanation has been prepared for each of the ten groups which represent an overall system. These individual explanations will enable a person with a bearing number to decode and identify the characteristics of the bearing for purposes of determining interchangeability and substitution.

4.2 Application. For example, you have a bearing number (111 X 02502 X 1510) - which was formulated by utilization of this standard. The number, because it is decriptive, can be decoded.

4.3 Interpretation. The breakdown of the assigned number is as follows:

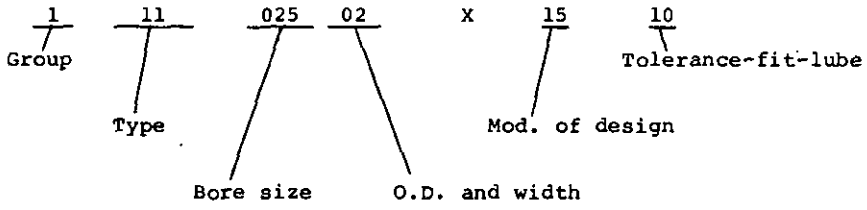

Turn to the presentation of Group 1. Within the group, type 11 is described as "annular ball bearing, single row radial type of non-loading groove construction, all metric dimensions with both rings the same width - dimension table MA". Turn to table MA; look for bore size 025 (25 mm), then down the chart to O.D. and width code 02. At this junction will be found the actual O.D. of 52mm and width of 15mm. Next, turn to section 3 of group 1 and follow down the modification of design code to 15. This tells you that the bearing has one plate (shield), a snap ring and groove and a standard retainer. Further, analysis of this chart indicates that it is ABEC 1 tolerance, tight internal fit up and regular slush lubrication.

Custodians:
Army - AT
Navy - SH
Review activities:
Army - AT, AV, MI, MU, WC
Navy - SH, YD
DSA - IS
User activities:
Army - EL, GL, ME
Navy - MC

Preparing activity:
Navy - SH
(Project 3110-0208)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 This section covers miniature and instrument ball bearings, group 0 (see figure 8).

2. REFERENCED DOCUMENTS

2.1 The issues of the following documents in effect on the date of invitation for bids form a part of this standard to the extent specified herein.

GOVERNMENTAL

MIL-L-6085 - Lubricating Oil: Aircraft Instrument, Low Volatility.
MIL-L-7870 - Lubricating Oil, General Purpose, Low Temperature.
MIL-B-23063 - Bearing, Ball, Annular, Instrument Precision.
MIL-G-23827 - Grease, Aircraft and Instrument, Gear and Actuator Screw.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

NONGOVERNMENTAL

AMERICAN NATIONAL STANDARDS INSTITUTE, INC. (ANSI)
B3.10 - Instrument Precision Ball Bearings, Requirements for.

(Application for copies should be addressed to the American National Standards Institute, Inc., 1430 Broadway, New York, N. Y. 10018.)

3. NUMBER STRUCTURE

3.1 Digit positions. Example of digit positions is shown in figure 1.

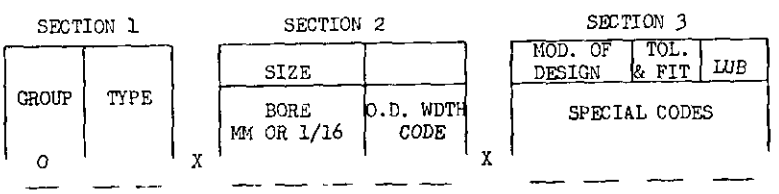


Figure 1 - Group 0, number structure.

4. CLASSIFICATION

4.1 Miniature bearings. Miniature bearings are those bearings whose O.D. dimensions are below and not including 3/8 inch or 9 mm.

4.2 Instrument bearings. Instrument bearings comprise bearings with functional requirements for use in any unit that can, in a general sense, be characterized as an instrument.

4.2.1 Instrument bearings are divided into the following two categories:

(a) Precision - Instrument precision bearings are those bearings which conform to tolerances of ABEC 5P, 7P or 9P (table I, II or III) and meet all requirements of MIL-B-23063.
(b) Semi-precision- Instrument semi-precision bearings are those bearings which conform to tolerances of ABEC 3 (table IV) but do not meet all requirements of MIL-B-23063.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

4.3 Bore sizes. Bore sizes of the miniature and instrument ball bearings in this group are limited to those contained in Section 12 of AFBMA and ANSI B3.10. Other sizes will be coded in accordance with group 1, annular ball bearings.

5. GROUP AND TYPE CODES

5.1 Digit positions. Example of digit positions is shown in figure 2.

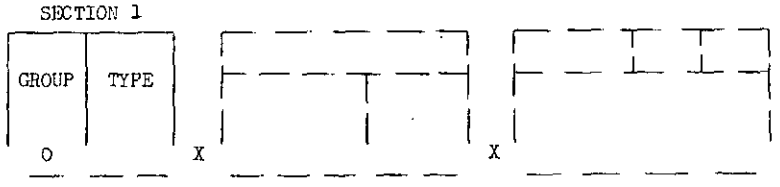


Figure 2 - Group 0, section 1.

5.2 Group code. Group code for first position shall be as follows:

0 - Miniature and instrument ball bearings.

5.3 Type code. Type code for second and third positions shall be as specified in 5.3.1 through 5.3.7.

5.3.1 Single row radial types. Single row radial types shall be as follows:

Type		Dimension table
11	Non-loading groove, both rings same width, unflanged, inch or metric bore, O.D. and width	MG (table XIV)
12	Loading groove, both rings same width, unflanged, inch or metric bore, O.D. and width	MG (table XIV)
15	Non-loading groove, both rings same width, unflanged, inch or decimal bore, O.D. and width	DA (table VIII)
16	Loading groove, both rings same width, unflanged, inch or decimal bore, O.D. and width	DA (table VIII)
17	Non-loading groove, inner ring extended both sides, unflanged, inch or decimal bore, O.D. and width	DB (table IX)
20	Non-loading groove, both rings same width, flanged, inch or decimal bore, O.D. and widths	DC (table X)
21	Loading groove, both rings same width, flanged, inch or decimal bore, O.D. and widths	DC (table X)
22	Non-loading groove, inner ring extended both sides, flanged, inch or decimal bore, O.D. and widths	DD (table XI)
23	Non-loading groove, inner ring extended both sides, flanged, tapered O.D., inch or decimal bore, O.D. and widths	DD (table XI)

5.3.2 Single row counter bore outer ring types (one direction thrust capacity) shall be as follows:

Type		Dimension table
24	Non-separable, both rings same width, flanged, inch or decimal bore, O.D. and widths	DC (table X)
26	Separable, both rings same width, flanged, inch or decimal bore, O.D. and widths	DC (table X)
28	Separable, both rings same width, unflanged, inch or decimal bore, O.D. and width	DA (table VIII)

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the currentversion before use.

Type		Dimension table
31	Non-separable, both rings same width, unflanged, inch or decimal bore, O.D. and width	DA (table VIII)
32	Non-separable, both rings same width, unflanged, inch or metric bore, O.D. and width	MG (table XIV)

5.3.3 *Single row*, shouldered inner ring types (one direction thrust capacity) shall be as follows:

Type		Dimension table
34	Separable, both rings same width, flanged, inch or decimal bore, O.D. and widths	DC (table X)
37	Separable, both rings same width, unflanged, inch or decimal bore, O.D. and width	DA (table VIII)
38	Separable, both rings same width, unflanged, inch or metric bore, O.D. and width	MG (table XIV)

5.3.4 Pivot bearings. Pivot bearings shall be as follows:

Type		Dimension table
60	Angular contact type, decimal dimensions machined outer ring, open end, no inner ring, non-separable	DE (table XII)
61	Pivot type, decimal dimensions machined outer ring, closed end, no inner ring, non-separable	DF (table XIII)
62	Pivot type, decimal dimensions, pressed outer ring, open end, no inner ring, self aligning	DE (table XII)
63	Pivot type, decimal dimensions, pressed outer ring, closed end, no inner ring, self aligning	DF (table XIII)
64	Angular contact type, decimal dimensions, pressed outer ring, open end, with separable inner ring	DE (table XII)
65	Angular contact type, decimal dimensions, pressed outer ring, closed end, with separable inner ring, self aligning	DE (table XII)
66	Angular contact type, decimal dimensions, pressed outer ring, open end, with separable inner ring, self aligning	DE (table XII)

5.3.5 *Single row radial types*, stainless steel construction shall be as follows:

Type		Dimension table
71	Non-loading groove, both rings same width, unflanged, inch or metric bore, O.D. and width	MG (table XIV)
72	Loading groove, both rings same width, unflanged, inch or metric bore, O.D. and width	MG (table XIV)
75	Non-loading groove, both rings same width, unflanged, inch or decimal bore, O.D. and width	DA (table VIII)
76	Loading groove, both rings same width, unflanged, inch or decimal bore, O.D. and width	DA (table VIII)
77	Non-loading groove, inner ring extended both sides, unflanged, inch or decimal bore. O.D. and width	DB (table IX)
80	Non-loading groove, both rings same width, flanged, inch or decimal bore, O.D. and widths	DC (table X)
81	Loading groove, both rings same width, flanged, inch or decimal bore, O.D. and widths	DC (table X)
82	Non-loading groove, inner ring extended both sides, flanged, inch or decimal bore, O.D. and widths	DD (table XI)
83	Non-loading groove, inner ring extended both sides, flanged, tapered O.D., inch or decimal bore, O.D. and widths	DD (table XI)

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

5.3.6 Single row counterbore outer ring types (one direction thrust capacity) stainless steel construction shall be as follows:

Type		Dimension table
84	Non-separable, both rings same width, flanged, inch or decimal bore, O.D. and widths	DC (table X)
86	Separable, both rings same width, flanged, inch or decimal bore, O.D. and widths	DC (table X)
88	Separable, both rings same width, unflanged, inch or decimal bore, O.D. and width	DA (table VIII)
91	Non-separable, both rings same width, unflanged, inch or decimal bore, O.D. and width	DA (table VIII)
92	Non-separable, both rings same width, unflanged, inch or metric bore, O.D. and width	MG (table XIV)

5.3.7 Single row, shouldered inner ring types (one direction thrust capacity) stainless steel construction shall be as follows:

Type		Dimension table
94	Separable, both rings same width, flanged, inch or decimal bore, O.D. and width	DC (table X)
97	Separable, both rings same width, unflanged, inch or decimal bore, O.D. and width	DA (table VIII)
98	Separable, both rings same width, unflanged, inch or metric bore, O.D. and width	MG (table XIV)

6. BORE SIZE - O.D. AND WIDTH CODE (EXCLUDES PIVOT BEARINGS (see section 8.))

6.1 Digit positions. Example of digit positions is shown in figure 3.

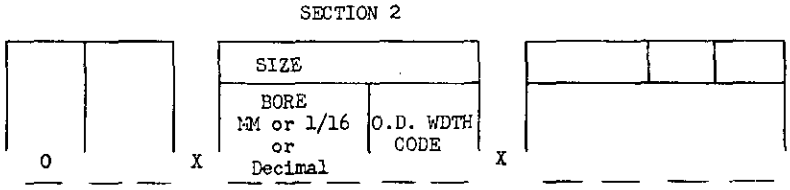


Figure 3 - Group O, section 2

6.2 Bore size (4, 5 and 6th positions). The bore size of miniature and instrument bal bearings is either expressed as metric, or decimal. Type descriptions and boundary dimension tables indicate which method of expression is used.

6.2.1 Metric. Metric bores are expressed as the actual number of mm.

Example: 4 mm = 004; 25 mm = 025; 120 mm = 120

6.2.2 Decimal. Decimal bores are expressed as the actual number of thousands to the inch.

Example: 46 thousands = 046
156 thousands = 156

6.3 O.D. and width code (7 and 8th positions). The O.D. and width dimensions of a bearing are expressed by a code number as shown in the boundary dimension tables (see table VIII through XIV).

6.3.1 Application. The type description carries a reference to the appropriate boundary dimension table. These tables are arranged by bore size, and within each bore size the O.D.s and widths are arranged in numerical sequence. Opposite each set of dimensions is the appropriate code for the O.D. and width. Where bearing dimensions corresponds to AFBMA basic standards, the O.D. and width code is identical with their series code.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

6.3.2 Interpretation of O.D. and width code. A bearing number 011-00403 is decoded as:

011 = Instrument bearing, single row radial, non-loading groove, both rings same width, unflanged, inch or metric dimensions. Boundary dimension table-MG (table XIV).
00403 = 4mm bore size; O.D. and width code 03

Reference to boundary dimension table MG (see table XIV) bore size of 004 and code 03 indicates that the O.D. is 16mm and width is 5mm.

7. VARIATIONS OF THE GROUP 0 BASE BEARING NUMBER (EXCLUDES PIVOT BEARINGS - SEE SECTION 9).

7.1 Digit positions. Example of digit positions is shown on figure 4.

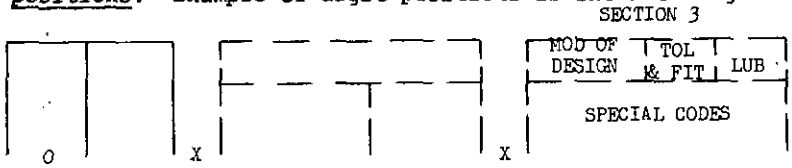


Figure 4 - Group 0, section 3.

7.2 Additional variations. Section 3 codes any additional variations, modifications or special features of a bearing, as described by the base number, which are necessary for complete identification. When section 3 is required, it may be either a "Significant Code" covering those common features itemized in table V or an arbitrarily assigned number known as a "Special Code" covering all other variations, modifications, etc.

7.2.1 Significant codes. Significant codes may be either two or four digits and will begin with the numerals 0 through 7. These codes are constant in meaning within the group, regardless of the base number with which they are used. Reference to table V will furnish the significance of each code.

7.2.2 Special codes. Special codes are arbitrarily assigned numbers of four digits only that begin with the numerals 8 and 9. These four digit numbers are assigned in numerical sequence as they are required to code additional features (not covered by the significant codes) of a particular base number. The more common features significantly coded in the "Table of Variation" (see table VI) may occur in conjunction with some additional feature or features, in which case all of the additional features are coded by a special code.

7.2.2.1 Special codes are assigned only by the preparing custodian responsible for the numbering system.

8. O.D., PIVOT AND WIDTH CODE

8.1 Digit position. Example of digit position is shown on figure 5.

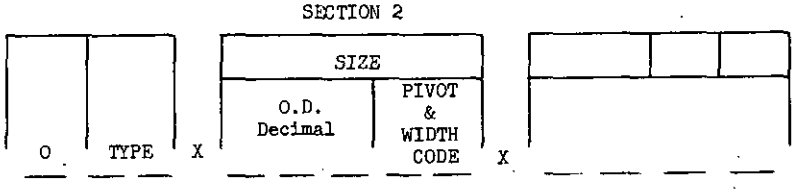


Figure 5 - Group 0, section 2.

8.2 O.D. (4, 5 and 6th positions). The O.D. of a pivot bearing is expressed in decimals (thousandths of an inch).

Example: 25 thousandths = 025;
187 thousandths = 187; etc.

8.3 Pivot and width code (7 and 8th positions). The pivot data and width dimensions of a pivot bearing are expressed by a code as shown in the boundary dimension tables (see tables VIII through XIV).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

8.3.1 Flanged pivot diameter. Flanged pivot diameter shall be as shown on figure 6.



Figure 6 - Group 0, flange pivot diameter.

8.3.2 The flanged pivot diameter is expressed in decimals (thousandths of an inch) and may be either one of the two types shown, as applicable. Bearing types 60 and 62 may be used with or without the flanged pivot.

8.3.3 Application. The type description carries a reference to the appropriate boundary dimension table. These tables are arranged by the O.D. and within each O.D. the widths are arranged in numerical sequence. Opposite each set of dimensions is the appropriate "Code" for the pivot data and width.

8.3.4 Interpretation of pivot and width code. A bearing number 061 X 15701 is decoded as:

061 = Pivot type, decimal dimensions, machined outer ring, closed end, no inner ring, non-separable. Boundary dimension table - DF (see table XIII)
15701 = 0.157 O.D., pivot and width code 01. Reference to boundary dimension table DF, 0.157 O.D. and code 01 indicates that the pivot is 60 degrees and the bearing width is 0.094.

9. VARIATIONS OF THE GROUP 0 BASE BEARING NUMBER FOR PIVOT BEARINGS

9.1 Digit positions. Example of digit positions is shown on figure 7.

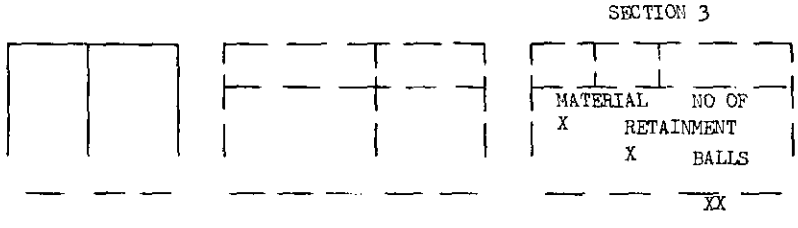


Figure 7 - Group 0, section 3.

9.2 Additional variations. Section 3 codes any additional variations, modifications or special features of a bearing, as described by the base number, which are necessary for complete identification. When section 3 is required, it may be a significant code covering those common features itemized in table VI, or an arbitrarily assigned number known as a "Special Code" covering all other variations, modifications, etc.

9.2.1 Significant codes. Significant codes may be either 1, 2 or 4 digits and remain constant in meaning for identification of material retainment and number of balls. Reference to table VI will furnish the significance of each code.

9.2.2 Special codes. Special codes are arbitrarily assigned numbers of four digits only that begin with the numerals 8 and 9. These four digit numbers are assigned in numerical sequence, as they are required to code additional features, (not covered by the significant codes) of a particular base number. The more common features significantly coded in the "Table of Variation" see table VI may occur in conjunction with some additional feature or features, in which case all of the additional features are coded by a special code.

9.2.2.1 Special codes are assigned only by the preparing custodian responsible for the numbering system.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

10. BOUNDARY DIMENSION TABLES

10.1 Use. Use of boundary dimension tables shall be as follows:

Dimension tables	Bearing types
DA (table VIII)	15, 16, 28, 31, 37, 75, 76, 88, 91, 97
DB (table IX)	17, 77
DC (table X)	20, 21, 24, 26, 34, 80, 81, 84, 86, 94
DD (table XI)	22, 23, 82, 83
DE (table XII)	60, 62, 64, 65, 66
DF (table XIII)	61, 63
MG (table XIV)	11, 12, 32, 38, 71, 72, 92, 98

10.2 Internal fit up. Radial internal clearance (radial play) values considered as standard are listed below. The effective gaging load is 0.5 pound for bearings with bore sizes ranging from 0.0469 inch to 0.2500 inch in the miniature series and from 0.1250 inch to 0.3750 inch in the intermediate range.

Tight fit - 0.0001 to 0.0003 inch
Standard fit - 0.0002 to 0.0005 inch
Loose fit - 0.0005 to 0.0008 inch

Radial play ranges other than the above are to be coded as special.

10.2.1 Standard values for maximum starting torque of selected sizes of instrument ball bearings shall be as shown in table VII.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table I - Tolerances for instrument precision ball bearings - ABEC5P
(tolerances in 0.0001 inch)

Inner ring

Bore diameter d				Bore tolerance limits		Bore 2 point out-of round	Bore taper	Radial runout	Width variation	Reference side runout with bore	Groove runout width reference side
mm		Inch		d_{min}	d_{max}						
Over	Including	Over	Including	-	+						
0	10	0	0.3937	2	0	1	1	2	2	3	3
10	18	0.3937	.7087	2	0	1	1	2	2	3	3
18	30	.7087	1.1811	2	0	1	1	2	2	3	3

Outer ring

O.D. D				O.D. tolerance limits																	
				D_m		Open type bearings				Shield seal bearings						Outside cylin. surf. runout with ref. side	Groove runout with ref. side	Flange width tolerance limits		Flange dia. tolerance limits	
mm		Inch				Limits		O.D. 2 point out-of-round	Out-of-dia. taper	Limits[1]		O.D. 2 point out-of-round	O.D. taper	Radial runout	Width variation						
Over	Incl.	Over	Incl.	High +	Low -	D_{max} +	D_{min} -			D_{max} +	D_{min} -							+	-	+	-
0	18	0	0.7087	0	2	0	2	1	1	0.4	2.4	2	2	2	2	3	3	0	20	0	10
18	30	0.7087	1.1811	0	2	0	2	1	1	.4	2.4	2	2	2	2	3	3	0	20	0	10
30	50	1.1811	1.9685	0	2	0	2	1	1	.4	2.4	2	2	2	2	3	3	0	20	0	10

Width tolerance limits

Bearings other than duplex, width of individual inner or outer ring			
Bore diameter mm		Width tolerance limits	
Over	Including	Plus	Minus
0	30	0	10

Duplex bearings[2] total width of a pair of inner or outer rings			
Bore diameter mm		Width tolerance limits	
Over	Including	Plus	Minus
0	30	0	150

[1] $\frac{D_{max} + D_{min}}{2}$ shall be within D_m.

[2] If other than a pair of bearings is involved, the tolerance is in proportion to the number of bearings.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table II - Tolerances for instrument precision ball bearings - ABEC7P
(tolerances in 0.0001 inch)

Bore diameter d				Bore tolerance limits		Bore 2 point out-of round	Bore taper	Radial runout	Width variation	Reference side runout with bore	Groove runout with reference side
mm		Inch									
Over	Including	Over	Including	d_{min} −	d_{max} +						
0	10	0	0.3937	2	0	1	1	1.0	1	1.0	1.0
10	18	0.3937	.7087	2	0	1	1	1.0	1	1.0	1.0
18	30	.7087	1.1811	2	0	1	1	1.5	1	1.5	1.5

Outer ring

O.D. D				O.D. tolerance limits																
						Open type bearings				Shield seal bearings										
mm		Inch		D_m		Limits		O.D. 2 point out-of-round	O.D. taper	Limits[1]		O.D. 2 point out-of-round	O.D. taper	Radial runout	Width variation	Outside cylin. surf. runout with ref. side	Groove runout with ref. side	Flange width tolerance limits		Flange dia. tolerance limits	
Over	Incl.	Over	Incl.	High +	Low −	D_{max} +	D_{min} −			D_{max} +	D_{min} −							+	−	+	−
0	18	0	0.7087	0	2	0	2	1	1	0.4	2.4	2	2	2	1	1.5	2	0	20	0	10
18	30	0.7087	1.1811	0	2	0	2	1	1	.4	2.4	2	2	2	1	1.5	2	0	20	0	10
30	50	1.1811	1.9685	0	2	0	2	1	1	.4	2.4	2	2	2	1	1.5	2	0	20	0	10

Bearings other than duplex, width of individual inner or outer ring			
Bore diameter mm		Width tolerance limits	
Over	Including	Plus	Minus
0	30	0	10

Duplex Bearings[2] total width of a pair of inner or other rings			
Bore diameter mm		Width tolerance limits	
Over	Including	Plus	Minus
0	30	0	150

[1] $\frac{D_{max} + D_{min}}{2}$ shall be within D_m.

[2] If other than a pair of bearings is involved, the tolerance is in preparation to the number of bearings.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table III - Tolerances for instrument precision ball bearings - ABEC9P
(tolerances in 0.0001 inch)

Inner ring

Bore diameter d				Bore Tolerance Limits		Bore 2 point out-of-round	Bore taper	Radial runout	Width variation	Reference side runout with bore	Groove runout with reference side
mm		Inch									
Over	Including	Over	Including	d_{min} −	d_{max} +						
0	10	0	0.3937	1	0	0.5	0.5	0.5	0.5	0.5	0.5
10	18	0.3937	.7087	1	0	.5	.5	.5	.5	.5	.5
18	30	.7087	1.1811	1	0	.5	.5	1.0	.5	.5	1.0

Outer ring

O.D. D				O.D. tolerance limits		O.D. 2 point out-of-round	O.D. taper	Radial runout	Width variation	Outside cylindrical surface runout with reference side	Groove runout with reference side
mm		Inch									
Over	Including	Over	Including	D_{max} +	D_{min} −						
0	18	0	0.7087	0	1.0	0.5	0.5	0.5	0.5	0.5	0.5
18	30	0.7087	1.1811	0	1.5	.8	.8	1.0	.5	.5	1.0
30	50	1.1811	1.9685	0	1.5	.8	.8	1.0	.5	.5	1.0

Width Tolerance Limits

Bearings other than duplex, width of individual inner or outer ring			
Bore diameter mm		Width tolerance limits	
Over	Including	Plus	Minus
0	30	0	10

Duplex bearings[1] total width of a pair of inner or outer rings			
Bore Diameter mm		Width tolerance limits	
Over	Including	Plus	Minus
0	30	0	150

[1]If other than a pair of bearings is involved, the tolerance is in proportion to the number of bearings.

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T07:25Z
Check the source to verify that this is the current version before use.

Table IV - Tolerances for instrument semi-precision ball bearings - ABEC 3
(tolerances in 0.0001 inch)

Inner ring

Bore diameter				Bore tolerance limits				
mm		Inch		d_m		d_{min}	d_{max}	Radial runout
Over	Including	Over	Including	Low −	High +	−	+	
0	10	0	0.3937	2	0	3	1	2
10	18	0.3937	.7087	2	0	3	1	3
18	30	.7087	1.1811	2	0	3	1	3

Outer ring

O.D.				O.D. tolerance limits						Radial runout	Flange width tolerance limits		Flange diameter tolerance limits	
mm		Inch		D_m		Open type bearing limits[1]		Shield/seal bearing limits[1]						
Over	Including	Over	Including	High +	Low −	D_{max} +	D_{min} −	D_{max} +	D_{min} −		+	−	+	−
0	18	0	0.7087	0	3	1	4	2	5	4	0	20	50	20
18	30	0.7087	1.1811	0	3	1	4	2	5	4	0	20	50	20
30	50	1.1811	1.9685	0	3	2	5	4	7	4	0	20	50	20

Width tolerance limits

Bearing other than duplex width of individual inner or outer ring				Duplex bearings[2] total width of a pair of inner or outer rings			
Bore diameter mm		Width tolerance limits		Bore Diameter mm		Width tolerance limits	
Over	Including	Plus	Minus	Over	Including	Plus	Minus
0	30	0	50	0	30	0	200

[1] $\frac{D_{max}+D_{min}}{2}$ shall be within D_m

[2] If other than a pair of bearings is involved, the tolerance is in proportion to the number of bearings.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table V - Significant codes for variations of group 0 base bearing numbers
(excludes pivot bearings)
see table VI

1st position code X- - -	Protection (1st position)	2nd position code -X- -	Retainer (2nd position)
0- - -	No closures	-0- -	Pressed steel
1- - -	One shield	-1- -	Pressed stainless steel
2- - -	Two shields	-2- -	Pressed bronze
3- - -	One seal	-3- -	Spring-stainless steel
4- - -	Two seals	-4- -	Machined non-metallic
		-5- -	Full type-no retainer

3rd position code - -X-	Tolerance and internal fit (3rd position)	4th position code - - -X	Lubricant (4th position)
- -0-	ABEC 5 standard	- - -0	Mfr. std. preservative
- -1-	ABEC 5 tight	- - -1	MIL-L-6085
- -2-	ABEC 5 loose	- - -2	Versilub F50-silicone oil
- -3-	ABEC 7 standard	- - -3	ASU-M100 extreme HT grease
- -4-	ABEC 7 tight	- - -4	MIL-G-23827
- -5-	ABEC 7 loose	- - -5	MIL-L-6085 (centrifuged)
- -6-	ABEC 3 standard	- - -6	Unitemp-500
- -7-	ABEC 3 tight	- - -7	Dry-no lubricant
- -8-	ABEC 3 loose	- - -8	MIL-L-7870
- -9-	[1]ABEC 9 standard	- - -9	DC33 silicone grease

[1]Bearings made to ABEC 9 tolerances with tight or loose fit will be coded special

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table VI - Significant codes for variations of group O pivot bearing base numbers

1st position code	Material (1st position)	3rd & 4th position code	Number of balls (3rd and 4th position)
X_ _ _		_ _XX	
0_ _ _	- - - - - - - - - - - - - - - - - - -	_ _03	Three
1_ _ _	Stainless steel (440c)	_ _04	Four
2_ _ _	Chrome steel (SAE 52100)	_ _05	Five
3_ _ _	- - - - - - - - - - - - - - - - - - -	_ _06	Six
4_ _ _	- - - - - - - - - - - - - - - - - - -	_ _07	Seven
		_ _08	Eight
		_ _09	Nine
		_ _10	Ten
		_ _11	Eleven
		_ _12	Twelve
		_ _13	Thirteen
		_ _14	Fourteen
		_ _15	Fifteen
		_ _16	Sixteen
2nd position code	Retainment (2nd position)		
_X_ _			
_0_ _	None		
_1_ _	Ball retainer		
_2_ _	Retainment plate		
_3_ _	Ball retainer and plate		
_4_ _	Ball retainer, plate and loading spring		
_5_ _			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table VII - Starting torque values for instrument ball bearings

Bore diameter d	O.D. D	Test load	Maximum starting torque milligram - millimeters radial internal clearance		
			Tight fit 0.0001 - 0.0003 inch	Normal fit 0.0002 - 0.0005 inch	Loose fit 0.0005 - 0.0008 inch
Inches	Inches	Grams			
0.0400	0.1250	75	1,800	1,500	1,400
.0469	.1562	75	1,800	1,500	1,400
.0550	.1875	75	1,800	1,500	1,400
.0781	.2500	75	1,800	1,500	1,400
.0937	.3125	75	1,800	1,500	1,400
.1250	.2500	75	1,800	1,500	1,400
.1250	.3125	75	1,800	1,500	1,400
.1250	.3750	75	2,000	1,600	1,500
.1250	.3750	400	5,000	4,500	4,200
.1250	.5000	400	5,000	4,500	4,200
.1562	.3125	75	1,800	1,500	1,400
.1875	.3125	75	1,800	1,500	1,400
.1875	.3750	75	2,000	1,600	1,500
.1875	.5000	400	6,500	5,500	5,000
.2500	.3750	75	1,800	1,500	1,400
.2500	.5000	400	6,000	5,200	4,800
.2500	.6250	400	7,000	6,000	5,500
.2500	.7500	400	8,000	7,000	6,500
.3750	.8750	400	11,000	9,500	9,000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table VIII - Boundary dimensions-DA

Bore		O.D.	Width	O.D. and width	Bore		O.D.	Width	O.D. and width
Decimal	Inches	Inches	Inches	Code	Decimal	Inches	Inches	Inches	Code
025	0.0250	0.1000	0.0312	01	187	0.1875	0.3125	0.1094	01
							.3125	.1250	02
040	.0400	.1250	.0469	01			.3750	.1250	05
							.5000	.1094	07
046	.0469	.1562	.0625	01			.5000	.1562	09
		.1562	.0938	02			.5000	.1960	19
							.7500	.1960	12
055	.0550	.1875	.0781	01			.8750	.1960	13
		.1875	.0938	02					
		.1875	.1094	03	218	.2188	.3125	.1094	01
		.2188	.0781	04					
		.2188	.1094	05	250	.2500	.3750	.1250	01
							.5000	.1250	05
078	.0781	.2500	.0938	01			.5000	.1875	07
		.2500	.1094	02			.6250	.1960	09
		.2500	.1406	03			.7500	.2188	02
							.7500	.2812	12
093	.0938	.1875	.0625	01					
		.1875	.0938	02	312	.3125	.5000	.1562	01
		.2500	.0625	03					
		.2750	.0625	04	375	.3750	.6250	.1562	01
		.3125	.0625	05			.6250	.1960	02
		.3125	.1094	06			.8750	.2188	09
		.3125	.1406	07			.8750	.2812	19
125	.1250	.2500	.0938	01	500	.5000	.7500	.1562	01
		.2500	.1094	03			.7500	.1960	02
		.3125	.1094	05			.8750	.2188	03
		.3125	.1406	06			1.1250	.2500	09
		.3750	.0938	07			1.1250	.3125	19
		.3750	.1094	08					
		.3750	.1406	10	625	.6250	.8750	.1562	01
		.3750	.1562	09			.8750	.1960	02
		.4375	.0938	13			1.3750	.2812	09
		.5000	.1719	02			1.3750	.3438	19
		.5000	.1094	12					
		.7500	.1250	14	750	.7500	1.0000	.1562	01
							1.0000	.1960	02
156	.1562	.3125	.1094	01					
		.3125	.1250	02					
		.3125	.1406	03					

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the currentversion before use.

Table IX - Boundary dimensions-DB

Bore size in		O.D.	Inner ring width	Outer ring width	O.D. and width
Decimal	Inches	Inches	Inches	Inches	Code
040	0.0400	0.1250	0.0781	0.0469	01
046	.0469	.1562	.0937	.0625	01
		.1562	.1250	.0937	02
055	.0550	.1875	.1094	.0781	01
		.1875	.1406	.1094	02
078	.0781	.2500	.1250	.0937	01
		.2500	.1719	.1406	02
093	.0937	.1875	.0937	.0625	01
		.1875	.1250	.0937	02
		.3125	.1406	.1094	03
		.3125	.1719	.1406	04
125	.1250	.2500	.1250	.0937	01
		.2500	.1406	.1094	02
		.3125	.1406	.1094	03
		.3125	.1719	.1406	04
		.3750	.1406	.1094	05
		.3750	.1719	.1406	06
		.3750	.1875	.1562	07
156	.1562	.3125	.1406	.1094	01
		.3125	.1562	.1250	02
187	.1875	.3125	.1406	.1094	01
		.3125	.1562	.1250	02
		.3750	.1562	.1250	03
250	.2500	.3750	.1562	.1250	01
		.5000	.1562	.1250	02
		.5000	.2188	.1875	03
312	.3125	.5000	.1875	.1562	01

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXV - Boundary dimensions-MB (cont'd.)

Bore MM	O.D. MM	Width[1]	O.D. and width code	Bore MM	O.D. MM	Width[1]	O.D. and width code
180	440	5-3/4 inches	33	280	500	63	06
					500	4-7/8 inches	16
190	340	46	06		560	80	12
	340	3-3/8 inches	16		580	6-1/2 inches	32
	360	55	12		620	108	13
	400	4-1/2 inches	32		660	8-1/2 inches	33
	420	78	13				
	460	6 inches	33	300	520	67	06
					540	5 inches	16
200	360	48	06		580	85	12
	360	3-1/2	16		620	7 inches	32
	380	58	12		660	116	13
	420	4-3/4 inches	32				
	440	80	13	320	540	71	06
	480	6-1/2 inches	33		580	5-1/8 inches	16
					620	92	12
210	370	50	06		660	7-1/2 inches	32
	380	3-3/4 inches	16		700	124	13
	400	62	12				
	440	5 inches	32				
	460	84	13				
	510	6-3/4 inches	33				
220	390	51	06				
	400	3-7/8 inches	16				
	420	65	12				
	460	5-1/4 inches	32				
	480	88	13				
	540	7 inches	33				
230	410	53	06				
	420	4 inches	16				
	460	69	12				
	480	5-1/2 inches	32				
	500	91	13				
	560	7-1/4 inches	33				
240	430	55	06				
	440	4-1/4 inches	16				
	480	72	12				
	500	5-3/4 inches	32				
	520	95	13				
	580	7-1/2 inches	33				
250	445	57	06				
	460	4-3/8 inches	16				
	500	76	12				
	520	6 inches	32				
	560	98	13				
	600	7-3/4 inches	33				
260	460	59	06				
	480	4-1/2 inches	16				
	520	80	12				
	540	6-1/4 inches	32				
	600	102	13				
	620	8 inches	33				

[1]Dimensions are in millimeters, unless otherwise indicated.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXVI - Boundary dimensions-MC

Bore MM	O.D. MM	Width O.R.[1]	Width I.R.[1]	Width Overall[1]	O.D. and width code
5	19	0.315	0.386	0.406	15
	19	.315	.497	.497	25
	19	.406	.386	.406	65
	19	.406	.390	.406	75
	19	.406	.497	.497	85
	19	.562	.562	.562	52
6	19	.315	.386	.406	15
	19	.315	.497	.497	25
	19	.315	.562	.562	35
	19	.354	.338	.354	45
	19	.406	.386	.406	65
	19	.406	.390	.406	75
	19	.406	.497	.497	85
	19	.472	.472	.472	42
	19	.562	.562	.562	52
	24	.296	.386	.406	06
	24	.315	.386	.406	16
	24	.315	.497	.497	36
	24	.315	.562	.562	46
	24	.371	.386	.406	56
	24	.391	.386	.406	66
	24	.406	.386	.406	76
	24	.406	.390	.406	86
	24	.406	.497	.497	96
	24	.562	.562	.562	03
	24	.580	.580	.580	13
7	22	.315	.386	.406	15
	22	.315	.497	.497	25
	22	.315	.562	.562	35
	22	.360	.390	.406	45
	22	.406	.386	.406	65
	22	.406	.390	.406	75
	22	.406	.497	.497	85
	22	.500	.500	.500	42
	22	.562	.562	.562	52
	24	.296	.386	.406	06
	24	.315	.386	.406	16
	24	.315	.497	.497	36
	24	.315	.562	.562	46
	24	.371	.386	.406	56
	24	.391	.386	.406	66
	24	.406	.386	.406	76
	24	.406	.390	.406	86
	24	.406	.497	.497	96
	24	.562	.562	.562	03
	24	.580	.580	.580	13
8	22	.315	.386	.406	15
	22	.315	.497	.497	25
	22	.315	.562	.562	35
	22	.398	.390	.406	45
	22	.406	.386	.406	65
	22	.406	.390	.406	75
	22	.406	.497	.497	85
	22	.500	.500	.500	01
8	22	0.562	0.562	0.562	11
	24	.296	.386	.406	06
	24	.315	.386	.406	16
	24	.315	.417	.433	26
	24	.315	.497	.497	36
	24	.315	.562	.562	46
	24	.371	.386	.406	56
	24	.391	.390	.406	66
	24	.406	.360	.390	92
	24	.406	.386	.406	76
	24	.406	.390	.406	86
	24	.406	.497	.497	96
	24	.562	.562	.562	52
	24	.580	.580	.580	62
9	26	.315	.386	.406	15
	26	.315	.497	.497	25
	26	.398	.437	.453	45
	26	.406	.386	.406	65
	26	.406	.497	.497	85
	26	.453	.437	.453	75
	26	.562	.562	.562	52
	30	.354	.480	.500	16
	30	.354	.646	.646	36
	30	.385	.480	.500	06
	30	.460	.480	.500	56
	30	.486	.480	.500	66
	30	.500	.480	.500	76
	30	.500	.484	.500	86
	30	.500	.646	.646	96
	30	.656	.656	.656	03
	30	.687	.687	.687	13
10	26	.453	.453	.453	90
	28	.354	.456	.472	05
	30	.354	.480	.500	15
	30	.354	.646	.646	25
	30	.385	.480	.500	35
	30	.460	.480	.500	45
	30	.485	.480	.500	55
	30	.500	.480	.500	65
	30	.500	.484	.500	75
	30	.500	.646	.646	85
	30	.656	.656	.656	52
	30	.687	.687	.687	62
11	32	.385	.480	.500	35
	32	.394	.480	.500	15
	32	.394	.606	.606	25
	32	.460	.480	.500	45
	32	.485	.480	.500	55
	32	.500	.480	.500	65
	32	.500	.484	.500	75
	32	.500	.606	.606	85
	32	.606	.606	.606	32
	32	.656	.656	.656	52
	32	.687	.687	.687	62

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXVI - Boundary dimensions-MC (cont'd.)

Bore MM	O.D. MM	Width O.R.[1]	Width I.R.[1]	Width Overall[1]	O.D. and width code
12	32	0.453	0.453	0.453	90
	32	.385	.480	.500	35
	32	.394	.480	.500	15
	32	.394	.606	.606	25
	32	.460	.480	.500	45
	32	.485	.480	.500	55
	32	.500	.480	.500	65
	32	.500	.484	.500	75
	32	.500	.606	.606	85
	32	.606	.606	.606	32
	32	.656	.656	.656	52
	32	.687	.687	.687	62
13	28	.453	.453	.453	90
	32	.385	.480	.500	35
	32	.394	.480	.500	15
	32	.394	.606	.606	25
	32	.460	.480	.500	45
	32	.485	.480	.500	55
	32	.500	.480	.500	65
	32	.500	.484	.500	75
	32	.500	.606	.606	85
	32	.606	.606	.606	32
	32	.656	.656	.656	52
	32	.687	.687	.687	62
14	35	.385	.480	.500	35
	35	.433	.480	.500	15
	35	.433	.567	.567	25
	35	.460	.480	.500	45
	35	.485	.480	.500	55
	35	.500	.480	.500	65
	35	.500	.484	.500	75
	35	.500	.567	.567	85
	35	.567	.567	.567	32
	35	.656	.656	.656	52
	35	.687	.687	.687	62
15	32	.500	.500	.500	90
	35	.354	.456	.472	05
	35	.385	.480	.500	35
	35	.433	.480	.500	15
	35	.433	.567	.567	25
	35	.460	.480	.500	45
	35	.485	.480	.500	55
	35	.500	.480	.500	65
	35	.500	.484	.500	75
	35	.500	.567	.567	85
	35	.567	.567	.567	32
	35	.656	.656	.656	52
	35	.687	.687	.687	62
	42	.512	.552	.591	06
	42	.512	.669	.669	16
	42	.591	.552	.591	26
	42	.591	.669	.669	36
16	32	.500	.500	.500	90
	35	.385	.480	.500	35
16	35	.433	.480	.500	15
	35	.433	.567	.567	25
	35	.460	.480	.500	45
	35	.485	.480	.500	55
	35	.500	.480	.500	65
	35	.500	.484	.500	75
	35	.500	.567	.567	85
	35	.567	.567	.567	32
	35	.656	.656	.656	52
	35	.687	.687	.687	62
	40	.431	.538	.563	35
	40	.472	.538	.563	15
	40	.472	.654	.654	25
	40	12mm	.6875	.6875	82
	40	.472	.718	.718	05
	40	.431	.538	.563	45
	40	.548	.538	.563	55
	40	.563	.538	.563	65
	40	.563	.547	.563	75
	40	.563	.654	.654	85
	40	.654	.654	.654	32
	40	.718	.718	.718	52
	40	.750	.750	.750	62
	47	.551	.591	.630	06
	47	.551	.709	.709	16
	47	.630	.591	.630	26
	47	.630	.605	.630	46
	47	.630	.709	.709	36
20	42	.563	.563	.563	90
	47	.495	.600	.625	35
	47	.551	.600	.625	15
	47	14mm	17mm	17mm	72
	47	.551	.699	.699	25
	47	14mm	.8125	.8125	82
	47	.595	.600	.625	45
	47	.610	.600	.625	55
	47	.625	.600	.625	65
	47	.625	.609	.625	75
	47	.625	.699	.699	85
	47	.696	.696	.696	22
	47	.699	.699	.699	32
	47	.804	.804	.804	42
	47	.813	.813	.813	52
	47	.843	.843	.843	62
	52	.591	.709	.748	06
	52	15mm	19mm	19mm	73
	52	15mm	.875	.875	83
	52	.591	.906	.906	16
	52	.709	.684	.709	46
	52	.748	.709	.748	26
	52	.748	.906	.906	36
	52	.818	.818	.818	03
	52	.948	.948	.948	23
25	47	.563	.563	.563	90

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXVI - Boundary dimensions-MC (cont'd.)

Bore MM	O.D. MM	Width O.R.[1]	Width I.R.[1]	Width Overall[1]	O.D. and width code
25	52	0.495	0.600	0.625	35
	52	.591	.600	.625	15
	52	.591	.659	.659	25
	52	15mm	18mm	18mm	72
	52	0.591	0.813	0.813	05
	52	.595	.600	.625	45
	52	.610	.600	.625	55
	52	.625	.600	.625	65
	52	.625	.609	.625	75
	52	.625	.659	.659	85
	52	.659	.659	.659	32
	52	.696	.696	.696	22
	52	.804	.804	.804	42
	52	.813	.813	.813	52
	52	.843	.843	.843	62
	62	17mm	21mm	21mm	06
	62	0.669	0.984	0.984	16
	62	17mm	1.000	1.000	83
	62	0.729	0.944	0.984	76
	62	.827	.827	.827	13
	62	.827	.903	.903	56
	62	.827	.984	.984	36
	62	.883	1.033	1.033	66
	80	21mm	27mm	27mm	74
26	52	0.591	0.600	0.625	15
	52	.591	.659	.659	25
	52	.625	.600	.625	65
	52	.625	.609	.625	75
	52	.625	.659	.659	85
	52	.659	.659	.659	32
	52	.812	.812	.812	52
30	62	.630	.748	.787	15
	62	16mm	20mm	20mm	72
	62	16mm	0.9375	.9375	82
	62	0.630	.945	.945	25
	62	.757	.748	.787	55
	62	.787	.748	.787	65
	62	.787	.945	.945	85
	62	.818	.818	.818	22
	62	.945	.945	.945	32
	62	.948	.948	.948	42
	62	1.062	1.062	1.062	52
	72	19mm	24mm	24mm	73
	72	19mm	1.1875	1.1875	83
	72	0.808	1.023	1.063	76
	72	.891	1.001	1.001	56
	72	.945	1.166	1.166	66
	90	23mm	30mm	30mm	74
35	72	0.669	0.787	0.827	15
	72	17mm	21mm	21mm	72
	72	0.669	0.984	0.984	25
	72	17mm	1.0625	1.0625	82
	72	0.797	0.787	0.827	35
	72	.827	.787	.827	65
	72	.827	.984	.984	85
35	72	0.903	0.903	0.903	22
	72	.984	.984	.984	52
	72	1.033	1.033	1.033	42
	72	1.125	1.125	1.125	62
	80	21mm	27mm	27mm	73
	80	21mm	1.375	1.375	83
	80	0.955	1.065	1.065	56
	100	25mm	33mm	33mm	74
40	80	18mm	23mm	23mm	72
	80	0.709	0.945	0.945	45
	80	.709	1.1811	1.1811	05
	80	18mm	1.1875	1.1875	82
	80	0.827	0.945	0.945	15
	80	.827	1.063	1.063	25
	80	.906	.906	.906	02
	80	.912	1.022	1.022	35
	80	.945	.945	0.945	12
	80	.945	1.063	1.063	85
	80	.967	1.187	1.187	95
	80	1.063	1.063	1.063	32
	80	1.102	1.102	1.102	52
	90	23mm	30mm	30mm	73
	90	23mm	1.4375	1.4375	83
	90	1.056	1.166	1.166	56
	90	1.111	1.331	1.331	66
	110	27mm	35mm	35mm	74
45	85	19mm	24mm	24mm	72
	85	0.748	1.024	1.024	45
	85	.748	1.1811	1.1811	05
	85	19mm	1.1875	1.1875	82
	85	0.827	0.945	0.945	15
	85	.827	1.062	1.063	25
	85	.912	1.022	1.022	35
	85	.945	.945	.945	02
	85	.967	1.187	1.187	95
	85	1.142	1.142	1.142	52
	100	25mm	32mm	32mm	73
	100	25mm	1.5625	1.5625	83
	100	1.201	1.336	1.336	56
	100	1.246	1.516	1.516	66
	100	0.984	1.378	1.378	16
	120	29mm	37mm	37mm	74
50	90	20mm	25mm	25mm	72
	90	0.787	1.024	1.024	45
	90	.787	1.1811	1.1811	05
	90	20mm	1.1875	1.1875	82
	90	0.866	1.024	1.024	15
	90	.866	1.1811	1.1811	25
	90	.912	1.022	1.022	35
	90	.867	1.187	1.187	95
	90	.984	0.984	0.984	02
	90	1.181	1.181	1.181	52
	110	27mm	35mm	35mm	73
	110	27mm	1.750	1.750	83
	110	1.285	1.460	1.460	56

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXVI - Boundary dimensions-MC (cont'd.)

Bore MM	O.D. MM	Width O.R.[1]	Width I.R.[1]	Width Overall[1]	O.D. and width code
	110	1.330	1.680	1.680	66
	130	31mm	40mm	40mm	74
55	100	.827	1.063	1.063	45
	100	21mm	1.3125	1.3125	82
	100	.827	1.339	1.339	05
	100	.984	1.312	1.312	25
	100	1.014	1.125	1.124	35
	100	1.069	1.289	1.289	95
	120	29mm	38mm	38mm	73
	120	29mm	1.9385	1.9385	83
	120	1.369	1.544	1.544	56
	120	1.414	1.764	1.764	66
	140	33mm	43mm	43mm	74
60	110	22mm	28mm	28mm	72
	110	22mm	1.4375	1.4375	82
	110	1.098	1.233	1.233	35
	110	1.153	1.423	1.423	95
	130	31mm	40mm	40mm	73
	130	31mm	2.125	2.125	83
	150	35mm	45mm	45mm	74
65	120	23mm	29mm	29mm	72
	120	23mm	1.500	1.500	82
	140	33mm	43mm	43mm	73
	140	33mm	2.3125	2.3125	83
	160	37mm	48mm	48mm	74
70	125	24mm	31mm	31mm	72
	150	35mm	45mm	45mm	73
	150	35mm	2.500	2.500	82
	180	42mm	54mm	54mm	74
	180	42mm	3.125	3.125	83
75	130	25mm	32mm	32mm	72
	160	37mm	48mm	48mm	73
	160	37mm	2.6875	2.6875	82
	190	45mm	58mm	58mm	74
80	140	26mm	34mm	34mm	72
	160	39mm	50mm	50mm	73
	170	39mm	2.6875	2.6875	82
	200	48mm	61mm	61mm	74
85	150	28mm	36mm	36mm	72
	180	41mm	53mm	53mm	73
	180	41mm	2.875	2.875	82
	210	52mm	66mm	66mm	74
90	160	30mm	39mm	39mm	72
	190	43mm	55mm	55mm	73
	190	43	2.875	2.875	82
	225	54mm	68mm	68mm	74
	225	54mm	3.875	3.875	83
95	170	32mm	41mm	41mm	72
95	170	32mm	2.1875	2.1875	82
	200	45mm	58mm	58mm	73
	200	45mm	3.0625	3.0625	83
	240	55mm	70mm	70mm	74
100	180	34mm	44mm	44mm	72
	215	47mm	60mm	60mm	73
	215	47mm	3.25	3.250	82
	250	58mm	74mm	74mm	74
105	190	36mm	46mm	46mm	72
	225	49mm	62mm	62mm	73
	225	49mm	3.4375	3.4375	82
	260	60mm	76mm	76mm	74
110	200	38mm	49mm	49mm	72
	240	50mm	64mm	64mm	73
	240	50mm	3.625	3.625	82
	280	65mm	82mm	82mm	74
120	215	40mm	51mm	51mm	72
	260	55mm	69mm	69mm	73
	260	55mm	4.125	4.125	82
	310	72mm	89mm	89mm	74
130	230	40mm	51mm	51mm	72
	280	55mm	72mm	72mm	73
	340	78mm	96mm	96mm	74
140	250	42mm	53mm	53mm	72
	300	62mm	77mm	77mm	73
	300	63mm	4.50	4.50	82
	360	82mm	100mm	100mm	74
150	270	45mm	57mm	57mm	72
	380	85mm	105mm	105mm	74
160	290	48mm	60mm	60mm	72
	340	68mm	88mm	88mm	73
	400	88mm	108mm	108mm	74
170	310	52mm	64mm	64mm	72
	360	72mm	88mm	88mm	73
	420	92mm	112mm	112mm	74
180	320	52mm	64mm	64mm	72
	380	75mm	92mm	92mm	73
	440	95mm	118mm	118mm	74
190	340	55mm	68mm	68mm	72
	400	78mm	96mm	96mm	73
	460	98mm	121mm	121mm	74
200	360	58mm	72mm	72mm	72
	420	80mm	98mm	98mm	73
	480	102mm	126mm	126mm	74

[1] Dimensions are in inches unless otherwise indicated.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

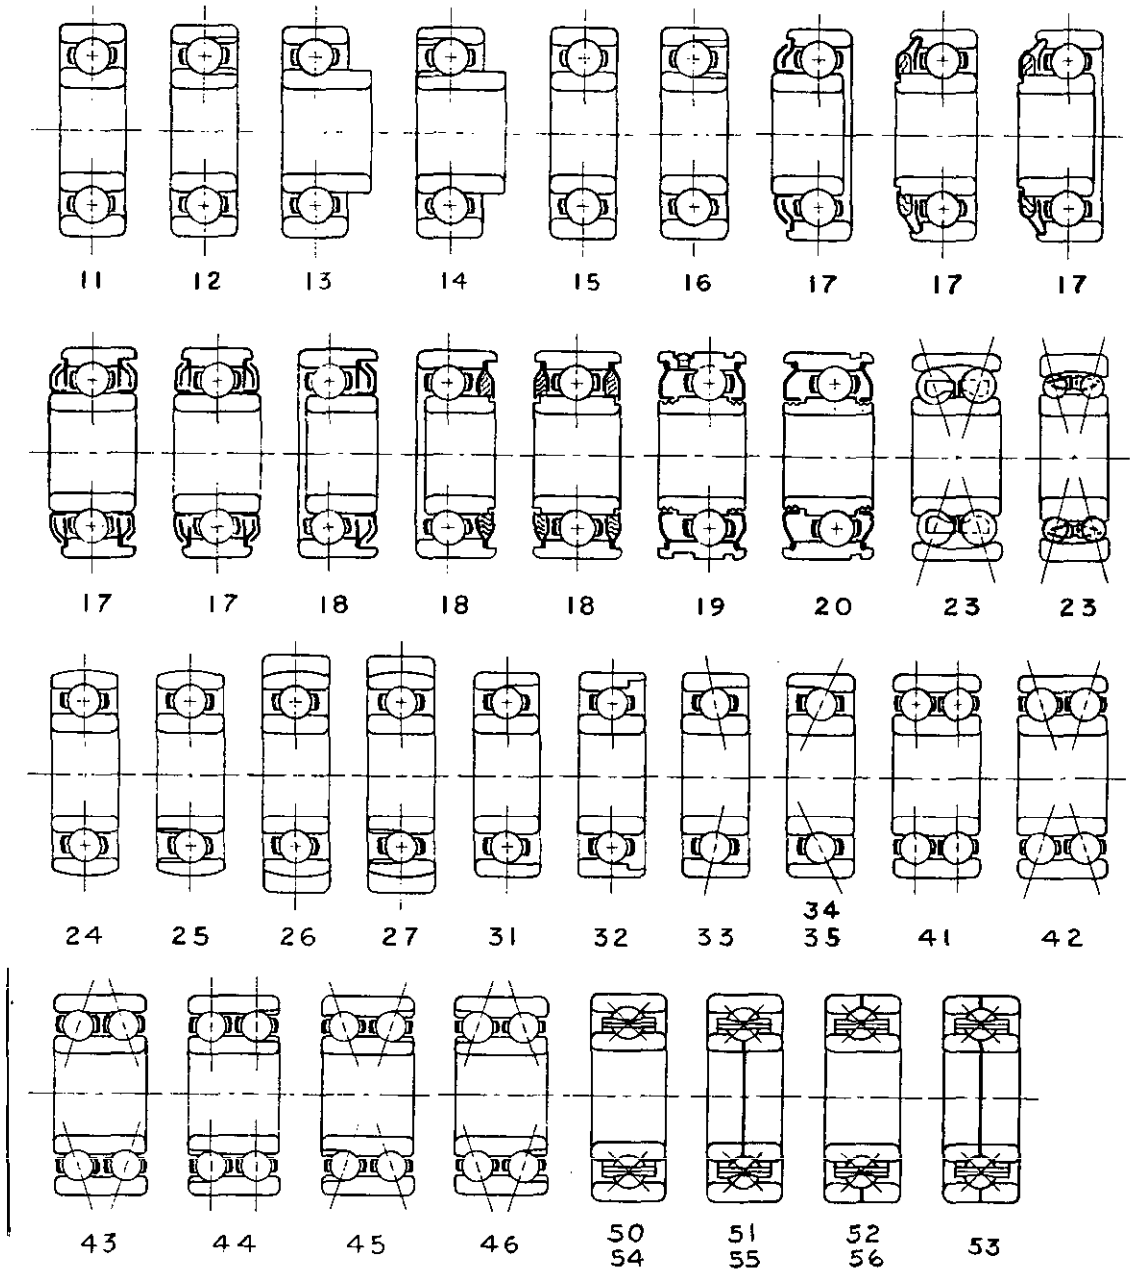


Figure 13 - Illustrations of group 1 bearing types.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 This section covers cylindrical and self-aligning roller bearings - group 2 (see figure 18).

2. REFERENCED DOCUMENTS

2.1 This section is not applicable.

3. NUMBER STRUCTURE

3.1 Digit positions. Example of digit positions is shown on figure 14.

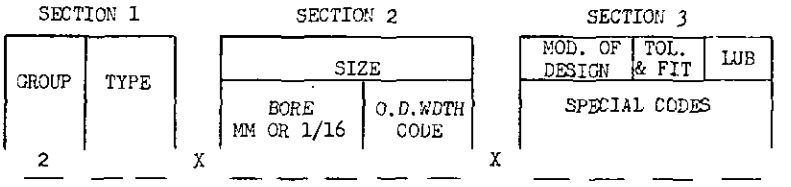


Figure 14. Group 2, number structure.

4. CLASSIFICATION

4.1 Standard values. Standard values for tolerances of group 2 metric annular roller bearings are shown in table XXVII.

4.2 Standard values for internal radial clearance in self-aligning and cylindrical roller bearings are shown in tables XXVIII and XXIX, respectively.

5. GROUP AND TYPE CODES

5.1 Digit positions. Example of digit positions is shown on figure 15.

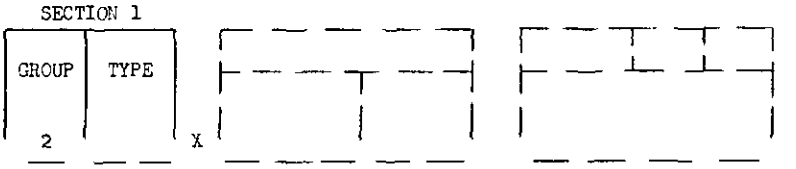


Figure 15 - Group 2, section 1

5.2 Group code. Group code for first position shall be as follows:

2 - Cylindrical and self-aligning roller bearings.

5.3 Type code. Type code for second and third positions shall be as specified in 5.3.1 through 5.3.9.

5.3.1 Cylindrical roller bearings, non-locating single row of rollers, metric bore and O.D., inch or metric width shall be as follows:

Type		Dimension table
11	Two lip inner ring-cylindrical outer ring with two roller retainment rings on outer.	MA (table XXXIV)
12	Two lip inner ring-cylindrical outer ring.	MA (table XXXIV)
13	One lip inner ring-cylindrical outer ring with two roller retainment rings on outer.	MA (table XXXIV)
14	Cylindrical inner ring-cylindrical outer ring with two roller retainment rings on outer.	MA (table XXXIV)

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

15	Cylindrical inner ring-two lip outer ring.	MA (table XXXIV)
16	Cylindrical inner ring-one lip outer ring.	MA (table XXXIV)
21	Cylindrical inner ring-cylindrical outer ring with one centrally located roller guide ring.	MA (table XXXIV)
22	Cylindrical outer ring-cylindrical inner ring with one centrally located roller guide ring.	MA (table XXXIV)
23	Cylindrical inner and outer rings.	MA (table XXXIV)

5.3.2 Cylindrical roller bearings-one direction locating-single row of rollers-metric bore and O.D. -inch or metric width shall be as follows:

Type		Dimension table
31	Two lip inner ring-one lip outer ring.	MA (table XXXIV)
32	Two lip inner ring-one lip outer ring with one roller retainment ring on outer.	MA (table XXXIV)
33	One lip inner ring-two lip outer ring.	MA (table XXXIV)
34	One lip inner and outer ring.	MA (table XXXIV)
35	One lip inner ring-one lip outer ring with one roller retainment ring on outer.	MA (table XXXIV)
36	One lip inner ring with one roller retainment ring-two lip outer ring.	MA (table XXXIV)

5.3.3 Cylindrical roller bearings-two direction locating-single row of rollers-metric bore and O.D. -inch or metric width shall be as follows:

Type		Dimension table
37	Two lip inner ring-two lip outer ring.	MA (table XXXIV)
38	Two lip inner ring-two lip outer ring with one lip of inner separable and extended.	MC (table XXXVI)

5.3.4 Cylindrical roller bearings, double row of roller types-metric bore and O.D. -inch or metric width shall be as follows:

Type		Dimension table
41	Two lip inner ring-cylindrical outer ring.	MA (table XXXIV)
42	Two lip inner ring-cylindrical outer ring with two roller retainment rings on outer.	MA (table XXXIV)
43	Cylindrical inner ring-two lip outer ring.	MA (table XXXIV)
44	Cylindrical inner ring-cylindrical outer ring with two roller retainment rings on outer.	MA (table XXXIV)
45	Cylindrical inner and outer rings.	MA (table XXXIV)

5.3.5 Cylindrical roller bearings, non-locating, single row of rollers, all inch dimensions shall be as follows:

Type		Dimension table
51	Two lip inner ring, cylindrical outer ring.	IA (table XXXII)
52	Cylindrical inner ring, two lip outer ring.	IA (table XXXII)
53	Two lip inner ring, cylindrical outer ring with two roller retainment rings on outer.	IA (table XXXII)

5.3.6 Cylindrical roller bearings, one direction locating, single row of rollers, all inch dimensions shall be as follows:

Type		Dimension table
56	Two lip inner ring, one lip outer ring	IA (Table XXXII)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

5.3.7 Cylindrical roller bearings, two direction locating, single row of rollers, all inch dimensions shall be as follows:

Type		Dimension table
58	Two lip inner ring, two lip outer ring.	IA (table XXXII)

5.3.8 Self-aligning roller bearings. Self-aligning roller bearings shall be as follows:

Type		Dimension table
59	Single row, angular contact types, outer and inner race-ways-convex, metric bore, O.D. and width	MA (table XXXIV)
60	Single row, radial contact types, internal self-aligning, two lip inner ring, raceways of inner and outer rings concave, metric bore O.D. and width (for Airframe type-see group 5, type 24).	MA (table XXXIV)
61	Single row, angular contact types, outer and inner race-ways concave, metric bore, O.D. and width.	MA (table XXXIV)
62	Cylindrical roller bearings, single row, external self-aligning with aligning ring, two lip inner ring, cylindrical I.D. on outer ring, metric bore and O.D., inch or metric width.	MB (table XXXV)
63	Cylindrical roller bearings, single row, external self-aligning with aligning ring, two lip inner ring, cylindrical I.D. outer ring with two roller retainment rings, metric bore and O.D., inch or metric width.	MB (table XXXV)
64	Spherical roller bearings, double row, self contained, outer and inner raceways concave, metric bore and O.D., inch or metric width.	MA (table XXXIV)
65	Concave roller bearings, double row, self contained, outer and inner raceways convex metric bore O.D. and width.	MA (table XXXIV)
66	Spherical roller bearings, single row, adjustable, angular contact, inch bore, O.D. and width.	IA (table XXXII)
67	Spherical roller bearings, double row, two outer races, angular contact, inch bore, O.D. and width.	IA (table XXXII)
70	Ground, single row, cylindrical rollers, two direction locating, split outer ring, inner and outer rings grooved for four point roller contact, all inch dimensions.	IQ (table XXXIII)
71	Ground, single row, cylindrical rollers, two direction locating, split inner ring, inner and outer rings grooved for four point roller contact, all inch dimensions.	IQ (table XXXIII)

5.3.9 Double row of rollers, two piece outer ring, outer and inner raceways convex (see group 9).

6. BORE SIZE - O.D. AND WIDTH CODE

6.1 Digit positions. Example of digit positions is shown on figure 16.

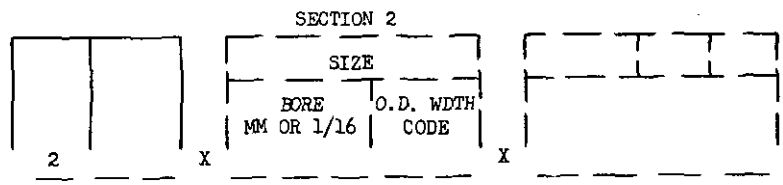


Figure 16 - Group 2, section 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

6.2 Bore size (4, 5 and 6th positions). The bore size of cylindrical and self-aligning roller bearings is either expressed as metric or inch. Type descriptions and boundary dimension tables indicate which method of expression is used.

6.2.1 Metric. Metric bores are expressed as the actual number of mm.

Example: 4 mm = 004; 25 mm = 025;
120 mm = 120; etc.

6.2.2 Inch. Inch bores are expressed as the number of 1/16ths in the bore size (except boundary dimensions IQ, table XXXIII which expresses the number of 1/8ths in the bore size).

Example: 15/16 inch = 015; 1 inch = 016;
1-3/8 inches = 022; 10 inches = 160.
Example: 7/8 inch = 007; 98 inches = 784

6.3 O.D. and width code (7 and 8th positions). The O.D. and width dimensions of a bearing are expressed by a code as shown in the boundary dimension tables (see tables XXXII through XXXVI).

6.3.1 Application. The type description carries a reference to the appropirate boundary dimension table. These tables are arranged by bore size, and within each bore size the O.D.s and widths are arranged in numerical sequence. Opposite each set of dimensions is the appropriate code for the O.D. and width. Where bearing dimensions correspond to AFBMA basic standards, the O.D. and width code is identical with their series code.

6.3.2 Interpretation of O.D. and width code. A bearing number - 211 X 02502 is decoded as:

211 = Cylindrical roller bearing, non-locating, single row of rollers, all metric dimensions, two lip inner ring, cylindrical outer ring with two roller retainment rings on outer. Boundary dimension table - MA (see table XXXIV).
02502 = 25 mm bore size: O.D. and width code 02.

Reference to boundary dimension table MA (see table XXXIV), bore size of 025 and code 02 indicates that the O.D. is 52mm and width is 15mm.

7. VARIATION OF THE GROUP 2 BASE BEARING NUMBER

7.1 Digit positions. Example of digit positions is shown on figure 17.

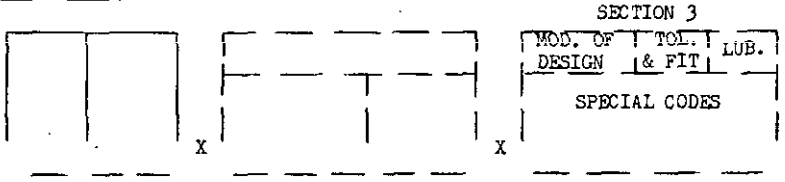


Figure 17 - Group 2, section 3.

7.2 Additional variations. Section 3 codes any additional variations, modifications or special features of a bearing, as described by the base number, which are necessary for complete identification. When section 3 is required it may be either a "Significant Code" covering those common features itemized in tables XXX and XXXI, or an arbitrarily assigned number known as a "Special Code" covering all other variations, modifications, etc.

7.2.1 Significant codes. Significant codes may be either two or four digits and will begin with the numerals 0 through 7. These codes are constant in meaning within the group, regardless of the base number with which they are used. Reference to tables XXX and XXXI will furnish the significance of each code.

7.2.2 Special codes. Special codes are arbitrarily assigned numbers of four digits only that begin with the numerals 8 and 9. These four digit numbers are assigned in numerical sequence as they are required to code additional features (not covered by the significant codes) of a particular base number. The more common features significantly coded in the "Table of Variation" (see table XXXI) may occur in conjunction with some additional feature or features, in which case all of the additional features are coded by a special code.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the currenversion before use.

7.2.2.1 Special codes are assigned only by the central agency responsible for the numbering system. A 0 digit in any position of a significant type number indicates the "standard" for the feature coded in that number position.

8. BOUNDARY DIMENSION TABLES

8.1 Use. Use of boundary dimension tables shall be as follows:

Dimension table	Bearing types
IA (table XXXII)	51, 52, 53, 56, 58, 66, 67
IQ (table XXXIII)	70, 71
MA (table XXXIV)	11, 12, 13, 14, 15, 16, 21, 22, 23, 31, 32, 33, 34, 35, 36, 37, 41, 42, 43, 44, 45, 59, 60, 61, 64, 65
MB (table XXXV)	62, 63
MC (table XXXVI)	38

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXVII - Tolerance limits for group 2 metric annular roller bearings

Tolerances in 0.0001 inch										Tolerances as shown			
Inner ring					Outer ring					Width			
Bore		RBEC 1			Outside diameter		RBEC 1			Nominal bore in mm		RBEC 1	
Over	Incl	Low −	High +	Ecc	Over	Incl	Low +	High −	Ecc	Over	Incl	High +	Low −
10	18	3	0	4	18	30	0	4	6	0	180	0	.005
18	30	4	0	5	30	50	0	5	8	180	315	0	.010
30	50	5	0	6	50	80	0	5	10	315	400	0	.016
50	80	6	0	8	80	120	0	6	14	400	500	0	.018
80	120	8	0	10	120	150	0	8	16	500	630	0	.022
120	180	10	0	12	150	180	0	10	18				
180	250	12	0	16	180	250	0	12	20				
250	315	14	0	20	250	315	0	14	24				
315	400	16	0	24	315	400	0	16	28				
400	500	18	0	26	400	500	0	18	32				
					500	630	0	20	40				

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXVIII - Tolerance limits for internal radial clearance in self-aligning roller bearings under no load

Tolerance limits in 0.0001 inch

Basic bore diameter		With cylindrical bore							
		Symbol 2		Symbol 0		Symbol 3		Symbol 4	
MM				Normal					
Over	Incl.	Low	High	Low	High	Low	High	Low	High
14	24	4	8	8	14	14	18	18	24
24	30	6	10	10	16	16	22	22	28
30	40	6	12	12	18	18	24	24	32
40	50	8	14	14	22	22	30	30	39
50	65	10	17	17	26	26	36	36	47
65	80	12	20	20	32	32	44	44	57
80	100	14	25	25	39	39	53	53	71
100	120	17	31	31	48	48	64	64	83
120	140	20	38	38	57	57	75	75	95
140	160	24	43	43	65	65	87	87	110
160	180	26	47	47	71	71	95	95	122
180	200	28	51	51	79	79	103	103	133
200	225	32	55	55	87	87	114	114	149
225	250	36	59	59	95	95	126	126	165
250	280	39	67	67	103	103	138	138	180
280	315	44	75	75	110	110	145	145	197
315	355	47	79	79	122	122	161	161	216
355	400	51	87	87	134	134	177	177	236
400	450	55	95	95	145	145	197	197	260
450	500	55	103	103	162	162	216	216	284
500	560	59	110	110	173	173	236	236	307
560	630	67	122	122	189	189	256	256	335
630	710	75	138	138	209	209	276	276	362
710	800	83	153	153	228	228	303	303	397
800	900	91	169	169	256	256	338	338	440
900	1000	103	188	188	280	280	365	365	480
With tapered bore									
14	24	6	10	10	14	14	18	18	24
24	30	8	12	12	17	17	22	22	30
30	40	8	14	14	20	20	26	26	34
40	50	12	18	18	24	24	32	32	41
50	65	14	22	22	30	30	39	39	49
65	80	18	28	28	37	37	49	49	61
80	100	20	32	32	44	44	57	57	75
100	120	25	39	39	53	53	69	69	89
120	140	30	47	47	63	63	81	81	102
140	160	34	51	51	71	71	91	91	118
160	180	37	55	55	79	79	102	102	134
180	200	41	63	63	88	88	114	114	146
200	225	47	71	71	99	99	126	126	162
225	250	53	79	79	106	106	140	140	178
250	280	59	87	87	118	118	156	156	195
280	315	65	94	94	130	130	169	169	213
315	355	71	106	106	142	142	187	187	234
355	400	81	118	118	157	157	207	207	258
400	450	86	130	130	173	173	224	224	283
450	500	98	146	146	193	193	248	248	311
500	560	110	161	161	213	213	275	275	343
560	630	126	181	181	236	236	307	307	386
630	710	138	201	201	264	264	335	335	429
710	800	154	224	224	295	295	378	378	480
800	900	173	252	252	331	331	421	421	539
900	1000	192	280	280	366	366	470	470	600

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXIX - Tolerance limits for internal radial clearance in cylindrical roller bearings

Values in 0.0001 inch

Column		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
Bearing bore MM		Group 0						Group 3						Group 4				
		Interchangeable assembly				Tolerance range		Interchangeable assembly				Tolerance range		Inter-changeable assembly				Tolerance range inter-changeable
			Matched assembly						Matahced assembly									
Over	Incl.	Low	Low	High	High	Inter-changeable	Matched	Low	Low	High	High	Inter-changeable	Matched	Low		High		
-	10	5	7	12	13	8	5	9	9	15	17	3	6	16		26		10
10	18	5	7	12	14	9	5	10	10	16	19	9	5	18		28		10
18	24	6	8	14	16	10	6	12	12	18	23	11	6	20		32		12
24	30	6	8	14	16	10	6	12	12	19	26	14	7	22		36		14
30	40	8	10	17	19	11	7	15	15	23	29	14	8	26		41		15
40	50	11	12	19	22	11	7	18	18	26	32	14	8	30		46		18
50	65	13	15	23	25	12	8	21	21	30	37	16	9	35		54		19
65	80	14	16	25	28	14	9	26	26	36	44	18	10	42		64		22
80	100	16	19	29	32	16	10	32	32	43	54	22	11	51		80		29
100	120	18	21	32	36	18	11	34	34	46	58	24	12	56		88		32
120	140	22	25	37	41	19	12	41	41	55	67	26	14	66		101		35
140	160	26	30	43	49	23	13	49	49	65	77	28	16	77		112		35
160	180	27	31	45	52	25	14	52	52	69	82	30	17	82		118		36
180	200	32	36	51	59	27	15	59	59	77	93	34	18	93		130		37

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table X - Boundary dimensions-DC

Bore		O.D.	Width	Flange O.D.	Flange width	O.D. width and flange
Size in						
Decimal	Inches	Inches	Inches	Inches	Inches	Code
040	0.0400	0.1250	0.0469	0.1719	0.013	01
046	.0469	.1562	.0625	.203	.013	01
		.1562	.0937	.203	.031	02
055	.0550	.1875	.0781	.234	.023	01
		.1875	.1094	.234	.031	02
078	.0781	.2500	.0937	.296	.023	01
		.2500	.1406	.296	.031	02
093	.0938	.1875	.0625	.234	.018	01
		.1875	.0937	.234	.031	02
		.3125	.1094	.359	.023	03
		.3125	.1406	.359	.031	04
125	.1250	.2500	.0937	.296	.023	01
		.2500	.1094	.296	.031	02
		.3125	.1094	.359	.023	03
		.3125	.1406	.359	.031	04
		.3750	.1094	.422	.023	05
		.3750	.1406	.422	.031	06
		.3750	.1562	.440	.030	07
156	.1562	.3125	.1094	.359	.023	01
		.3125	.1250	.359	.036	02
187	.1875	.3125	.1094	.359	.023	01
		.3125	.1250	.359	.036	02
		.3750	.1250	.422	.023	03
		.3750	.1250	.422	.031	04
		.5000	.1562	.565	.042	06
		.5000	.1960	.565	.042	05
250	.2500	.3750	.1250	.422	.023	01
		.3750	.1250	.422	.036	02
		.5000	.1250	.547	.023	03
		.5000	.1875	.547	.045	04
		.6250	.1960	.690	.042	05
312	.3125	.5000	.1562	.547	.031	01
375	.3750	.6250	.1562	.690	.042	01
		.6250	.1960	.690	.042	02
		.8750	.2188	.969	.062	04
		.8750	.2812	.969	.062	03
500	.5000	.7500	.1562	.844	.042	01
		.7500	.1960	.844	.042	02
625	.6250	.8750	.1562	.969	.042	01
		.8750	.1960	.969	.042	02
750	.7500	1.0000	.1562	1.094	.042	01
		1.0000	.1960	1.094	.042	02

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XI - Boundary dimensions-DD

Bore		O.D.	I.R. width	O.R. width	Flange O.D.	Flange width	O.D. width and flange
Size in							
Decimal	Inches	Inches	Inches	Inches	Inches	Inches	Code
040	0.0400	0.1250	0.0781	0.0469	0.171	0.013	01
046	.0469	.1562	.0937	.0625	.203	.013	01
		.1562	.1250	.0937	.203	.031	02
055	.0550	.1875	.1094	.0781	.234	.023	01
		.1875	.1406	.1094	.234	.031	02
078	.0781	.2500	.1250	.0937	.296	.023	01
		.2500	.1719	.1406	.296	.031	02
093	.0937	.1875	.0937	.0625	.234	.018	01
		.1875	.1250	.0937	.234	.031	02
		.3125	.1406	.1094	.359	.023	03
		.3125	.1719	.1406	.359	.031	04
125	.1250	.2500	.1250	.0937	.296	.023	01
		.2500	.1406	.1094	.296	.031	02
		.3125	.1406	.1094	.359	.023	03
		.3125	.1719	.1406	.359	.031	04
		.3750	.1406	.1094	.422	.023	05
		.3750	.1719	.1406	.422	.031	06
		.3750	.1875	.1562	.440	.030	07
156	.1562	.3125	.1406	.1094	.359	.023	01
		.3125	.1562	.1250	.359	.036	02
187	.1875	.3125	.1406	.1094	.359	.023	01
		.3125	.1562	.1250	.359	.036	02
		.3750	.1562	.1250	.422	.023	03
		.3750	.1562	.1250	.422	.031	04
		.4375	.1875	.1630	.500	.042	05
		.4382	.1890	.1630	.500	.042	09
		.5625	.2188	.1875	.625	.042	06
		.5630	.2500	.2260	.625	.042	07
		.5632	.2180	.1950	.625	.042	08
250	.2500	.3750	.1562	.1250	.422	.023	01
		.3750	.1562	.1250	.422	.036	02
		.5000	.1562	.1250	.547	.023	03
		.5000	.2188	.1875	.547	.045	04
		.6250	.2500	.2188	.688	.042	05
		.6257	.2500	.2260	.688	.042	06
312	.3125	.5000	.1875	.1562	.547	.031	01
		.6875	.2500	.2188	.750	.042	02
		.6882	.2500	.2260	.750	.042	03

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XII - Boundary dimensions-DE

O.D. code		Width	Pivot taper	Figure pivot diameter	Pivot and width
Decimal	Inches	Inches	Degrees	Inches	Code
065	0.0650	0.033	60	0.010	01
106	.1063	.049	60	.032	01
		.053	60	.015	02
125	.1250	.046	60	.032	01
157	.1575	.071	60	.039	01
		.075	60	.030	02
		.081	00	.039	03
167	.1673	.076	60	.039	01
		.080	60	.030	02
		.087	00	.039	03
		.091	00	.039	04
187	.1875	.070	60	.048	01
216	.2165	.093	60	.065	01
250	.2500	.093	60	.065	01
275	.2750	.118	60	.079	01
295	.2953	.128	60	.079	01
		.132	00	.078	02
		.136	60	.047	03
		.136	00	.078	04
375	.3750	.140	60	.094	01
		.140	60	.125	02
		.157	60	.118	03
393	.3937	.157	60	.118	01
		.171	60	.118	02
405	.4055	.143	00	.125	01
423	.4232	.140	60	.125	01
		.171	60	.118	02
		.189	00	.118	03
		.191	60	.079	04
		.197	00	.118	05
500	.5000	.156	00	.187	01
551	.5515	.236	00	.157	01
		.260	00	.157	02
625	.6250	.196	00	.250	01
		.196	00	.312	02
629	.6299	.260	00	.196	01
		.272	00	.196	02

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.


Table XIII - Boundary dimensions-DF

O.D. code		Width	Pivot taper	Pivot and width	O.D. code		Width	Pivot taper	Pivot and width
Decimal	Inches	Inches	Degrees	Code	Decimal	Inches	Inches	Degrees	Code
043	0.0433	0.028	60	01	196	0.1968	0.118	60	01
059	.0590	.047	60	01	295	.2953	.136	60	01
							.147	60	02
065	.0650	.033	60	01			.177	60	03
		.039	60	02					
					393	.3937	.236	60	01
106	.1063	.053	60	01					
		.059	60	02	423	.4232	.191	60	01
							.211	60	02
118	.1181	.070	60	01					
					500	.5000	.156	62	01
157	.1575	.094	60	01					
					629	.6299	.210	30	01
167	.1673	.080	60	01			.210	40	02
		.093	60	02					
					673	.6733	.210	40	01

Table XIV - Boundary dimensions-MG

Bore		O.D.		Width		O.D. and width
Mm	Inch	Mm	Inch	Mm	Inch	Code
4	0.1574	16	0.6299	5	0.1968	03
5	.1968	16	.6299	5	.1968	02
		19	.7480	6	.2362	03
6	.2362	19	.7480	6	.2362	02
7	.2755	22	.8661	7	.2755	02
8	.3149	22	.8661	7	.2755	10
		24	.9448	7	.2755	05
9	.3543	26	1.0236	8	.3149	02
10	.3937	26	1.0236	8	.3149	10
		30	1.1811	9	.3543	02
13	.5118	30	1.1811	7	.2755	05

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

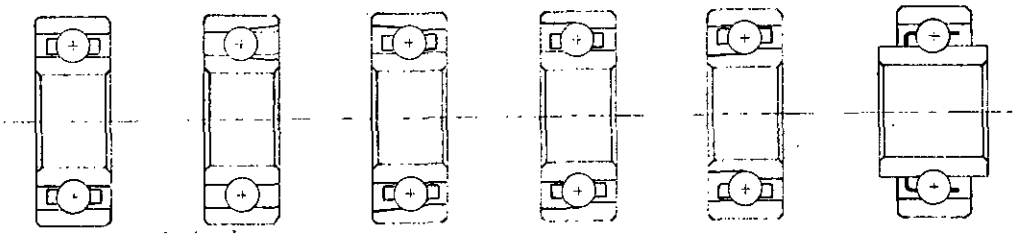

11, 71
15, 75


12, 72
16, 76

31, 91
32, 92

28, 88

37, 97
38, 98

17, 77

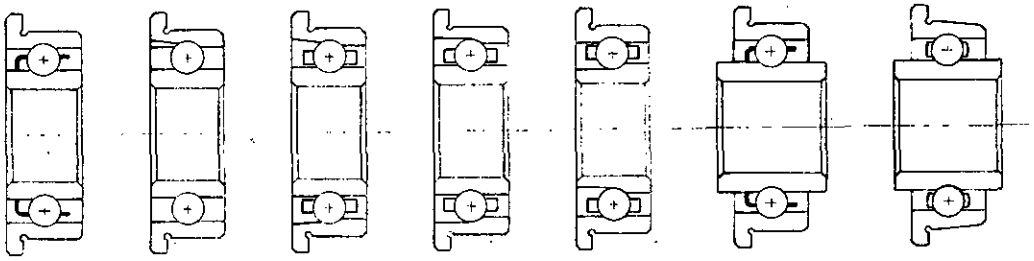

20, 80

21, 81


24, 84

26, 86

34, 94

22, 82

23, 83

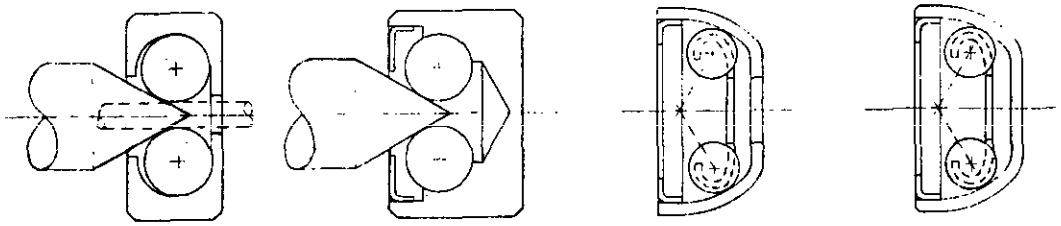


60

61

62

63

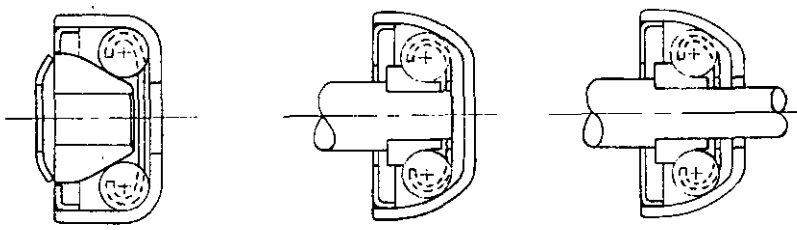

64

65

66

Figure 8 Illustrations of Group 0 Bearing Types

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 This section covers annular ball bearings group 1 (see figure 13).

2. REFERENCED DOCUMENTS

2.1 The issues of the following documents in effect on the date of invitation for bids form a part of this standard to the extent specified herein.

GOVERNMENTAL

MIL-G-3545 - Grease, Aircraft, High Temperature.
MIL-L-6085 - Lubricating Oil: Aircraft Instrument, Low Volatility.
MIL-G-7711 - Grease, Aircraft, General Purpose.
MIL-L-7870 - Lubricating Oil, General Purpose Low Temperature.
MIL-G-15719 - Lubricating Grease (High-Temperature, Electric Motor, Ball and Roller Bearings).
MIL-G-18709 - Grease, Ball and Roller Bearing.
MIL-G-23827 - Grease, Aircraft and Instrument, Gear and Actuator Screw.
MIL-G-25013 - Grease, Aircraft, Ball and Roller Bearing.

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. NUMBER STRUCTURE

3.1 Digit positions. Example of digit positions is shown on figure 9.

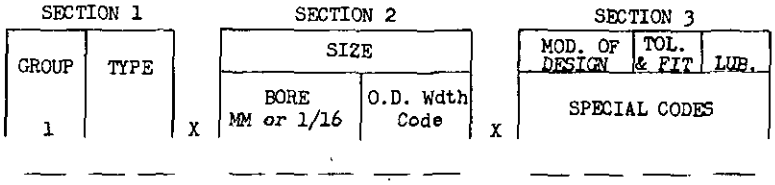


Figure 9 - Group 1, number structure.

4. CLASSIFICATION

4.1 Standard tolerances. ABEC, AFBMA standard tolerances for annular ball bearings in this group are as specified in tables XV through XIX.

4.2 Standard values. Standard values for radial internal clearance of single row radial contact ball bearings are shown in table XX.

5. GROUP AND TYPE CODES

5.1 Digit positions. Example of digit position is shown on figure 10.

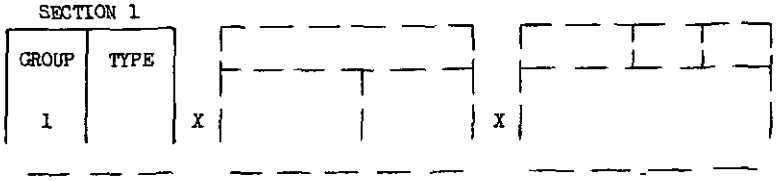


Figure 10 - Group 1, section 1

5.2 Group code. Group code for first position shall be as follows:

1. Annular ball bearings.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

5.3 Type code. Type code for second and third positions shall be as specified in 5.3.1 through 5.3.5.

5.3.1 Single row radial types. Single row radial types shall be as follows:

Type		Dimension table
11	Non-loading groove, both rings same width, metric bore, O.D. and width.	MA (table XXIV)
12	Loading groove, both rings same width, metric bore, O.D. and width.	MA (table XXIV)
13	Non-loading groove, inner ring extended one side only, metric bore and O.D., inch or metric widths.	MC (table XXVI)
14	Loading groove, inner ring extended one side only, metric bore and O.D., inch or metric widths.	MC (table XXVI)
15	Non-loading groove, both rings same width, inch bore, O.D. and width.	IA (table XXIII)
16	Loading groove, both rings same width, inch bore, O.D. and width.	IA (table XXIII)
17	Non-loading groove, inner ring wider than outer ring, modified for sealing purposes, metric bore and O.D., inch or metric widths.	MC (table XXVI)
18	Non-loading groove, both rings same width or outer ring slightly wider, modified for sealing purposes, metric bore and O.D., inch or metric widths.	MC (table XXVI)
19	Non-loading groove, both rings same width, modified for sealing purposes (cartridge type with grease plug) metric bore and O.D., inch width.	MA (table XXIV)
20	Non-loading groove, both rings same width, modified for sealing purposes (cartridge type without grease plug) metric bore and O.D., inch width.	MA (table XXIV)

5.3.2 Self-aligning types. Self-aligning types shall be as follows:

Type		Dimension table
23	Internal self-aligning, double row, both rings same width, metric bore, O.D., and width.	MA (table XXIV)
24	Non-loading groove, external self-aligning, single row, both rings same width, metric bore, O.D., and width.	MA (table XXIV)
25	Loading groove, external self-aligning, single row, both rings same width, no aligning ring, metric bore, O.D. and width.	MA (table XXIV)
26	Non-loading groove, external self-aligning, single row, both rings same width with aligning ring, metric bore, O.D. and width.	MB (table XXV)
27	Loading groove, external self-aligning, single row, both rings same width with aligning ring, metric bore, O.D. and width.	MB (table XXV)

5.3.3 Single row counter bore and angular contact types (one direction thrust capacity) shall be as follows:

Type		Dimension table
31	Counterbore (primarily radial) self contained, one bearing only, both rings same width, metric bore, O.D., and width.	MA (table XXIV)
32	Counterbore (magneto or separable type) one bearing only, both rings same width, metric bore, O.D. and width.	MA (table XXIV)
33	Angular contact (contact angle 25 degrees or less) self contained, one bearing only, both rings same width, metric bore, O.D. and width.	MA (table XXIV)
34	Angular contact (contact angle greater than 25 degrees) self contained, one bearing only, both rings same width, metric bore, O.D. and width.	MA (table XXIV)
35	Angular contact (contact angle greater than 25 degrees) self contained, one bearing only, both rings same width, inch bore, O.D. and width.	IA (table XXIII)

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T07:25Z
Check the source to verify that this is the currentversion before use.

5.3.4 Double row types (two direction thrust capacity) shall be as follows:

Type		Dimension table
41	Non-loading groove, radial construction, metric bore and O.D., inch or metric width.	MA (table XXIV)
42	Non-loading groove, vertex of contact angle inside bearing, metric bore and O.D., inch or metric width.	MA (table XXIV)
43	Non-loading groove, vertex of contact angle outside bearing, metric bore and O.D., inch or metric width.	MA (table XXIV)
44	Loading groove, radial construction, metric bore and bore and O.D., inch or metric width.	MA (table XXIV)
45	Loading groove, vertex of contact angle inside bearing, metric bore and O.D., inch or metric width.	MA (table XXIV)
46	Loading groove, vertex of contact angle outside bearing, metric bore and O.D., inch or metric width.	MA (table XXIV)

5.3.5 Single row, four point ball contact types shall be as follows:

Type		Dimension table
50	Ground, non-loading groove, both rings same width, metric bore, O.D. and width.	MA (table XXIV)
51	Ground, non-loading groove, both rings same width with split inner ring, metric bore, O.D., and width.	MA (table XXIV)
52	Ground, non-loading groove, both rings same width with split outer ring, metric bore, O.D., and width.	MA (table XXIV)
53	Ground, non-loading groove, both rings same width with split inner and outer rings, metric bore, O.D. and width.	MA (table XXIV)
54	Ground, non-loading groove, both rings same width, inch bore, O.D. and width.	IA (table XXIII)
55	Ground, non-loading groove, both rings same width with split inner ring, inch bore, O.D. and width.	IA (table XXIII)
56	Ground, non-loading groove, both rings same width with split outer ring, inch bore, O.D. and width.	IA (table XXIII)

6. BORE SIZE - O.D. AND WIDTH CODE

6.1 Digit position. Example of digit position is shown on figure 11.

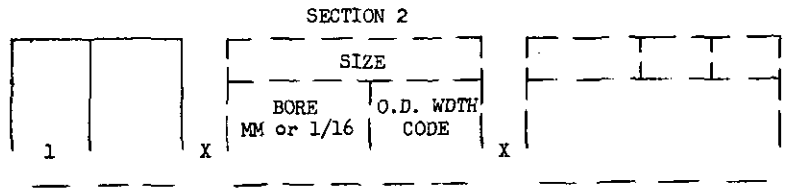


Figure 11 - Group 1, section 2

6.2 Bore size (4, 5 and 6th positions). The bore size of annular ball bearings is either expressed as metric or inch. Type descriptions and boundary dimension tables (see tables XXIII through XXVI), indicate which method of expression is used.

6.2.1 Metric. Metric bores are expressed as the actual number of mm.

Example: 4mm = 004; 25mm = 025, etc.

6.2.2 Inch. Inch bores are expressed as the number of 1/16ths in the bore size.

Example: 15/16 inch = 015; 1-3/8 inches = 022, etc.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

6.3 O.D. and width code (7 and 8th positions). The O.D. and width dimensions of a bearing are expressed by a code, as shown in the boundary dimension tables (see tables XXIII through XXVI).

6.3.1 Application. The type description carries a reference to the appropriate boundary dimension table. These tables are arranged by bore size and within each bore size the O.D.s and widths are arranged in numerical sequence. Opposite each set of dimensions is the appropriate "Code" for the O.D. and width. Where bearing dimensions correspond to AFBMA basic standards, the O.D. and width code is identical with their series code.

6.3.2 Interpretation of O.D. and width code. A bearing number - 111 X 02502 is decoded as:

111 = Annular ball bearing, single row radial, non-loading groove type, both rings same width, metric bore, O.D. and width. Boundary dimension table - MA. (see table XXIV).
02502 = 25mm bore size; O.D. and width code - 02.

Reference to boundary dimension table MA (see table XXIV), bore size of 025 and code 02 indicates that the O.D. is 52mm and width is 15mm.

7. VARIATIONS OF THE GROUP 1 BASE BEARING NUMBER

7.1 Digit position. Example of digit positions is shown on figure 12.

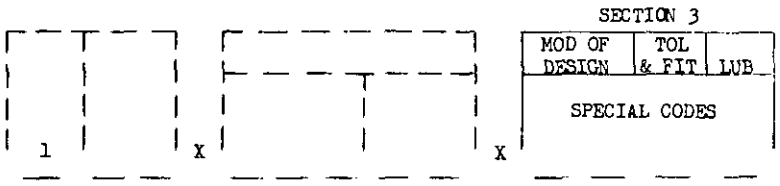


Figure 12 - Group 1, section 3

7.2 Additional variations. Section 3 codes any additional variations, modifications or special features of a bearing, as described by the base number, which are necessary for complete identification. When section 3 is required it may be either a "Significant Code" covering those common features itemized in tables XXI and XXII, or an arbitrarily assigned number known as a "Special Code" covering all other variations, modifications, etc.

7.2.1 Significant codes. Significant codes may be either two or four digits and will begin with the numerals 0 through 7. These codes are constant in meaning within the group regardless of the base number with which they are used. Reference to tables XXI and XXII will furnish the significance of each code.

7.2.2 Special codes. Special codes are arbitrarily assigned numbers of four digits only that begin with the numerals 8 and 9. These four digit numbers are assigned in numerical sequence as they are required to code additional features, (not covered by the significant codes) of a particular base number. The more common features significantly coded in the "Table of Variation" (see table XXII) may occur in conjunction with some additional feature or features, in which case all of the additional features are coded by a special code.

7.2.2.1 Special codes are assigned only by the preparing custodian responsible for the numbering system. A 0 digit in any position of a significant type number indicates the "standard" for the feature coded in that number position.

8. BOUNDARY DIMENSION TABLES

8.1 Use. Use of the boundary dimensions tables is as follows:

Dimension tables	Bearing types
IA (table XXIII)	15, 16, 35, 54, 55, 56
MA (table XXIV)	11, 12, 19, 20, 23, 24, 25, 31, 32, 33, 34, 41, 42, 43, 44, 45, 46, 50, 51, 52, 53

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Dimension tables	Bearing types
MB (table XXV)	26, 27
MC (table XXVI)	13, 14, 17, 18

8.2 Internal fit up.

8.2.1 Standard. In this class, internal unmounted clearances to be of such magnitude that, as a result of the bearings internal design, when mounted with standard ABEC fits for revolving shafts the average radial clearances will be those best suited for single row annular bearing service.

8.2.2 Loose. In this class, internal unmounted clearances to be of such magnitude that, as a result of the bearings internal design, the bearings can accommodate heavier press fits or when normal press fits are used, will have radial clearance.

8.2.3 Tight. In this class, internal unmounted clearances to be of such magnitude that, as a result of the bearings internal design, when mounted with standard ABEC fits for revolving shafts, the bearings operating fit-up will be an actual preloaded condition.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XV - ABEC-1 tolerance limits for metric and inch dimension radial ball bearings
(tolerance limits in 0.0001 inch)

Inner ring

Basic bore diameter[d]				Bore tolerance limits				Radial runout max.
MM		Inch		Low	High	d_{min} [1]	d_{max} [1]	
Over	Incl.	Over	Incl.	−	+	−	+	
0	10	0	0.3937	3	0	4	1	3
10	18	0.3937	0.7087	3	0	4	1	4
18	30	0.7087	1.1811	4	0	5	1	5
30	50	1.1811	1.9685	5	0	7	2	6
50	80	1.9685	3.1496	6	0	8	2	8
80	120	3.1496	4.7244	8	0	11	3	10
120	180	4.7244	7.0866	10	0	13	3	12
180	250	7.0866	9.8425	12	0	16	4	16
250	315	9.8425	12.4015	14	0	18	4	20
315	400	12.4015	15.7480	16	0	20	4	24
400	500	15.7480	19.6850	18	0	23	5	26
500	630	19.6850	24.8031	20	0	26	6	28
630	800	24.8031	31.4961	30	0	38	8	32
800	1000	31.4961	39.3701	40	0	50	10	35

Outer ring

Basic O.D. D				Outside diameter tolerance limits						Radial Runout Max.
MM		Inch		D_m		Open bearings		Shield/seal bearings[3]		
Over	Incl.	Over	Incl.	High +	Low −	D_{max} [2] +	D_{min} [2] −	D_{max} +	D_{min} −	
0	18	0	0.7087	0	4	1	5	2	6	6
18	30	0.7087	1.1811	0	4	1	5	2	6	6
30	50	1.1811	1.9685	0	5	2	7	3	8	8
50	80	1.9685	3.1496	0	5	2	7	4	9	10
80	120	3.1496	4.7244	0	6	3	9	6	12	14
120	150	4.7244	5.9055	0	8	3	11	6	14	16
150	180	5.9055	7.0866	0	10	3	13	6	16	18
180	250	7.0866	9.8425	0	12	4	16	8	20	20
250	315	9.8425	12.4015	0	14	4	18	8	22	24
315	400	12.4015	15.7480	0	16	4	20	9	25	28
400	500	15.7480	19.6850	0	18	5	23	10	28	32
500	630	19.6850	24.8031	0	20	6	26	12	32	40
630	800	24.8031	31.4961	0	30	8	38	-	-	47
800	1000	31.4961	39.3701	0	40	10	50	-	-	55
1000	1250	39.3701	49.2126	0	50	12	62	-	-	64
1250	1600	49.2126	62.9921	0	65	16	81	-	-	76
1600	2000	62.9921	78.7402	0	80	20	100	-	-	90

Width tolerance limits

Basic inner ring bore		Bearings other than duplex width of individual inner or outer ring		Duplex bearings[4] total width of inner or outer rings	
MM		Width tolerance limits		Width tolerance limits	
Over	Incl.	High +	Low −	High +	Low −
0	0	0	50	0	200
80	180	0	50	0	300
180	315	0	100	0	400
315	400	0	160	0	500
400	500	0	180	-	-
500	630	0	220	-	-
630	800	0	300	-	-
800	1000	0	400	-	-

[1] d_{min} and d_{max} apply to diameter series 0 up to and including 40 mm bore, in diameter series 2 up to and including 180 mm bore, and diameter series 3 and 4 only; d_{min} and d_{max} are not restricted in larger sizes.

[2] D_{min} and D_{max} apply to diameter series 0 up to and including 80 mm O.D., in diameter series 2 up to and including 315 mm O.D., and diameter series 3 and 4 only. D_{min} and D_{max} are not restricted in larger sizes.

[3] Applicable to shielded and sealed bearings only in diameter series 2, 3 and 4.

[4] If other than a pair of bearings is involved, the tolerance is in proportion to the number of bearings.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XVI - ABEC-3 tolerance limits for metric and inch dimension radial ball bearings (excludes magneto bearing)
(tolerances in 0.0001 inch)

Inner ring[1]

Bore d				Bore tolerance limits				Radial runout (total indicator reading)
Millimeters[2]		Inches		d_m		d_{min}	d_{max}	
Over	Including	Over	Including	Low −	High +	−	+	
0	10	0	0.3937	2	0	3	1	2
10	18	0.3937	.7087	2	0	3	1	3
18	30	.7087	1.1811	2	0	3	1	3
30	50	1.1811	1.9685	3	0	5	2	4
50	80	1.9685	3.1496	4	0	6	2	4
80	120	3.1496	4.7244	5	0	8	3	5
120	180	4.7244	7.0866	6	0	9	3	6
180	250	7.0866	9.8425	7	0	11	4	8
250	315	9.8425	12.4015	8	0	12	4	10

Outer ring[3]

O.D. D				O.D. tolerance limits				Radial runout (total indicator reading)
Millimeters[2]		Inches		d_m		D_{max}	D_{min}	
Over	Including	Over	Including	High +	Low −	+	−	
0	18	0	0.7087	0	3	1	4	4
18	30	0.7087	1.1811	0	3	1	4	4
30	50	1.1811	1.9685	0	3	2	5	4
50	80	1.9685	3.1496	0	4	2	6	5
80	120	3.1496	4.7244	0	4	3	7	7
120	150	4.7244	5.9055	0	5	3	8	8
150	180	5.9055	7.0866	0	6	3	9	9
180	250	7.0866	9.8425	0	7	4	11	10
250	315	9.8425	12.4015	0	8	4	12	12
315	400	12.4015	15.7480	0	9	4	13	14
400	500	15.7480	19.6850	0	10	5	15	16

Bearings other than duplex
width of
individual inner or outer ring

Nominal bore			Width tolerance limits	
Millimeters[2]		Inch type		
Over	Including		Plus	Minus
0	180	All sizes	0	50
180	315		0	100
315	400		0	160
400	500		0	180
500	630		0	220

Duplex bearings
total width of inner or outer rings

Nominal bore			Width tolerance limits	
Millimeters[2]		Inch type		
Over	Including		Plus	Minus
0	80	All sizes	0	200
80	180		0	300
180	315		0	400
315	400		0	500

[1] Bore tolerance limits apply to diameter series 0, 2, 3 and 4.
[2] Metric dimensions are reference values only.
[3] O.D. tolerance limits apply to diameter series 0, 2, 3 and 4 before insertion of shields or seals, if any.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XVII - ABEC-5 tolerance limits for metric and inch dimension radial ball bearings
(tolerances limits in 0.0001 inch)

Inner ring

Basic bore diameter d				Bore tolerance limits		Radial runout	Width variation	Reference side runout with bore	Groove runout with reference side [1]
MM		Inch							
Over	Incl	Over	Incl	d_{min} −	d_{max} +	Max.	Max.	Max.	Max.
0	10	0	0.3937	2	0	2	2	3	3
10	18	0.3937	.7087	2	0	2	2	3	3
18	30	.7087	1.1811	2	0	2	2	3	3
30	50	1.1811	1.9685	2	0	2	2	3	3
50	80	1.9685	3.1496	3	0	2	2	3	3
80	120	3.1496	4.7244	3	0	3	3	3	4
120	180	4.7244	7.0866	4	0	3	3	4	4
180	250	7.0866	9.8425	5	0	4	4	4	5
250	315	9.8425	12.4015	5	0	5	5	5	6
315	400	12.4015	15.7480	6	0	5	5	5	7

Outer ring

Basic O. D. D				O.D. tolerance limits						Radial runout	Width variation	Outside cylindrical surface runout with reference side [2]	Groove runout with reference side [1]
				Open bearings		Shielded/sealed bearings							
						D_m		D_{max}	D_{min}				
MM		Inch		D_{max}	D_{min}	High	Low	+	−				
Over	Incl	Over	Incl	+	−	+	−			Max.	Max.	Max.	Max.
0	18	0	0.7087	0	2	0	2	1	3	2	2	3	3
18	30	0.7087	1.1811	0	2	0	2	1	3	2	2	3	3
30	50	1.1811	1.9685	0	2	0	2	2	4	2	2	3	3
50	80	1.9685	3.1496	0	3	0	3	2	5	3	2	3	4
80	120	3.1496	4.7244	0	3	0	3	3	6	4	3	3	5
120	150	4.7244	5.9055	0	4	0	4	3	7	4	3	4	5
150	180	5.9055	7.0866	0	5	0	5	3	8	5	3	4	6
180	250	7.0866	9.8425	0	5	0	5	4	9	5	4	4	6
250	315	9.8425	12.4015	0	5	0	5	-	-	6	5	5	7
315	400	12.4015	15.7480	0	6	0	6	-	-	7	5	5	8
400	500	15.7480	19.6850	0	7	0	7	-	-	8	6	6	9
500	630	19.6850	24.8031	0	8	0	8	-	-	9	6	6	10

Width tolerance limits

Basic inner ring bore		Bearings other than duplex width of individual inner or outer ring		Duplex bearings [3] total width of inner or outer rings	
MM		Width tolerance limits		Width tolerance limits	
Over	Incl	High +	Low −	High +	Low −
0	10	0	16	0	200
10	18	0	32	0	200
18	80	0	50	0	200
80	180	0	50	0	300
180	315	0	100	0	400
315	400	0	160	0	500

[1] Applies to groove type ball bearings only.
[2] Applies to bearing width series 1, or narrower, as designated in AFBMA Standard Section No. 2 - boundary dimensions.
[3] If other than a pair of bearings is involved, the tolerance is in proportion to the number of bearings.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the currentversion before use.

Table XVIII - ABEC-7 tolerance limits for metric and inch dimension radial ball bearings
(tolerance limits in 0.0001 inch)

Inner ring

Basic bore diameter d				Bore tolerance limits		Radial runout Max.	Width variation Max.	Reference side runout with bore Max.	Groove runout with reference side [1] Max.
MM		Inch							
Over	Incl.	Over	Incl.	d_{min} −	d_{max} +				
0	10	0	0.3937	1.5	0	1	1	1	1
10	18	0.3937	.7087	1.5	0	1	1	1	1
18	30	.7087	1.1811	1.5	0	1.5	1	1.5	1.5
30	50	1.1811	1.9685	2	0	1.5	1	1.5	1.5
50	80	1.9685	3.1496	2	0	1.5	1.5	2	1.5
80	120	3.1496	4.7244	2.5	0	2	1.5	2	2
120	180	4.7244	7.0866	3	0	3	2	3	3
180	250	7.0866	9.8425	4	0	3	2	3	3
250	315	9.8425	12.4015	5	0	4	3	4	4

Outer ring

Basic O.D. D				O.D. tolerance limits						Radial runout Max.	Width variation Max.	Out cyl. sur. runout w/ref side [2] Max.	Groove runout w/ref. side [1] Max.
MM		Inch		Open bearings		Shielded/sealed bearings							
						D_m		D_{max}	D_{min}				
Over	Incl.	Over	Incl.	D_{max} +	D_{min} −	High +	Low −	+	−				
0	18	0	0.7087	0	2	0	2	1	3	2	1	1.5	2
18	30	0.7087	1.1811	0	2	0	2	1	3	2	1	1.5	2
30	50	1.1811	1.9685	0	2	0	2	2	4	2	1	1.5	2
50	80	1.9685	3.1496	0	2	0	2	2	4	2	1	1.5	2
80	120	3.1496	4.7244	0	3	0	3	3	6	2	2	2	2
120	150	4.7244	5.9055	0	4	0	4	3	7	3	2	2	3
150	180	5.9055	7.0866	0	4	0	4	3	7	3	2	2	3
180	250	7.0866	9.8425	0	4	0	4	4	8	4	3	3	4
250	315	9.8425	12.4015	0	5	-	-	-	-	4	3	3	4
315	400	12.4015	15.7480	0	5	-	-	-	-	5	3	4	5
400	500	15.7480	19.6850	0	6	-	-	-	-	5	4	4	5

Width tolerance limits

Basic inner ring bore		Bearings other than duplex width of individual inner or outer ring		Duplex bearings [3] total width of inner or outer rings	
MM		Width tolerance limits		Width tolerance limits	
Over	Incl.	High +	Low −	High +	Low −
0	10	0	16	0	200
10	18	0	32	0	200
18	80	0	50	0	200
80	180	0	50	0	300
180	315	0	100	0	400

[1] Applies to groove type ball bearings only.
[2] Applies to Bearing Width Series 1, or narrower, as designated in AFBMA Standard Section No. 2 - Boundary dimensions.
[3] If other than a pair of bearings is involved, the tolerance is in proportion to the number of bearings.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table XIX - ABEC-9 tolerance limits for metric and inch dimension radial ball bearings
(tolerance limits in 0.0001 inch)

Inner ring

Basic bore diameter d				Bore tolerance limits		Radial runout	Width variation	Reference side runout with bore	Groove runout with reference side[1]
MM		Inch							
Over	Incl.	Over	Incl.	d_{min} −	d_{max} +	Max.	Max.	Max.	Max.
0	10	0	0.3937	1	0	0.5	0.5	0.5	0.5
10	18	0.3937	.7087	1	0	.5	.5	.5	.5
18	30	.7087	1.1811	1	0	1	.5	.5	1
30	50	1.1811	1.9685	1	0	1	.5	.5	1
50	80	1.9685	3.1496	1.5	0	1	.5	.5	1
80	120	3.1496	4.7244	2	0	1	1	1	1
120	150	4.7244	5.9055	2.5	0	1	1	1	1
150	180	5.9055	7.0866	2.5	0	2	1.5	1.5	2
180	250	7.0866	9.8425	3	0	2	1.5	1.5	2

Outer ring

Basic O.D. D				O.D.[2] tolerance limits		Radial runout	Width variation	Outside cylindrical surface runout with reference side[3]	Groove runout with reference side[1]
MM		Inch							
Over	Incl.	Over	Incl.	D_{max} +	D_{min} −	Max.	Max.	Max.	Max.
0	18	0	0.7087	0	1	0.5	0.5	0.5	0.5
18	30	0.7087	1.1811	0	1.5	1	.5	.5	1
30	50	1.1811	1.9685	0	1.5	1	.5	.5	1
50	80	1.9685	3.1496	0	1.5	1.5	.5	.5	1.5
80	120	3.1496	4.7244	0	2	2	1	1	2
120	150	4.7244	5.9055	0	2	2	1	1	2
150	180	5.9055	7.0866	0	2.5	2	1	1	2
180	250	7.0866	9.8425	0	3	2.5	1.5	1.5	2.5
250	315	9.8425	12.4015	0	3	2.5	1.5	1.5	2.5
315	400	12.4015	15.7480	0	4	3	2.5	2.5	3

Width tolerance limits

Basic inner ring bore		Bearings other than duplex width of individual inner or outer ring		Duplex bearings[4] total width of inner or outer rings	
MM		Width tolerance limits		Width tolerance limits	
Over	Incl.	High +	Low −	High +	Low −
0	10	0	10	0	200
10	18	0	32	0	200
18	80	0	50	0	200
80	180	0	50	0	300
180	250	0	100	0	400

[1] Applies to groove type ball bearings only.
[2] Outer ring tolerances apply before seals or shields are inserted.
[3] Applies to Bearing Width Series 1, or narrower, as designated in AFBMA Standard Section No. 2 - Boundary dimensions.
[4] If other than a pair of bearings is involved, the tolerance is in proportion to the number of bearings.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XX - Standard tolerance values for radial internal clearance of single row, radial contact ball bearings (tolerances in 0.0001 inch)

Bore diameter MM		Internal clearance numbers															
		Tight				Std				Loose				Extra loose			
		Symbol 2				Symbol 0 normal				Symbol 3				Symbol 4			
		Acceptance limits				Acceptance limits				Acceptance limits				Acceptance limits			
			Mfg. limits				Mfg. limits				Mfg. limits				Mfg. limits		
Over	Incl	Low	Low	High	High	Low	Low	High	High	Low	Low	High	High	Low	Low	High	High
2.5	10	-	-	2.5	3.0	1	1.5	4.5	5	3	4	8	9	-	-	--	--
10	18	-	-	3.0	3.5	1	2	6	7	4	5	9	10	7	8	12	13
18	24	-	-	3.5	4.0	2	3	7	8	5	6	10	11	8	9	13	14
24	30	-	-	4	4.5	2	3	7	8	5	6	10	11	9	10	15	16
30	40	-	-	4	4.5	2	3	7	8	6	7	12	13	11	12	17	18
40	50	-	-	4	4.5	2	3	8	9	7	8	13	14	12	13	19	20
50	65	-	1	5	6	3	4	10	11	9	10	16	17	15	16	23	24
65	80	-	1	5	6	4	5	11	12	10	11	19	20	18	19	27	28
80	100	-	1	6	7	5	6	13	14	12	13	22	23	21	22	32	33
100	120	-	1	7	8	6	7	15	16	14	15	25	26	24	25	37	38
120	140	-	1	8	9	7	8	18	19	16	18	30	32	28	30	43	45
140	160	-	1	8	9	7	8	20	21	18	20	34	36	32	34	49	51
160	180	-	1	9	10	8	9	23	24	21	23	38	40	36	38	55	58
180	200	-	1	11	12	10	11	27	28	25	27	44	46	42	44	62	64

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXI - Significant codes for variations of group 1 base bearing numbers

1st and 2nd position code XX--	Protection (1st position)	Means of location and retainer (2nd position)	
00--	Nothing	No snap ring or groove	Mfr's standard retainer
01--			Pressed steel
02--			Pressed brass, or bronze
03--			Mach. brass or bronze
04--			Mach. non-metallic
05--	Nothing	Snap ring and groove	Mfr's standard retainer
06--			Pressed steel
07--			Pressed brass, or bronze
08--			Mach. brass or bronze
09--			Mach. non-metallic
10--	One shield	No snap ring or groove	Mfr's standard retainer
11--			Pressed steel
12--			Pressed brass, or bronze
13--			Mach. brass or bronze
14--			Mach. non-metallic
15--	One shield	Snap ring and groove	Mfr's standard retainer
16--			Pressed steel
17--			Pressed brass, or bronze
18--			Mach. brass or bronze
19--			Mach. non-metallic
20--	Two shields	No snap ring or groove	Mfr's standard retainer
21--			Pressed steel
22--			Pressed brass, or bronze
23--			Mach. brass or bronze
24--			Mach. non-metallic
25--	Two shields	Snap ring and groove	Mfr's standard retainer
26--			Pressed steel
27--			Pressed brass, or bronze
28--			Mach. brass or bronze
29--			Mach. non-metallic
30--	One seal mfr's standard	No snap ring or groove	Pressed steel
31--	One seal synth. contact		Pressed steel
35--	One seal mfr's standard	Snap ring and groove	Pressed steel
36--	One seal synth. contact		Pressed steel
40--	Two seals mfr's standard	No snap ring or groove	Pressed steel
41--	Two seals synth. contact		Pressed steel
45--	Two seals mfr's standard	Snap ring and groove	Pressed steel
46--	Two seals synth. contact		Pressed steel
50--	Shield and seal mfr's std	No snap ring or groove	Pressed steel
51--	Shield synth. contact		Pressed steel
55--	Shield and seal mfr's std	Snap ring and groove	Pressed steel
56--	Shield synth. contact		Pressed steel
60--	Faces ground for duplex mtg.	No snap ring or groove	Mfr's standard retainer
61--	Faces ground for duplex mtg.		Pressed brass, or bronze
62--	Faces ground for duplex mtg.		Mach. brass or bronze
63--	Faces ground for duplex mtg.		Mach. non-metallic
64--	Duplex brgs. (1-pr) DB-DF or DT	No snap ring or groove	Mfr's standard retainer
65--			Pressed brass, or bronze
66--			Mach. brass or bronze
67--			Mach. non-metallic

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXI - Significant codes for variations of group 1 base bearing numbers (cont'd.)

1st and 2nd position code XX--	Protection (1st position)	Means of location and retainer (2nd position)	
	Miscellaneous		
68--	Full type	----------	(No retainer)
69--	Tapered bore	No snap ring or groove	Mfr's standard retainer
70--	Full type and 2 shields		(No retainer)
71--	Full type and 1 shield		(No retainer)
72--	Faces ground for duplex mtg		Pressed steel retainer
73--	Duplex brgs. (1 pr) DB-DF or DT		Pressed steel retainer

3rd and 4th position code[1] XX	Tolerance and internal fit or preload on duplex (3rd position)		Lubrication (4th position)
--00	ABEC 1 - Std. fit	Light preload	Regular Slush[2]
--01			MIL-G-25013
--02			MIL-L-7870
--03			MIL-G-81322
--04			MIL-G-23827
--05			MIL-G-7711
--06			MIL-G-15719
--07			Regular slush-heavy type
--08			MIL-L-6085
--10	ABEC 1 - Tight fit	Medium preload	Regular Slush[2]
--11			MIL-G-25013
--12			MIL-L-7870
--13			MIL-G-81322
--14			MIL-G-23827
--15			MIL-G-7711
--16			MIL-G-15719
--17			Regular slush-heavy type
--18			MIL-L-6085
--20	ABEC 1 - Loose fit	Heavy preload	Regular Slush[2]
--21			MIL-G-25013
--22			MIL-L-7870
--23			MIL-G-81322
--24			MIL-G-23827
--25			MIL-G-7711
--26			MIL-G-15719
--27			Regular slush-heavy type
--28			MIL-L-6085

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXI - Significant codes for variations of group 1 base bearing numbers(cont'd.)

3rd and 4th position code[1] XX--	Tolerance and internal fit or preload on duplex (3rd position)		Lubrication (4th position)
--30 --31 --32 --33 --34 --35 --36 --37 --38	ABEC - 3 - Std fit	Light preload	Regular slush[2] MIL-G-25013 MIL-L-7870 MIL-G-81322 MIL-G-23827 MIL-G-7711 MIL-G-15719 Regular slush-heavy type MIL-L-6085
--40 --41 --42 --43 --44 --45 --46 --47 --48	ABEC - 3 - Tight fit	Medium preload	Regular slush[2] MIL-G-25013 MIL-L-7870 MIL-G-81322, MIL-G-23827 MIL-G-7711 MIL-G-15719 Regular slush-heavy type MIL-L-6085
--50 --51 --52 --53 --54 --55 --56 --57 --58	ABEC 5 - Std. fit	Light preload	Regular slush[2] MIL-G-25013 MIL-L-7870 MIL-G-81322 MIL-G-23827 MIL-G-7711 MIL-G-15719 Regular slush-heavy type MIL-L-6085
--60 --61 --62 --63 --64 --65 --66 --67 --68	ABEC 5 - Tight fit	Medium preload	Regular slush[2] MIL-G-25013 MIL-L-7870 MIL-G-81322 MIL-G-23827 MIL-G-7711 MIL-G-15719 Regular slush-heavy type MIL-L-6085
--70 --71 --72 --73 --74 --75 --76 --77 --78	ABEC 3 - Loose fit	Heavy preload	Regular slush[2] MIL-G-25013 MIL-L-7870 MIL-G-81322 MIL-G-23827 MIL-G-7711 MIL-G-15719 Regular slush-heavy type MIL-L-6085
--80 --81 --82 --83 --84 --85 --86 --87 --88	ABEC 5 - Loose fit	Heavy preload	Regular slush[2] MIL-G-25013 MIL-L-7870 MIL-G-81322 MIL-G-23827 MIL-G-7711 MIL-G-15719 Regular slush-heavy type MIL-L-6085

[1] Codes in this column are only used with the codes in the previous column where the features coded are necessary for complete identification.
[2] For Double Closure Bearings use MIL-G-18709.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXII - Additional significant codes for variations of group 1 base bearing numbers.

Serial code number	Description	Lubrication
7430 7440 7460 7530 7540 7560 7630 7640 7660	ABEC-1 tolerance Standard fit, pressed steel retainer 1 steel labyrinth seal 2 steel labyrinth seals 1 steel labyrinth seal, 1 shield 1 felt labyrinth seal 2 felt labyrinth seals 1 felt labyrinth seal, 1 shield 1 felt contact seal 2 felt contact seals 1 felt contact seal, 1 shield	Use 4th position codes listed in table XXI as applicable
8115	ABEC-1- snap ring and groove located on same side as closure (seal or shield) pressed steel retainer Standard fit	Regular slush
8504 8505 8506	ABEC-7- stainless steel construction - pressed stainless steel retainer Standard fit Tight fit Loose fit	Regular slush
8514 8515 8516	ABEC-7- stainless steel construction - pressed stainless steel retainer-1 shield Standard fit Tight fit Loose fit	Regular slush

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXII - Additional significant codes for variations of group 1 base bearing numbers (cont'd.)

Serial code number	Description	Lubrication
	ABEC-7-stainless steel construction - pressed stainless steel retainer-2 shields	
8524 8525 8526	Standard fit Tight fit Loose fit	Low Temperature Grease
	ABEC-7-stainless steel construction machined non-metallic retainer	
8554 8555 8556	Standard fit Tight fit Loose fit	Regular Slush
	ABEC-9-stainless steel construction pressed stainless steel retainer	
8507 8508 8509	Standard fit Tight fit Loose fit	Regular Slush
	ABEC-9- stainless steel construction - pressed stainless steel retainer-1 shield	
8517 8518 8519	Standard fit Tight fit Loose fit	Regular Slush
	ABEC-9- stainless steel construction - pressed stainless steel retainer-2 shields	
8527 8528 8529	Standard fit Tight fit Loose fit	Instrument Oil

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXIII - Boundary dimensions-IA

Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches	
002	1/8	1/4	3/32	01
		1/4	7/64	03
		1/4	1/8	04
		5/16	7/64	05
		5/16	9/64	06
		3/8	3/32	07
		3/8	7/64	08
		3/8	9/64	10
		3/8	5/32	09
		7/16	7/64	11
		1/2	7/64	12
		1/2	11/64	02
003	3/16	5/16	7/64	01
		5/16	1/8	02
		5/16	9/64	03
		5/16	5/32	04
		3/8	1/8	05
		3/8	5/32	06
		1/2	7/64	07
		1/2	5/32	09
		1/2	0.197	19
		11/16	1/4	08
		11/16	5/16	18
		3/4	1/4	10
004	1/4	3/8	1/8	01
		3/8	5/32	04
		1/2	1/8	05
		1/2	5/32	06
		1/2	3/16	07
		1/2	7/32	08
		5/8	5/32	10
		5/8	3/16	11
		5/8	0.197	09
		5/8	1/4	13
		11/16	1/4	14
		11/16	5/16	24
		3/4	7/32	02
		3/4	1/4	22
		3/4	9/32	12
		7/8	7/32	15
		7/8	1/4	16
		1-5/16	9/16	03
005	5/16	1/2	5/32	01
		1/2	3/16	02
		7/8	9/32	03
		7/8	11/32	04
		29/32	5/16	05
006	3/8	5/8	5/32	01
		7/8	7/32	09
		7/8	1/4	22
		7/8	9/32	19
		7/8	11/32	12
		29/32	5/16	15
		1-1/8	3/8	04
006	3/8	1-1/2	9/16	03
007	7/16	29/32	5/16	01
		1-1/8	3/8	03
		1-3/8	7/16	05
008	1/2	3/4	5/32	01
		1-1/8	1/4	09
		1-1/8	9/32	22
		1-1/8	5/16	19
		1-1/8	3/8	04
		1-5/16	3/8	02
		1-3/8	7/16	05
		1-5/8	5/8	03
009	9/16	1-3/8	7/16	01
010	5/8	7/8	5/32	07
		1-3/8	9/32	09
		1-3/8	5/16	22
		1-3/8	11/32	19
		1-3/8	7/16	04
		1-9/16	7/16	02
		1-5/8	1/2	05
		1-3/4	1/2	06
		1-13/16	5/8	03
012	3/4	1	5/32	01
		1-5/8	5/16	09
		1-5/8	3/8	22
		1-5/8	7/16	19
		1-5/8	1/2	04
		1-3/4	1/2	05
		1-7/8	9/16	02
		2	9/16	06
		2	11/16	03
014	7/8	1-7/8	3/8	09
		1-7/8	7/16	22
		1-7/8	1/2	19
		2	9/16	02
		2-1/4	11/16	03
016	1	2	3/8	09
		2	7/16	22
		2	1/2	19
		2	9/16	04
		2-1/4	5/8	02
		2-3/8	25/32	11
		2-3/8	1-3/16	15
		2-1/2	3/4	03
018	1-1/8	2-1/8	3/8	09
		2-1/8	7/16	22
		2-1/8	1/2	19
		2-3/8	25/32	05
		2-3/8	1-3/16	07
		2-1/2	5/8	02

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXIII - Boundary dimensions-IA (cont'd.)

Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches	
018	1-1/8	2-13/16	13/16	03
019	1-3/16	2-5/8	13/16	01
		2-5/8	1-5/16	03
020	1-1/4	2-1/4	3/8	09
		2-1/4	7/16	22
		2-1/4	1/2	19
		2-1/2	5/8	04
		2-9/16	11/16	05
		2-5/8	13/16	07
		2-5/8	1-5/16	11
		2-3/4	11/16	02
		3-1/8	7/8	03
021	1-5/16	2-9/16	11/16	02
022	1-3/8	2-1/2	7/16	09
		2-1/2	1/2	22
		2-1/2	9/16	19
		2-9/16	9/16	01
		3	11/16	02
		3-1/2	7/8	03
024	1-1/2	2-5/8	7/16	09
		2-5/8	1/2	22
		2-5/8	9/16	19
		2-11/16	9/16	01
		2.8345	0.670	05
		2.8345	1.310	07
		3-1/4	3/4	02
		3-3/4	15/16	03
025	1-9/16	2	1/4	01
026	1-5/8	2-7/8	9/16	01
		3-1/2	3/4	02
		4	15/16	03
028	1-3/4	2-7/8	7/16	09
		3	9/16	01
		3.3464	13/16	11
		3.3464	1-37/64	15
		3-3/4	13/16	02
		4-1/4	1-1/16	03
030	1-7/8	3-3/16	5/8	01
		4	13/16	02
		4-1/2	1-1/16	03
031	1-15/16	3.5433	0.787	01
		3.5433	1.526	03
032	2	2-1/2	1/4	04
		2-5/8	5/16	05
		3-5/16	5/8	01
		3.9370	53/64	06
		3.9370	1-21/32	07
032	2	4	13/16	02
		4-1/2	1-1/16	03
034	2-1/8	3-7/16	5/8	01
035	2-3/16	3.9370	53/64	02
		3.9370	1-21/32	04
036	2-1/4	3-9/16	5/8	01
		3.9370	53/64	05
		3.9370	1-21/32	07
		4.3307	0.866	09
		4.3307	1-3/4	11
		4-1/2	7/8	02
		5	1-1/4	03
038	2-3/8	3-3/4	11/16	01
039	2-7/16	4.3307	0.866	02
		4.3307	1-3/4	04
040	2-1/2	3	1/4	04
		3-1/8	5/16	05
		3-7/8	11/16	01
		4.3307	0.866	06
		4.3307	1-3/4	07
		5	15/16	02
		5-1/2	1-1/4	03
042	2-5/8	4-1/8	11/16	01
		4.4677	0.948	03
		4.4677	1.716	05
		5	1-3/32	07
		5	2-3/16	09
044	2-3/4	4-1/8	11/16	01
		5.1172	1-1/16	05
		5.1172	2-1/8	07
		5-1/4	15/16	02
		6-1/4	1-3/8	03
046	2-7/8	4-1/2	3/4	01
048	3	3-1/2	1/4	04
		3-5/8	5/16	05
		4-1/2	3/4	01
		5.1172	1-1/16	07
		5.1172	2-1/8	09
		5-3/4	1-1/16	02
		5.9045	1-7/64	11
		5.9045	2.313	13
		7	1-9/16	03
050	3-1/8	4-3/4	3/4	01
052	3-1/4	4-3/4	3/4	01
		6	1-1/16	02

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXIII - Boundary dimensions-IA (cont'd.)

Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches	
052	3-1/4	7-1/2	1-9/16	03
054	3-3/8	5	3/4	01
		7-1/2	1-9/16	03
055	3-7/16	6	1-9/16	02
		6	2-3/4	04
056	3-1/2	4	1/4	04
		4-1/8	5/16	05
		5	3/4	01
		6	1-9/16	07
		6	2-3/4	09
		6-1/2	1-1/8	02
		6-1/2	1-3/4	12
		8-1/8	1-3/4	03
		8-1/8	2-3/4	13
058	3-5/8	5-1/4	3/4	01
		6	1-9/16	02
		6	2-3/4	04
		7.0866	1.339	06
		7.0866	2.677	08
060	3-3/4	5-1/4	3/4	01
		6-3/4	1-1/8	02
		6-3/4	1-3/4	12
		8-1/4	1-3/4	03
		8-1/4	2-3/4	13
062	3-7/8	5-5/8	7/8	01
063	3-15/16	7.0856	1.495	03
		7.0856	2-3/4	05
064	4	4-1/2	1/4	04
		4-5/8	5/16	05
		4-3/4	3/8	06
		5	1/2	07
		5-1/2	3/4	08
		5-5/8	7/8	01
		6	1	09
		7-1/4	1-1/4	02
		7-1/4	1-3/4	12
		7.4792	1.419	10
		7.4792	2.974	11
		8-1/2	1-3/4	03
		8-1/2	2-3/4	13
066	4-1/8	6	7/8	01
068	4-1/4	4-3/4	1/4	04
		4-7/8	5/16	05
		5	3/8	06
		5-1/4	1/2	07
		5-3/4	3/4	08

Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches	
068	4-1/4	6	7/8	01
		6-1/4	1	09
		7-1/2	1-1/4	02
		7-1/2	1-15/16	12
		8-3/4	1-3/4	03
		8-3/4	2-3/4	13
070	4-3/8	6-1/4	7/8	01
072	4-1/2	5	1/4	04
		5-1/8	5/16	05
		5-1/4	3/8	06
		5-1/2	1/2	07
		6	3/4	08
		6-1/4	7/8	01
		6-1/2	1	09
		8	1-5/16	02
		8	2-1/16	12
		9-3/8	2	03
		9-3/8	3-1/8	13
074	4-5/8	6-1/2	7/8	01
076	4-3/4	5-1/4	1/4	04
		5-3/8	5/16	05
		5-1/2	3/8	06
		5-3/4	1/2	07
		6-1/4	3/4	08
		6-1/2	7/8	01
		6-3/4	1	09
		8-1/4	1-5/16	02
		8-1/4	2-1/16	12
		10	2	03
		10	3-1/8	13
078	4-7/8	7	1	01
080	5	5-1/2	1/4	04
		5-5/8	5/16	05
		5-3/4	3/8	06
		6	1/2	07
		6-1/2	3/4	08
		7	1	01
		9	1-3/8	02
		9	2-3/16	12
		10	2	03
		10	3-1/8	13
082	5-1/8	7-1/4	1	01
084	5-1/4	7-1/4	1	01
086	5-3/8	7-1/2	1	01
088	5-1/2	6	1/4	04
		6-1/8	5/16	05

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXIII - Boundary dimensions-IA (cont'd.)

Bore		O.D.	Width	O.D. and width code	Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
088	5-1/2	6-1/4	3/8	06	120	7-1/2	8-1/8	5/16	05
		6-1/2	1/2	07			8-1/4	3/8	06
		7	3/4	08			8-1/2	1/2	07
		7-1/2	1	01			9	3/4	08
		9-1/2	1-3/8	02			9-1/2	1	09
		9-1/2	2-3/16	12			10	1-1/4	01
		11	2	03			12-1/2	1-3/4	02
		11	3-1/8	13			12-1/2	2-3/4	12
							14-1/2	2-3/4	03
090	5-5/8	7-3/4	1	01			14-1/2	4-1/4	13
092	5-3/4	7-3/4	1	01	124	7-3/4	10-1/2	1-3/8	01
094	5-7/8	8	1	01	128	8	8-1/2	1/4	04
							8-5/8	5/16	05
096	6	6-1/2	1/4	04			8-3/4	3/8	06
		6-5/8	5/16	05			9	1/2	07
		6-3/4	3/8	06			9-1/2	3/4	08
		7	1/2	07			10	1	09
		7-1/2	3/4	08			10-3/4	1-3/8	01
		8	1	01			13	1-3/4	02
		10-1/2	1-9/16	02			13	2-3/4	12
		10-1/2	2-7/16	12			15	2-3/4	03
		12	2-1/4	03			16	4-1/4	13
		12	3-1/2	13					
					132	8-1/4	11	1-3/8	01
100	6-1/4	8-1/2	1-1/8	01					
					136	8-1/2	11-1/2	1-1/2	01
104	6-1/2	7	1/4	04			14	2	02
		7-1/8	5/16	05			14	3-1/8	12
		7-1/4	3/8	06			16	3	03
		7-1/2	1/2	07					
		8	3/4	08	140	8-3/4	11-3/4	1-1/2	01
		8-1/2	1	09					
		8-3/4	1-1/8	01	144	9	9-1/2	1/4	04
		11	1-9/16	02			9-5/8	5/16	05
		11	2-7/16	12			9-3/4	3/8	06
		13	2-1/2	03			10	1/2	07
		13	3-7/8	13			10-1/2	3/4	08
							11	1	09
108	6-3/4	9	1-1/8	01			12	1-1/2	01
							14-1/2	2	02
112	7	7-1/2	1/4	04			14-1/2	3-1/8	12
		7-5/8	5/16	05			17	3	03
		7-3/4	3/8	06			17	4-5/8	13
		8	1/2	07					
		8-1/2	3/4	08	152	9-1/2	12-3/4	1-5/8	01
		9	1	09			15-1/8	2	02
		9-1/2	1-1/4	01			15-1/8	3-1/8	12
		12	1-3/4	02			18	3-1/4	03
		12	2-3/4	12					
		13-1/2	2-1/2	03	160	10	10-1/2	1/4	04
		13-1/2	3-7/8	13			10-5/8	5/16	05
							10-3/4	3/8	06
116	7-1/4	9-3/4	1-1/4	01			11	1/2	07
							11-1/2	3/4	08
120	7-1/2	8	1/4	04			12	1	09

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the currenversion before use.

Table XXIII - Boundary dimensions-IA (cont'd.)

Bore		O.D.	Width	O.D. and width code	Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
160	10	13-1/4	1-5/8	01	248	15-1/2	20-1/2	2-1/2	01
		15-3/4	2	02			21-1/2	2-3/8	05
		15-3/4	3-1/8	12			23	3-1/4	02
		18-1/2	3-1/4	03					
		18-1/2	5	13	256	16	16-5/8	5/16	05
							16-3/4	3/8	06
168	10-1/2	14	1-3/4	01			17	1/2	07
		16-5/8	2-1/4	02			17-1/2	3/4	08
		16-5/8	3-1/2	12			18	1	09
		19-1/2	3-1/2	03			21-1/2	2-3/4	01
							23-3/4	3-1/4	02
176	11	11-1/2	1/4	04					
		11-5/8	5/16	05	264	16-1/2	22	2-3/4	01
		11-3/4	3/8	06					
		12	1/2	07	272	17	22-1/2	2-3/4	01
		12-1/2	3/4	08					
		13	1	09	280	17-1/2	23-1/2	3	01
		14-1/2	1-3/4	01					
		17-1/2	2-1/4	02	288	18	18-5/8	5/16	05
		17-1/2	3-1/2	12			18-3/4	3/8	06
		20	3-1/2	03			19	1/2	07
							19-1/2	3/4	08
184	11-1/2	15-1/4	1-7/8	01			20	1	09
		18	2-3/8	02			24	3	01
		18	3-5/8	12					
		21	3-3/4	03	296	18-1/2	24-1/2	3	01
		21-1/2	3-1/2	93			25-1/2	2-3/4	05
192	12	12-1/2	1/4	04	304	19	25-1/2	3-1/4	01
		12-5/8	5/16	05					
		12-3/4	3/8	06	312	19-1/2	26	3-1/4	01
		13	1/2	07					
		13-1/2	3/4	08	320	20	20-5/8	5/16	05
		14	1	09			20-3/4	3/8	06
		16	2	01			21	1/2	07
		18-1/2	2-5/8	02			21-1/2	3/4	08
							22	1	09
200	12-1/2	16-1/2	2	01			26-1/2	3-1/4	01
		19	2-5/8	02					
					328	20-1/2	27-1/2	3-1/2	01
208	13	17-1/2	2-1/4	01					
		20	2-3/4	02	336	21	28	3-1/2	01
216	13-1/2	18	2-1/4	01	400	25	25-3/4	3/8	06
		20-3/4	2-3/4	02			26	1/2	07
							26-1/2	3/4	08
224	14	14-5/8	5/16	05			27	1	09
		14-3/4	3/8	06					
		15	1/2	07	480	30	30-3/4	3/8	06
		15-1/2	3/4	08			31	1/2	07
		16	1	09			31-1/2	3/4	08
		18-1/2	2-1/4	01			32	1	09
		21-1/2	2-7/8	02					
					560	35	36-1/2	3/4	01
232	14-1/2	19-1/2	2-1/2	01			37	1	03
		22	3	02					
					640	40	41-1/2	3/4	02
240	15	20	2-1/2	01			42	1	04
		22-1/2	3	02					

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXIV - Boundary dimensions-MA

Bore MM	O.D. MM	Width [1]	O.D. and width code	Bore MM	O.D. MM	Width [1]	O.D. and width code
3	7	2.5	18		22	14	40
	8	3	19		22	19	50
	10	4	02		22	25	60
	10	6	32		24	7	05
	13	5	03		24	8	02
	13	7	33		24	12	32
					26	8	92
4	9	3	18		28	9	03
	11	4	19		28	13	23
	11	6	39		28	15	33
	13	5	02				
	13	7	32	9	17	4	18
	16	5	03		17	6	38
	16	10	33		20	6	19
					20	9	39
5	11	3.5	18		24	7	10
	13	4	19		24	10	20
	13	6	39		24	12	30
	16	5	02		24	15	40
	16	9	32		24	20	50
	19	6	03		24	27	60
	19	10	31		26	8	02
	19	11	33		26	10	31
					26	13	32
6	13	4	18		28	8	05
	13	6	38		30	10	03
	15	5	19		30	14	23
	15	7	39		30	16	33
	17	6	10				
	17	9	30	10	19	5	18
	19	6	02		19	7	38
	19	10	32		22	6	19
	22	7	03		22	10	39
	22	11	23		22	16	59
	22	13	33		22	22	69
	24	7	05		26	8	10
					26	10	20
7	14	4	18		26	12	30
	14	6	38		26	16	40
	16	5	19		26	21	50
	16	6	39		26	29	60
	19	6	10		28	8	05
	19	10	30		30	9	02
	22	7	02		30	0-1/2 inch	52
	22	10	31		30	14	22
	22	12	32		30	0-9/16 inch	32
	24	7	05		30	0-11/16 inch	62
	26	8	93				
	26	9	03		32	9	06
	26	13	23		35	11	03
	26	15	33		35	17	23
					35	19	33
8	16	4	18				
	16	6	38	11	32	7	05
	19	6	19				
	19	9	39	12	21	5	18
	22	7	10		21	7	38
	22	10	31		24	6	19
	22	11	30		24	10	39

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the currenversion before use.

Table XXIV - Boundary dimensions-MA (cont'd.)

Bore MM	O.D. MM	Width [1]	O.D. and width code	Bore MM	O.D. MM	Width [1]	O.D. and width code
12	24	16	59	15	52	24	24
	24	22	69				
	28	8	10	16	35	11	12
	28	10	20		38	10	05
	28	12	30		38	11	92
	28	16	40		38	12	02
	28	21	50				
	28	29	60	17	26	5	18
	30	8	01		26	7	38
	32	7	05		30	7	19
	32	10	02		30	10	39
	32	0-1/2 inch	52		30	13	49
	32	14	22		30	18	59
	32	0-5/8 inch	32		30	23	69
	32	0-3/4 inch	62		35	8	00
	37	9	43		35	10	10
	37	10	73		35	12	20
	37	12	03		35	14	30
	37	17	23		35	18	40
	37	0-3/4 inch	33		35	24	50
	42	13	04		35	32	60
	42	19	24		40	10	92
					40	12	02
13	30	7	05		40	0-1/2 inch	52
	32	10	02		40	16	22
	32	0-5/8 inch	32		40	0-11/16 inch	32
					40	0-13/16 inch	62
14	35	8	05		44	10	15
					44	11	05
15	24	5	18		47	14	03
	24	7	33		47	19	23
	28	7	19		47	0-7/8 inch	33
	28	10	39		47	1 inch	53
	28	13	49		62	17	04
	28	18	59		62	29	24
	28	23	69		62	1-3/16 inches	34
	32	8	00				
	32	9	10	19	40	9	92
	32	11	20				
	32	13	30	20	32	4	08
	32	17	40		32	7	18
	32	23	50		32	10	38
	32	30	60		37	7	09
	35	8	05		37	9	19
	35	9	92		37	11	29
	35	11	02		37	13	39
	35	0-1/2 inch	52		37	17	49
	35	14	22		37	23	59
	35	0-5/8 inch	32		37	30	69
	35	0-3/4 inch	62		40	11	15
	37	9	06		42	8	00
	37	10	16		42	9	06
	40	9	43		42	10	16
	40	10	53		42	12	10
	40	11	73		42	14	20
	42	13	03		42	16	30
	42	17	23		42	22	40
	42	0-3/4 inch	33				
	52	15	04		42	30	50

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXIV - Boundary dimensions-MA (cont'd.)

Bore MM	O.D. MM	Width [1]	O.D. and width code	Bore MM	O.D. MM	Width [1]	O.D. and width code
20	42	40	60	25	80	1-3/8 inches	34
	47	12	92		80	36	24
	47	14	02		80	1-1/2 inches	44
	47	18	22				
	47	0-3/4 inch	52	27	88	19	94
	47	0-13/16 inch	32				
	47	0-15/16 inch	62	30	42	4	08
	47	1-5/8 inches	82		42	7	18
	52	10	43		42	10	38
	52	12	73		47	7	09
	52	15	03		47	9	19
	52	21	23		47	11	29
	52	0-7/8 inch	33		47	13	39
	52	1 inch	53		47	17	49
	52	1-3/4 inches	63		47	23	59
	65	14	94		47	30	69
	72	19	04		52	13	15
	72	33	24		55	9	00
	72	1-3/8 inches	34		55	13	10
					55	16	20
22	72	16	94		55	19	30
					55	25	40
25	37	4	08		55	34	50
	37	7	18		55	45	60
	37	10	38		62	10	06
	42	7	09		62	13	16
	42	9	19		62	16	02
	42	11	29		62	0-3/4 inch	52
	42	13	39		62	20	22
	42	17	49		62	0-15/16 inch	32
	42	23	59		62	1-1/16 inches	62
	42	30	69		62	1-7/8 inches	82
	47	8	00		72	13	43
	47	12	10		72	16	73
	47	14	20		72	19	03
	47	16	30		72	27	23
	47	22	40		72	1-3/16 inches	33
	47	30	50		72	1-5/16 inches	53
	47	40	60		72	2-3/8 inches	63
	52	9	06		90	23	04
	52	10	16		90	28	14
	52	12	42		90	1-9/16 inches	34
	52	15	02		90	40	24
	52	18	22		95	20	94
	52	0-3/4 inch	52				
	52	0-13/16 inch	32	35	47	1	08
	52	0-7/8 inch	62		47	7	18
	52	0-15/16 inch	72		47	10	38
	52	1-5/8 inches	82		55	7	09
	62	12	43		55	10	19
	62	14	73		55	13	29
	62	17	03		55	15	39
	62	24	23		55	20	49
	62	1 inch	33		55	27	59
	62	1-1/8 inches	53		55	36	69
	62	2 inches	63		62	9	00
	80	17	94		62	14	10
	80	21	04		62	17	20
	80	25	14		62	20	30
					62	27	40

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXIV - Boundary dimensions-MA (cont'd.)

Bore MM	O.D. MM	Width[1]	O.D. and width code
35	62	36	50
	62	48	60
	70	10	06
	70	14	16
	72	14	42
	72	17	02
	72	0-7/8 inch	52
	72	23	22
	72	1-1/16 inches	32
	72	1-3/16 inches	62
	72	2-1/8 inches	82
	80	14	43
	80	18	73
	80	21	03
	80	31	23
	80	1-3/8 inches	33
	80	1-1/2 inches	53
	80	2-3/4 inches	63
	100	25	04
	100	30	14
	100	43	24
	100	1-3/4 inches	34
	103	22	94
40	52	4	08
	52	7	18
	52	10	38
	62	8	09
	62	12	19
	62	14	29
	62	16	39
	62	22	49
	62	30	59
	62	40	69
	68	9	00
	68	15	10
	68	18	20
	68	21	30
	68	28	40
	68	38	50
	68	50	60
	72	16	15
	80	11	06
	80	14	42
	80	18	02
	80	21	92
	80	23	22
	80	1 inch	52
	80	1-3/16 inches	32
	80	1-5/16 inches	62
	80	2-3/8 inches	82
	90	16	43
	90	20	73
	90	23	03
	90	33	23
	90	1-7/16 inches	33
	90	1-9/16 inches	53
	90	2-3/8 inches	63
40	110	27	04
	110	33	14
	110	46	24
	110	1-15/16 inches	34
45	58	7	18
	58	10	38
	58	13	48
	68	8	09
	68	12	19
	68	14	29
	68	16	39
	68	22	49
	68	30	59
	68	40	69
	75	10	00
	75	16	10
	75	19	20
	75	23	30
	75	30	40
	75	40	50
	75	54	60
	80	18	15
	85	11	06
	85	14	42
	85	15	16
	85	19	02
	85	23	22
	85	1 inch	52
	85	1-3/16 inches	32
	85	1-5/16 inches	62
	85	2-3/8 inches	82
	100	17	43
	100	22	73
	100	25	03
	100	36	23
	100	1-9/16 inches	33
	100	1-11/16 inches	53
	100	3-1/8 inches	63
	120	29	04
	120	35	14
	120	50	24
	120	2-1/8 inches	34
50	65	5	08
	65	7	18
	65	10	28
	65	12	38
	65	15	48
	72	8	09
	72	12	19
	72	14	29
	72	16	39
	72	22	49
	72	30	59
	72	40	69
	80	10	00
	80	16	10

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXIV - Boundary dimensions-MA (cont'd.)

Bore MM	O.D. MM	Width [1]	O.D. and width code	Bore MM	O.D. MM	Width [1]	O.D. and width code
50	80	19	20	55	120	43	23
	80	23	30		120	1-15/16 inch	33
	80	40	50		120	2-1/16 inch	53
	80	54	60		120	3-7/8 inch	63
	85	19	15		140	33	04
	90	11	06		140	40	14
	90	14	42		140	57	24
	90	15	16		140	2-1/2 inch	34
	90	20	02		140	2-5/8 inch	44
	90	23	22				
	90	1 inch	52	60	78	7	08
	90	1-3/16 inch	32		78	10	18
	90	1-5/16 inch	62		78	12	28
	90	1-7/16 inch	72		78	14	38
	90	2-3/8 inch	82		78	18	48
	110	19	43		85	9	09
	110	24	73		85	13	19
	110	27	03		85	16	29
	110	40	23		85	19	39
	110	1-3/4 inch	33		85	25	49
	110	1-7/8 inch	53		85	34	59
	110	3-1/2 inch	63		85	45	69
	130	31	04		95	11	00
	130	37	14		95	18	10
	130	53	24		95	22	20
	130	2-5/16 inch	34		95	26	30
	130	3-7/16 inch	44		95	32	70
					95	35	40
55	72	7	08		95	46	50
	72	9	18		95	63	60
	72	11	28		100	21	15
	72	13	38		105	12	06
	72	17	48		105	17	16
	80	9	09		110	17	42
	80	13	19		110	22	02
	80	16	29		110	28	22
	80	19	39		110	1-3/8 inch	52
	80	25	49		110	1-7/16 inch	32
	80	45	69		110	1-1/2 inch	62
	90	11	00		110	1-9/16 inch	92
	90	18	10		110	1-3/4 inch	72
	90	20	15		110	2-7/8 inch	82
	90	22	20		127	20	43
	90	26	30		130	26	73
	90	30	70		130	31	03
	90	35	40		130	46	23
	90	46	50		130	2-1/8 inch	33
	90	63	60		130	2-1/4 inch	53
	100	12	06		130	4-1/4 inch	63
	100	16	42		150	35	04
	100	21	02		150	42	14
	100	25	22		150	60	24
	100	1-3/16 inch	52		150	2-5/8 inch	34
	100	1-5/16 inch	32				
	100	1-7/16 inch	62	65	85	7	08
	100	1-5/8 inch	72		85	10	18
	100	2-5/8 inch	82		85	13	28
	117	19	43		85	15	38
	120	25	73		85	20	48
	120	29	03				

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXIV - Boundary dimensions-MA (cont'd.)

Bore MM	O.D. MM	Width [1]	O.D. and width code
65	90	9	09
	90	13	19
	90	16	29
	90	19	39
	90	25	49
	90	34	59
	90	45	69
	100	11	00
	100	18	10
	100	22	20
	100	26	30
	100	35	40
	100	46	50
	100	63	60
	105	22	15
	115	14	06
	115	18	16
	120	17	42
	120	23	02
	120	31	22
	120	1-3/8 inches	52
	120	1-1/2 inches	32
	120	1-5/8 inches	62
	120	1-3/4 inches	92
	120	1-7/8 inches	72
	120	3 inches	82
	137	22	43
	140	27	73
	140	33	03
	140	48	23
	140	2-5/16 inches	33
	140	2-7/16 inches	53
	140	4-5/8 inches	63
	160	37	04
	160	45	14
	160	64	24
	160	2-13/16 inches	34
70	90	8	08
	90	10	18
	90	13	28
	90	15	38
	90	20	48
	100	10	09
	100	16	19
	100	19	29
	100	23	39
	100	30	49
	100	40	59
	100	54	69
	110	13	00
	110	20	10
	110	23	15
	110	24	20
	110	30	30
	110	36	70
	110	40	40
	110	54	50
	110	71	60
	120	14	06
	120	19	16
70	120	19	16
	125	20	42
	125	24	02
	125	31	22
	125	1-7/16 inches	52
	125	1-9/16 inches	32
	125	1-5/8 inches	12
	125	1-11/16 inches	92
	125	1-3/4 inches	62
	125	1-15/16 inches	72
	125	3-1/8 inches	82
	147	24	43
	150	28	73
	150	35	03
	150	51	23
	150	2-1/2 inches	33
	150	2-5/8 inches	93
	150	5 inches	63
	180	42	04
	180	50	14
	180	74	24
	180	3-1/8 inches	34
75	95	8	08
	95	10	18
	95	13	28
	95	15	38
	95	20	48
	105	10	09
	105	16	19
	105	19	29
	105	23	39
	105	30	49
	105	40	59
	105	54	69
	115	13	00
	115	20	10
	115	24	20
	115	30	30
	115	40	40
	115	54	50
	115	71	60
	120	23	15
	130	16	06
	130	20	42
	130	25	02
	130	31	22
	130	1-7/16 inches	52
	130	1-5/8 inches	32
	130	1-3/4 inches	62
	130	2 inches	72
	130	3-1/4 inches	82
	157	25	43
	160	30	73
	160	37	03
	160	55	23
	160	2-11/16 inches	33
	160	2-13/16 inches	93
	160	5-3/8 inches	63
	190	45	04

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXIV - Boundary dimensions-MA (cont'd.)

Bore MM	O.D. MM	Width[1]	O.D. and width code	Bore MM	O.D. MM	Width[1]	O.D. and width code
75	190	53	14	85	130	14	00
	190	77	24		130	22	10
	190	3-1/4 inches	34		130	24	15
					130	27	20
80	100	8	08		130	34	30
	100	10	18		130	45	40
	100	13	28		130	60	50
	100	15	38		130	80	60
	100	20	48		145	18	06
	110	10	09		145	22	16
	110	16	19		150	23	42
	110	19	29		150	28	02
	110	23	39		150	36	22
	110	30	49		150	1-3/4 inches	52
	110	40	59		150	1-15/16 inches	32
	110	54	69		150	2-1/16 inches	62
	125	14	00		150	2-9/16 inches	72
	125	22	10		150	3-7/8 inches	82
	125	24	15		180	41	03
	125	27	20		180	60	23
	125	34	30		180	2-7/8 inches	33
	125	40	70		180	5-3/4 inches	63
	125	45	40		210	52	04
	125	60	50		210	60	14
	125	80	60		210	86	24
	135	16	06		210	3-5/8 inches	34
	135	21	16				
	140	21	42	90	115	9	08
	140	26	02		115	13	18
	140	33	22		115	16	28
	140	1-5/8 inches	52		115	19	38
	140	1-3/4 inches	32		115	25	48
	140	1-7/8 inches	62		125	11	09
	140	2-1/8 inches	72		125	18	19
	140	3-1/2 inches	82		125	22	29
	168	27	43		125	26	39
	170	32	73		125	35	49
	170	39	03		125	46	59
	170	58	23		125	63	69
	170	2-11/16 inches	33		140	16	00
	170	2-13/16 inches	53		140	24	10
	170	5-3/8 inches	63		140	26	15
	200	48	04		140	30	20
	200	57	14		140	44	70
	200	80	24		140	50	40
	200	3-7/16 inches	34		140	67	50
					140	90	60
85	110	9	08		150	18	06
	110	13	18		150	23	16
	110	16	28		160	25	42
	110	19	38		160	26	85
	110	25	48		160	30	02
	120	11	09		160	35	95
	120	18	19		160	40	22
	120	22	29		160	2 inches	52
	120	26	39		160	2-1/16 inches	32
	120	35	49		160	2-3/16 inches	62
	120	46	59		160	2-1/2 inches	72
	120	63	69		160	4-1/8 inches	82

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXIV - Boundary dimensions-MA (cont'd.)

Bore MM	O.D. MM	Width[1]	O.D. and width code
90	190	43	03
	190	64	23
	190	2-7/8 inches	33
	190	5-3/4 inches	63
	225	54	04
	225	63	14
	225	90	24
	225	3-7/8 inches	34
95	120	9	08
	120	13	18
	120	16	28
	120	19	38
	120	25	48
	130	11	09
	130	18	19
	130	22	29
	130	26	39
	130	35	49
	130	46	59
	130	63	69
	145	17	00
	145	24	10
	145	30	20
	145	37	30
	145	50	40
	145	67	50
	145	90	60
	150	28	15
	160	20	06
	160	24	16
	170	26	42
	170	28	92
	170	32	02
	170	43	22
	170	2-3/16 inches	32
	170	2-5/16 inches	62
	170	2-5/8 inches	72
	170	4-3/8 inches	82
	200	45	03
	200	67	23
	200	3-1/16 inches	33
	200	6-1/8 inches	63
	240	55	04
	240	95	24
	240	4-3/16 inches	34
	250	55	94
	250	4-3/16 inches	84
100	125	9	08
	125	13	18
	125	16	28
	125	19	38
	125	25	48
	140	13	09
	140	20	19
	140	24	29
	140	30	39
100	140	40	49
	140	54	59
	140	71	69
	150	16	00
	150	24	10
	150	30	20
	150	37	30
	150	44	70
	150	50	40
	150	67	50
	150	90	60
	160	28	06
	165	20	61
	165	21	01
	165	25	16
	165	30	11
	165	39	21
	165	52	31
	180	28	42
	180	34	02
	180	46	22
	180	2-3/8 inches	32
	180	2-1/2 inches	62
	180	2-13/16 inches	72
	180	4-3/4 inches	82
	215	47	03
	215	73	23
	215	3-1/4 inches	33
	215	6-1/2 inches	63
	250	58	04
	250	98	24
	250	4-1/2 inches	34
	265	60	94
	265	4-1/2 inches	84
105	130	9	08
	130	13	18
	130	16	28
	130	19	38
	130	25	48
	145	13	09
	145	20	19
	145	24	29
	145	30	39
	145	40	49
	145	54	59
	145	71	69
	160	18	00
	160	26	10
	160	33	20
	160	41	30
	160	56	40
	160	75	50
	160	100	60
	175	22	01
	175	33	11
	175	42	21
	175	56	31
	180	22	06

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXIV - Boundary dimensions-MA (cont'd.)

Bore MM	O.D. MM	Width[1]	O.D. and width code	Bore MM	O.D. MM	Width[1]	O.D. and width code
105	180	26	16	120	165	27	29
	190	29	42		165	34	39
	190	36	02		165	45	49
	190	50	22		165	60	59
	190	2-9/16 inches	32		165	80	69
	190	5-1/8 inches	82		180	19	00
	225	49	03		180	28	10
	225	77	23		180	36	20
	225	3-7/16 inches	33		180	46	30
	225	6-7/8 inches	63		180	52	70
	260	60	04		180	60	40
	260	100	24		180	80	50
					180	109	60
110	140	10	08		190	32	06
	140	16	18		200	25	01
	140	19	28		200	38	11
	140	23	38		200	48	21
	140	30	48		200	62	31
	150	13	09		215	40	02
	150	20	19		215	42	12
	150	24	29		215	58	22
	150	30	39		215	6 inches	82
	150	40	49		215	3 inches	32
	150	54	59		260	55	03
	150	71	69		260	86	23
	170	19	00		260	4-1/8 inches	33
	170	28	10		260	8-1/4 inches	63
	170	36	20		310	72	04
	170	45	30		310	118	24
	170	52	70				
	170	60	40	130	165	11	08
	170	80	50		165	18	18
	170	109	60		165	22	28
	175	30	06		165	26	38
	180	22	01		165	35	48
	180	33	11		180	16	09
	180	42	21		180	24	19
	180	56	31		180	30	29
	185	22	16		180	37	39
	185	26	26		180	50	49
	200	31	42		180	67	59
	200	38	02		180	90	69
	200	53	22		200	22	00
	200	2-3/4 inches	32		200	33	10
	200	5-1/2 inches	82		200	42	20
	240	50	03		200	52	30
	240	80	23		200	69	40
	240	3-5/8 inches	33		200	95	50
	240	7-1/4 inches	63		200	125	60
	280	65	04		205	34	06
	280	108	24		210	25	01
					210	38	11
120	150	10	08		210	48	21
	150	16	18		210	64	31
	150	19	28		230	40	02
	150	23	38		230	46	12
	150	30	48		230	64	22
	165	14	09		230	3-1/8 inches	32
	165	22	19		230	6-1/4 inches	82

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXIV - Boundary dimensions-MA (cont'd.)

Bore MM	O.D. MM	Width[1]	O.D. and width code
130	280	58	03
	280	93	23
	280	4-3/8 inches	33
	280	8-3/4 inches	63
	340	78	04
	340	128	24
140	175	11	08
	175	18	18
	175	22	28
	175	26	38
	175	35	48
	190	16	09
	190	24	19
	190	30	29
	190	37	39
	190	50	49
	190	67	59
	190	90	69
	210	22	00
	210	33	10
	210	42	20
	210	53	30
	210	69	40
	210	95	50
	210	125	60
	220	36	06
	220	2-1/2 inches	26
	220	5 inches	36
	225	27	01
	225	40	11
	225	50	21
	225	68	31
	250	42	02
	250	50	12
	250	68	22
	250	3-1/4 inches	32
	250	6-1/2 inches	82
	300	62	03
	300	102	23
	300	4-1/2 inches	33
	300	9 inches	63
	360	82	04
	360	132	24
150	190	13	08
	190	20	18
	190	24	28
	190	30	38
	190	40	48
	210	19	09
	210	28	19
	210	36	29
	210	45	39
	210	60	49
	210	80	59
	210	109	69
	225	24	00
	225	35	10
150	225	45	20
	225	56	30
	225	75	40
	225	100	50
	225	136	60
	235	38	06
	235	2-5/8 inches	26
	235	5-1/4 inches	36
	250	31	01
	250	46	11
	250	60	21
	250	80	31
	270	45	02
	270	54	12
	270	73	22
	270	3-1/2 inches	32
	270	7 inches	82
	320	65	03
	320	67	13
	320	108	23
	320	4-7/8 inches	33
	320	9-3/4 inches	63
	380	85	04
	380	138	24
160	200	13	08
	200	20	18
	200	24	28
	200	30	38
	200	40	48
	220	19	09
	220	28	19
	220	36	29
	220	45	39
	220	60	49
	220	80	59
	220	109	69
	240	25	00
	240	38	10
	240	48	20
	240	60	30
	240	80	40
	240	109	50
	240	145	60
	250	40	06
	250	2-7/8 inches	26
	250	5-3/4 inches	36
	270	34	01
	270	49	91
	270	51	11
	270	66	21
	270	86	31
	290	48	02
	290	59	12
	290	80	22
	290	3-7/8 inches	32
	290	7-3/4 inches	82
	340	68	03
	340	71	13

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXIV - Boundary dimensions-MA (cont'd.)

Bore MM	O.D. MM	Width[1]	O.D. and width code	Bore MM	O.D. MM	Width[1]	O.D. and width code
160	340	114	23	180	280	46	10
	340	5-1/4 inches	33		280	60	20
	340	10-1/2 inches	63		280	74	30
	400	88	04		280	3-1/4 inches	80
	400	142	24		280	100	40
					280	136	50
170	215	14	08		280	6-1/2 inches	90
	215	22	18		280	180	60
	215	27	28		300	37	01
	215	34	38		300	56	11
	215	45	48		300	72	21
	230	19	09		300	96	31
	230	28	19		320	52	02
	230	36	29		320	62	12
	230	45	39		320	86	22
	230	60	49		320	4-1/4 inches	32
	230	80	59		320	8-1/2 inches	82
	230	109	69		380	75	03
	260	28	00		380	79	13
	260	42	10		380	126	23
	260	54	20		380	5-3/4 inches	33
	260	67	30		380	11-1/2 inches	63
	260	90	40		440	95	04
	260	122	50		440	150	24
	260	160	60				
	265	42	06	190	240	16	08
	265	3 inches	26		240	24	18
	265	6 inches	36		240	30	28
	280	34	01		240	37	38
	280	51	11		240	50	48
	280	66	21		260	22	09
	280	88	31		260	33	19
	310	52	02		260	42	29
	310	62	12		260	52	39
	310	86	22		260	69	49
	310	4-1/8 inches	32		260	95	59
	310	8-1/4 inches	82		260	125	69
	360	72	03		290	31	00
	360	75	13		290	46	10
	360	120	23		290	60	20
	360	5-1/2 inches	33		290	75	30
	360	11	63		290	100	40
	420	92	04		290	136	50
	420	145	24		290	180	60
					300	46	06
180	225	14	08		300	3-3/8 inches	26
	225	22	18		300	6-3/4 inches	36
	225	27	28		320	42	01
	225	34	38		320	60	11
	225	45	48		320	78	21
	250	22	09		320	104	31
	250	33	19		340	55	02
	250	42	29		340	65	12
	250	52	39		340	92	22
	250	69	49		340	4-1/2 inches	32
	250	95	59		340	9 inches	82
	250	125	69		400	78	03
	280	31	00		400	83	13
	280	44	70		400	132	23

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXIV - Boundary dimensions-MA (cont'd.)

Bore MM	O.D. MM	Width[1]	O.D. and width code
190	400	6 inches	33
	400	12 inches	63
	460	98	04
	460	155	24
200	250	16	08
	250	24	18
	250	30	28
	250	37	38
	250	50	48
	280	25	09
	280	38	19
	280	48	29
	280	60	39
	280	80	49
	280	109	59
	280	145	69
	310	34	00
	310	51	10
	310	66	20
	310	82	30
	310	109	40
	310	150	50
	310	200	60
	320	48	06
	320	3-1/2 inches	26
	320	7 inches	36
	340	44	01
	340	65	11
	340	82	21
	340	112	31
	360	58	02
	360	70	12
	360	98	22
	360	4-3/4 inches	32
	360	9-1/2 inches	82
	420	80	03
	420	87	13
	420	138	23
	420	6-1/2 inches	33
	420	13 inches	63
	480	102	04
	480	160	24
210	340	50	06
	340	3-3/4 inches	26
	340	7-1/2 inches	36
220	270	16	08
	270	24	18
	270	30	28
	270	37	38
	270	50	48
	300	25	09
	300	38	19
	300	48	29
	300	60	39
	300	80	49
	300	109	59
	300	145	69
220	340	37	00
	340	56	10
	340	72	20
	340	90	30
	340	118	40
	340	160	50
	340	218	60
	350	51	06
	350	3-7/8 inches	26
	350	7-3/4 inches	36
	370	48	01
	370	69	11
	370	88	21
	370	120	31
	400	65	02
	400	78	12
	400	108	22
	400	5-1/4 inches	32
	400	144	42
	400	10-1/2 inches	82
	460	88	03
	460	99	13
	460	145	23
	460	7 inches	33
	460	14 inches	63
	540	115	04
	540	180	24
230	370	53	06
	370	4 inches	26
	370	8 inches	36
240	300	19	08
	300	28	18
	300	36	28
	300	45	38
	300	60	48
	320	25	09
	320	38	19
	320	48	29
	320	60	39
	320	80	49
	320	109	59
	320	145	69
	360	37	00
	360	56	10
	360	72	20
	360	92	30
	360	118	40
	360	160	50
	360	218	60
	390	55	06
	390	4-1/4 inches	26
	390	8-1/2 inches	36
	400	50	01
	400	74	11
	400	95	21
	400	128	31
	440	72	02
	440	85	12

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXIV - Boundary dimensions-MA (cont'd.)

Bore MM	O.D. MM	Width[1]	O.D. and width code
240	440	120	22
	440	5-3/4 inches	32
	440	160	42
	440	11-1/2 inches	82
	500	95	03
	500	111	13
	500	155	23
	500	7-1/2 inches	33
	500	15 inches	63
	580	122	04
	580	190	24
250	410	57	06
	410	4-3/8 inches	26
	410	8-3/4 inches	36
260	320	19	08
	320	28	18
	320	36	28
	320	45	38
	320	60	48
	360	31	09
	360	46	19
	360	60	29
	360	75	39
	360	100	49
	360	136	59
	360	180	69
	400	44	00
	400	65	10
	400	82	20
	400	104	30
	400	140	40
	400	190	50
	400	250	60
	430	59	06
	430	4-1/2 inches	26
	430	9 inches	36
	440	57	01
	440	82	11
	440	106	21
	440	144	31
	480	80	02
	480	90	12
	480	130	22
	480	6-1/4 inches	32
	480	174	42
	480	12-1/2 inches	82
	540	102	03
	540	120	13
	540	165	23
	540	8 inches	33
	540	16 inches	63
	620	132	04
	620	206	24
280	350	22	08
	350	33	18
	350	42	28
	350	52	38
280	350	69	48
	380	31	09
	380	46	19
	380	60	29
	380	75	39
	380	100	49
	380	136	59
	380	180	69
	420	44	00
	420	65	10
	420	82	20
	420	106	30
	420	140	40
	420	190	50
	420	250	60
	460	57	01
	460	63	41
	460	82	11
	460	106	21
	460	4-7/8 inches	61
	460	146	31
	460	9-3/4 inches	51
	500	80	02
	500	90	12
	500	130	22
	500	6-1/2 inches	32
	500	176	42
	500	13 inches	82
	580	108	03
	580	128	13
	580	165	23
	580	8-1/2 inches	33
	580	17 inches	63
	670	140	04
	670	224	24
300	380	25	08
	380	38	18
	380	48	28
	380	60	38
	380	80	48
	420	37	09
	420	56	19
	420	72	29
	420	90	39
	420	118	49
	420	160	59
	420	218	69
	460	50	00
	460	74	10
	460	95	20
	460	118	30
	460	160	40
	460	218	50
	460	290	60
	480	67	06
	480	5 inches	26
	480	10 inches	36
	500	63	01

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXIV - Boundary dimensions-MA (cont'd.)

O.D. MM	O.D. MM	Width[1]	O.D. and width code	Bore MM	O.D. MM	Width[1]	O.D. and width code
300	500	90	11	340	420	80	48
	500	160	31		460	37	09
	540	85	02		460	56	19
	540	98	12		460	72	29
	540	140	22		460	90	39
	540	7 inches	32		460	118	49
	540	192	42		460	160	59
	540	14 inches	82		460	218	69
	620	109	03		520	57	00
	620	140	13		520	82	10
	620	185	23		520	106	20
	620	9 inches	33		520	133	30
	620	18 inches	63		520	180	40
	710	150	04		520	243	50
	710	236	24		520	325	60
					580	78	01
320	400	25	08		580	106	11
	400	38	18		580	140	21
	400	48	28		580	190	31
	400	60	38		620	92	02
	400	80	48		620	118	12
	440	37	09		620	165	22
	440	56	19		620	224	32
	440	72	29		710	118	03
	440	90	39		710	165	13
	440	118	49		710	212	23
	440	160	59		710	272	33
	440	128	69		800	165	04
	480	50	00		800	265	24
	480	74	10				
	480	95	20	360	440	25	08
	480	121	30		440	38	18
	480	160	40		440	48	28
	480	218	50		440	60	38
	480	290	60		440	80	48
	500	71	06		480	37	09
	500	5-1/8 inches	26		480	56	19
	500	10-1/4 inches	36		480	72	29
	540	71	01		480	90	39
	540	100	11		480	118	49
	540	128	21		480	160	59
	540	176	31		480	218	69
	580	92	02		540	57	00
	580	105	12		540	82	10
	580	150	22		540	106	20
	580	7-1/2 inches	32		540	134	30
	580	208	42		540	180	40
	580	15 inches	82		540	243	50
	670	112	03		540	325	60
	670	155	13		600	78	01
	670	200	23		600	106	11
	670	9-1/2 inches	33		600	140	21
	670	19 inches	63		600	192	31
	750	155	04		650	95	02
	750	250	24		650	122	12
					650	170	22
340	420	25	08		650	232	32
	420	38	18		750	125	03
	420	48	28		750	170	13
	420	60	38		750	224	23

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXIV - Boundary dimensions-MA (cont'd.)

Bore MM	O.D. MM	Width[1]	O.D. and width code	Bore MM	O.D. MM	Width[1]	O.D. and width code
360	750	290	33	400	650	200	31
	850	180	04		720	103	02
	850	280	24		720	140	12
					720	185	22
380	480	31	08		720	256	32
	480	46	18		820	136	03
	480	60	28		820	185	13
	480	75	38		820	243	23
	480	100	48		820	308	33
	520	44	09		950	200	04
	520	65	19		950	315	24
	520	82	29				
	520	106	39	420	520	31	08
	520	140	49		520	46	18
	520	190	59		520	60	28
	520	250	69		520	75	38
	560	57	00		520	100	48
	560	82	10		560	44	09
	560	106	20		560	65	19
	560	135	30		560	82	29
	560	180	40		560	106	39
	560	243	50		560	140	49
	560	325	60		560	190	59
	620	78	01		560	250	69
	620	106	11		620	63	00
	620	140	21		620	90	10
	620	194	31		620	118	20
	680	95	02		620	150	30
	680	132	12		620	200	40
	680	175	22		620	355	50
	680	240	32				
	780	128	03		700	88	01
	780	175	13		700	122	11
	780	230	23		700	165	21
	780	300	33		700	224	31
	900	190	04		760	109	02
	900	300	24		760	150	12
					760	195	22
400	500	31	08		760	272	32
	500	46	18		850	136	03
	500	60	28		850	190	13
	500	75	38		850	250	23
	500	100	48		850	315	33
	540	44	09		980	206	04
	540	65	19		980	325	24
	540	82	29				
	540	106	39	440	540	31	08
	540	140	49		540	46	18
	540	190	59		540	60	28
	540	250	69		540	75	38
	600	63	00		540	100	48
	600	90	10		600	50	09
	600	118	20		600	74	19
	600	148	30		600	95	29
	600	200	40		600	118	39
	600	272	50		600	160	49
	600	355	60		600	218	59
	650	80	01		600	290	69
	650	112	11		650	67	00
	650	145	21		650	94	10

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXIV - Boundary dimensions-MA (cont'd.)

Bore MM	O.D. MM	Width[1]	O.D. and width code
440	650	122	20
	650	157	30
	650	212	40
	650	280	50
	650	375	60
	720	88	01
	720	122	11
	720	165	21
	720	226	31
	790	112	02
	790	155	12
	790	200	22
	790	280	32
	900	145	03
	900	200	13
	900	265	23
	900	345	33
	1030	212	04
	1030	335	24
460	580	37	08
	580	56	18
	580	72	28
	580	90	38
	580	118	48
	620	50	09
	620	74	19
	620	95	29
	620	118	39
	620	160	49
	620	218	59
	620	290	69
	680	71	00
	680	100	10
	680	128	20
	680	163	30
	680	218	40
	680	300	50
	680	400	60
	760	95	01
	760	132	11
	760	175	21
	760	240	31
	830	118	02
	830	165	12
	830	212	22
	830	296	32
	950	155	03
	950	212	13
	950	280	23
	950	365	33
	1060	218	04
	1060	345	24
480	600	37	08
	600	56	18
	600	72	28
	600	90	38
	600	118	48
	650	54	09
480	650	78	19
	650	100	29
	650	128	39
	650	170	49
	650	230	59
	650	308	69
	700	71	00
	700	100	10
	700	128	20
	700	165	30
	700	218	40
	700	300	50
	700	400	60
	790	100	01
	790	136	11
	790	180	21
	790	248	31
	870	125	02
	870	170	12
	870	224	22
	870	310	32
	980	160	03
	980	218	13
	980	290	23
	980	375	33
	1120	230	04
	1120	365	24
500	620	37	08
	620	56	18
	620	72	28
	620	90	38
	620	118	48
	670	54	09
	670	78	19
	670	100	29
	670	128	39
	670	170	49
	670	230	59
	670	308	69
	720	71	00
	720	100	10
	720	128	20
	720	167	30
	720	218	40
	720	300	50
	720	400	60
	830	106	01
	830	145	11
	830	190	21
	830	264	31
	920	136	02
	920	185	12
	920	243	22
	920	336	32
	1030	170	03
	1030	230	13
	1030	300	23
	1030	388	33

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXIV - Boundary dimensions-MA (cont'd.)

Bore MM	O.D. MM	Width[1]	O.D. and width code
500	1150	236	04
	1150	375	24
530	650	37	08
	650	56	18
	650	72	28
	650	90	38
	650	118	48
	710	57	09
	710	82	19
	710	106	29
	710	136	39
	710	180	49
	710	243	59
	710	325	69
	780	80	00
	780	112	10
	780	145	20
	780	185	30
	780	250	40
	780	335	50
	780	450	60
	870	109	01
	870	150	11
	870	195	21
	870	272	31
	980	145	02
	980	200	12
	980	258	22
	980	355	32
	1090	180	03
	1090	243	13
	1090	325	23
	1090	412	33
	1220	250	04
	1220	400	24
560	680	37	08
	680	56	18
	680	72	28
	680	90	38
	680	118	48
	750	60	09
	750	85	19
	750	112	29
	750	140	39
	750	190	49
	750	258	59
	750	345	69
	820	82	00
	820	115	10
	820	150	20
	820	195	30
	820	258	40
	820	355	50
	820	462	60
	920	115	01
	920	160	11
	920	206	21
560	920	280	31
	1030	150	02
	1030	206	12
	1030	272	22
	1030	365	32
	1150	190	03
	1150	335	23
	1150	438	33
	1280	258	04
	1280	412	24
600	730	42	08
	730	60	18
	730	78	28
	730	98	38
	730	128	48
	800	63	09
	800	90	19
	800	118	29
	800	150	39
	800	200	49
	800	272	59
	800	355	69
	870	85	00
	870	118	10
	870	155	20
	870	200	30
	870	272	40
	870	365	50
	870	488	60
	980	122	01
	980	170	11
	980	218	21
	980	300	31
	1090	155	02
	1090	212	12
	1090	280	22
	1090	388	32
	1220	200	03
	1220	272	13
	1220	355	23
	1220	462	33
	1360	272	04
	1360	438	24
630	780	48	08
	780	69	18
	780	88	28
	780	112	38
	780	150	48
	850	71	09
	850	100	19
	850	128	29
	850	165	39
	850	218	49
	850	300	59
	850	400	69
	920	92	00
	920	128	10

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 20260-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXIV _ Boundary dimensions-MA (cont'd.)

Bore MM	O.D. MM	Width[1]	O.D. and width code	Bore MM	O.D. MM	Width[1]	O.D. and width code
630	920	170	20	710	950	106	19
	920	212	30		950	140	29
	920	290	40		950	180	39
	920	388	50		950	243	49
	920	515	60		950	325	59
	1030	128	01		950	438	69
	1030	175	11		1030	103	00
	1030	230	21		1030	140	10
	1030	315	31		1030	185	20
	1150	165	02		1030	236	30
	1150	230	12		1030	315	40
	1150	300	22		1030	438	50
	1150	412	32		1030	580	60
	1280	206	03		1150	140	01
	1280	280	13		1150	195	11
	1280	375	23		1150	250	21
	1280	488	33		1150	345	31
	1420	280	04		1280	180	02
	1402	450	24		1280	250	12
					1280	325	22
670	820	48	08		1280	450	32
	820	69	18		1420	224	03
	820	88	28		1420	308	13
	820	112	38		1420	412	23
	820	150	48		1420	530	33
	900	73	09				
	900	103	19	750	920	54	08
	900	136	29		920	78	18
	900	170	39		920	100	28
	900	230	49		920	128	38
	900	308	59		920	170	48
	900	412	69		1000	80	09
	980	100	00		1000	112	19
	980	136	10		1000	145	29
	980	180	20		1000	185	39
	980	230	30		1000	250	49
	980	308	40		1000	335	59
	980	425	50		1000	450	69
	980	560	60		1090	109	00
	1090	136	01		1090	150	10
	1090	185	11		1090	195	20
	1090	243	21		1090	250	30
	1090	336	31		1090	335	40
	1220	175	02		1090	462	50
	1220	243	12		1090	615	60
	1220	315	22		1220	150	01
	1220	438	32		1220	206	11
	1360	218	03		1220	272	21
	1360	300	13		1220	365	31
	1360	400	23		1360	195	02
	1360	515	33		1360	265	12
	1500	290	04		1360	345	22
	1500	475	24		1360	475	32
					1500	236	03
710	870	50	08		1500	325	13
	870	74	18		1500	438	23
	870	95	28		1500	560	33
	870	118	38				
	870	160	48	800	980	57	08
	850	78	09		980	82	18

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXIV - Boundary dimensions-MA (cont'd.)

Bore MM	O.D. MM	Width[1]	O.D. and width code	Bore MM	O.D. MM	Width[1]	O.D. and width code
800	980	106	28	850	1500	280	12
	980	136	38		1500	375	22
	980	180	48		1500	515	32
	1060	82	09				
	1060	115	19	900	1090	60	08
	1060	150	29		1090	85	18
	1060	195	39		1090	112	28
	1060	258	49		1090	140	38
	1060	355	59		1090	190	48
	1060	462	69		1180	88	09
	1150	112	00		1180	122	19
	1150	155	10		1180	165	29
	1150	200	20		1180	206	39
	1150	258	30		1180	280	49
	1150	345	40		1180	375	59
	1150	475	50		1180	500	69
	1150	630	60		1280	122	00
	1280	155	01		1280	170	10
	1280	212	11		1280	218	20
	1280	272	21		1280	280	30
	1280	375	31		1280	375	40
	1420	200	02		1280	515	50
	1420	272	12		1280	690	60
	1420	355	22		1420	165	01
	1420	488	32		1420	230	11
					1420	300	21
850	1030	57	08		1420	412	31
	1030	82	18				
	1030	106	28	950	1150	63	08
	1030	136	38		1150	90	18
	1030	180	48		1150	118	28
	1120	85	09		1150	150	38
	1120	118	19		1150	200	48
	1120	155	29		1250	95	09
	1120	200	39		1250	132	19
	1120	272	49		1250	175	29
	1120	365	59		1250	224	39
	1120	488	69		1250	300	49
	1220	118	00		1250	400	59
	1220	165	10		1250	545	69
	1220	212	20		1360	132	00
	1220	272	30		1360	180	10
	1220	365	40		1360	236	20
	1220	500	50		1360	300	30
	1220	670	60		1360	412	40
	1360	165	01		1360	560	50
	1360	224	11		1360	730	60
	1360	290	21		1500	175	01
	1360	400	31		1500	243	11
	1500	206	02		1500	315	21
					1500	438	31

[1]Dimensions are in millimeters unless otherwise indicated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXV - Boundary dimensions-MB

Bore MM	O.D. MM	Width[1]	O.D. and width code
10	33	9	02
12	35	10	02
	43	14	23
15	38	11	02
	47	13	03
	48	15	23
17	44	12	02
	46	14	22
	52	14	03
	53	16	23
	68	19	04
20	52	14	02
	53	16	22
	57	15	03
	58	15	13
	58	17	23
	62	0-13/16 inch	32
	72	0-7/8 inch	33
	80	24	04
25	57	15	02
	58	15	12
	58	17	22
	68	17	03
	68	19	23
	72	0-13/16 inch	32
	80	1 inch	33
	90	23	04
30	68	16	02
	68	18	22
	80	19	03
	80	21	23
	80	0-15/16 inch	32
	90	1-3/16 inches	33
	100	25	04
35	79	17	02
	80	17	12
	80	19	22
	85	1-1/16 inches	32
	88	21	03
	90	21	13
	90	23	23
	100	1-3/8 inches	33
	110	27	04
40	88	18	02
	90	18	12
	90	20	22
	90	1-3/16 inches	32
	100	23	03
	100	25	23
	110	1-7/16 inches	33
	120	29	04
45	93	19	02
	95	19	12
	95	21	22
	100	1-3/16 inches	32
	110	25	03
	110	27	23
	120	1-9/16 inches	33
	130	31	04
50	100	20	02
	100	22	22
	110	1-3/16 inches	32
	120	27	03
	120	29	23
	130	1-3/4 inches	33
	140	33	04
55	110	21	02
	110	23	22
	120	1-5/16 inches	32
	130	29	03
	130	31	23
	140	1-15/16 inches	33
	150	35	04
60	120	22	02
	120	24	22
	130	1-7/16 inches	32
	140	31	13
	140	33	23
	145	31	03
	150	2-1/8 inches	33
	160	37	04
65	130	23	12
	130	25	22
	135	23	02
	140	1-1/2 inches	32
	150	33	13
	150	35	23
	155	33	03
	160	2-5/16 inches	33
	173	39	04
70	135	24	12
	135	26	22
	140	24	02
	150	1-9/16 inches	32
	160	35	13
	160	37	23
	165	35	03
	180	2-1/2 inches	33
	193	44	04
75	140	25	12
	140	27	22
	145	25	02
	160	1-5/8 inches	32
	173	37	13

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXV - Boundary dimensions-MB (cont'd.)

Bore MM	O.D. MM	Width[1]	O.D. and width code	Bore MM	O.D. MM	Width[1]	O.D. and width code
75	173	39	23		240	49	13
	175	37	03		240	53	23
	190	2-11/16 inches	33		260	3-7/16 inches	33
	203	47	04				
80	150	26	12	110	215	38	12
	150	28	22		215	42	22
	155	26	02		220	38	02
	170	1-3/4 inches	32		240	2-3/4 inches	32
	183	39	13		255	54	23
	183	41	23		256	50	13
	190	39	03		265	50	03
	200	2-11/16 inches	33		280	3-5/8 inches	33
	213	50	04	120	230	40	12
85	160	28	12		260	3 inches	32
	160	30	22		280	55	13
	165	28	02		310	4-1/8 inches	33
	180	1-15/16 inches	32	130	250	40	12
	193	41	13		280	3-1/8 inches	32
	193	44	23		300	58	13
	200	41	03		300	59	03
	210	2-7/8 inches	33		340	4-3/8 inches	33
	225	56	04	140	240	36	06
90	173	32	22		250	2-1/2 inches	16
	174.6	30	12		270	42	12
	175	30	02		275	50	02
	190	2-1/16 inches	32		300	3-1/4 inches	32
	203	47	23		320	62	13
	204.6	43	13		360	4-1/2 inches	33
	210	43	03	150	260	38	06
	225	2-7/8 inches	33		270	2-5/8 inches	16
	240	58	04		290	45	12
95	183	34	22		300	45	02
	184.6	32	12		320	3-1/2 inches	32
	190	32	02		340	65	13
	200	2-3/16 inches	32		380	4-7/8 inches	33
	213	45	13	160	280	40	06
	213	50	23		290	2-7/8 inches	16
	220	45	03		310	48	12
	240	3-1/16 inches	33		340	3-7/8 inches	32
	265	59	04		360	68	13
100	193	36	22		400	5-1/4 inches	33
	194.6	34	12	170	300	42	06
	200	34	02		310	3 inches	16
	215	2-3/8 inches	32		320	52	12
	230	47	13		360	4-1/8 inches	32
	230	51	23		380	72	13
	235	47	03		420	5-1/2 inches	33
	250	3-1/4 inches	33	180	320	44	06
	280	64	04		320	3-1/4 inches	16
105	203	38	22		350	52	12
	204.6	36	12		380	4-1/4 inches	32
	210	36	02		410	75	13
	225	2-9/16 inches	32				

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXX - Significant codes for variations of group 2 base bearing numbers

1st and 2nd position code XX--	Modification (1st position)		Means of location and retainer (2nd position)
00--	Nothing	No snap ring or groove	Manufacturer's standard retainer
01--			Strip steel, stamped
02--			Strip brass or bronze
03--			Machine brass or bronze
05--		Snap ring and groove	Manufacturer's standard retainer
06--			Strip steel, stamped
08--			Machine brass or bronze
10--	Inner ring lip separable	No snap ring or groove	Manufacturer's standard retainer
11--			Strip steel, stamped
13--	Inner ring lip separable	No snap ring or groove	Machine brass or bronze
15--		Snap ring and groove	Manufacturer's standard retainer
16--			Strip steel, stamped
18--			Machine brass or bronze
20--	Outer ring lip separable	No snap ring or groove	Manufacturer's standard retainer
21--			Strip steel, stamped
23--			Machine brass or bronze
48--	Full type	No snap ring or groove	(No retainer)
49--		Snap ring and groove	(No retainer)
50--	Taper bore	No snap ring or groove	Manufacturer's standard retainer
51--			Strip steel, stamped
53--			Machine brass or bronze
55--		Snap ring and groove	Manufacturer's standard retainer
56--			Strip steel, stamped
58--			Machine brass or bronze
60--	Faces ground for duplex mtg.	No snap ring or groove	Strip steel, stamped
62--			Machine brass or bronze
64--	Duplex brgs.,(1 pr.), DF,DB or DT	No snap ring or groove	Strip steel, stamped
66--			Machine brass or bronze
70--	With spacer ring (non-adjustable)	No snap ring or groove	Manufacturer's standard retainer

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXXI - Additional significant codes for variations of group 2 base bearing numbers

1st and 2nd position code XX--	Oil holes and groove		Retainer				Tapered bore
	O.R.	I.R.	Pressed brass	Machine bronze	Pressed aluminum brass or bronze	Machined aluminum brass or bronze	
72--	X		X				
73--	X					X	
74--	X			X			
75--	X		X				X
76--					X		
77--							
78--	X			X			

3rd and 4th position code[1] --XX	Tolerance and internal fit (3rd position)	Lubrication (4th position)
--00	RBEC 1-standard fit	Regular slush
--10	RBEC 1-tight fit	Regular slush
--20	RBEC 1-loose fit	Regular slush
--30	RBEC 3-standard fit	Regular slush
--40	RBEC 3-tight fit	Regular slush
--70	RBEC 3-loose fit	Regular slush
--50	RBEC 5-standard fit	Regular slush
--60	RBEC 5-tight fit	Regular slush
--80	RBEC 5-loose fit	Regular slush

[1]Codes in this column (3 and 4) are only used with the codes in the preceding column (1 and 2) where the features coded are necessary for complete identification.

ARBITRARY SPECIAL CODES

8000 and 9000 series — Arbitrary "Special Codes" assigned to a given condition or series of conditions, are in the 8000 and 9000 series of numbers. They are nonrepetitive in meaning and apply only to the base number with which they are used. All conditions, other than (a) variations of basic dimensions, and (b) conditions covered by the above significant codes, are coded as "Special Codes". A variation of basic dimensions puts the bearing into group 9.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXXII - Boundary dimensions - IA

Bore		O.D.	Width	O.D. and width code	Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
002	1/8	1/4	3/32	01	006	3/8	1-1/2	9/16	03
		1/4	7/64	03					
		1/4	1/8	04	007	7/16	29/32	5/16	01
		5/16	7/64	05			1-1/8	3/8	03
		5/16	9/64	06			1-3/8	7/16	05
		3/8	3/32	07					
		3/8	7/64	08	008	1/2	3/4	5/32	01
		3/8	9/64	10			1-1/8	1/4	09
		3/8	5/32	09			1-1/8	9/32	22
		7/16	7/64	11			1-1/8	5/16	19
		1/2	7/64	12			1-1/8	3/8	04
		1/2	11/64	02			1-5/16	3/8	02
							1-3/8	7/16	05
003	3/16	5/16	7/64	01			1-5/8	5/8	03
		5/16	1/8	02					
		5/16	9/64	03	009	9/16	1-3/8	7/16	01
		5/16	5/32	04					
		3/8	1/8	05	010	5/8	7/8	5/32	07
		3/8	5/32	06			1-3/8	9/32	09
		1/2	7/64	07			1-3/8	5/16	22
		1/2	5/32	09			1-3/8	11/32	19
		1/2	.196	19			1-3/8	7/16	04
		11/16	1/4	08			1-9/16	7/16	02
		11/16	5/16	18			1-5/8	1/2	05
		3/4	1/4	10			1-3/4	1/2	06
							1-13/16	5/8	03
004	1/4	3/8	1/8	01					
		3/8	5/32	04	012	3/4	1	5/32	01
		1/2	1/8	05			1-5/8	5/16	09
		1/2	5/32	06			1-5/8	3/8	22
		1/2	3/16	07			1-5/8	7/16	19
		1/2	7/32	08			1-5/8	1/2	04
		5/8	5/32	10			1-3/4	1/2	05
		5/8	3/16	11			1-7/8	9/16	02
		5/8	.196	09			2	9/16	06
		5/8	1/4	13			2	11/16	03
		11/16	1/4	14					
		11/16	5/16	24	014	7/8	1-7/8	3/8	09
		3/4	7/32	02			1-7/8	7/16	22
		3/4	1/4	22			1-7/8	1/2	19
		3/4	9/32	12			2	9/16	02
		7/8	7/32	15			2-1/4	11/16	03
		7/8	1/4	16					
		1-5/16	9/16	03	016	1	2	3/8	09
							2	7/16	22
005	5/16	1/2	5/32	01			2	1/2	19
		1/2	3/16	02			2	9/16	04
		7/8	9/32	03			2-1/4	5/8	02
		7/8	11/32	04			2-3/8	25/32	11
		29/32	5/16	05			2-3/8	1-3/16	15
							2-1/2	3/4	03
006	3/8	5/8	5/32	01					
		7/8	7/32	09	018	1-1/8	2-1/8	3/8	09
		7/8	1/4	22			2-1/8	7/16	22
		7/8	9/32	19			2-1/8	1/2	19
		7/8	11/32	12			2-3/8	25/32	05
		29/32	5/16	15			2-3/8	1-3/16	07
		1-1/8	3/8	04			2-1/2	5/8	02

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXXII - Boundary dimensions - IA (Cont'd)

Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches	
018	1-1/8	2-13/16	13/16	03
019	1-3/16	2-5/8	13/16	01
		2-5/8	1-5/16	03
020	1-1/4	2-1/4	3/8	09
		2-1/4	7/16	22
		2-1/4	1/2	19
		2-1/2	5/8	04
		2-9/16	11/16	05
		2-5/8	13/16	07
		2-5/8	1-5/16	11
		2-3/4	11/16	02
		3-1/8	7/8	03
021	1-5/16	2-9/16	11/16	02
022	1-3/8	2-1/2	7/16	09
		2-1/2	1/2	22
		2-1/2	9/16	19
		2-9/16	9/16	01
		3	11/16	02
		3-1/2	7/8	03
024	1-1/2	2-5/8	7/16	09
		2-5/8	1/2	22
		2-5/8	9/16	19
		2-11/16	9/16	01
		2.8345	0.670	05
		2.8345	1.310	07
		3-1/4	3/4	02
		3-3/4	15/16	03
025	1-9/16	2	1/4	01
026	1-5/8	2-7/8	9/16	01
		3-1/2	3/4	02
		4	15/16	03
028	1-3/4	2-7/8	7/16	09
		3	9/16	01
		3.3464	13/16	11
		3.3464	1-37/64	15
		3-3/4	13/16	02
		4-1/4	1-1/16	03
030	1-7/8	3-3/16	5/8	01
		4	13/16	02
		4-1/2	1-1/16	03
031	1-15/16	3.5433	0.787	01
		3.5433	1.526	03
032	2	2-1/2	1/4	04
		2-5/8	5/16	05
		3-5/16	5/8	01
		3.9370	53/64	06
		3.9370	1-21/32	07

Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches	
032	2	4	13/16	02
		4-1/2	1-1/16	03
034	2-1/8	3-7/16	5/8	01
035	2-3/16	3.9370	53/64	02
		3.9370	1-21/32	04
036	2-1/4	3-9/16	5/8	01
		3.9370	53/64	05
		3.9370	1-21/32	07
		4.3307	0.866	09
		4.3307	1-3/4	11
		4-1/2	7/8	02
		5	1-1/4	03
038	2-3/8	3-3/4	11/16	01
039	2-7/16	4.3307	0.866	02
		4.3307	1-3/4	04
040	2-1/2	3	1/4	04
		3-1/8	5/16	05
		3-7/8	11/16	01
		4.3307	0.866	06
		4.3307	1-3/4	07
		5	15/16	02
		5-1/2	1-1/4	03
042	2-5/8	4-1/8	11/16	01
		4.4677	0.948	03
		4.4677	1.716	05
		5	1-3/32	07
		5	2-3/16	09
044	2-3/4	4-1/8	11/16	01
		5.1172	1-1/16	05
		5.1172	2-1/8	07
		5-1/4	15/16	02
		6-1/4	1-3/8	03
046	2-7/8	4-1/2	3/4	01
048	3	3-1/2	1/4	04
		3-5/8	5/16	05
		4-1/2	3/4	01
		5.1172	1-1/16	07
		5.1172	2-1/8	09
		5-3/4	1-1/16	02
		5.9045	1-7/64	11
		5.9045	2.313	13
		7	1-9/16	03
050	3-1/8	4-3/4	3/4	01
052	3-1/4	4-3/4	3/4	01
		6	1-1/16	02

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXXII - Boundary dimensions - IA (Cont'd)

Bore		O.D.	Width	O.D. and width code	Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
052	3-1/4	7-1/2	1-9/16	03	068	4-1/4	6	7/8	01
							6-1/4	1	09
054	3-3/8	5	3/4	01			7-1/2	1-1/4	02
		7-1/2	1-9/16	03			7-1/2	1-15/16	12
							8-3/4	1-3/4	03
055	3-7/16	6	1-9/16	02			8-3/4	2-3/4	13
		6	2-3/4	04					
					070	4-3/8	6-1/4	7/8	01
056	3-1/2	4	1/4	04					
		4-1/8	5-1/6	05	072	4-1/2	5	1/4	04
		5	3/4	01			5-1/8	5/16	05
		6	1-9/16	07			5-1/4	3/8	06
		6	2-3/4	09			5-1/2	1/2	07
		6-1/2	1-1/8	02			6	3/4	08
		6-1/2	1-3/4	12			6-1/4	7/8	01
		8-1/8	1-3/4	03			6-1/2	1	09
		8-1/8	2-3/4	13			8	1-5/16	02
							8	2-1/16	12
058	3-5/8	5-1/4	3/4	01			9-3/8	2	03
		6	1-9/16	02			9-3/8	3-1/8	13
		6	2-3/4	04					
		7.0866	1.339	06	074	4-5/8	6-1/2	7/8	01
		7.0866	2.677	08					
					076	4-3/4	5-1/4	1/4	04
060	3-3/4	5-1/4	3/4	01			5-3/8	5/16	05
		6-3/4	1-1/8	02			5-1/2	3/8	06
		6-3/4	1-3/4	12			5-3/4	1/2	07
		8-1/4	1-3/4	03			6-1/4	3/4	08
		8-1/4	2-3/4	13			6-1/2	7/8	01
							6-3/4	1	09
062	3-7/8	5-5/8	7/8	01			8-1/4	1-5/16	02
							8-1/4	2-1/16	12
063	3-15/16	7.0856	1.495	03			10	2	03
		7.0856	2-3/4	05			10	3-1/8	13
064	4	4-1/2	1/4	04	078	4-7/8	7	1	01
		4-5/8	5/16	05					
		4-3/4	3/8	06	080	5	5-1/2	1/4	04
		5	1/2	07			5-5/8	5/16	05
		5-1/2	3/4	08			5-3/4	3/8	06
		5-5/8	7/8	01			6	1/2	07
		6	1	09			6-1/2	3/4	08
		7-1/4	1-1/4	02			7	1	01
		7-1/4	1-3/4	12			9	1-3/8	02
		7.4792	1.419	10			9	2-3/16	12
		7.4792	2.974	11			10	2	03
		8-1/2	1-3/4	03			10	3-1/8	13
		8-1/2	2-3/4	13					
					082	5-1/8	7-1/4	1	01
066	4-1/8	6	7/8	01					
					084	5-1/4	7-1/4	1	01
068	4-1/4	4-3/4	1/4	04					
		4-7/8	5/16	05	086	5-3/8	7-1/2	1	01
		5	3/8	06					
		5-1/4	1/2	07	088	5-1/2	6	1/4	04
		5-3/4	3/4	08			6-1/8	5/16	05

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXXII - Boundary dimensions - IA (Cont'd)

Bore		O.D.	Width	O.D. and width code	Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
088	5-1/2	6-1/4	3/8	06	120	7-1/2	8-1/8	5/16	05
		6-1/2	1/2	07			8-1/4	3/8	06
		7	3/4	08			8-1/2	1/2	07
		7-1/2	1	01			9	3/4	08
		9-1/2	1-3/8	02			9-1/2	1	09
		9-1/2	2-3/16	12			10	1-1/4	01
		11	2	03			12-1/2	1-3/4	02
		11	3-1/8	13			12-1/2	2-3/4	12
090	5-5/8	7-3/4	1	01			14-1/2	2-3/4	03
							14-1/2	4-1/4	13
092	5-3/4	7-3/4	1	01	124	7-3/4	10-1/2	1-3/8	01
094	5-7/8	8	1	01	128	8	8-1/2	1/4	04
096	6	6-1/2	1/4	04			8-5/8	5/16	05
		6-5/8	5/16	05			8-3/4	3/8	06
		6-3/4	3/8	06			9	1/2	07
		7	1/2	07			9-1/2	3/4	08
		7-1/2	3/4	08			10	1	09
		8	1	01			10-3/4	1-3/8	01
		10-1/2	1-9/16	02			13	1-3/4	02
		10-1/2	2-7/16	12			13	2-3/4	12
		12	2-1/4	03			15	2-3/4	03
		12	3-1/2	13			16	4-1/4	13
100	6-1/4	8-1/2	1-1/8	01	132	8-1/4	11	1-3/8	01
104	6-1/2	7	1/4	04	136	8-1/2	11-1/2	1-1/2	01
		7-1/8	5/16	05			14	2	02
		7-1/4	3/8	06			14	3-1/8	12
		7-1/2	1/2	07			16	3	03
		8	3/4	08	140	8-3/4	11-3/4	1-1/2	01
		8-1/2	1	09					
		8-3/4	1-1/8	01	144	9	9-1/2	1/4	04
		11	1-9/16	02			9-5/8	5/16	05
		11	2-7/16	12			9-3/4	3/8	06
		13	2-1/2	03			10	1/2	07
		13	3-7/8	13			10-1/2	3/4	08
108	6-3/4	9	1-1/8	01			11	1	09
							12	1-1/2	01
112	7	7-1/2	1/4	04			14-1/2	2	02
		7-5/8	5/16	05			14-1/2	3-1/8	12
		7-3/4	3/8	06			17	3	03
		8	1/2	07			17	4-5/8	13
		8-1/2	3/4	08	152	9-1/2	12-3/4	1-5/8	01
		9	1	09			15-1/8	2	02
		9-1/2	1-1/4	01			15-1/8	3-1/8	12
		12	1-3/4	02			18	3-1/4	03
		12	2-3/4	12					
		13-1/2	2-1/2	03	160	10	10-1/2	1/4	04
		13-1/2	3-7/8	13			10-5/8	5/16	05
116	7-1/4	9-3/4	1-1/4	01			10-3/4	3/8	06
							11	1/2	07
120	7-1/2	8	1/4	04			11-1/2	3/4	08
							12	1	09

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXXII - Boundary dimensions - IA (Cont'd)

Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches	
160	10	13-1/4	1-5/8	01
		15-3/4	2	02
		15-3/4	3-1/8	12
		18-1/2	3-1/4	03
		18-1/2	5	13
168	10-1/2	14	1-3/4	01
		16-5/8	2-1/4	02
		16-5/8	3-1/2	12
		19-1/2	3-1/2	03
176	11	11-1/2	1/4	04
		11-5/8	5/16	05
		11-3/4	3/8	06
		12	1/2	07
		12-1/2	3/4	08
		13	1	09
		14-1/2	1-3/4	01
		17-1/2	2-1/4	02
		17-1/2	3-1/2	12
		20	3-1/2	03
184	11-1/2	15-1/4	1-7/8	01
		18	2-3/8	02
		18	3-5/8	12
		21	3-3/4	03
		21-1/2	3-1/2	93
192	12	12-1/2	1/4	04
		12-5/8	5/16	05
		12-3/4	3/8	06
		13	1/2	07
		13-1/2	3/4	08
		14	1	09
		16	2	01
		18-1/2	2-5/8	02
200	12-1/2	16-1/2	2	01
		19	2-5/8	02
208	13	17-1/2	2-1/4	01
		20	2-3/4	02
216	13-1/2	18	2-1/4	01
		20-3/4	2-3/4	02
224	14	14-5/8	5/16	05
		14-3/4	3/8	06
		15	1/2	07
		15-1/2	3/4	08
		16	1	09
		18-1/2	2-1/4	01
		21-1/2	2-7/8	02
232	14-1/2	19-1/2	2-1/2	01
		22	3	02
240	15	20	2-1/2	01
		22-1/2	3	02
248	15-1/2	20-1/2	2-1/2	01
		21-1/2	2-3/8	05
		23	3-1/4	02
256	16	16-5/8	5/16	05
		16-3/4	3/8	06
		17	1/2	07
		17-1/2	3/4	08
		18	1	09
		21-1/2	2-3/4	01
		23-3/4	3-1/4	02
264	16-1/2	22	2-3/4	01
272	17	22-1/2	2-3/4	01
280	17-1/2	23-1/2	3	01
288	18	18-5/8	5/16	05
		18-3/4	3/8	06
		19	1/2	07
		19-1/2	3/4	08
		20	1	09
		24	3	01
296	18-1/2	24-1/2	3	01
		25-1/2	2-3/4	05
304	19	25-1/2	3-1/4	01
312	19-1/2	26	3-1/4	01
320	20	20-5/8	5/16	05
		20-3/4	3/8	06
		21	1/2	07
		21-1/2	3/4	08
		22	1	09
		26-1/2	3-1/4	01
328	20-1/2	27-1/2	3-1/2	01
336	21	28	3-1/2	01
400	25	25-3/4	3/8	06
		26	1/2	07
		26-1/2	3/4	08
		27	1	09
480	30	30-3/4	3/8	06
		31	1/2	07
		31-1/2	3/4	08
		32	1	09
560	35	36-1/2	3/4	01
		37	1	03
640	40	41-1/2	3/4	02
		42	1	04

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXXIII - Boundary dimensions-IQ

Bore		O.D.	Width	O.D. and width code
No. of 1/8	Inches	Inches	Inches	
32	4	6.250	1.125	01
34	4-1/4	6.500	1.125	01
36	4-1/2	6.750	1.125	01
38	4-3/4	7.000	1.125	01
39	4-7/8	7.125	1.125	01
40	5	7.250	1.125	01
	5	8.000	1.500	02
42	5-1/4	7.500	1.125	01
	5-1/4	8.250	1.500	02
44	5-1/2	7.750	1.125	01
	5-1/2	8.500	1.500	02
46	5-3/4	8.000	1.125	01
	5-3/4	8.750	1.500	02
48	6	8.250	1.125	01
	6	9.000	1.500	02
50	6-1/4	8.500	1.125	01
	6-1/4	9.250	1.500	02
52	6-1/2	8.750	1.125	01
	6-1/2	9.500	1.500	02
54	6-3/4	9.000	1.125	01
	6-3/4	9.750	1.500	02
55	6-7/8	9.125	1.125	01
56	7	9.250	1.125	01
	7	10.000	1.500	02
	7	10.500	1.750	03
58	7-1/4	9.500	1.125	01
	7-1/4	10.250	1.500	02
	7-1/4	10.750	1.750	03
60	7-1/2	9.750	1.125	01
	7-1/2	10.500	1.500	02
	7-1/2	11.000	1.750	03
62	7-3/4	10.000	1.125	01
	7-3/4	10.750	1.500	02
	7-3/4	11.250	1.750	03
64	8	10.250	1.125	01
	8	11.000	1.500	02
	8	11.500	1.750	03
66	8-1/4	10.500	1.125	01
	8-1/4	11.250	1.500	02
	8-1/4	11.750	1.750	03
68	8-1/2	10.750	1.125	01
	8-1/2	11.500	1.500	02
	8-1/2	12.000	1.750	03
70	8-3/4	11.000	1.125	01
	8-3/4	11.750	1.500	02
	8-3/4	12.250	1.750	03
71	8-7/8	11.125	1.125	01
72	9	11.250	1.125	01
	9	12.000	1.500	02
	9	12.500	1.750	03
	9	13.000	2.000	04
74	9-1/4	11.500	1.125	01
	9-1/4	12.250	1.500	02
	9-1/4	12.750	1.750	03
	9-1/4	13.250	2.000	04
76	9-1/2	11.750	1.125	01
	9-1/2	12.500	1.500	02
	9-1/2	13.000	1.750	03
	9-1/2	13.500	2.000	04
78	9-3/4	12.000	1.125	01
	9-3/4	12.750	1.500	02
	9-3/4	13.250	1.750	03
	9-3/4	13.750	2.000	04
80	10	12.250	1.125	01
	10	13.000	1.500	02
	10	14.000	2.000	03
	10	14.500	2.250	04
82	10-1/4	13.750	1.750	01
84	10-1/2	12.750	1.125	01
	10-1/2	13.500	1.500	02
	10-1/2	14.500	2.000	03
	10-1/2	15.000	2.250	04
87	10-7/8	13.125	1.125	01
88	11	13.250	1.125	01
	11	14.000	1.500	02
	11	15.000	2.000	03
	11	15.500	2.250	04
92	11-1/2	13.750	1.125	01
	11-1/2	14.500	1.500	02
	11-1/2	15.500	2.000	03
	11-1/2	16.000	2.250	04

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXXIII - Boundary dimensions-IQ (cont'd.)

Bore		O.D.	Width	O.D. and width code	Bore		O.D.	Width	O.D. and width code
No. of 1/8	Inches	Inches	Inches		No. of 1/8	Inches	Inches	Inches	
96	12	14.250	1.125	01	136	17	20.000	1.500	01
	12	15.500	1.750	02		17	21.000	2.000	02
	12	16.000	2.000	03		17	22.750	2.875	03
	12	17.750	2.875	04		17	25.000	4.000	04
100	12-1/2	14.750	1.125	01	140	17-1/2	20.500	1.500	01
	12-1/2	16.000	1.750	02		17-1/2	21.500	2.000	02
	12-1/2	16.500	2.000	03		17-1/2	23.250	2.875	03
	12-1/2	18.250	2.875	04		17-1/2	25.500	4.000	04
104	13	15.250	1.125	01	144	18	21.000	1.500	01
	13	16.500	1.750	02		18	22.000	2.000	02
	13	17.000	2.000	03		18	23.750	2.875	03
	13	18.750	2.875	04		18	26.000	4.000	04
106	13-1/4	16.750	1.750	01	146	18-1/4	21.750	1.750	01
108	13-1/2	15.750	1.125	01	148	18-1/2	21.500	1.500	01
	13-1/2	16.500	1.500	02		18-1/2	22.500	2.000	02
	13-1/2	17.000	1.750	03		18-1/2	24.250	2.875	03
	13-1/2	17.500	2.000	04		18-1/2	26.500	4.000	04
	13-1/2	19.250	2.875	05					
					151	18-7/8	21.125	1.125	01
111	13-7/8	16.125	1.125	01					
					152	19	22.000	1.500	01
112	14	16.250	1.125	01		19	23.000	2.000	02
	14	17.500	1.750	02		19	24.750	2.875	03
	14	18.000	2.000	03		19	27.000	4.000	04
	14	19.750	2.875	04					
					156	19-1/2	22.500	1.500	01
116	14-1/2	16.750	1.125	01		19-1/2	23.500	2.000	02
	14-1/2	18.000	1.750	02		19-1/2	25.250	2.875	03
	14-1/2	18.500	2.000	03		19-1/2	27.500	4.000	04
	14-1/2	20.250	2.875	04					
					160	20	23.500	1.750	01
120	15	18.000	1.500	01		20	24.500	2.250	02
	15	19.000	2.000	02		20	26.750	3.375	03
	15	19.500	2.250	03		20	29.000	4.500	04
	15	21.750	3.375	04					
					168	21	24.500	1.750	01
124	15-1/2	18.500	1.500	01		21	25.500	2.250	02
	15-1/2	19.500	2.000	02		21	27.750	3.375	03
	15-1/2	20.000	2.250	03		21	30.000	4.500	04
	15-1/2	22.250	3.375	04					
					176	22	25.500	1.750	01
128	16	19.000	1.500	01		22	27.750	2.875	02
	16	20.000	2.000	02		22	28.750	3.375	03
	16	20.500	2.250	03		22	32.250	5.125	04
	16	22.750	3.375	04					
					182	22-3/4	27.250	2.250	01
132	16-1/2	19.500	1.500	01					
	16-1/2	20.500	2.000	02	184	23	26.500	1.750	01
	16-1/2	21.000	2.250	03		23	27.000	2.000	02
	16-1/2	23.250	3.375	04		23	28.750	2.875	03
						23	29.750	3.375	04
						23	33.250	5.125	05

Source: https://assist.dla.mil -- Downloaded: 20261O-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXXIII - Boundary dimensions-IQ (cont'd.)

Bore		O.D.	Width	O.D. and width code	Bore		O.D.	Width	O.D. and width code
No. of 1/8	Inches	Inches	Inches		No. of 1/8	Inches	Inches	Inches	
186	23-1/4	26.750	1.750	01	264	33	37.000	2.000	01
188	23-1/2	26.500	1.500	01	266	33-1/4	36.750	1.750	01
191	23-7/8	26.125	1.125	01	268	33-1/2	36.500	1.500	01
192	24	27.500	1.750	01	271	33-7/8	36.125	1.125	01
	24	29.750	2.875	02					
	24	30.750	3.375	03	279	34-7/8	45.125	5.125	01
	24	34.250	5.125	04					
					280	35	40.750	2.875	01
200	25	29.000	2.000	01		35	44.000	4.500	02
	25	31.750	3.375	02		35	45.250	5.125	03
	25	33.000	4.000	03		35	48.500	6.750	04
	25	36.250	5.625	04					
					284	35-1/2	44.500	4.500	01
208	26	30.000	2.000	01					
	26	32.750	3.375	02	288	36	44.000	4.000	01
	26	34.000	4.000	03					
	26	37.250	5.625	04	293	36-5/8	43.375	3.375	01
216	27	31.000	2.000	01	297	37-1/8	42.875	2.875	01
	27	33.750	3.375	02					
	27	36.000	4.500	03	302	37-3/4	42.250	2.250	01
	27	39.500	6.250	04					
					304	38	42.000	2.000	01
217	27-1/8	32.875	2.875	01					
					306	38-1/4	41.750	1.750	01
222	27-3/4	32.250	2.250	01					
					308	38-1/2	41.500	1.500	01
224	28	32.000	2.000	01					
	28	34.750	3.375	02	311	38-7/8	41.125	1.125	01
	28	37.000	4.500	03					
	28	40.500	6.250	04	320	40	45.750	2.875	01
						40	49.000	4.500	02
226	28-1/4	31.750	1.750	01		40	50.250	5.125	03
						40	53.500	6.750	04
228	28-1/2	31.500	1.500	01					
					333	41-5/8	48.375	3.375	01
231	28-7/8	31.125	1.125	01					
					337	42-1/8	47.875	2.875	01
232	29	33.000	2.000	01					
	29	35.750	3.375	02	342	42-3/4	47.250	2.250	01
	29	38.000	4.500	03					
	29	41.500	6.250	04	344	43	47.000	2.000	01
240	30	34.500	2.250	01	346	43-1/4	46.750	1.750	01
	30	38.000	4.000	02		43-1/4	56.750	6.750	02
	30	40.250	5.125	03					
	30	43.500	6.750	04	348	43-1/2	46.500	1.500	01
253	31-5/8	38.375	3.375	01	350	43-3/4	56.250	6.250	01
257	32-1/8	37.875	2.875	01	351	43-7/8	46.125	1.125	01
262	32-3/4	37.250	2.250	01	355	44-3/8	55.625	5.625	01

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXXIII - Boundary dimensions-IQ (cont'd.)

Bore		O.D.	Width	O.D. and width code	Bore		O.D.	Width	O.D. and width code
No. of 1/8	Inches	Inches	Inches		No. of 1/8	Inches	Inches	Inches	
359	44-7/8	55.125	5.125	01	466	58-1/4	61.750	1.750	01
360	45	51.750	3.375	01	468	58-1/2	61.500	1.500	01
	45	54.000	4.500	02					
	45	56.250	5.625	03	471	58-7/8	61.125	1.125	01
	45	58.500	6.750	04					
					480	60	68.000	4.000	01
364	45-1/2	54.500	4.500	01		60	70.250	5.125	02
						60	71.250	5.625	03
368	46	54.000	4.000	01		60	73.500	6.750	04
373	46-5/8	53.375	3.375	01	506	63-1/4	76.750	6.750	01
377	47-1/8	52.875	2.875	01	510	63-3/4	76.250	6.250	01
382	47-3/4	52.250	2.250	01	515	64-3/8	75.625	5.625	01
384	48	52.000	2.000	01	519	64-7/8	75.125	5.125	01
386	48-1/4	51.750	1.750	01	520	65	74.000	4.500	01
						65	75.250	5.125	02
388	48-1/2	51.500	1.500	01		65	77.500	6.250	03
						65	78.500	6.750	04
391	48-7/8	51.125	1.125	01					
					524	65-1/2	74.500	4.500	01
400	50	56.750	3.375	01					
	50	59.000	4.500	02	528	66	74.000	4.000	01
	50	61.250	5.625	03					
	50	63.500	6.750	04	533	66-5/8	73.375	3.375	01
424	53	57.000	2.000	01	537	67-1/8	72.875	2.875	01
426	53-1/4	66.750	6.750	01	542	67-3/4	72.250	2.250	01
430	53-3/4	66.250	6.250	01	544	68	72.000	2.000	01
435	54-3/8	65.625	5.625	01	546	68-1/4	71.750	1.750	01
439	54-7/8	65.125	5.125	01	548	68-1/2	71.500	1.500	01
440	55	63.000	4.000	01	551	68-7/8	71.125	1.125	01
	55	69.250	5.125	02					
	55	66.250	5.625	03	560	70	79.000	4.500	01
	55	68.500	6.750	04		70	80.250	5.125	02
						70	82.500	6.250	03
444	55-1/2	64.500	4.500	01		70	83.500	6.750	04
448	56	64.000	4.000	01	586	73-1/4	86.750	6.750	01
453	56-5/8	63.375	3.375	01	590	73-3/4	86.250	6.250	01
457	57-1/8	62.875	2.875	01	595	74-3/8	85.625	5.625	01
462	57-3/4	62.250	2.250	01	599	74-7/8	85.125	5.125	01
464	58	62.000	2.000	01					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXXII - Boundary dimensions-IQ (cont'd.)

Bore		O.D.	Width	O.D. and width code
No. of 1/8	Inches	Inches	Inches	
600	75	85.250	5.125	01
	75	86.250	5.625	02
	75	87.500	6.250	03
	75	88.500	6.750	04
604	75-1/2	84.500	4.500	01
608	76	84.000	4.000	01
613	76-5/8	83.375	3.375	01
617	77-1/8	82.875	2.875	01
622	77-3/4	82.250	2.250	01
624	78	82.000	2.000	01
626	78-1/4	81.750	1.750	01
628	78-1/2	81.500	1.500	01
640	80	90.250	5.125	01
	80	91.250	5.625	02
	80	92.500	6.250	03
	80	93.500	6.750	04
666	83-1/4	96.750	6.750	01
670	83-3/4	96.250	6.250	01
675	84-3/8	95.625	5.625	01
679	84-7/8	95.125	5.125	01
680	85	96.250	5.625	01
	85	97.500	6.250	02
	85	98.500	6.750	03
684	85-1/2	94.500	4.500	01
688	86	94.000	4.000	01
693	86-5/8	93.375	3.375	01
697	87-1/8	92.875	2.875	01
702	87-3/4	92.250	2.250	01
704	88	92.000	2.000	01
706	88-1/4	91.750	1.750	01
720	90	101.250	5.625	01
	90	102.500	6.250	02
	90	103.500	6.750	03
746	93-1/4	106.750	6.750	01
750	93-3/4	106.250	6.250	01
755	94-3/8	105.625	5.625	01
759	94-7/8	105.125	5.125	01
760	95	107.500	6.250	01
	95	108.500	6.750	02
764	95-1/2	104.500	4.500	01
768	96	104.000	4.000	01
773	96-5/8	103.375	3.375	01
777	97-1/8	102.875	2.875	01
782	97-3/4	102.250	2.250	01
784	98	102.000	2.000	01
786	98-1/4	101.750	1.750	01
800	100	113.500	6.750	01
826	103-1/4	116.750	6.750	01
830	103-3/4	116.250	6.250	01
835	104-3/8	115.625	5.625	01
853	106-5/8	113.375	3.375	01
857	107-1/8	112.875	2.875	01
862	107-3/4	112.250	2.250	01
906	113-1/4	126.750	6.750	01
910	113-3/4	126.250	6.250	01
915	114-3/8	125.625	5.625	01
919	114-7/8	125.125	5.125	01
924	115-1/2	124.500	4.500	01
928	116	124.000	4.000	01
933	116-5/8	123.375	3.375	01
937	117-1/8	122.875	2.875	01
986	123-1/4	136.750	6.750	01
990	123-3/4	136.250	6.250	01
995	124-3/8	135.625	5.625	01
999	124-7/8	135.125	5.125	01

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXXIV - Boundary dimensions-MA.

Bore Mm	O.D. Mm	Width[1/]	O.D. and width code	Bore Mm	O.D. Mm	Width[1/]	O.D. and width code
3	7	2.5	18	8	22	14	40
	8	3	19		22	19	50
	10	4	02		22	25	60
	10	6	32		24	7	05
	13	5	03		24	8	02
	13	7	33		24	12	32
					26	8	92
4	9	3	18		28	9	03
	11	4	19		28	13	23
	11	6	39		28	15	33
	13	5	02				
	13	7	32	9	17	4	18
	16	5	03		17	6	38
	16	10	33		20	6	19
					20	9	39
5	11	3.5	18		24	7	10
	13	4	19		24	10	20
	13	6	39		24	12	30
	16	5	02		24	15	40
	16	9	32		24	20	50
	19	6	03		24	27	60
	19	10	31		26	8	02
	19	11	33		26	10	31
					26	13	32
6	13	4	18		28	8	05
	13	6	38		30	10	03
	15	5	19		30	14	23
	15	7	39		30	16	33
	17	6	10				
	17	9	30	10	19	5	18
	19	6	02		19	7	38
	19	10	32		22	6	19
	22	7	03		22	10	39
	22	11	23		22	16	59
	22	13	33		22	22	69
	24	7	05		26	8	10
					26	10	20
7	14	4	18		26	12	30
	14	6	38		26	16	40
	16	5	19		26	21	50
	16	6	39		26	29	60
	19	6	10		28	8	05
	19	10	30		30	9	02
	22	7	02		30	0-1/2 inch	52
	22	10	31		30	14	22
	22	12	32		30	0-9/16 inch	32
	24	7	05		30	0-11/16 inch	62
	26	8	93				
	26	9	03		32	9	06
	26	13	23		35	11	03
	26	15	33		35	17	23
					35	19	33
8	16	4	18				
	16	6	38	11	32	7	05
	19	6	19				
	19	9	39	12	21	5	18
	22	7	10		21	7	38
	22	10	31		24	6	19
	22	11	30		24	10	39

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXXIV - Boundary dimensions-MA.-(Cont'd)

Bore Mm	O.D. Mm	Width 1/	O.D. and width code	Bore Mm	O.D. Mm	Width 1/	O.D. and width code
12	24	16	59	15	52	24	24
	24	22	69				
	28	8	10	16	35	11	12
	28	10	20		38	10	05
	28	12	30		38	11	92
	28	16	40		38	12	02
	28	21	50				
	28	29	60	17	26	5	18
	30	8	01		26	7	38
	32	7	05		30	7	19
	32	10	02		30	10	39
	32	0-1/2 inch	52		30	13	49
	32	14	22		30	18	59
	32	0-5/8 inch	32		30	23	69
	32	0-3/4 inch	62		35	8	00
	37	9	43		35	10	10
	37	10	73		35	12	20
	37	12	03		35	14	30
	37	17	23		35	18	40
	37	0-3/4 inch	33		35	24	50
	42	13	04		35	32	60
	42	19	24		40	10	92
					40	12	02
13	30	7	05		40	0-1/2 inch	52
	32	10	02		40	16	22
	32	0-5/8 inch	32		40	0-11/16 inch	32
					40	0-13/16 inch	62
14	35	8	05		44	10	15
					44	11	05
15	24	5	18		47	14	03
	24	7	33		47	19	23
	28	7	19		47	0-7/8 inch	33
	28	10	39		47	1 inch	53
	28	13	49		62	17	04
	28	18	59		62	29	24
	28	23	69		62	1-3/16 inch	34
	32	8	00				
	32	9	10	19	40	9	92
	32	11	20				
	32	13	30	20	32	4	08
	32	17	40		32	7	18
	32	23	50		32	10	38
	32	30	60		37	7	09
	35	8	05		37	9	19
	35	9	92		37	11	29
	35	11	02		37	13	39
	35	0-1/2 inch	52		37	17	49
	35	14	22		37	23	59
	35	0-5/8 inch	33		37	30	69
	35	0-3/4 inch	62		40	11	15
	37	9	06		42	8	00
	37	10	16		42	9	06
	40	9	43		42	10	16
	40	10	53		42	12	10
	40	11	73		42	14	20
	42	13	03		42	16	30
	42	17	23		42	22	40
	42	0-3/4 inch	33				
	52	15	04		42	30	50

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXXIV - Boundary dimensions-MA.-(Cont'd)

Bore Mm	O.D. Mm	Width 1/	O.D. and width code	Bore Mm	O.D. Mm	Width 1/	O.D. and width code
20	42	40	60	25	80	1-3/8 inches	34
	47	12	92		80	36	24
	47	14	02		80	1-1/2 inches	44
	47	18	22				
	47	0-3/4 inch	52	27	88	19	94
	47	0-13/16 inch	32				
	47	0-15/16 inch	62	30	42	4	08
	47	1-5/8 inch	82		42	7	18
	52	10	43		42	10	38
	52	12	73		47	7	09
	52	15	03		47	9	19
	52	21	23		47	11	29
	52	0-7/8 inch	33		47	13	39
	52	1 inch	53		47	17	49
	52	1-3/4 inches	63		47	23	59
	65	14	94		47	30	69
	72	19	04		52	13	15
	72	33	24		55	9	00
	72	1-3/8 inches	34		55	13	10
					55	16	20
22	72	16	94		55	19	30
					55	25	40
25	37	4	08		55	34	50
	37	7	18		55	45	60
	37	10	38		62	10	06
	42	7	09		62	13	16
	42	9	19		62	16	02
	42	11	29		62	0-3/4 inch	52
	42	13	39		62	20	22
	42	17	49		62	0-15/16 inch	32
	42	23	59		62	1-1/16 inches	62
	42	30	69		62	1-7/8 inches	82
	47	8	00		72	13	43
	47	12	10		72	16	73
	47	14	20		72	19	03
	47	16	30		72	27	23
	47	22	40		72	1-3/16 inches	33
	47	30	50		72	1-5/16 inches	53
	47	40	60		72	2-3/8 inches	63
	52	9	06		90	23	04
	52	10	16		90	28	14
	52	12	42		90	1-9/16 inches	34
	52	15	02		90	40	24
	52	18	22		95	20	94
	52	0-3/4 inch	52				
	52	0-13/16 inch	32	35	47	4	08
	52	0-7/8 inch	62		47	7	18
	52	0-15/16 inch	72		47	10	38
	52	1-5/8 inches	82		55	7	09
	62	12	43		55	10	19
	62	14	73		55	13	29
	62	17	03		55	15	39
	62	24	23		55	20	49
	62	1 inch	33		55	27	59
	62	1-1/8 inch	53		55	36	69
	62	2 inch	63		62	9	00
	80	17	94		62	14	10
	80	21	04		62	17	20
	80	25	14		62	20	30
					62	27	40

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXXIV - Boundary dimensions-MA.-(Cont'd)

Bore Mm	O.D. Mm	Width 1/	O.D. and width code	Bore Mm	O.D. Mm	Width 1/	O.D. and width code
35	62	36	50	40	110	27	04
	62	48	60		110	33	14
	70	10	06		110	46	24
	70	14	16		110	1-15/16 inches	34
	72	14	42				
	72	17	02	45	58	7	18
	72	0-7/8 inch	52		58	10	38
	72	23	22		58	13	48
	72	1-1/16 inches	32		68	8	09
	72	1-3/16 inches	62		68	12	19
	72	2-1/8 inches	82		68	14	29
	80	14	43		68	16	39
	80	18	73		68	22	49
	80	21	03		68	30	59
	80	31	23		68	40	69
	80	1-3/8 inches	33		75	10	00
	80	1-1/2 inches	53		75	16	10
	80	2-3/4 inches	63		75	19	20
	100	25	04		75	23	30
	100	30	14		75	30	40
	100	43	24		75	40	50
	100	1-3/4 inches	34		75	54	60
	103	22	94		80	18	15
					85	11	06
40	52	4	08		85	14	42
	52	7	18		85	15	16
	52	10	38		85	19	02
	62	8	09		85	23	22
	62	12	19		85	1 inch	52
	62	14	29		85	1-3/16 inches	32
	62	16	39		85	1-5/16 inches	62
	62	22	49		85	2-3/8 inches	82
	62	30	59		100	17	43
	62	40	69		100	22	73
	68	9	00		100	25	03
	68	15	10		100	36	23
	68	18	20		100	1-9/16 inches	33
	68	21	30		100	1-11/16 inches	53
	68	28	40		100	3-1/8 inches	63
	68	38	50		120	29	04
	68	50	60		120	35	14
	72	16	15		120	50	24
	80	11	06		120	2-1/8 inches	34
	80	14	42				
	80	18	02	50	65	5	08
	80	21	92		65	7	18
	80	23	22		65	10	28
	80	1 inch	52		65	12	38
	80	1-3/16 inches	32		65	15	48
	80	1-5/16 inches	62		72	8	09
	80	2-3/8 inches	82		72	12	19
	90	16	43		72	14	29
	90	20	73		72	16	39
	90	23	03		72	22	49
	90	33	23		72	30	59
	90	1-7/16 inches	33		72	40	69
	90	1-9/16 inches	53		80	10	00
	90	2-3/8 inches	63		80	16	10

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXXIV - Boundary dimensions-MA.-(Cont'd)

Bore Mm	O.D. Mm	Width 1/	O.D. and width code	Bore Mm	O.D. Mm	Width 1/	O.D. and width code
50	80	19	20	55	120	43	23
	80	23	30		120	1-15/16 inches	33
	80	40	50		120	2-1/16 inches	53
	80	54	60		120	3-7/8 inches	63
	85	19	15		140	33	04
	90	11	06		140	40	14
	90	14	42		140	57	24
	90	15	16		140	2-1/2 inches	34
	90	20	02		140	2-5/8 inches	44
	90	23	22				
	90	1 inch	52	60	78	7	08
	90	1-3/16 inches	32		78	10	18
	90	1-5/16 inches	62		78	12	28
	90	1-7/16 inches	72		78	14	38
	90	2-3/8 inches	82		78	18	48
	110	19	43		85	9	09
	110	24	73		85	13	19
	110	27	03		85	16	29
	110	40	23		85	19	39
	110	1-3/4 inches	33		85	25	49
	110	1-7/8 inches	53		85	34	59
	110	3-1/2 inches	63		85	45	69
	130	31	04		95	11	00
	130	37	14		95	18	10
	130	53	24		95	22	20
	130	2-5/16 inches	34		95	26	30
	130	2-7/16	44		95	32	70
					95	35	40
55	72	7	08		95	46	50
	72	9	18		95	63	60
	72	11	28		100	21	15
	72	13	38		105	12	06
	72	17	48		105	17	16
	80	9	09		110	17	42
	80	13	19		110	22	02
	80	16	29		110	28	22
	80	19	39		110	1-3/8 inches	52
	80	25	49		110	1-7/16 inches	32
	80	45	69		110	1-1/2 inches	62
	90	11	00		110	1-9/16 inches	92
	90	18	10		110	1-3/4 inches	72
	90	20	15		110	2-7/8 inches	82
	90	22	20		127	20	43
	90	26	30		130	26	73
	90	30	70		130	31	03
	90	35	40		130	46	23
	90	46	50		130	2-1/8 inches	33
	90	63	60		130	2-1/4 inches	53
	100	12	06		130	4-1/4 inches	63
	100	16	42		150	35	04
	100	21	02		150	42	14
	100	25	22		150	60	24
	100	1-3/16 inches	52		150	2-5/8 inches	34
	100	1-5/16 inches	32				
	100	1-7/16 inches	62	65	85	7	08
	100	1-5/8 inches	72		85	10	18
	100	2-5/8 inches	82		85	13	28
	117	19	43		85	15	38
	120	25	73		85	20	48
	120	29	03				

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXXIV - Boundary dimensions-MA.-(Cont'd)

Bore Mm	O.D. Mm	Width [1]	O.D. and width code	Bore Mm	O.D. Mm	Width [1]	O.D. and width code
65	90	9	09	70	120	19	16
	90	13	19		125	20	42
	90	16	29		125	24	02
	90	19	39		125	31	22
	90	25	49		125	1-7/16 inches	52
	90	34	59		125	1-9/16 inches	32
	90	45	69		125	1-5/8 inches	12
	100	11	00		125	1-11/16 inches	92
	100	18	10		125	1-3/4 inches	62
	100	22	20		125	1-15/16 inches	72
	100	26	30		125	3-1/8 inches	82
	100	35	40		147	24	43
	100	46	50		150	28	73
	100	63	60		150	35	03
	105	22	15		150	51	23
	115	14	06		150	2-1/2 inches	33
	115	18	16		150	2-5/8 inches	93
	120	17	42		150	5 inches	63
	120	23	02		180	42	04
	120	31	22		180	50	14
	120	1-3/8 inches	52		180	74	24
	120	1-1/2 inches	32		180	3-1/8 inches	34
	120	1-5/8 inches	62				
	120	1-3/4 inches	92	75	95	8	08
	120	1-7/8 inches	72		95	10	18
	120	3 inches	82		95	13	28
	137	22	43		95	15	38
	140	27	73		95	20	48
	140	33	03		105	10	09
	140	48	23		105	16	19
	140	2-5/16 inches	33		105	19	29
	140	2-7/16 inches	53		105	23	39
	140	4-5/8 inches	63		105	30	49
	160	37	04		105	40	59
	160	45	14		105	54	69
	160	64	24		115	13	00
	160	2-13/16 inches	34		115	20	10
70	90	8	08		115	24	20
	90	10	18		115	30	30
	90	13	28		115	40	40
	90	15	38		115	54	50
	90	20	48		115	71	60
	100	10	09		120	23	15
	100	16	19		130	16	06
	100	19	29		130	20	42
	100	23	39		130	25	02
	100	30	49		130	31	22
	100	40	59		130	1-7/16 inches	52
	100	54	69		130	1-5/8 inches	32
	110	13	00		130	1-3/4 inches	62
	110	20	10		130	2 inches	72
	110	23	15		130	3-1/4 inches	82
	110	24	20		157	25	43
	110	30	30		160	30	73
	110	36	70		160	37	03
	110	40	40		160	55	23
	110	54	50		160	2-11/16 inches	33
	110	71	60		160	2-13/16 inches	93
	120	14	06		160	5-3/8 inches	63
					190	45	04

See footnote at end of table

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXXIV - Boundary dimensions-MA.-(Cont'd)

Bore Mm	O.D. Mm	Width 1/	O.D. and width code
75	190	53	14
	190	77	24
	190	3-1/4 inches	34
80	100	8	08
	100	10	18
	100	13	28
	100	15	38
	100	20	48
	110	10	09
	110	16	19
	110	19	29
	110	23	39
	110	30	49
	110	40	59
	110	54	69
	125	14	00
	125	22	10
	125	24	15
	125	27	20
	125	34	30
	125	40	70
	125	45	40
	125	60	50
	125	80	60
	135	16	06
	135	21	16
	140	21	42
	140	26	02
	140	33	22
	140	1-5/8 inches	52
	140	1-3/4 inches	32
	140	1-7/8 inches	62
	140	2-1/8 inches	72
	140	3-1/2 inches	82
	168	27	43
	170	32	73
	170	39	03
	170	58	23
	170	2-11/16 inches	33
	170	2-13/16 inches	53
	170	5-3/8 inches	63
	200	48	04
	200	57	14
	200	80	24
	200	3-7/16 inches	34
85	110	9	08
	110	13	18
	110	16	28
	110	19	38
	110	25	48
	120	11	09
	120	18	19
	120	22	29
	120	26	39
	120	35	49
	120	46	59
	120	63	69
85	130	14	00
	130	22	10
	130	24	15
	130	27	20
	130	34	30
	130	45	40
	130	60	50
	130	80	60
	145	18	06
	145	22	16
	150	23	42
	150	28	02
	150	36	22
	150	1-3/4 inches	52
	150	1-15/16 inches	32
	150	2-1/16 inches	62
	150	2-9/16 inches	72
	150	3-7/8 inches	82
	180	41	03
	180	60	23
	180	2-7/8 inches	33
	180	5-3/4 inches	63
	210	52	04
	210	60	14
	210	86	24
	210	3-5/8 inches	34
90	115	9	08
	115	13	18
	115	16	28
	115	19	38
	115	25	48
	125	11	09
	125	18	19
	125	22	29
	125	26	39
	125	35	49
	125	46	59
	125	63	69
	140	16	00
	140	24	10
	140	26	15
	140	30	20
	140	44	70
	140	50	40
	140	67	50
	140	90	60
	150	18	06
	150	23	16
	160	25	42
	160	26	85
	160	30	02
	160	35	95
	160	40	22
	160	2 inches	52
	160	2-1/16 inches	32
	160	2-3/16 inches	62
	160	2-1/2 inches	72
	160	4-1/8 inches	82

See footnote at end of table

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXXIV - Boundary dimensions-MA.-(Cont'd)

Bore Mm	O.D. Mm	Width 1/	O.D. and width code	Bore Mm	O.D. Mm	Width 1/	O.D. and width code
90	190	43	03	100	140	40	49
	190	64	23		140	54	59
	190	2-7/8 inches	33		140	71	69
	190	5-3/4 inches	63		150	16	00
	225	54	04		150	24	10
	225	63	14		150	30	20
	225	90	24		150	37	30
	225	3-7/8 inches	34		150	44	70
					150	50	40
95	120	9	08		150	67	50
	120	13	18		150	90	60
	120	16	28		160	28	06
	120	19	38		165	20	61
	120	25	48		165	21	01
	130	11	09		165	25	16
	130	18	19		165	30	11
	130	22	29		165	39	21
	130	26	39		165	52	31
	130	35	49		180	28	42
	130	46	59		180	34	02
	130	63	69		180	46	22
	145	17	00		180	2-3/8 inches	32
	145	24	10		180	2-1/2 inches	62
	145	30	20		180	2-13/16 inches	72
	145	37	30		180	4-3/4 inches	82
					215	47	03
	145	50	40		215	73	23
	145	67	50		215	3-1/4 inches	33
	145	90	60		215	6-1/2 inches	63
	150	28	15		250	58	04
	160	20	06		250	98	24
	160	24	16		250	4-1/2 inches	34
	170	26	42		265	60	94
	170	28	92		265	4-1/2 inches	84
	170	32	02				
	170	43	22	105	130	9	08
	170	2-3/16 inches	32		130	13	18
	170	2-5/16 inches	62		130	16	28
	170	2-5/8 inches	72		130	19	38
	170	4-3/8 inches	82		130	25	48
	200	45	03		145	13	09
	200	67	23		145	20	19
	200	3-1/16 inches	33		145	24	29
	200	6-1/8 inches	63		145	30	39
	240	55	04		145	40	49
	240	95	24		145	54	59
	240	4-3/16 inches	34		145	71	69
	250	55	94		160	18	00
	250	4-3/16 inches	84		160	26	10
					160	33	20
100	125	9	08		160	41	30
	125	13	18		160	56	40
	125	16	28		160	75	50
	125	19	38		160	100	60
	125	25	48		175	22	01
	140	13	09		175	33	11
	140	20	19		175	42	21
	140	24	29		175	56	31
	140	30	39		180	22	06

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXXIV - Boundary dimensions-MA.-(Cont'd)

Bore Mm	O.D. Mm	Width 1/	O.D. and width code
105	180	26	16
	190	29	42
	190	36	02
	190	50	22
	190	2-9/16 inches	32
	190	5-1/8 inches	82
	225	49	03
	225	77	23
	225	3-7/16 inches	33
	225	6-7/8 inches	63
	260	60	04
	260	100	24
110	140	10	08
	140	16	18
	140	19	28
	140	23	38
	140	30	48
	150	13	09
	150	20	19
	150	24	29
	150	30	39
	150	40	49
	150	54	59
	150	71	69
	170	19	00
	170	28	10
	170	36	20
	170	45	30
	170	52	70
	170	60	40
	170	80	50
	170	109	60
	175	30	06
	180	22	01
	180	33	11
	180	42	21
	180	56	31
	185	22	16
	185	26	26
	200	31	42
	200	38	02
	200	53	22
	200	2-3/4 inches	32
	200	5-1/2 inches	82
	240	50	03
	240	80	23
	240	3-5/8 inches	33
	240	7-1/4 inches	63
	280	65	04
	280	108	24
120	150	10	08
	150	16	18
	150	19	28
	150	23	38
	150	30	48
	165	14	09
	165	22	19
120	165	27	29
	165	34	39
	165	45	49
	165	60	59
	165	80	69
	180	19	00
	180	28	10
	180	36	20
	180	46	30
	180	52	70
	180	60	40
	180	80	50
	180	109	60
	190	32	06
	200	25	01
	200	38	11
	200	48	21
	200	62	31
	215	40	02
	215	42	12
	215	58	22
	215	6 inches	82
	215	3 inches	32
	260	55	03
	260	86	23
	260	4-1/8 inches	33
	260	8-1/4 inches	63
	310	72	04
	310	118	24
130	165	11	08
	165	18	18
	165	22	28
	165	26	38
	165	35	48
	180	16	09
	180	24	19
	180	30	29
	180	37	39
	180	50	49
	180	67	59
	180	90	69
	200	22	00
	200	33	10
	200	42	20
	200	52	30
	200	69	40
	200	95	50
	200	125	60
	205	34	06
	210	25	01
	210	38	11
	210	48	21
	210	64	31
	230	40	02
	230	46	12
	230	64	22
	230	3-1/8 inches	32
	230	6-1/4 inches	82

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXXIV - Boundary dimensions-MA.-(Cont'd)

Bore Mm	O.D. Mm	Width 1/	O.D. and width code	Bore Mm	O.D. Mm	Width 1/	O.D. and width code
130	280	58	03	150	225	45	20
	280	93	23		225	56	30
	280	4-3/8 inches	33		225	75	40
	280	8-3/4 inches	63		225	100	50
	340	78	04		225	136	60
	340	128	24		235	38	06
					235	2-5/8 inches	26
140	175	11	08		235	5-1/4 inches	36
	175	18	18		250	31	01
	175	22	28		250	46	11
	175	26	38		250	60	21
	175	35	48		250	80	31
	190	16	09		270	45	02
	190	24	19		270	54	12
	190	30	29		270	73	22
	190	37	39		270	3-1/2 inches	32
	190	50	49		270	7 inches	82
	190	67	59		320	65	03
	190	90	69		320	67	13
	210	22	00		320	108	23
	210	33	10		320	4-7/8 inches	33
	210	42	20		320	9-3/4 inches	63
	210	53	30		380	85	04
	210	69	40		380	138	24
	210	95	50				
	210	125	60	160	200	13	08
	220	36	06		200	20	18
	220	2-1/2 inches	26		200	24	28
	220	5 inches	36		200	30	38
	225	27	01		200	40	48
	225	40	11		220	19	09
	225	50	21		220	28	19
	225	68	31		220	36	29
	250	42	02		220	45	39
	250	50	12		220	60	49
	250	68	22		220	80	59
	250	3-1/4 inches	32		220	109	69
	250	6-1/2 inches	82		240	25	00
	300	62	03		240	38	10
	300	102	23		240	48	20
	300	4-1/2 inches	33		240	60	30
	300	9 inches	63		240	80	40
	360	82	04		240	109	50
	360	132	24		240	145	60
					250	40	06
150	190	13	08		250	2-7/8 inches	26
	190	20	18		250	5-3/4 inches	36
	190	24	28		270	34	01
	190	30	38		270	49	91
	190	40	48		270	51	11
	210	19	09		270	66	21
	210	28	19		270	86	31
	210	36	29		290	48	02
	210	45	39		290	59	12
	210	60	49		290	80	22
	210	80	59		290	3-7/8 inches	32
	210	109	69		290	7-3/4 inches	82
	225	24	00		340	68	03
	225	35	10		340	71	13

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXXIV - Boundary dimensions-MA.-(Cont'd)

Bore Mm	O.D. Mm	Width 1/	O.D. and width code	Bore Mm	O.D. Mm	Width 1/	O.D. and width code
160	340	114	23	180	280	46	10
	340	5-1/4 inches	33		280	60	20
	340	10-1/2 inches	63		280	74	30
	400	88	04		280	3-1/4 inches	80
	400	142	24		280	100	40
					280	136	50
170	215	14	08		280	6-1/2 inches	90
	215	22	18		280	180	60
	215	27	28		300	37	01
	215	34	38		300	56	11
	215	45	48		300	72	21
	230	19	09		300	96	31
	230	28	19		320	52	02
	230	36	29		320	62	12
	230	45	39		320	86	22
	230	60	49		320	4-1/4 inches	32
	230	80	59		320	8-1/2 inches	82
	230	109	69		380	75	03
	260	28	00		380	79	13
	260	42	10		380	126	23
	260	54	20		380	5-3/4 inches	33
	260	67	30		380	11-1/2 inches	63
	260	90	40		440	95	04
	260	122	50		440	150	24
	260	160	60				
	265	42	06	190	240	16	08
	265	3 inches	26		240	24	18
	265	6 inches	36		240	30	28
	280	34	01		240	37	38
	280	51	11		240	50	48
	280	66	21		260	22	09
	280	88	31		260	33	19
	310	52	02		260	42	29
	310	62	12		260	52	39
	310	86	22		260	69	49
	310	4-1/8 inches	32		260	95	59
	310	8-1/4 inches	82		260	125	69
	360	72	03		290	31	00
	360	75	13		290	46	10
	360	120	23		290	60	20
	360	5-1/2 inches	33		290	75	30
	360	11	63		290	100	40
	420	92	04		290	136	50
	420	145	24		290	180	60
					300	46	06
180	225	14	08		300	3-3/8 inches	26
	225	22	18		300	6-3/4 inches	36
	225	27	28		320	42	01
	225	34	38		320	60	11
	225	45	48		320	78	21
	250	22	09		320	104	31
	250	33	19		340	55	02
	250	42	29		340	65	12
	250	52	39		340	92	22
	250	69	49		340	4-1/2 inches	32
	250	95	59		340	9 inches	82
	250	125	69		400	78	03
	280	31	00		400	83	13
	280	44	70		400	132	23

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXXIV - Boundary dimensions-MA.-(Cont'd)

Bore Mm	O.D. Mm	Width [1]	O.D. and width code	Bore Mm	O.D. Mm	Width [1]	O.D. and width code
190	400	6 inches	33	220	340	37	00
	400	12 inches	63		340	56	10
	460	98	04		340	72	20
	460	155	24		340	90	30
					340	118	40
200	250	16	08		340	160	50
	250	24	18		340	218	60
	250	30	28		350	51	06
	250	37	38		350	3-7/8 inches	26
	250	50	48		350	7-3/4 inches	36
	280	25	09		370	48	01
	280	38	19		370	69	11
	280	48	29		370	88	21
	280	60	39		370	120	31
	280	80	49		400	65	02
	280	109	59		400	78	12
	280	145	69		400	108	22
	310	34	00		400	5-1/4 inches	32
	310	51	10		400	144	42
	310	66	20		400	10-1/2 inches	82
	310	82	30		460	88	03
	310	109	40		460	99	13
	310	150	50		460	145	23
	310	200	60		460	7 inches	33
	320	48	06		460	14 inches	63
	320	3-1/2 inches	26		540	115	04
	320	7 inches	36		540	180	24
	340	44	01				
	340	65	11	230	370	53	06
	340	82	21		370	4 inches	26
	340	112	31		370	8 inches	36
	360	58	02				
	360	70	12	240	300	19	08
	360	98	22		300	28	18
	360	4-3/4 inches	32		300	36	28
	360	9-1/2 inches	82		300	45	38
	420	80	03		300	60	48
	420	87	13		320	25	09
	420	138	23		320	38	19
	420	6-1/2 inches	33		320	48	29
	420	13 inches	63		320	60	39
	480	102	04		320	80	49
	480	160	24		320	109	59
					320	145	69
210	340	50	06		360	37	00
	340	3-3/4 inches	26		360	56	10
	340	7-1/2 inches	36		360	72	20
					360	92	30
220	270	16	08		360	118	40
	270	24	18		360	160	50
	270	30	28		360	218	60
	270	37	38		390	55	06
	270	50	48		390	4-1/4 inches	26
	300	25	09		390	8-1/2 inches	36
	300	38	19		400	50	01
	300	48	29		400	74	11
	300	60	39		400	95	21
	300	80	49		400	128	31
	300	109	59		440	72	02
	300	145	69		440	85	12

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXXIV - Boundary dimensions-MA.-(Cont'd)

Bore Mm	O.D. Mm	Width 1/	O.D. and width code	Bore Mm	O.D. Mm	Width 1/	O.D. and width code
240	440	120	22	280	350	69	48
	440	5-3/4 inches	32		380	31	09
	440	160	42		380	46	19
	440	11-1/2 inches	82		380	60	29
	500	95	03		380	75	39
	500	111	13		380	100	49
	500	155	23		380	136	59
	500	7-1/2 inches	33		380	180	69
	500	15 inches	63		420	44	00
	580	122	04		420	65	10
	580	190	24		420	82	20
					420	106	30
250	410	57	06		420	140	40
	410	4-3/8 inches	26		420	190	50
	410	8-3/4 inches	36		420	250	60
					460	57	01
260	320	19	08		460	63	41
	320	28	18		460	82	11
	320	36	28		460	106	21
	320	45	38		460	4-7/8 inches	61
	320	60	48		460	146	31
	360	31	09		460	9-3/4 inches	51
	360	46	19		500	80	02
	360	60	29		500	90	12
	360	75	39		500	130	22
	360	100	49		500	6-1/2 inches	32
	360	136	59		500	176	42
	360	180	69		500	13 inches	82
	400	44	00		580	108	03
	400	65	10		580	128	13
	400	82	20		580	165	23
	400	104	30		580	8-1/2 inches	33
	400	140	40		580	17 inches	63
	400	190	50		670	140	04
	400	250	60		670	224	24
	430	59	06				
	430	4-1/2 inches	26	300	380	25	08
	430	9 inches	36		380	38	18
	440	57	01		380	48	28
	440	82	11		380	60	38
	440	106	21		380	80	48
	440	144	31		420	37	09
	480	80	02		420	56	19
	480	90	12		420	72	29
	480	130	22		420	90	39
	480	6-1/4 inches	32		420	118	49
	480	174	42		420	160	59
	480	12-1/2 inches	82		420	218	69
	540	102	03		460	50	00
	540	120	13		460	74	10
	540	165	23		460	95	20
	540	8 inches	33		460	118	30
	540	16 inches	63		460	160	40
	620	132	04		460	218	50
	620	206	24		460	290	60
					480	67	06
280	350	22	08		480	5 inches	26
	350	33	18		480	10 inches	36
	350	42	28		500	63	01
	350	52	38				

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXXIV - Boundary dimensions-MA.-(Cont'd)

Bore Mm	O.D. Mm	Width [1]	O.D. and width code	Bore Mm	O.D. Mm	Width [1]	O.D. and width code
300	500	90	11	340	420	80	48
	500	160	31		460	37	09
	540	85	02		460	56	19
	540	98	12		460	72	29
	540	140	22		460	90	39
	540	7 inches	32		460	118	49
	540	192	42		460	160	59
	540	14 inches	82		460	218	69
	620	109	03		520	57	00
	620	140	13		520	82	10
	620	185	23		520	106	20
	620	9 inches	33		520	133	30
	620	18 inches	63		520	180	40
	710	150	04		520	243	50
	710	236	24		520	325	60
					580	78	01
320	400	25	08		580	106	11
	400	38	18		580	140	21
	400	48	28		580	190	31
	400	60	38		620	92	02
	400	80	48		620	118	12
	440	37	09		620	165	22
	440	56	19		620	224	32
	440	72	29		710	118	03
	440	90	39		710	165	13
	440	118	49		710	212	23
	440	160	59		710	272	33
	440	128	69		800	165	04
	480	50	00		800	265	24
	480	74	10				
	480	95	20	360	440	25	08
	480	121	30		440	38	18
	480	160	40		440	48	28
	480	218	50		440	60	38
	480	290	60		440	80	48
	500	71	06		480	37	09
	500	5-1/8 inches	26		480	56	19
	500	10-1/4 inches	36		480	72	29
	540	71	01		480	90	39
	540	100	11		480	118	49
	540	128	21		480	160	59
	540	176	31		480	218	69
	580	92	02		540	57	00
	580	105	12		540	82	10
	580	150	22		540	106	20
	580	7-1/2 inches	32		540	134	30
	580	208	42		540	180	40
	580	13 inches	82		540	243	50
	670	112	03		540	325	60
	670	155	13		600	78	01
	670	200	23		600	106	11
	670	9-1/2 inches	33		600	140	21
	670	19 inches	63		600	192	31
	750	155	04		650	95	02
	750	250	24		650	122	12
					650	170	22
340	420	25	08		650	232	32
	420	38	18		750	125	03
	420	48	28		750	170	13
	420	60	38		750	224	23

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXXIV - Boundary dimensions-MA.-(Cont'd)

Bore Mm	O.D. Mm	Width 1/	O.D. and width code	Bore Mm	O.D. Mm	Width 1/	O.D. and width code
360	750	290	33	400	650	200	31
	850	180	04		720	103	02
	850	280	24		720	140	12
					720	185	22
380	480	31	08		720	256	32
	480	46	18		820	136	03
	480	60	28		820	185	13
	480	75	38		820	243	23
	480	100	48		820	308	33
	520	44	09		950	200	04
	520	65	19		950	315	24
	520	82	29				
	520	106	39	420	520	31	08
	520	140	49		520	46	18
	520	190	59		520	60	28
	520	250	69		520	75	38
	560	57	00		520	100	48
	560	82	10		560	44	09
	560	106	20		560	65	19
	560	135	30		560	82	29
	560	180	40		560	106	39
	560	243	50		560	140	49
	560	325	60		560	190	59
	620	78	01		560	250	69
	620	106	11		620	63	00
	620	140	21		620	90	10
	620	194	31		620	118	20
	680	95	02		620	150	30
	680	132	12		620	200	40
	680	175	22		620	355	50
	680	240	32				
	780	128	03		700	88	01
	780	175	13		700	122	11
	780	230	23		700	165	21
	780	300	33		700	224	31
	900	190	04		760	109	02
	900	300	24		760	150	12
					760	195	22
400	500	31	08		760	272	32
	500	46	18		850	136	03
	500	60	28		850	190	13
	500	75	38		850	250	23
	500	100	48		850	315	33
	540	44	09		980	206	04
	540	65	19		980	325	24
	540	82	29				
	540	106	39	440	540	31	08
	540	140	49		540	46	18
	540	190	59		540	60	28
	540	250	69		540	75	38
	600	63	00		540	100	48
	600	90	10		600	50	09
	600	118	20		600	74	19
	600	148	30		600	95	29
	600	200	40		600	118	39
	600	272	50		600	160	49
	600	355	60		600	218	59
	650	80	01		600	290	69
	650	112	11		650	67	00
	650	145	21		650	94	10

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXXIV - Boundary dimensions-MA.-(Cont'd)

Bore Mm	O.D. Mm	Width 1/	O.D. and width code	Bore Mm	O.D. Mm	Width 1/	O.D. and width code
440	650	122	20	480	650	78	19
	650	157	30		650	100	29
	650	212	40		650	128	39
	650	280	50		650	170	49
	650	375	60		650	230	59
	720	88	01		650	308	69
	720	122	11		700	71	00
	720	165	21		700	100	10
	720	226	31		700	128	20
	790	112	02				
	790	155	12		700	165	30
	790	200	22		700	218	40
	790	280	32		700	300	50
	900	145	03		700	400	60
	900	200	13		790	100	01
	900	265	23		790	136	11
	900	345	33		790	180	21
	1030	212	04		790	248	31
	1030	335	24		870	125	02
					870	170	12
460	580	37	08		870	224	22
	580	56	18		870	310	32
	580	72	28		980	160	03
	580	90	38		980	218	13
	580	118	48		980	290	23
	620	50	09		980	375	33
	620	74	19		1120	230	04
	620	95	29		1120	365	24
	620	118	39				
	620	160	49	500	620	37	08
	620	218	59		620	56	18
	620	290	69		620	72	28
	680	71	00		620	90	38
	680	100	10		620	118	48
	680	128	20		670	54	09
	680	163	30		670	78	19
	680	218	40		670	100	29
	680	300	50		670	128	39
	680	400	60		670	170	49
	760	95	01		670	230	59
	760	132	11		670	308	69
	760	175	21		720	71	00
	760	240	31		720	100	10
	830	118	02		720	128	20
	830	165	12		720	167	30
	830	212	22		720	218	40
	830	296	32		720	300	50
	950	155	03		720	400	60
	950	212	13		830	106	01
	950	280	23		830	145	11
	950	365	33		830	190	21
	1060	218	04		830	264	31
	1060	345	24		920	136	02
					920	185	12
480	600	37	08		920	243	22
	600	56	18		920	336	32
	600	72	28		1030	170	03
	600	90	38		1030	230	13
	600	118	48		1030	300	23
	650	54	09		1030	388	33

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXXIV - Boundary dimensions-MA.-(Cont'd)

Bore Mm	O.D. Mm	Width 1/	O.D. and width code	Bore Mm	O.D. Mm	Width 1/	O.D. and width code
500	1150	236	04	560	920	280	31
	1150	375	24		1030	150	02
					1030	206	12
530	650	37	08		1030	272	22
	650	56	18		1030	365	32
	650	72	28		1150	190	03
	650	90	38		1150	335	23
	650	118	48		1150	438	33
	710	57	09		1280	258	04
	710	82	19		1280	412	24
	710	106	29				
	710	136	39	600	730	42	08
	710	180	49		730	60	18
	710	243	59		730	78	28
	710	325	69		730	98	38
	780	80	00		730	128	48
	780	112	10		800	63	09
	780	145	20		800	90	19
	780	185	30		800	118	29
	780	250	40		800	150	39
	780	335	50		800	200	49
	780	450	60		800	272	59
	870	109	01		800	355	69
	870	150	11		870	85	00
	870	195	21		870	118	10
	870	272	31		870	155	20
	980	145	02		870	200	30
	980	200	12		870	272	40
	980	258	22		870	365	50
	980	355	32		870	488	60
	1090	180	03		980	122	01
	1090	243	13		980	170	11
	1090	325	23		980	218	21
	1090	412	33		980	300	31
	1220	250	04		1090	155	02
	1220	400	24		1090	212	12
					1090	280	22
560	680	37	08		1090	388	32
	680	56	18		1220	200	03
	680	72	28		1220	272	13
	680	90	38		1220	355	23
	680	118	48		1220	462	33
	750	60	09		1360	272	04
	750	85	19		1360	438	24
	750	112	29				
	750	140	39	630	780	48	08
	750	190	49		780	69	18
	750	258	59		780	88	28
	750	345	69		780	112	38
	820	82	00		780	150	48
	820	115	10		850	71	09
	820	150	20		850	100	19
	820	195	30		850	128	29
	820	258	40		850	165	39
	820	355	50		850	218	49
	820	462	60		850	300	59
	920	115	01		850	400	69
	920	160	11		920	92	00
	920	206	21		920	128	10

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXXIV - Boundary dimensions-MA.-(Cont'd)

Bore Mm	O.D. Mm	Width [1]	O.D. and width code	Bore Mm	O.D. Mm	Width [1]	O.D. and width code
630	920	170	20	710	950	106	19
	920	212	30		950	140	29
	920	290	40		950	180	39
	920	388	50		950	243	49
	920	515	60		950	325	59
	1030	128	01		950	438	69
	1030	175	11		1030	103	00
	1030	230	21		1030	140	10
	1030	315	31		1030	185	20
	1150	165	02		1030	236	30
	1150	230	12		1030	315	40
	1150	300	22		1030	438	50
	1150	412	32		1030	580	60
	1280	206	03		1150	140	01
	1280	280	13		1150	195	11
	1280	375	23		1150	250	21
	1280	488	33		1150	345	31
	1420	280	04		1280	180	02
	1420	450	24		1280	250	12
					1280	325	22
670	820	48	08		1280	450	32
	820	69	18		1420	224	03
	820	88	28		1420	308	13
	820	112	38		1420	412	23
	820	150	48		1420	530	33
	900	73	09				
	900	103	19	750	920	54	08
	900	136	29		920	78	18
	900	170	39		920	100	28
	900	230	49		920	128	38
	900	308	59		920	170	48
	900	412	69		1000	80	09
	980	100	00		1000	112	19
	980	136	10		1000	145	29
	980	180	20		1000	185	39
	980	230	30		1000	250	49
	980	308	40		1000	335	59
	980	425	50		1000	450	69
	980	560	60		1090	109	00
	1090	136	01		1090	150	10
	1090	185	11		1090	195	20
	1090	243	21		1090	250	30
	1090	336	31		1090	335	40
	1220	175	02		1090	462	50
	1220	243	12		1090	615	60
	1220	315	22		1220	150	01
	1220	438	32		1220	206	11
	1360	218	03		1220	272	21
	1360	300	13		1220	365	31
	1360	400	23		1360	195	02
	1360	515	33		1360	265	12
	1500	290	04		1360	345	22
	1500	475	24		1360	475	32
					1500	236	03
710	870	50	08		1500	325	13
	870	74	18		1500	438	23
	870	95	28		1500	560	33
	870	118	38				
	870	160	48	800	980	57	08
	950	78	09		980	82	18

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXXIV - Boundary dimensions-MA.-(Cont'd)

Bore Mm	O.D. Mm	Width 1/	O.D. and width code	Bore Mm	O.D. Mm	Width 1/	O.D. and width code
800	980	106	28	850	1500	280	12
	980	136	38		1500	375	22
	980	180	48		1500	515	32
	1060	82	09				
	1060	115	19	900	1090	60	08
	1060	150	29		1090	85	18
	1060	195	39		1090	112	28
	1060	258	49		1090	140	38
	1060	355	59		1090	190	48
	1060	462	69		1180	88	09
	1150	112	00		1180	122	19
	1150	155	10		1180	165	29
	1150	200	20		1180	206	39
	1150	258	30		1180	280	49
	1150	345	40		1180	375	59
	1150	475	50		1180	500	69
	1150	630	60		1280	122	00
	1280	155	01		1280	170	10
	1280	212	11		1280	218	20
	1280	272	21		1280	280	30
	1280	375	31		1280	375	40
	1420	200	02		1280	515	50
	1420	272	12		1280	690	60
	1420	355	22		1420	165	01
	1420	488	32		1420	230	11
					1420	300	21
850	1030	57	08		1420	412	31
	1030	82	18				
	1030	106	28	950	1150	63	08
	1030	136	38		1150	90	18
	1030	180	48		1150	118	28
	1120	85	09		1150	150	38
	1120	118	19		1150	200	48
	1120	155	29		1250	95	09
	1120	200	39		1250	132	19
	1120	272	49		1250	175	29
	1120	365	59		1250	224	39
	1120	488	69		1250	300	49
	1220	118	00		1250	400	59
	1220	165	10		1250	545	69
	1220	212	20		1360	132	00
	1220	272	30		1360	180	10
	1220	365	40		1360	236	20
	1220	500	50		1360	300	30
	1220	670	60		1360	412	40
	1360	165	01		1360	560	50
	1360	224	11		1360	730	60
	1360	290	21		1500	175	01
	1360	400	31		1500	243	11
	1500	206	02		1500	315	21
					1500	438	31

1/ Dimensions are in mm unless otherwise shown.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXXV - Boundary dimensions-MB

Bore Mm	O.D. Mm	Width 1/	O.D. and width code	Bore Mm	O.D. Mm	Width 1/	O.D. and width code
10	33	9	02	45	93	19	02
					95	19	12
12	35	10	02		95	21	22
	43	14	23		100	1-3/16 inches	32
					110	25	03
15	38	11	02		110	27	23
	47	13	03		120	1-9/16 inches	33
	48	15	23		130	31	04
17	44	12	02	50	100	20	02
	46	14	22		100	22	22
	52	14	03		110	1-3/16 inches	32
	53	16	23		120	27	03
	68	19	04		120	29	23
					130	1-3/4 inches	33
20	52	14	02		140	33	04
	53	16	22				
	57	15	03	55	110	21	02
	58	15	13		110	23	22
	58	17	23		120	1-5/16 inches	32
	62	0-13/16 inches	32		130	29	03
	72	0-7/8 inch	33		130	31	23
	80	21	04		140	1-15/16 inches	33
					150	35	04
25	57	15	02				
	58	15	12	60	120	22	02
	58	17	22		120	24	22
	68	17	03		130	1-7/16 inches	32
	68	19	23		140	31	13
	72	0-13/16 inch	32		140	33	23
	80	1 inch	33		145	31	03
	90	23	04		150	2-1/8 inches	33
					160	37	04
30	68	16	02				
	68	18	22	65	130	23	12
	80	19	03		130	25	22
	80	21	23		135	23	02
	80	0-15/16 inch	32		140	1-1/2 inches	32
	90	1-3/16 inches	33		150	33	13
	100	25	04		150	35	23
					155	33	03
35	79	17	02		160	2-5/16 inches	33
	80	17	12		173	39	04
	80	19	22				
	85	1-1/16 inches	32	70	135	24	12
	88	21	03		135	26	22
	90	21	13		140	24	02
		23	23		150	1-9/16 inches	32
	100	1-3/8 inches	33		160	35	13
	110	27	04		160	37	23
					165	35	03
40	88	18	02		180	2-1/2 inches	33
	90	18	12		193	44	04
	90	20	22				
	90	1-3/16 inches	32	75	140	25	12
	100	23	03		140	27	22
	100	25	23		145	25	02
	110	1-7/16 inches	33		160	1-5/8 inches	32
	120	29	04		173	37	13

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXXV - Boundary dimensions-MB (Continued)

Bore Mm	O.D. Mm	Width 1/	O.D. and width code
75	173	39	23
	175	37	03
	190	2-11/16 inches	33
	203	47	04
80	150	26	12
	150	28	22
	155	26	02
	170	1-3/4 inches	32
	183	39	13
	183	41	23
	190	39	03
	200	2-11/16 inches	33
	213	50	04
85	160	28	12
	160	30	22
	165	28	02
	180	1-15/16 inches	32
	193	41	13
	193	44	23
	200	41	03
	210	2-7/8 inches	33
	225	56	04
90	173	32	22
	174.6	30	12
	175	30	02
	190	2-1/16 inches	32
	203	47	23
	204.6	43	13
	210	43	03
	225	2-7/8 inches	33
	240	58	04
95	183	34	22
	184.6	32	12
	190	32	02
	200	2-3/16 inches	32
	213	45	13
	213	50	23
	220	45	03
	240	3-1/6 inches	33
	265	59	04
100	193	36	22
	194.6	34	12
	200	34	02
	215	2-3/8 inches	32
	230	47	13
	230	51	23
	235	47	03
	250	3-1/4 inches	33
	280	64	04
105	203	38	22
	204.6	36	12
	210	36	02
	225	2-9/16 inches	32
105	240	49	13
	240	53	23
	260	3-7/16 inches	33
110	215	38	12
	215	42	22
	220	38	02
	240	2-3/4 inches	32
	255	54	23
	256	50	13
	265	50	03
	280	3-5/8 inches	33
120	230	40	12
	260	3 inches	32
	280	55	13
	310	4-1/8 inches	33
130	250	40	12
	280	3-1/8 inches	32
	300	58	13
	300	59	03
	340	4-3/8 inches	33
140	240	36	06
	250	2-1/2 inches	16
	270	42	12
	275	50	02
	300	3-1/4 inches	32
	320	62	13
	360	4-1/2 inches	33
150	260	38	06
	270	2-5/8 inches	16
	290	45	12
	300	45	02
	320	3-1/2 inches	32
	340	65	13
	380	4-7/8 inches	33
160	280	40	06
	290	2-7/8 inches	16
	310	48	12
	340	3-7/8 inches	32
	360	68	13
	400	5-1/4 inches	33
170	300	42	06
	310	3 inches	16
	320	52	12
	360	4-1/8 inches	32
	380	72	13
	420	5-1/2 inches	33
180	320	44	06
	320	3-1/4 inches	16
	350	52	12
	380	4-1/4 inches	32
	410	75	13

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXXV - Boundary dimensions-MB (Continued).

Bore Mm	O.D. Mm	Width 1/	O.D. and width code	Bore Mm	O.D. Mm	Width 1/	O.D. and width code
180	440	5-3/4 inches	33	280	500	63	06
					500	4-7/8 inches	16
190	340	46	06		560	80	12
	340	3-3/8 inches	16		580	6-1/2 inches	32
	360	55	12		620	108	13
	400	4-1/2 inches	32		660	8-1/2 inches	33
	420	78	13				
	460	6 inches	33	300	520	67	06
					540	5 inches	16
200	360	48	06		580	85	12
	360	3-1/2 inches	16		620	7 inches	32
	380	58	12		660	116	13
	420	4-3/4 inches	32				
	440	80	13	320	540	71	06
	480	6-1/2 inches	33		580	5-1/8 inches	16
					620	92	12
210	370	50	06		660	7-1/2 inches	32
	380	3-3/4 inches	16		700	124	13
	400	62	12				
	440	5 inches	32				
	460	84	13				
	510	6-3/4 inches	33				
220	390	51	06				
	400	3-7/8 inches	16				
	420	65	12				
	460	5-1/4 inches	32				
	480	88	13				
	540	7 inches	33				
230	410	53	06				
	420	4 inches	16				
	460	69	12				
	480	5-1/2 inches	32				
	500	91	13				
	560	7-1/4 inches	33				
240	430	55	06				
	440	4-1/4 inches	16				
	480	72	12				
	500	5-3/4 inches	32				
	520	95	13				
	580	7-1/2 inches	33				
250	445	57	06				
	460	4-3/8 inches	16				
	500	76	12				
	520	6 inches	32				
	560	98	13				
	600	7-3/4 inches	33				
260	460	59	06				
	480	4-1/2 inches	16				
	520	80	12				
	540	6-1/4 inches	32				
	600	102	13				
	620	8 inches	33				

1/ Dimensions are in mm unless otherwise shown.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXXVI - Boundary dimensions-MC

Bore	O.D.	Width[1/]			O.D. and width code	Bore	O.D.	Width[1/]			O.D. and width code
Mm	Mm	O.R.	I.R.	Overall		Mm	Mm	O.R.	I.R.	Overall	
5	19	0.315	0.386	0.406	15	8	22	0.562	0.562	0.562	11
	19	.315	.497	.497	25		24	.296	.386	.406	06
	19	.406	.386	.406	65		24	.315	.386	.406	16
	19	.406	.390	.406	75		24	.315	.417	.433	26
	19	.406	.497	.497	85		24	.315	.497	.497	36
	19	.562	.562	.562	52		24	.315	.562	.562	46
							24	.371	.386	.406	56
6	19	.315	.386	.406	15		24	.391	.386	.406	66
	19	.315	.497	.497	25		24	.406	.360	.390	92
	19	.315	.562	.562	35		24	.406	.386	.406	76
	19	.354	.338	.354	45		24	.406	.390	.406	86
	19	.406	.386	.406	65		24	.406	.497	.497	96
	19	.406	.390	.406	75		24	.562	.562	.562	52
	19	.406	.497	.497	85		24	.580	.580	.580	62
	19	.472	.472	.472	42						
	19	.562	.562	.562	52	9	26	.315	.386	.406	15
	24	.296	.386	.406	06		26	.315	.497	.497	25
	24	.315	.386	.406	16		26	.398	.437	.453	45
	24	.315	.497	.497	36		26	.406	.386	.406	65
	24	.315	.562	.562	46		26	.406	.497	.497	85
	24	.371	.386	.406	56		26	.453	.437	.453	75
	24	.391	.386	.406	66		26	.562	.562	.562	52
	24	.406	.386	.406	76		30	.354	.480	.500	16
	24	.406	.390	.406	86		30	.354	.646	.646	36
	24	.406	.497	.497	96		30	.385	.480	.500	06
	24	.562	.562	.562	03		30	.460	.480	.500	56
	24	.580	.580	.580	13		30	.486	.480	.500	66
							30	.500	.480	.500	76
7	22	.315	.386	.406	15		30	.500	.484	.500	86
	22	.315	.497	.497	25		30	.500	.646	.646	96
	22	.315	.562	.562	35		30	.656	.656	.656	03
	22	.360	.390	.406	45		30	.687	.687	.687	13
	22	.406	.386	.406	65						
	22	.406	.390	.406	75	10	26	.453	.453	.453	90
	22	.406	.497	.497	85		28	.354	.456	.472	05
	22	.500	.500	.500	42		30	.354	.480	.500	15
	22	.562	.562	.562	52		30	.354	.646	.646	25
	24	.296	.386	.406	06		30	.385	.480	.500	35
	24	.315	.386	.406	16		30	.460	.480	.500	45
	24	.315	.497	.497	36		30	.485	.480	.500	55
	24	.315	.562	.562	46		30	.500	.480	.500	65
	24	.371	.386	.406	56		30	.500	.484	.500	75
	24	.391	.386	.406	66		30	.500	.646	.646	85
	24	.406	.386	.406	76		30	.656	.656	.656	52
	24	.406	.390	.406	86		30	.687	.687	.687	62
	24	.406	.497	.497	96						
	24	.562	.562	.562	03	11	32	.385	.480	.500	35
	24	.580	.580	.580	13		32	.394	.480	.500	15
							32	.394	.606	.606	25
8	22	.315	.386	.406	15		32	.460	.480	.500	45
	22	.315	.497	.497	25		32	.485	.480	.500	55
	22	.315	.562	.562	35		32	.500	.480	.500	65
	22	.398	.390	.406	45		32	.500	.484	.500	75
	22	.406	.386	.406	65		32	.500	.606	.606	85
	22	.406	.390	.406	75		32	.606	.606	.606	32
	22	.406	.497	.497	85		32	.656	.656	.656	52
	22	.500	.500	.500	01		32	.687	.687	.687	62

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXXVI - Boundary dimensions-MC (Cont'd)

Bore	O.D.	Width[1]			O.D. and width code	Bore	O.D.	Width[1]			O.D. and width code
Mm	Mm	O.R.	I.R.	Overall		Mm	Mm	O.R.	I.R.	Overall	
12	28	0.453	0.453	0.453	90	16	35	0.433	0.480	0.500	15
	32	.385	.480	.500	35		35	.433	.567	.567	25
	32	.394	.480	.500	15		35	.460	.480	.500	45
	32	.394	.606	.606	25		35	.500	.480	.500	65
	32	.460	.480	.500	45		35	.500	.484	.500	75
	32	.485	.480	.500	55		35	.500	.500	.500	80
	32	.500	.480	.500	65		35	.500	.567	.567	85
	32	.500	.484	.500	75		35	.567	.567	.567	32
	32	.500	.606	.606	85		35	.656	.656	.656	52
	32	.606	.606	.606	32		35	.687	.687	.687	62
	32	.656	.656	.656	52						
	32	.687	.687	.687	62	17	35	.500	.500	.500	90
							40	.431	.538	.563	35
13	28	.453	.453	.453	90		40	.472	.538	.563	15
	32	.385	.480	.500	35		40	.472	.654	.654	25
	32	.394	.480	.500	15		40	12mm	.6875	.6875	82
	32	.394	.606	.606	25		40	.472	.718	.718	05
	32	.460	.480	.500	45		40	.431	.538	.563	45
	32	.485	.480	.500	55		40	.548	.538	.563	55
	32	.500	.480	.500	65		40	.563	.538	.563	65
	32	.500	.484	.500	75		40	.563	.547	.563	75
	32	.500	.606	.606	85		40	.563	.654	.654	85
	32	.606	.606	.606	32		40	.654	.654	.654	32
	32	.656	.656	.656	52		40	.718	.718	.718	52
	32	.687	.687	.687	62		40	.750	.750	.750	62
							47	.551	.591	.630	06
14	35	.385	.480	.500	35		47	.551	.709	.709	16
	35	.433	.480	.500	15		47	.630	.591	.630	26
	35	.433	.567	.567	25		47	.630	.605	.630	46
	35	.460	.480	.500	45		47	.630	.709	.709	36
	35	.485	.480	.500	55						
	35	.500	.480	.500	65	20	42	.563	.563	.563	90
	35	.500	.484	.500	75		47	.495	.600	.625	35
	35	.500	.567	.567	85		47	.551	.600	.625	15
	35	.567	.567	.567	32		47	14mm	17mm	17mm	72
	35	.656	.656	.656	52		47	.551	.699	.699	25
	35	.687	.687	.687	62		47	14mm	.8125	.8125	82
							47	.595	.600	.625	45
15	32	.500	.500	.500	90		47	.610	.600	.625	55
	35	.354	.456	.472	05		47	.625	.600	.625	65
	35	.385	.480	.500	35		47	.625	.609	.625	75
	35	.433	.480	.500	15		47	.625	.699	.699	85
	35	.433	.567	.567	25		47	.696	.696	.696	22
	35	.460	.480	.500	45		47	.699	.699	.699	32
	35	.485	.480	.500	55		47	.804	.804	.804	42
	35	.500	.480	.500	65		47	.813	.813	.813	52
	35	.500	.484	.500	75		47	.843	.843	.843	62
	35	.500	.567	.567	85		52	.591	.709	.748	06
	35	.567	.567	.567	32		52	15mm	19mm	19mm	73
	35	.656	.656	.656	52		52	15mm	.875	.875	83
	35	.687	.687	.687	62		52	.591	.906	.906	16
	42	.512	.552	.591	06		52	.709	.684	.709	46
	42	.512	.669	.669	16		52	.748	.709	.748	26
	42	.591	.552	.591	26		52	.748	.906	.906	36
	42	.591	.669	.669	36		52	.818	.818	.818	03
							52	.948	.948	.948	23
16	32	.500	.500	.500	90						
	35	.385	.480	.500	35	25	47	.563	.563	.563	90

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXXVI - Boundary dimensions-MC (Cont'd)

Bore	O.D.	Width[1/]			O.D. and width code	Bore	O.D.	Width[1/]			O.D. and width code
Mm	Mm	O.R.	I.R.	Overall		Mm	Mm	O.R.	I.R.	Overall	
25	52	0.495	0.600	0.625	35	35	72	0.903	0.903	0.903	22
	52	.591	.600	.625	15		72	.984	.984	.984	52
	52	.591	.659	.659	25		72	1.033	1.033	1.033	42
	52	15mm	18mm	18mm	72		72	1.125	1.125	1.125	62
	52	.591	.813	.813	05		80	21mm	27mm	27mm	73
	52	.595	.600	.625	45		80	21mm	1.375	1.375	83
	52	.610	.600	.625	55		80	.955	1.065	1.065	56
	52	.625	.600	.625	65		100	25mm	33mm	33mm	74
	52	.625	.609	.625	75						
	52	.625	.659	.659	85	40	80	18mm	23mm	23mm	72
	52	.659	.659	.659	32		80	.709	.945	.945	45
	52	.696	.696	.696	22		80	.709	1.1811	1.1811	05
	52	.804	.804	.804	42		80	18mm	1.1875	1.1875	82
	52	.813	.813	.813	52		80	.827	.945	.945	15
	52	.843	.843	.843	62		80	.827	1.063	1.063	25
	62	17mm	21mm	21mm	06		80	.906	.906	.906	02
	62	.669	.984	.984	16		80	.912	1.022	1.022	35
	62	17mm	1.000	1.000	83		80	.945	.945	.945	12
	62	.729	.944	.984	76		80	.945	1.063	1.063	85
	62	.827	.827	.827	13		80	.967	1.187	1.187	95
	62	.827	.903	.903	56		80	1.063	1.063	1.063	32
	62	.827	.984	.984	36		80	1.102	1.102	1.102	52
	62	.883	1.033	1.033	66		90	23mm	30mm	30mm	73
	80	21mm	27mm	27mm	74		90	23mm	1.4375	1.4375	83
							90	1.056	1.166	1.166	56
26	52	.591	.600	.625	15		90	1.111	1.331	1.331	66
	52	.591	.659	.659	25		110	27mm	35mm	35mm	74
	52	.625	.600	.625	65						
	52	.625	.609	.625	75	45	85	19mm	24mm	24mm	72
	52	.625	.659	.659	85		85	.748	1.024	1.024	45
	52	.659	.659	.659	32		85	.748	1.1811	1.1811	05
	52	.812	.812	.812	52		85	19mm	1.1875	1.1875	82
							85	.827	.945	.945	15
30	62	.630	.748	.787	15		85	.827	1.062	1.063	25
	62	16mm	20mm	20mm	72		85	.912	1.022	1.022	35
	62	16mm	.9375	.9375	82		85	.945	.945	.945	02
	62	.630	.945	.945	25		85	.967	1.187	1.187	95
	62	.757	.748	.787	55		85	1.142	1.142	1.142	52
	62	.787	.748	.787	65		100	25mm	32mm	32mm	73
	62	.787	.945	.945	85		100	25mm	1.5625	1.5625	83
	62	.818	.818	.818	22		100	1.201	1.336	1.336	56
	62	.945	.945	.945	32		100	1.246	1.516	1.516	66
	62	.948	.948	.948	42		100	.984	1.378	1.378	16
	62	1.062	1.062	1.062	52		120	29mm	37mm	37mm	74
	72	19mm	24mm	24mm	73						
	72	19mm	1.1875	1.1875	83	50	90	20mm	25mm	25mm	72
	72	.808	1.023	1.063	76		90	.787	1.024	1.024	45
	72	.891	1.001	1.001	56		90	.787	1.1811	1.1811	05
	72	.945	1.166	1.166	66		90	20mm	1.1875	1.1875	82
	90	23mm	30mm	30mm	74		90	.866	1.024	1.024	15
							90	.866	1.1811	1.1811	25
35	72	.669	.787	.827	15		90	.912	1.022	1.022	35
	72	17mm	21mm	21mm	72		90	.867	1.187	1.187	95
	72	.669	.984	.984	25		90	.984	.984	.984	02
	72	17mm	1.0625	1.0625	82		90	1.181	1.181	1.181	52
	72	.797	.787	.827	35		110	27mm	35mm	35mm	73
	72	.827	.787	.827	65		110	27mm	1.750	1.750	83
	72	.827	.984	.984	85		110	1.285	1.460	1.460	56

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXXVI - Boundary dimensions-MC (Cont'd)

Bore	O.D.	Width[1]			O.D. and width code	Bore	O.D.	Width[1]			O.D. and width code
Mm	Mm	O.R.	I.R.	Overall		Mm	Mm	O.R.	I.R.	Overall	
50	110	1.330	1.680	1.680	66	95	170	32mm	2.1875	2.1875	82
	130	31mm	40mm	40mm	74		200	45mm	58mm	58mm	73
							200	45mm	3.0625	3.0625	83
55	100	.827	1.063	1.063	45		240	55mm	70mm	70mm	74
	100	21mm	1.3125	1.3125	82						
	100	.827	1.339	1.339	05	100	180	34mm	44mm	44mm	72
	100	.984	1.312	1.312	25		215	47mm	60mm	60mm	73
	100	1.014	1.125	1.124	35		215	47mm	3.25	3.250	82
	100	1.069	1.289	1.289	95		250	58mm	74mm	74mm	74
	120	29mm	38mm	38mm	73						
	120	29mm	1.9385	1.9385	83	105	190	36mm	46mm	46mm	72
	120	1.369	1.544	1.544	56		225	49mm	62mm	62mm	73
	120	1.414	1.764	1.764	66		225	49mm	3.4375	3.4375	82
	140	33mm	43mm	43mm	74		260	60mm	76mm	76mm	74
60	110	22mm	28mm	28mm	72	110	200	38mm	49mm	49mm	72
	110	22mm	1.4375	1.4375	82		240	50mm	64mm	64mm	73
	110	1.098	1.233	1.233	35		240	50mm	3.625	3.625	82
	110	1.153	1.423	1.423	95		280	65mm	82mm	82mm	74
	130	31mm	40mm	40mm	73						
	130	31mm	2.125	2.125	83	120	215	40mm	51mm	51mm	72
	150	35mm	45mm	45mm	74		260	55mm	69mm	69mm	73
							260	55mm	4.125	4.125	82
65	120	23mm	29mm	29mm	72		310	72mm	89mm	89mm	74
	120	23mm	1.500	1.500	82						
	140	33mm	43mm	43mm	73	130	230	40mm	51mm	51mm	72
	140	33mm	2.3125	2.3125	83		280	58mm	72mm	72mm	73
	160	37mm	48mm	48mm	74		340	78mm	96mm	96mm	74
70	125	24mm	31mm	31mm	72	140	250	42mm	53mm	53mm	72
	150	35mm	45mm	45mm	73		300	62mm	77mm	77mm	73
	150	35mm	2.500	2.500	82		300	63mm	4.50	4.50	82
	180	42mm	54mm	54mm	74		360	82mm	100mm	100mm	74
	180	42mm	3.125	3.125	83						
						150	270	45mm	57mm	57mm	72
75	130	25mm	32mm	32mm	72		380	85mm	105mm	105mm	74
	160	37mm	48mm	48mm	73						
	160	37mm	2.6875	2.6875	82	160	290	48mm	60mm	60mm	72
	190	45mm	58mm	58mm	74		340	68mm	88mm	88mm	73
							400	88mm	108mm	108mm	74
80	140	26mm	34mm	34mm	72						
	160	39mm	50mm	50mm	73	170	310	52mm	64mm	64mm	72
	170	39mm	2.6875	2.6875	82		360	72mm	88mm	88mm	73
	200	48mm	61mm	61mm	74		420	92mm	112mm	112mm	74
85	150	28mm	36mm	36mm	72	180	320	52mm	64mm	64mm	72
	180	41mm	53mm	53mm	73		380	75mm	92mm	92mm	73
	180	41mm	2.875	2.875	82		440	95mm	118mm	118mm	74
	210	52mm	66mm	66mm	74						
						190	340	55mm	68mm	68mm	72
90	160	30mm	39mm	39mm	72		400	78mm	96mm	96mm	73
	190	43mm	55mm	55mm	73		460	98mm	121mm	121mm	74
	190	43mm	2.875	2.875	82						
	225	54mm	68mm	68mm	74	200	360	58mm	72mm	72mm	72
	225	54mm	3.875	3.875	83		420	80mm	98mm	98mm	73
							480	102mm	126mm	126mm	74
95	170	32mm	41mm	41mm	72						

[1] Dimensions are in inches unless otherwise shown.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

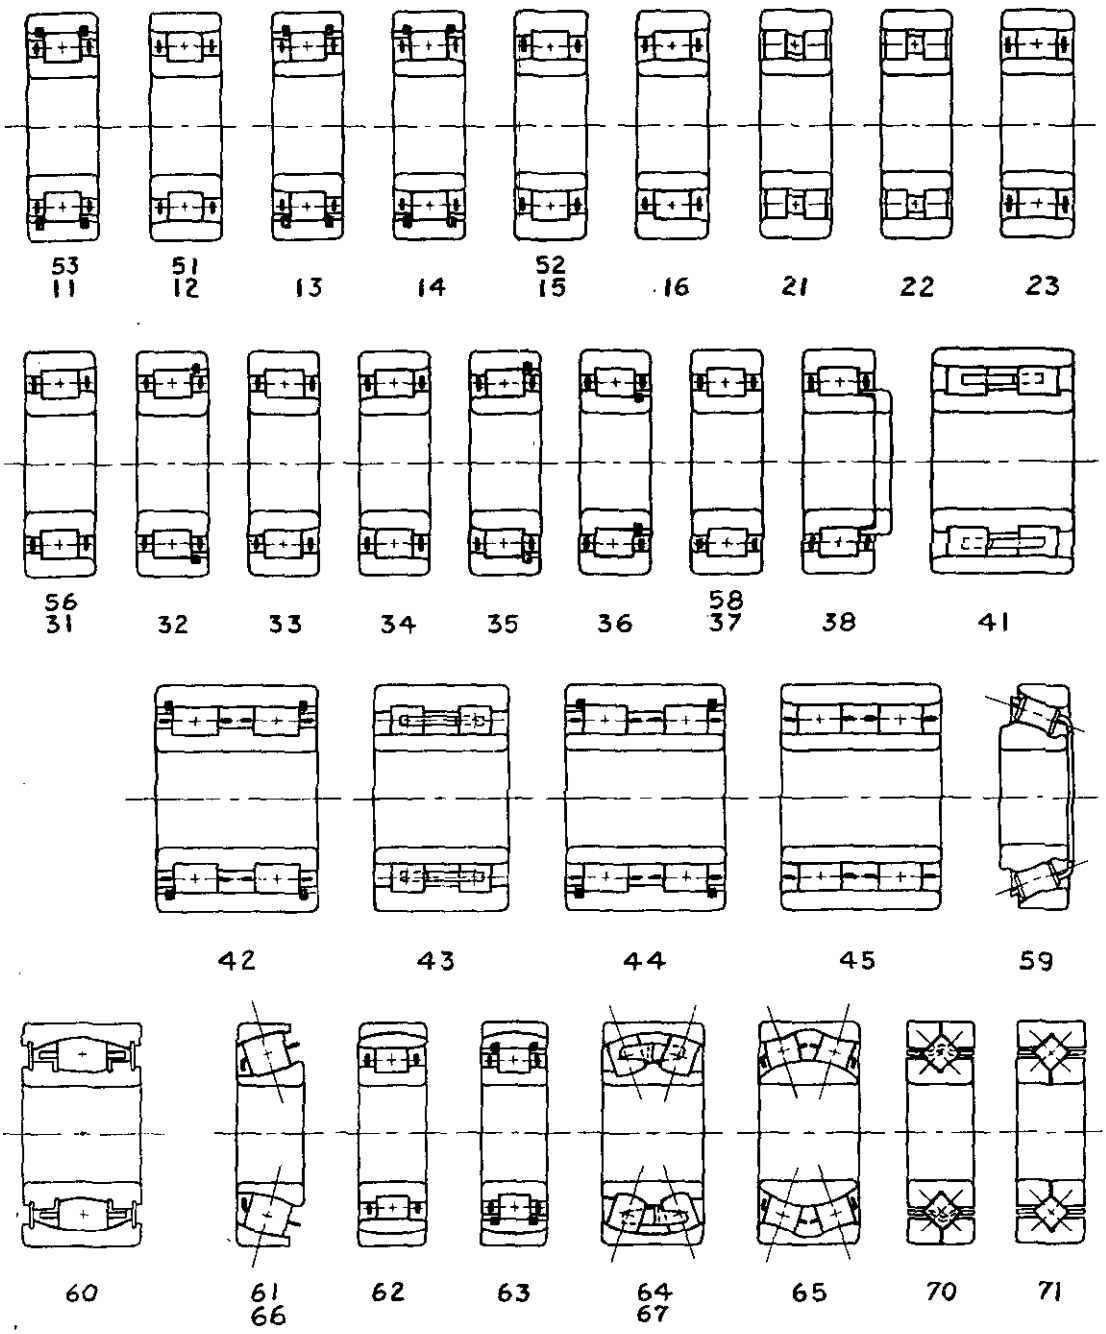


Figure 18 - Illustrations of group 2 bearing types.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 This section covers journal and needle roller bearings - group 3 (see figure 23).

2. REFERENCED DOCUMENTS

2.1 This section is not applicable.

3. NUMBER STRUCTURE

3.1 Digit positions. Example of digit positions is shown on figure 19.

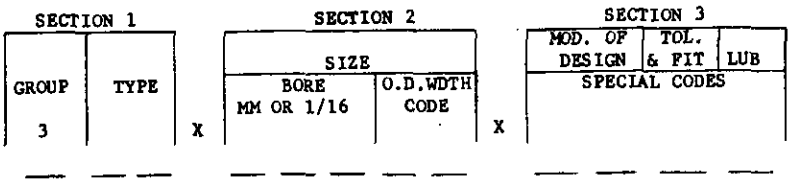


Figure 19 - Group 3, number structure.

4. CLASSIFFICATION

4.1 Standard tolerance values. Standard tolerance values for needle roller bearings in this group are shown in tables XXXVII and XXXVIII.

4.2 Definition of journal bearings. Journal bearings are those roller bearings made up of 3 separable parts - an inner race, outer race and roller assembly. They rely on proper housing or shaft design for the retention of the roller assembly.

4.3 Standard features. The following features are to be considered as "standard".

(a) Journal bearings
  (1) Outer race to be with lubrication holes and inner race to be without lubrication holes.
  (2) Solid rollers to be hardened and ground.
  (3) Solid outer races to have plus tolerances on O.D.
  (4) Solid outer races to be hardened.

(b) Needle bearings (drawn shell)
  (1) Lubrication holes in both inner and outer races.
  (2) Extra capacity outer race.

(c) Needle bearings (hardened and ground)
  (1) Lubrication holes and oil groove in outer race with lubrication hole in the inner race.
  (2) Hardened and ground needle bearings to be in accordance with provisions of AFBMA for industrial needle bearings, or Airframe needle bearings.

4.3.1 Cam followers: Cam followers shall have provision for relubrication and shall have no cotter pin hole in shank.

4.3.2 Additional variations: Variations other than the foregoing will be coded.

5. GROUP AND TYPE CODES

5.1 Digit positions. Example of digit positions are shown on figure 20.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

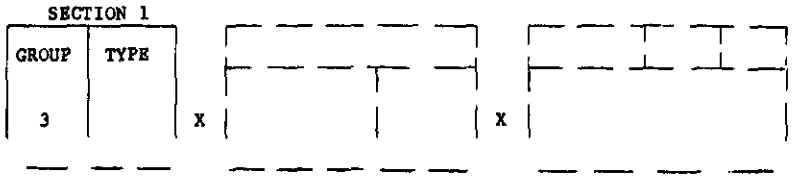


Figure 20 - Group 3, section 1.

5.2 Group code. Group code for first position shall be as follows:

3 - Journal and needle roller bearings.

5.3 Type codes. Type codes for the second and third positions shall be as specified in 5.3.1 through 5.3.8.

5.3.1 Journal bearings complete with solid inner and outer races and roller assembly shall be as follows:

Type		Dimension table
11	Complete bearing - flush type, inner and outer race same width, one or two roller assemblies, metric bore, inch or metric O.D. and width.	MD (table XLVII)
12	Complete bearing - flush type inner and outer race same width one or two roller assemblies, inch bore, O.D. and width.	IE (table XLIV)
15	Complete bearing - extended (two notch) inner race, inch bore and width, inch or metric O.D.	IB (table XLII)
16	Complete bearing - extended (one notch) inner race, inch bore and width, inch or metric O.D.	IB (table XLII)
17	Complete bearing - extended (no notch) inner race, inch bore and width, inch or metric O.D.	IB (table XLII)

5.3.2 Journal bearings complete with solid outer race and roller assembly (no inner race) shall be as follows:

Type		Dimension table
21	Complete bearing (less inner race) one or two roller assemblies, inch bore and width, metric O.D.	IF (table XLV)
23	Complete bearing (less inner race) one or two roller assemblies, inch bore, O.D. and width.	IE (table XLIV)

5.3.3 Journal bearings, split outer race shall be as follows:

Type		Dimension table
31	Complete bearing - split outer race, roller assembly with solid inner race, inch bore, O.D. and width.	IE (table XLIV)
32	Complete bearing - split outer race, roller assembly with solid extended inner race, inch bore and width, inch or metric O.D.	IB (table XLII)
33	Complete bearing - split outer race, roller assembly, no inner race, inch bore, O.D. and width.	IE (table XLIV)

5.3.4 Roller assembly only shall be as follows:

Type		Dimension table
40	Needle roller assembly, inch bore, O.D. and width.	IG (table XLVI)
41	Journal roller assembly, inch bore, O.D. and width.	IG (table XLVI)

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

5.3.5 Hardened and ground races only shall be as follows:

Type		Dimension table
43	Outer race, O.D. chamfered, inch bore and width, metric O.D.	IF (table XLV)
44	Outer race, O.D. chamfered, inch bore, O.D. and width.	IG (table XLVI)
45	Inner race, I.D. chamfered, inch bore, O.D. and width.	IC (table XLVI)
46	Inner race, I.D. chamfered, metric bore, inch or metric O.D. and width.	MD (table XLVII)
47	Solid inner races - not covered by other type codes, inch bore, O.D. and width.	IG (table XLVI)
48	Solid outer races - not covered by other type codes, inch bore, O.D. and width.	IG (table XLVI)
49	Solid inner race, I.D. chamfered, one notch, inch bore, O.D. and width.	IG (table XLVI)
50	Solid inner race, I.D. chamfered, two notches, inch bore, O.D. and width.	IG (table XLVI)

5.3.6 Drawn shell needle bearings. Drawn shell needle bearings shall be as follows:

Type		Dimension table
51	Complete bearing - outer race containing rollers with separable inner race, both races same width, inch bore, O.D. and width.	IE (table XLIV)
52	Complete bearing - outer race containing rollers with separable extended inner race, inch bore and width, inch or metric O.D.	IB (table XLII)
53	Complete bearing - outer race containing rollers, extended inner race with retaining washers, non-separable, inch bore and width, inch or metric O.D.	IB (table XLII)
54	Complete bearing - outer race containing rollers, no inner race, open ends, inch bore, O.D. and width.	IE (table XLIV)
55	Complete bearing - outer race containing rollers, no inner race, one end closed, inch bore, O.D. and width.	IE (table XLIV)
56	Complete bearing - outer race and rollers with one piece cage type retainer, open ends, no inner race, inch bore, O.D. and width.	IE (table XLIV)
57	Complete bearing - outer race and rollers with one piece cage type retainer, one end closed, no inner race, inch bore, O.D. and width.	IE (table XLIV)
58	Complete bearing - outer race and rollers, no inner race or roller retainment, single row, open ends, inch bore, O.D. and width.	IE (table XLIV)
59	Complete bearing - outer race and rollers, no inner race or roller retainment, single row, one end closed, inch bore, O.D. and width.	IE (table XLIV)

5.3.7 Hardened and ground needle bearings. Hardened and ground needle bearings shall be as follows:

Type		Dimension table
61	Complete bearing of one piece or composite outer race and rollers with one piece cage type retainer, separable inner race, one or two rows of rollers, inch bore, O.D. and width.	IE (table XLIV)
62	Complete bearing of one piece or composite outer race and rollers with one piece cage type retainer, separable inner race, one or two rows of rollers, metric bore, inch or metric O.D. and width.	MD (table XLVII)
63	Complete bearing of one piece or composite outer race and rollers with one piece cage type retainer, no inner race, one or two rows of rollers, inch bore, O.D. and width.	IE (table XLIV)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Type		Dimension table
64	Complete bearing of one piece or composite inner race containing rollers with separable outer race, one or two rows of rollers, inch bore, O.D. and width.	IE (table XLIV)
65	Complete bearing of one piece or composite inner race containing rollers, no outer race, one or two rows of rollers, inch bore, O.D. and width.	IE (table XLIV)
66	Needle roller, cam follower, without stud, inch bore and width, inch or metric O.D.	IB (table XLII)
67	Complete bearing, separable inner race, no roller retainment, single row, metric bore, inch or metric O.D. and width.	MD (table XLVII)
68	Complete bearing of inner race and outer race, non-separable assembly, extended inner race with retaining washers, one or two rows of rollers, inch bore and width, inch or metric O.D.	IB (table XLII)
69	Complete bearing of inner race and outer race, non-separable assembly, extended inner race with retaining washers, external self-aligning with aligning ring, one or two rows of rollers, inch bore and width, inch or metric O.D.	IB (table XLII)

5.3.8 Cam followers. Cam followers shall be as follows:

Type		Dimension table
71	Needle roller cam follower, inch roller, O.D., width stud length and diameter.	ID (table XLIII)
72	Needle roller cam follower, two seals, inch roller, O.D. width, stud length and diameter.	ID (table XLIII)

6. BORE SIZE - O.D. AND WIDTH CODES

6.1 Digit positions. Example of digit positions is shown on figure 21.

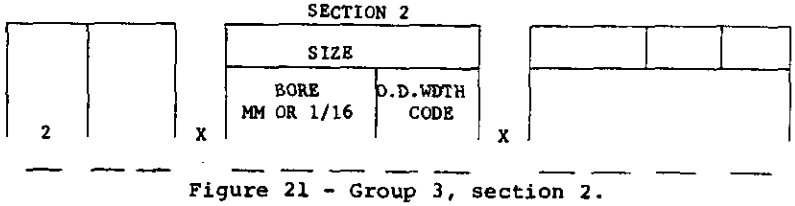


Figure 21 - Group 3, section 2.

6.2 Bore size (4, 5 and 6th positions). The bore size of journal and needle roller bearings is either expressed in metric or inch. Type descriptions and boundary dimension tables indicate which method of expression is used.

6.2.1 Metric. Metric bores are expressed as the actual number of mm.

Example: 4 mm = 004; 25mm - 025; 120mm = 120

6.2.2 Inch Inch bores are expressed as the number of 1/16ths in the bore size.

Example: 15/16 inch = 015; 1 inch - 016
1-3/8 inches - 022; 10 inches = 160

6.3 O.D. and width code (7 and 8th positions). The O.D. and width dimensions of a bearing are expressed by a code, as shown in the boundary dimension tables.

6.4 Application. The type description carries a reference to the appropriate boundary dimension table. These tables are arranged by bore size, and within each bore size the O.D. and widths are arranged in numerical sequence. Opposite each set of dimensions is the appropriate "code" for the O.D. and width. Where bearing dimensions correspond to AFBMA basic standards the O.D. and width code is identical with their series code.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

6.5 Interpretation of O.D. and width codes. A bearing number 311 X 03022 is decoded as:

311 = Journal bearing, complete with solid inner and outer races and roller assembly, flush type (inner and outer race same width) one or two roller assemblies, metric bore, inch or metric O.D. and width. Boundary dimension table - MD (see table XLVII).
03022 = 30 mm bore size: O.D. and width code 22.

Reference to boundary dimension table MD (table XLVII), bore size 030 and code 22 indicates that the O.D. is 62mm and width is 13/16ths.

7. VARIATIONS OF THE GROUP 3 BASE BEARING NUMBER

7.1 Digit positions. Example of digit positions is shown on figure 22.

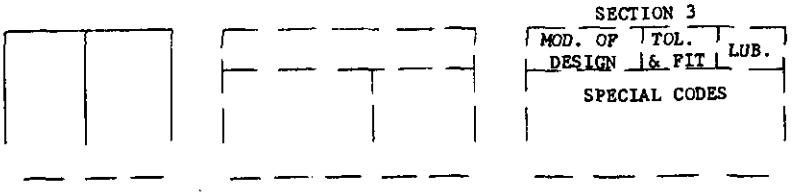


Figure 22 - Group 3, section 3.

7.2 Additional variations. Section 3 codes any additional variations, modifications or special features of a bearing, as described by the base number, which are necessary for complete identification. When section 3 is required it may be either a "Significant Code" covering those common features itemized in tables XXXIX, LX and XLI or an arbitrarily assigned number known as a "Special Code" covering all other variations, modifications, etc.

7.2.1 Significant codes. Significant codes may be either two or four digits and will begin with the numerals 0 through 7. These codes are constant in meaning within the group, regardless of the base number with which they are used. Reference to tables XXXIX, XL and XLI will furnish the significance of each code.

7.2.2 Special codes. Special codes are arbitrarily assigned numbers of four digits only that begin with the numerals 8 and 9. These four digit numbers are assigned in numerical sequence as they are required to code additional features (not covered by the significant codes), of a particular base number. The more common features significantly coded in the "Table of Variation" (see table XL) may occur in conjunction with some additional feature or features, in which case all of the additional features are coded by a special code.

7.2.2.1 Special codes are assigned only by the central agency responsible for the numbering system. A 0 digit in any position of a significant type number indicates the "standard" for the feature coded in that number position.

8. BOUNDARY DIMENSION TABLES

8.1 Use. Use of boundary dimension tables shall be as follows:

Dimension table	Bearing types
IB (table XLII)	15, 16, 17, 32, 52, 53, 66, 68, 69
ID (table XLIII)	71, 72
IE (table XLIV)	12, 23, 31, 33, 51, 54, 55, 56, 57, 58, 59, 61, 63, 64, 65
IF (table XLV)	21, 43
IG (table XLVI)	40, 41, 44, 45, 47, 48, 49, 50
MD (table XLVII)	11, 46, 62, 67

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXXVII - Standard tolerance limits for industrial needle bearings

(Tolerance limits in 0.0001 inch)

Basic bore or Basic O.D. (Inches)		Tolerance limits	
Over	Incl.	Plus	Minus
0	0.7500	0	4
0.7500	2.0000	0	5
2.0000	3.2500	0	6
3.2500	4.7500	0	8
4.7500	7.2500	0	10
7.2500	10.2500	0	12
10.2500	12.5000	0	14
12.5000	15.7500	0	16
15.7500	19.7500	0	18
Basic bearing width limits			
Outer ring		+0	-50
Inner rings whose O.D, is 5.0000 inches or less		+50	+100
Inner rings whose O.D. is greater than 5.0000 inches		+100	+150
Shaft diameter for series NAA and NBA[1]			
Size of shaft (Inches)		Tolerance Limits	
From	To	Plus	Minus
0	4.0000	0	5
4.0000	6.0000	0	7
6.0000 and over		0	10

[1]For these designations see AFBMA Standard Section No.5 - Bearing Identification Code.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXXVIII - Standard tolerance limits for *airframe* needle bearings

(tolerance limits in 0.0001 inch)

Basic bore diameter		Bore tolerance limits		Basic O.D.		O.D. tolerance limits	
Inches				Inches			
Over	Incl.	Plus	Minus	Over	Incl.	Plus	Minus
0	3.1250	0	7	0	1.9375	0	5
3.1250	4.6250	0	8	1.9375	3.1250	0	6
4.6250	7.0000	0	10	3.1250	4.6250	0	8
7.0000	10.5000	0	12	4.6250	7.0000	0	10
10.5000	13.5000	0	16	7.0000	10.5000	0	12
				10.5000	14.5000	0	16
				14.5000	15.2500	0	24

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXXIX - Significant codes for variations of group 3 base bearing numbers

1st and 2nd position code XX--	Significant codes for variations of base bearing numbers		
00--	Standard features - journal roller bearings - types 11-50 Oil hole in outer race, no oil hole in inner race Minus tolerance on I.D., plus tolerance on O.D. Solid outer race (types 11-23) Split outer race (types 31, 32, 33)		
00--	Standard features - drawn shell needle bearings - types 51-59 Oil hole in both inner and outer races Extra capacity outer race		
00--	Standard features - solid hardened and ground needle bearings - type 61-69 Oil hole and oil groove in outer race Oil hole in inner race		
00--	Standard features - cam follers - provisions for relubrication No cotter pin hole in shank		
	Deviations from these standard features are coded as follows:		
	Complete bearing with inner and outer race	Outer race only or complete bearing (without inner base)	Inner race only or complete bearing (without outer race)
11--	Soft solid rollers with soft split outer race	Soft solid rollers with soft split race	
12--	No oil hole in inner or outer races	No oil hole in race	No oil hole in race
13--	Hardened spiral or wound rollers	Hardened spiral or wound rollers	Hardened spiral or wound rollers
14--	-Cam follower- Chromium plated O.D. All other exposed surfaces cadmium plated		
15--	Hardened spiral rollers with soft split outer race	Hardened spiral rollers with soft split race	Harden spiral rollers with soft race
16--	-Cam follower- Chromium plated O.D. All other exposed surfaces cadmium plated - cotter pin hole in shank - no relubrication provisions		
17--	Hardened solid rollers with soft split outer race	Hardened solid rollers with soft split race	Hardened solid rollers with soft race
18--	Cam-follower- Roller O.D. chromium plated-oxide black sides-all other exposed surfaces cadmium plated - no relubrication provisions		
19--	Soft solid rollers	Soft solid rollers	Soft solid rollers
20--	Cam-follower- Roller O.D. chromium plated-oxide black sides-all other exposed surfaces cadmium plated-cotter pin hole in shank-no relubrication provisions		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXXIX - Significant codes for variations of group 3 base bearing numbers (cont'd.)

1st and 2nd position code XX--	Complete bearing with inner and outer race	Outer race only or complete bearing (without inner race)	Inner race only or complete bearing (without outer race)
21--	No oil hole or oil groove in outer race, oil hole in inner race	No oil hole or oil groove in outer race	Oil hole in inner race
22--	Cam-follower- Roller O.D. and sides chromium plated - all other exposed surfaces cadmium plated - cotter pin hole in shank - NAS 516-1 fitting		
23--	Oil hole in outer race, oil hole and oil groove in inner race, outer race has oxide black finish, all other exposed surfaces cadmium plated		
24--		No oil hole in outer race- with roller retainer	
25--		With roller retainer and one seal	
26--		No oil hole in outer race- with roller retainer and one seal	
27--		With roller retainer and two seals	
28--		No oil hole in outer race- with roller retainer and two seals	
29--		Roller retainer - one seal- ground O.D.	
30--		No oil hole in outer race- roller retainer, one seal and ground O.D.	
31--	Oil hole and oil groove in outer race, oil hole in inner race, ground O.D.		
32--		Roller retainer, two seals, ground O.D.	
33--		No oil hole in outer race, roller retainer, two seals, ground O.D.	
34--		Roller retainer, one seal, oxide black finish with stainless steel rollers	
35--	Oil hole and oil groove in outer race, oil hole in inner race, cadmium plated exposed surfaces with stainless steel rollers		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXXIX - Significant codes for variations of group 3 base bearing numbers (cont'd.)

1st and 2nd position code XX--	Complete bearing with inner and outer race	Outer race only or complete bearing (without inner race)	Inner race only or complete bearing (without outer race)
36--		No oil hole in outer race, roller retainer, one seal, oxide black finish with stainless steel rollers	
37--	Oil hole and oil groove in outer race, oil hole and oil groove in inner race		
38--		Roller retainer, two seals, oxide black finish with stainless steel rollers	
39--		No oil hole in outer race, roller retainer, two seals, oxide black finish with stainless steel rollers	
40--		Roller retainer, one seal, cadmium plated exposed surfaces with stainless steel rollers	
41--		No oil hole in outer race, roller retainer, one seal, cadmium plated exposed surfaces with stainless steel rollers	
42--		Roller retainer, two seals, cadmium plated exposed surfaces with stainless steel rollers	
43--		No oil hole in outer race, roller retainer, two seals, cadmium plated exposed surfaces with stainless steel rollers	
44--		Roller retainer, one seal chromium plated exposed surfaces	
45--	Oil hole and oil groove in outer race, oil hole in inner race		
46--		No oil hole in outer race, roller retainer, one seal, chromium plated exposed surfaces	
47--		Roller retainer, two seals, chromium plated exposed surfaces	
48--	No oil hole or oil groove in outer race, oil hole in inner race, cadmium plated exposed surfaces with stainless steel rollers		

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXXIX - Significant codes for variations of group 3 base bearing numbers (cont'd.)

1st and 2nd position code XX--	Complete bearing with inner and outer race	Outer race only or complete bearing (without inner race)	Inner race only or complete bearing (without outer race)
49--	No oil hole or oil groove in outer race, no oil hole in inner race, cadmium plated exposed surfaces, stainless steel rollers	No oil hole or oil groove in outer race, cadmium plated exposed surfaces, stainless steel rollers	
50--	Oil hole and oil groove in outer race, no oil hole in inner race, cadmium plated exposed surfaces, stainless steel rollers	Oil hole and oil groove in outer race, cadmium plated exposed surfaces, stainless steel rollers	
51--		No oil hole in outer race, roller retainer, two seals, chromium plated exposed surfaces	
52--	Oil hole and oil groove in outer race, no oil hole in inner race, chromium plated exposed surfaces		
53--	No oil hole or oil groove in outer race, no oil hole in inner race, ground O.D.	No oil hole or oil groove in outer race, ground outside diameter	
54--	Oil hole and oil groove in outer race, oil hole in inner race, chromium plated exposed surfaces	Oil hole and oil groove in outer race, chromium plated exposed surfaces	
55--	Oil hole and oil groove in outer race, no oil hole in inner race	Oil hole and oil groove in outer race	
56--	No oil hole or oil groove in outer race, oil hole in inner race, chromium plated exposed surfaces		
57--	-Cam follower- Roller O.D. and sides chromium plated -- all other exposed surfaces cadmium plated heat treated stud-NAS 516-1 fitting		
58--	No oil hole or oil groove in outer race, no oil hole in inner race, chromium plated exposed surfaces	No oil hole or oil groove in outer race, chromium plated exposed surfaces	
59--	Oil hole and oil groove in outer race, oil hole in inner race, chromium plated O.D., all other surfaces cadmium plated		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXXIX - Significant codes for variations of group 3 base bearing numbers (cont'd.)

1st and 2nd position code XX--	Complete bearing with inner and outer race	Outer race only or complete bearing (without inner race)	Inner race only or complete bearing (without outer race)
60--	Oil hole and oil groove in outer race, no oil hole in inner race, chromium plated O.D., all other surfaces cadmium plated	Oil hole and oil groove in outer race, chromium plated O.D., all other surfaces cadmium plated	
61--	No oil hole or oil groove in outer race, oil hole in inner race, chromium plated O.D., all other surfaces cadmium plated		
62--	No oil hole or oil groove in outer race, no oil in inner race, chromium plated O.D., all other exposed surfaces cadmium	No oil hole or oil groove in outer race, chromium plated O.D., all other exposed surfaces cadmium plated	
63--	Oil hole and oil groove in outer race, oil hole in inner race, oxide black finish with stainless steel rollers		
64--	Oil hole and oil groove in outer race, no oil hole in inner race, oxide black finish, stainless steel rollers	Oil hole and oil groove in race with oxide black finish, stainless steel rollers	
65--	No oil hole or oil groove in outer race, oil hole in inner race, oxide black finish stainless steel rollers		
66--	No oil hole or oil groove in outer race, no oil hole in inner race, oxide black finish stainless steel rollers	No oil hole or oil groove in race, oxide black finish stainless steel rollers	
67--	Cam follower Roller O.D. and sides chromium plated - all other exposed surfaces cadmium plated - NAS 516-1 fitting - magnetic inspection		
69--	Oil hole and oil groove in outer race, no oil hole in inner race, ground O.D.	Oil hole and oil groove in outer race, ground outside diameter	
70--	No oil hole or oil groove in outer race, oil hole in inner race, ground O.D.		
71--		Roller retainer, one seal, chromium plated outside diameter, all other exposed surfaces cadmium plated	

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table XXXIX - Significant codes for variations of group 3 base bearing numbers (cont'd.)

1st and 2nd position code XX--	Complete bearing with inner and outer race	Outer race only or complete bearing (without inner race)	Inner race only or complete bearing (without outer race)
72--		No oil hole in outer race, roller retainer, one seal, chromium plated O.D., all other exposed surfaces cadmium plated	
73--		Roller retainer, two seals, chromium plated O.D., all other exposed surfaces cadmium plated	
74--		No oil hole in outer race, roller retained, two seals, chromium plated O.D., all other exposed surfaces cadmium plated	
75--		Roller assembly with hardened rollers not ground	
76--		Roller assembly with unhardened rollers not ground	
77--	No oil hole or oil groove in outer race, oil hole and oil groove in inner race		Oil hole and oil groove in race
78--	Oil hole without groove in outer race, no oil hole in inner race	Oil hole without groove in race	
79--	Oil hole without groove in outer race, oil hole in inner race		

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the currentversion before use.

Table XL - Additional significant codes for variations of group 3 base bearing numbers

3rd and 4th position code [1] --XX	Tolerance (3rd position)	Lubrication (4th position)
	Journal roller bearings-types 11 through 48	
--00	Journal roller bearing-plus O.D.	Regular slush
--01		Extra low temperature grease
--02		Low temperature oil
--03		High temperature grease
--04		Low temperature grease
--05		Medium temperature grease
--06		Water resistant grease
--07		Regular slush, heavy
	This represents Hyatt, RBC and Rollway practice and has been set up as "standard".	
	Journal roller bearing-minus O.D.	
--10		Regular slush
--11		Extra low temperature grease
--12		Low temperature oil
--13		High temperature grease
--14		Low temperature grease
--15		Medium temperature grease
--16		Water resistant grease
--17		Regular slush, heavy
	This represents the practice of manufacturers other than Hyatt, RBC and Rollway.	
	Hardened and ground needle bearings-types 61 through 67	
--00	AFBMA tolerances for industrial needle bearings	Regular slush
--01		Extra low temperature grease
--02		Low temperature oil
--03		High temperature grease
--04		Low temperature grease
--05		Medium temperature grease
--06		Water resistant grease
--07		Regular slush, heavy
	Air frame needle bearings-type 68	
--40	AFBMA tolerances for airframe needle bearings	Regular slush
--41		Extra low temperature grease
--42		Low temperature oil
--43		High temperature grease
--44		Low temperature grease
--45		Medium temperature grease
--46		Water resistant grease
--47		Regular slush, heavy

[1] Codes in this column are only used with the codes in the previous column, where the features coded are necessary for complete identification.

	Arbitrary special codes
8000 and 9000	Arbitrary "special codes" assigned to a given condition or series of conditions, are in the 8000 and 9000 series of numbers. They are non-repetitive in meaning and apply only to the base number with which they are used. All conditions, other than (a) variations of basic dimensions, and (b) conditions covered by the above significant codes, are coded as "special codes." A variation of basic dimensions puts the bearing into group 9

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLI - First and second position codes for variation of group 3 base bearing numbers "partial tabulated listing"

Modification	Complete bearing with inner and outer race				Outer race only or complete bearing (no inner race)		Inner race only or complete bearing (no outer race)	
	Oil hole and oil groove in O.R. oil hole in I.R.[1]	Oil hole and oil groove in O.R. No oil hole in I.R.[1]	No oil hole or oil groove in O.R. Oil hole in I.R.	No oil hole or groove in O.R. and I.R.	Oil hole and oil groove in O.R.[1]	No oil hole or oil groove in O.R.	Oil hole in I.R.	No oil hole in I.R.
No other modifications	45	55	21	12	55	21	21	12
Oil groove on inner race	37	--	77	--	--	--	77	--
No oil groove on outer race	79	78	--	--	78	--	--	--
Ground O.D.	31	69	70	53	69	53	--	--
Oxide black finish with stainless steel rollers	63	64	65	66	64	66	--	--
Cadmium plated exposed surfaces with stainless steel rollers	35	50	48	49	50	49	--	--
Chromium plated exposed surfaces	54	52	56	58	54	58	--	--
Chromium plated O.D. all other exposed surfaces cadmium plated	59	60	61	62	60	62	--	--
With roller retainer	--	--	--	--	--	24	--	--
With roller retainer and one seal	--	--	--	--	25	26	--	--
With roller retainer and two seals	--	--	--	--	27	28	--	--
Roller retainer, one seal, ground O.D.	--	--	--	--	29	30	--	--
Roller retainer, two seals, ground O.D.	--	--	--	--	32	33	--	--
Roller retainer, one seal, oxide black finish with stainless steel rollers	--	--	--	--	34	36	--	--

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLI - First and second position codes for variation of group 3 base bearing numbers "partial tabulated listing" (cont'd.)

Modification	Complete bearing with inner and outer race				Outer race only or complete bearing (no inner race)		Inner race only or complete bearing (no outer race)	
	Oil hole and oil groove in O.R. Oil hole in I.R.[1]	Oil hole and oil groove in O.R. No oil hole in I.R.[1]	No oil hole or oil groove in O.R. Oil hole in I.R.	No oil hole or groove in O.R. and I.R.	Oil hole and oil groove in O.R.[1]	No oil hole or oil groove in O.R.	Oil hole in I.R.	No oil hole in I.R.
Roller retainer, two seals, oxide black finish with stainless steel rollers	--	--	--	--	38	39	--	--
Roller retainer, one seal cadmium plated exposed surfaces with stainless steel rollers	--	--	--	--	40	41	--	--
Roller retainer, two seals, cadmium plated exposed surfaces with stainless steel rollers	--	--	--	--	42	43	--	--
Roller retainer, one seal, chromium plated exposed surfaces	--	--	--	--	44	46	--	--
Roller retainer, two seals, chromium plated exposed surfaces	--	--	--	--	47	51	--	--
Roller retainer, one seal, chromium plated outside diameter, all other exposed surfaces cadmium plated	--	--	--	--	71	72	--	--
Roller retainer, two seals, chromium plated outside diameter, all other exposed surfaces cadmium plated	--	--	--	--	73	74	--	--

[1] Types 51 thru 59 have no oil groove in outer race.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLII - Boundary dimensions-IB

Bore		O.D. [1]	Width		O.D. and width code	Bore		O.D. [1]	Width		O.D. and width code
No. of 1/16	Inches		O.R. inches	I.R. Inches		No. of 1/16	Inches		O.R. inches	I.R. inches	
003	.1900	5/8	1/2	17/32	01	008	.5000	1-3/4	1	1-1/16	02
		5/8	1/2	5/8	03			1-7/8	1	1-1/16	04
		11/16	7/32	5/16	05						
		7/8	7/32	5/16	08	009	.5625	1-1/4	9/16	11/16	01
								1-11/16	25/32	7/8	08
004	.2500	5/8	1/2	9/16	13						
		11/16	1/2	17/32	01	010	.6250	1-1/8	3/4	25/32	01
		11/16	1/2	9/16	03			1-1/8	3/4	7/8	03
		11/16	1/2	5/8	05			1-1/4	29/32	1	05
		3/4	1/2	3/8	07			1-3/8	15/16	1	07
		3/4	1/2	9/16	02			1-5/16	5/8	3/4	09
		13/16	1/4	3/8	09			1-1/2	5/8	3/4	11
		7/8	3/8	1/4	11			1-5/8	1-3/8	1-1/2	13
		7/8	1/2	9/16	04			1-3/4	29/32	1	08
		15/16	9/32	3/8	08			2	1-1/4	1-5/16	02
								2-1/4	1-1/4	1-5/16	04
005	.3125	11/16	1/2	17/32	01						
		11/16	1/2	5/8	03	012	.7500	1-1/4	1	1-1/32	01
		13/16	11/32	7/16	05			1-1/4	1	1-1/8	03
		13/16	31/32	1	07			1-3/8	1-3/32	1-3/16	05
		7/8	5/16	7/16	09			1-1/2	7/8	1	07
		1	5/8	11/16	02			1-1/2	1-3/16	1-1/4	09
		1-1/16	11/32	7/16	08			1-3/4	7/8	1	11
		1-1/8	5/8	11/16	04			1-7/8	1-5/8	1-3/4	13
		1-3/16	25/32	7/8	11			1-7/8	1	1-1/8	08
								2-1/2	1-1/2	1-9/16	02
006	.3750	3/4	3/4	25/32	01			2-3/4	1-1/2	1-9/16	04
		3/4	3/4	13/16	03						
		3/4	3/4	7/8	05	014	.8750	1-3/8	1	1-1/32	01
		7/8	15/32	9/16	07			1-3/8	1	1-1/8	03
		15/16	3/8	1/2	09			1-1/2	1-11/32	1-7/16	05
		1-1/16	3/8	1/2	11			1-5/8	1	1-1/8	07
		1-1/8	3/8	1/2	13			1-7/8	1	1-1/8	09
		1-1/8	7/8	1	15			2-1/8	1-7/8	2	11
		1-3/16	15/32	9/16	08			2-3/8	1	1-3/8	13
		1-1/4	3/4	13/16	02			2-1/8	1-1/8	1-1/4	08
		1-3/8	3/4	13/16	04						
						016	1.000	1-1/2	1	1-1/32	01
007	.4375	13/16	3/4	25/32	01			1-1/2	1	1-1/8	03
		13/16	3/4	7/8	03			1-5/8	1-19/32	1-11/16	05
		15/16	17/32	5/8	05			1-3/4	1-1/8	1-1/4	07
		1	7/16	1/2	07			1-13/16	1-1/2	1-5/8	09
		1	7/16	9/16	09			2-1/8	1-1/8	1-1/4	11
		1-5/16	17/32	5/8	08			2-7/8	2-1/4	2-5/8	13
		1-1/2	7/8	15/16	02			2-1/4	1-1/8	1-1/4	08
		1-5/8	7/8	15/16	04			3	1-3/4	1-13/16	02
								3-1/4	1-3/4	1-13/16	04
008	.5000	1	3/4	25/32	01						
		1	3/4	7/8	03	018	1.1250	62mm	1-1/8	2-1/2	01
		1-1/16	7/8	15/16	05			72mm	1-3/16	2-1/2	03
		1-1/8	21/32	3/4	07			3-1/2	2	2-1/16	02
		1-3/16	1/2	5/8	09						
		1-1/4	1/2	5/8	11	019	1.1875	62mm	1-1/8	2-1/2	01
		1-3/8	1/2	5/8	13						
		1-3/8	1-1/8	1-1/4	15	020	1.2500	1-7/8	1-1/4	1-9/32	01
		1-1/2	21/32	3/4	08			1-7/8	1-1/4	1-3/8	03

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLII - Boundary dimensions-IB (cont'd.)

Bore		O.D.[1]	Width		O.D. and width code	Bore		O.D.[1]	Width		O.D. and width code
No. of 1/16	Inches		O.R. inches	I.R. inches		No. of 1/16	Inches		O.R. inches	I.R. inches	
020	1.2500	2	1.049	1-1/4	05	039	2.4375	120mm	2-1/16	2-3/8	01
		2-1/2	1.049	1-1/4	08						
		72mm	1-3/16	2-1/2	07	040	2.5000	3-1/4	1.049	1-1/4	01
		80mm	1-3/8	2-1/2	09			120mm	2-1/16	3-1/2	03
		4	2-1/4	2-5/16	02			130mm	2-1/16	3-1/2	05
								5-3/8	1-3/4	2-1/8	07
022	1.3750	2-1/4	1.299	1-1/2	01			3-3/4	1.049	1-1/4	08
		62mm	1-3/8	1-23/32	02						
		2-1/2	1-3/8	1-23/32	04	043	2.6875	120mm	2-1/16	2-3/8	01
		2.626	1.243	1.622	03						
		72mm	1-3/16	2-1/2	05	044	2.7500	3-1/2	1.049	1-1/4	01
		80mm	1-3/8	2-1/2	07			140mm	2-3/16	3-1/2	03
		3-5/8	1-1/4	1-5/8	09			7	3-3/4	3-7/8	02
		3-5/8	2-1/2	2-7/8	11						
						047	2.9575	130mm	2-5/8	2-15/16	01
023	1.4375	72mm	1-3/16	1-7/16	01						
						048	3.0000	3-3/4	1.049	1-1/4	01
024	1.5000	2-1/4	1.049	1-1/4	01			130mm	2-5/8	3-3/8	03
		2-3/4	1.049	1-1/4	08			150mm	2-5/16	3-3/8	05
		80mm	1-3/8	2-1/2	03			6-1/8	3	3-3/8	07
		90mm	1-7/16	2-1/2	05			6-1/8	4	4-3/8	09
		3-3/4	1-1/4	1-5/8	07			4-1/4	1.049	1-1/4	08
026	1.6250	80mm	1-3/8	2-3/4	01	052	3.2500	4	1.049	1-1/4	01
		90mm	1-7/16	2-3/4	03			160mm	2-7/16	3-3/8	03
027	1.6875	85mm	1-9/16	1-13/16	05	055	3.4375	160mm	3-13/16	3-1/8	01
028	1.7500	100mm	1-9/16	2-3/4	01	056	3.5000	4-3/8	1.049	1-1/4	01
		4-1/8	1-3/8	1-3/4	03			6-5/8	3	3-1/4	03
		4-1/4	2-3/4	3-1/8	05			6-5/8	4	4-3/8	05
		5	2-3/4	2-7/8	02			6-5/8	5	5-5/8	07
								170mm	2-9/16	3-3/8	09
030	1.8750	2-1/2	1.049	1-1/4	01			4-7/8	1.049	1-1/4	08
		100mm	1-9/16	2-3/4	03						
		4-3/8	2-3/4	3-1/8	05	060	3.7500	4-5/8	1.049	1-1/4	01
								160mm	2-13/16	4-3/8	03
031	1.9375	90mm	1-3/4	2	01			180mm	2-3/4	4-3/8	05
		110mm	1-3/4	3	03						
						063	3.9375	180mm	3-1/4	3-5/8	01
032	2.0000	2-3/4	1.049	1-1/4	01						
		3-17/32	2	2-7/16	04	064	4.000	4-7/8	1.049	1-1/4	01
		3-9/16	2	2-7/16	06			180mm	3-1/4	4-3/8	03
		110mm	1-3/4	3	03			7-3/8	4	4-3/8	05
		4-3/4	3	3-3/8	05			7-3/8	5	5-3/8	07
		3-1/4	1.049	1-1/4	08			7-3/8	6	6-3/8	09
								200mm	3-1/8	4-3/8	11
035	2.1875	100mm	1-13/16	2-1/8	01			5-3/8	1.049	1-1/4	08
036	2.2500	3	1.049	1-1/4	01	068	4.2500	5-1/8	1.049	1-1/4	01
		110mm	1-15/16	3-1/2	03			7-7/8	4	4-3/8	03
		120mm	1-15/16	3	05			7-7/8	5	5-3/8	05
		5	3	3-3/8	07			7-7/8	6	6-3/8	06
		6	3-1/4	3-3/8	02						
						071	4.4375	200mm	3-1/2	3-7/8	01
037	2.3125	110mm	1-15/16	2-1/4	01						

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLII - Boundary dimensions-IB (cont'd.)

Bore		O.D.[1]	Width		O.D. and width code	Bore		O.D.[1]	Width		O.D. and width code
No. of 1/16	Inches		O.R. inches	I.R. inches		No. of 1/16	Inches		O.R. inches	I.R. inches	
072	4.5000	5-3/8	1.049	1-1/4	01	080	5.0000	5-7/8	1.049	1-1/4	01
		200mm	3-1/2	4-3/8	03			215mm	3-7/8	4-7/8	03
		5-7/8	1.049	1-1/4	08			8-5/8	4	4-3/8	05
								8-5/8	5	5-3/8	07
076	4.7500	5-5/8	1.049	1-1/4	01			8-5/8	6	6-3/8	09
								6-3/8	1.049	1-1/4	08
079	4.9375	230mm	4-1/4	4-5/8	01						
						087	5.4375	250mm	4-3/4	5-1/8	01

[1] Dimensions are in inches unless otherwise shown.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLIII - Boundary dimensions-ID

Roller			Stud				Code
O.D. No. of 1/16	O.D. Inches	Width Inches	Length Inches	Thread length Inches	Diameter Inches	Threads per inch	
008	1/2	9/32	13/32	11/32	0.190	10-32	01
	1/2	11/32	1/2	1/4	.190	10-32	02
	1/2	3/8	5/8	1/4	.190	10-32	03
	1/2	3/8	5/8	1/4	1/4	1/4-28	04
009	9/16	3/8	5/8	1/4	.190	10-32	01
	9/16	3/8	5/8	1/4	1/4	1/4-28	02
010	5/8	13/32	5/8	5/16	1/4	1/4-28	01
	5/8	7/16	3/4	5/16	1/4	1/4-28	02
	5/8	7/16	3/4	5/16	5/16	5/16-24	03
011	11/16	9/32	15/32	11/32	1/4	1/4-28	01
	11/16	7/16	3/4	5/16	1/4	1/4-28	02
	11/16	7/16	3/4	5/16	5/16	5/16-24	03
012	3/4	11/32	35/64	23/64	5/16	5/16-24	02
	3/4	7/16	3/4	3/8	5/16	5/16-24	01
	3/4	1/2	7/8	3/8	3/8	3/8-24	03
	3/4	1/2	7/8	3/8	7/16	7/16-20	04
014	7/8	15/32	39/64	23/64	3/8	3/8-24	02
	7/8	1/2	3/4	3/8	3/8	3/8-24	01
	7/8	1/2	7/8	3/8	3/8	3/8-24	03
	7/8	1/2	7/8	3/8	7/16	7/16-20	04
016	1	17/32	47/64	27/64	7/16	7/16-20	02
	1	5/8	1	1/2	7/16	7/16-20	03
	1	5/8	1	1/2	1/2	1/2-20	05
	1	5/8	1	1/2	5/8	5/8-18	04
018	1-1/8	5/8	1	1/2	7/16	7/16-20	03
	1-1/8	5/8	1	1/2	5/8	5/8-18	02
	1-1/8	21/32	51/64	27/64	1/2	1/2-20	04
	1-1/8	3/4	1	1/2	1/2	1/2-20	05
020	1-1/4	3/4	1	1/2	1/2	1/2-20	03
	1-1/4	3/4	1-1/4	5/8	1/2	1/2-20	05
	1-1/4	3/4	1-1/4	5/8	3/4	3/4-16	04
022	1-3/8	3/4	1-1/4	5/8	1/2	1/2-20	03
	1-3/8	3/4	1-1/4	5/8	3/4	3/4-16	04
	1-3/8	7/8	1-1/4	5/8	9/16	9/16-18	05
024	1-1/2	7/8	1-1/2	3/4	5/8	5/8-18	03
	1-1/2	7/8	1-1/2	3/4	7/8	7/8-14	04
	1-1/2	1	1-1/2	3/4	5/8	5/8-18	05
026	1-5/8	7/8	1-1/2	3/4	5/8	5/8-18	03
	1-5/8	7/8	1-1/2	3/4	7/8	7/8-14	04
	1-5/8	1	1-1/2	3/4	5/8	5/8-18	05
028	1-3/4	1	1-1/2	3/4	5/8	5/8-18	03
	1-3/4	1	1-3/4	7/8	3/4	3/4-16	05
	1-3/4	1	1-3/4	7/8	1	1-14	04

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLIII - Boundary dimensions-ID (cont'd.)

Roller			Stud				Code
O.D. No. of 1/16	O.D. Inches	Width Inches	Length Inches	Thread length Inches	Diameter Inches	Threads per inch	
030	1-7/8	1	1-3/4	7/8	3/4	3/4-16	03
	1-7/8	1	1-3/4	7/8	1	1-14	04
	1-7/8	1-1/8	1-3/4	7/8	3/4	3/4-16	05
032	2	1-1/4	2	1	7/8	7/8-14	03
	2	1-1/4	2	1	1-1/8	1-1/8-12	04
036	2-1/4	1-1/4	2	1	7/8	7/8-14	03
	2-1/4	1-1/4	2	1	1-1/8	1-1/8-12	04
040	2-1/2	1-1/2	2-1/4	1-1/8	1	1-14	03
	2-1/2	1-1/2	2-1/4	1-1/8	1-1/4	1-1/4-12	04
	2-1/2	1-1/2	2-1/2	1-1/4	1	1-14	05
044	2-3/4	1-1/2	2-1/4	1-1/8	1	1-14	03
	2-3/4	1-1/2	2-1/4	1-1/8	1-1/4	1-1/4-12	04
	2-3/4	1-1/2	2-1/2	1-1/4	1	1-14	05
048	3	1-3/4	2-1/2	1-1/4	1-1/4	1-1/4-12	03
	3	1-3/4	2-1/2	1-1/4	1-1/2	1-1/2-12	04
	3	1-3/4	3	1-1/2	1-1/4	1-1/4-12	05
052	3-1/4	1-3/4	2-1/2	1-1/4	1-1/4	1-1/4-12	03
	3-1/4	1-3/4	2-1/2	1-1/4	1-1/4	1-1/2-12	04
	3-1/4	1-3/4	3	1-1/2	1-1/4	1-1/4-12	05
056	3-1/2	2	2-3/4	1-3/8	1-3/8	1-3/8-12	03
	3-1/2	2	2-3/4	1-3/8	1-3/4	1-3/4-12	04
	3-1/2	2	3-1/2	1-3/4	1-3/8	1-3/8-12	05
064	4	2-1/4	3-1/2	1-1/2	1-1/2	1-1/2-12	03
	4	2-1/4	3-1/2	1-1/2	2	2-12	04
	4	2-1/4	4	1-3/4	1-1/2	1-1/2-12	05
080	5	2-3/4	4-1/4	2	2	2-12	01
	5	2-3/4	4-1/4	2	2-1/2	2-1/2-12	02
096	6	3-1/4	5-1/2	2-1/2	2-1/2	2-1/2-12	01
	6	3-1/4	5-1/2	2-1/2	3	3-12	02

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLIV - Boundary dimensions-IE

Bore		O.D.	Width	O.D. and width code	Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
002	1/8	1/4	1/4	01	008	1/2	15/16	1-1/2	08
							15/16	1-5/8	29
003	3/16	11/32	0.213	03			15/16	1-3/4	30
		11/32	7/32	04			15/16	1-7/8	31
		11/32	1/4	01			15/16	2	09
		11/32	3/8	02			15/16	2-1/4	10
							1	1	12
004	1/4	7/16	9/32	03			1	1-1/4	13
		7/16	5/16	01			1-1/16	3/4	14
		7/16	11/32	04			1-1/16	7/8	32
		7/16	3/8	05			1-1/16	1	15
		7/16	7/16	02			1-1/16	1-1/8	33
		7/16	15/32	06			1-1/16	1-3/8	34
		7/16	1/2	07			1-1/16	1-1/4	16
							1-1/16	1-1/2	17
005	5/16	1/2	5/16	01			1-1/16	1-5/8	35
		1/2	11/32	04			1-1/16	1-3/4	18
		1/2	3/8	05			1-1/16	1-7/8	36
		1/2	7/16	02			1-1/16	2	19
		1/2	15/32	06			1-1/16	2-1/2	20
		1/2	1/2	07			1-1/8	3/4	37
		1/2	9/16	03			1-1/8	7/8	38
							1-1/8	1	39
006	3/8	9/16	11/32	12			1-1/8	1-1/8	40
		9/16	3/8	01			1-1/8	1-1/4	41
		9/16	1/2	13			1-1/8	1-3/8	42
		9/16	17/32	14			1-1/8	1-1/2	43
		9/16	5/8	02			1-1/8	1-5/8	44
		5/8	1/2	03			1-1/8	1-3/4	45
		3/4	3/4	04			1-1/8	1-7/8	46
		13/16	1/2	05			1-1/8	2	47
		13/16	9/16	06			1-3/16	1	21
		13/16	5/8	07			1-1/4	3/4	22
		13/16	3/4	08			1-1/4	7/8	49
		13/16	1	09			1-1/4	1	23
		7/8	1-1/4	10			1-1/4	1-1/8	50
		1-1/8	3/4	11			1-1/4	1-1/4	51
							1-1/4	1-3/8	52
007	7/16	5/8	1/2	01			1-1/4	1-1/2	24
		5/8	3/4	02			1-1/4	1-5/8	53
		11/16	1/2	03			1-1/4	1-3/4	54
		13/16	1-1/4	06			1-1/4	1-7/8	55
		7/8	5/8	04					
		1-1/8	3/4	05	009	9/16	3/4	3/8	09
							3/4	1/2	07
008	1/2	11/16	3/8	11			3/4	3/4	01
		11/16	7/16	01			13/16	3/4	02
		11/16	1/2	02			1-1/16	3/4	03
		11/16	17/32	48			1-1/16	1	04
		11/16	3/4	03			1-1/8	1-1/2	10
		3/4	17/32	56			1-1/4	3/4	08
		3/4	9/16	57			1-5/16	3/4	05
		3/4	3/4	25			1-5/16	1	06
		3/4	1	04					
		15/16	3/4	05	010	5/8	13/16	1/2	01
		15/16	7/8	26			13/16	21/32	84
		15/16	1	06			13/16	3/4	02
		15/16	1-1/8	27			7/8	1/2	03
		15/16	1-3/8	28			1-1/16	3/4	04
		15/16	1-1/4	07			1-1/16	7/8	05

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLIV - Boundary dimensions-IE (cont'd.)

Bore		O.D.	Width	O.D. and width code	Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
010	5/8	1-1/16	1	06	010	5/8	1-5/8	3/4	64
		1-1/16	1-1/8	28			1-5/8	7/8	65
		1-1/16	1-1/4	07			1-5/8	1	66
		1-1/16	1-3/8	29			1-5/8	1-1/8	67
		1-1/16	1-1/2	08			1-5/8	1-1/4	68
		1-1/16	1-5/8	09			1-5/8	1-3/8	69
		1-1/16	1-3/4	10			1-5/8	1-1/2	70
		1-1/16	1-7/8	30			1-5/8	1-5/8	71
		1-1/16	2	11			1-5/8	1-3/4	72
		1-1/8	3/4	12			1-5/8	1-7/8	73
		1-1/8	1	13			1-5/8	2	74
		1-3/16	3/4	14			1-3/4	1	75
		1-3/16	7/8	31			1-3/4	1-1/8	76
		1-3/16	1	15			1-3/4	1-1/4	77
		1-3/16	1-1/8	32			1-3/4	1-3/8	78
		1-3/16	1-1/4	16			1-3/4	1-1/2	79
		1-3/16	1-3/8	33			1-3/4	1-5/8	80
		1-3/16	1-1/2	17			1-3/4	1-3/4	81
		1-3/16	1-5/8	34			1-3/4	1-7/8	82
		1-3/16	1-3/4	18			1-3/4	2	83
		1-3/16	1-7/8	35					
		1-3/16	2	19	011	11/16	7/8	1/2	07
		1-3/16	2-1/2	20			7/8	3/4	06
		1-1/4	7/8	36			1-3/16	3/4	01
		1-1/4	1	37			1-3/16	1	02
		1-1/4	1-1/8	38			1-3/8	3/4	03
		1-1/4	1-1/4	39			1-7/16	3/4	04
		1-1/4	1-3/8	40			1-7/16	1	05
		1-1/4	1-1/2	41					
		1-1/4	1-5/8	42	012	3/4	1	1/2	01
		1-1/4	1-3/4	43			1	5/8	02
		1-1/4	1-7/8	44			1	21/32	09
		1-1/4	2	45			1	11/16	19
		1-5/16	1	21			1	3/4	03
		1-5/16	1-1/2	22			1-3/16	3/4	04
		1-5/16	2	23			1-3/16	7/8	05
		1-3/8	3/4	24			1-3/16	1	06
		1-3/8	7/8	25			1-3/16	1-1/8	43
		1-3/8	1	26			1-3/16	1-1/4	07
		1-3/8	1-1/8	46			1-3/16	1-3/8	44
		1-3/8	1-1/4	47			1-3/16	1-1/2	08
		1-3/8	1-3/8	48			1-3/16	1-5/8	45
		1-3/8	1-1/2	27			1-3/16	1-7/8	46
		1-3/8	1-5/8	49			1-3/16	2	10
		1-3/8	1-3/4	50			1-1/4	3/4	11
		1-3/8	1-7/8	51			1-1/4	7/8	12
		1-3/8	2	52			1-1/4	1	13
		1-7/16	2	85			1-1/4	1-1/8	14
		1-1/2	3/4	53			1-1/4	1-1/4	15
		1-1/2	7/8	54			1-5/16	3/4	47
		1-1/2	1	55			1-5/16	7/8	48
		1-1/2	1-1/8	56			1-5/16	1	16
		1-1/2	1-1/4	57			1-5/16	1-1/8	17
		1-1/2	1-3/8	58			1-5/16	1-1/4	18
		1-1/2	1-1/2	59			1-5/16	1-3/8	49
		1-1/2	1-5/8	60			1-5/16	1-5/8	20
		1-1/2	1-3/4	61			1-5/16	1-3/4	21
		1-1/2	1-7/8	62			1-5/16	1-7/8	50
		1-1/2	2	63					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLIV - Boundary dimensions-IE (cont'd.)

Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches	
012	3/4	1-5/16	2	22
		1-5/16	2-1/4	51
		1-5/16	2-1/2	23
		1-3/8	3/4	52
		1-3/8	7/8	53
		1-3/8	1	24
		1-3/8	1-1/8	54
		1-3/8	1-1/4	25
		1-3/8	1-3/8	55
		1-3/8	1-1/2	26
		1-3/8	1-5/8	56
		1-3/8	1-3/4	27
		1-3/8	1-7/8	57
		1-3/8	2	58
		1-7/16	1	28
		1-7/16	1-1/8	59
		1-7/16	1-1/4	29
		1-7/16	1-3/8	60
		1-7/16	1-1/2	30
		1-7/16	1-5/8	61
		1-7/16	1-3/4	62
		1-7/16	1-7/8	63
		1-7/16	2	31
		1-7/16	2-1/4	64
		1-7/16	2-1/2	32
		1-7/16	3	33
		1-1/2	3/4	34
		1-1/2	7/8	35
		1-1/2	1	36
		1-1/2	1-1/8	65
		1-1/2	1-1/4	66
		1-1/2	1-3/8	67
		1-1/2	1-1/2	37
		1-1/2	1-5/8	68
		1-1/2	1-3/4	69
		1-1/2	1-7/8	70
		1-1/2	2	38
		1-1/2	2-1/4	71
		1-1/2	2-1/2	72
		1-9/16	1	39
		1-9/16	1-1/2	40
		1-9/16	2	41
		1-9/16	2-1/2	42
		1-5/8	1	73
		1-5/8	1-1/8	74
		1-5/8	1-1/4	75
		1-5/8	1-3/8	76
		1-5/8	1-1/2	77
		1-5/8	1-5/8	78
		1-5/8	1-3/4	79
		1-5/8	1-7/8	80
		1-5/8	2	81
		1-5/8	2-1/4	82
		1-5/8	2-1/2	83
		1-3/4	3/4	84
		1-3/4	7/8	85
		1-3/4	1	86
012	3/4	1-3/4	1-1/8	87
		1-3/4	1-1/4	88
		1-3/4	1/3/8	89
		1-3/4	1-1/2	90
		1-3/4	1-5/8	91
		1-3/4	1-3/4	92
		1-3/4	1-7/8	93
		1-3/4	2	94
		1-15/16	1	95
		1-15/16	1-1/8	96
		1-15/16	1-1/4	97
		1-15/16	1-3/8	98
		1-15/16	1-1/2	99
013	13/16	1-1/16	1/2	10
		1-1/16	7/8	01
		1-1/16	1	02
		1-1/4	3/4	03
		1-1/4	1	04
		1-5/16	3/4	05
		1-5/16	1	06
		1-1/2	1	07
		1-9/16	1	08
		1-9/16	1-1/4	09
014	7/8	1-1/8	1/2	01
		1-1/8	3/4	02
		1-1/8	1	03
		1-3/16	25/32	34
		1-3/16	3/4	04
		1-3/16	13/16	46
		1-3/16	1-1/32	63
		1-3/16	1-1/16	77
		1-5/16	3/4	42
		1-5/16	7/8	43
		1-5/16	1	05
		1-5/16	1-1/8	44
		1-5/16	1-1/4	06
		1-5/16	1-3/8	07
		1-5/16	1-1/2	08
		1-5/16	1-5/8	09
		1-5/16	1-3/4	10
		1-5/16	1-7/8	45
		1-5/16	2	11
		1-3/8	3/4	12
		1-3/8	7/8	13
		1-3/8	1	14
		1-3/8	1-1/8	15
		1-3/8	1-1/4	16
		1-7/16	3/4	17
		1-7/16	7/8	47
		1-7/16	1	18
		1-7/16	1-1/8	48
		1-7/16	1-1/4	19
		1-7/16	1-3/8	49
		1-7/16	1-1/2	20
		1-7/16	1-5/8	21

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLIV - Boundary dimensions-IE (cont'd.)

Bore		O.D.	Width	O.D. and width code	Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
014	7/8	1-7/16	1-3/4	22	014	7/8	1-15/16	1-1/4	90
		1-7/16	1-7/8	50			1-15/16	1-1/2	91
		1-7/16	2	23			1-15/16	1-3/4	92
		1-7/16	2-1/4	51			1-15/16	2	93
		1-7/16	2-1/2	24			2-1/16	1	94
		1-1/2	3/4	52			2-1/16	1-1/4	95
		1-1/2	7/8	53			2-1/16	1-1/2	96
		1-1/2	1	54			2-1/16	1-3/4	97
		1-1/2	1-1/8	55			2-1/16	2	98
		1-1/2	1-1/4	56			2-5/16	1	99
		1-1/2	1-3/8	57					
		1-1/2	1-1/2	58	015	15/16	1-1/16	1	09
		1-1/2	1-5/8	59			1-3/16	1	01
		1-1/2	1-3/4	60			1-3/8	1	02
		1-1/2	1-7/8	61			1-7/16	3/4	03
		1-1/2	2	62			1-7/16	1	04
		1-9/16	1	25			1-5/8	1	05
		1-9/16	1-1/8	64			1-5/8	1-1/4	06
		1-9/16	1-1/4	26			1-11/16	1	07
		1-9/16	1-3/8	65			1-11/16	1-1/4	08
		1-9/16	1-1/2	27					
		1-9/16	1-5/8	66	016	1	1-1/4	1/2	01
		1-9/16	1-3/4	28			1-1/4	3/4	02
		1-9/16	1-7/8	67			1-1/4	1	03
		1-9/16	2	29			1-5/16	1	04
		1-9/16	2-1/4	68			1-5/16	1-1/2	05
		1-9/16	2-1/2	30			1-7/16	3/4	06
		1-9/16	3	31			1-7/16	1	07
		1-5/8	3/4	69			1-7/16	1-1/4	08
		1-5/8	7/8	70			1-7/16	1-1/2	09
		1-5/8	1	32			1-7/16	1-3/4	10
		1-5/8	1-1/8	71			1-7/16	2	11
		1-5/8	1-1/4	33			1-7/16	2-1/4	12
		1-5/8	1-3/8	72			1-7/16	2-1/2	13
		1-5/8	1-5/8	73			1-1/2	3/4	14
		1-5/8	1-3/4	74			1-1/2	7/8	15
		1-5/8	1-7/8	75			1-1/2	1	16
		1-5/8	2	35			1-1/2	1-1/16	17
		1-5/8	2-1/4	76			1-1/2	1-1/8	18
		1-11/16	1	36			1-1/2	1-1/4	19
		1-11/16	2	37			1-9/16	3/4	75
		1-11/16	2-1/2	38			1-9/16	7/8	76
		1-3/4	1	78			1-9/16	1	20
		1-3/4	1-1/8	79			1-9/16	1-1/8	77
		1-3/4	1-1/4	80			1-9/16	1-1/4	21
		1-3/4	1-3/8	81			1-9/16	1-3/8	78
		1-3/4	1-1/2	82			1-9/16	1-1/2	22
		1-3/4	1-5/8	83			1-9/16	1-5/8	23
		1-3/4	1-3/4	84			1-9/16	1-3/4	79
		1-3/4	1-7/8	85			1-9/16	1-7/8	80
		1-3/4	2	86			1-9/16	2	24
		1-3/4	2-1/4	87			1-9/16	2-1/4	81
		1-3/4	2-1/2	88			1-9/16	2-1/2	25
		1-7/8	1	39			1-11/16	3/4	82
		1-7/8	1-1/2	40			1-11/16	7/8	83
		1-7/8	2	41			1-11/16	1	26
		1-15/16	1	89			1-11/16	1-1/8	84

Source: https://assist.dla.mil -- Downloaded: 20261O-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLIV - Boundary dimensions-IE (cont'd.)

Bore		O.D.	Width	O.D. and width code	Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
016	1	1-11/16	1-1/4	27	016	1	2-5/8	1-1/2	72
		1-11/16	1-3/8	85			2-5/8	2	73
		1-11/16	1-1/2	28			2-5/8	2-1/2	74
		1-11/16	1-5/8	29	017	1-1/16	1-5/16	5/8	06
		1-11/16	1-3/4	86			1-9/16	1	01
		1-11/16	1-7/8	87			1-9/16	1-1/4	02
		1-11/16	2	30			1-13/16	1	03
		1-11/16	2-1/4	88			1-13/16	1-1/4	04
		1-11/16	2-1/2	89			1-7/8	1-1/4	05
		1-3/4	3/4	90					
		1-3/4	7/8	91	018	1-1/8	1-3/8	1/2	01
		1-3/4	1	31			1-3/8	3/4	02
		1-3/4	1-1/8	92			1-3/8	1	03
		1-3/4	1-1/4	32			1-1/2	1-1/4	87
		1-3/4	1-3/8	93			1-9/16	1	04
		1-3/4	1-1/2	33			1-9/16	1-1/2	05
		1-3/4	1-5/8	94			1-9/16	2	06
		1-3/4	1-3/4	34			1-5/8	3/4	07
		1-3/4	1-7/8	95			1-5/8	7/8	08
		1-3/4	2	35			1-5/8	1	09
		1-3/4	2-1/4	96			1-5/8	1-1/16	10
		1-3/4	2-1/2	36			1-5/8	1-1/8	11
		1-3/4	2-3/4	97			1-5/8	1-1/4	12
		1-3/4	3	37			1-11/16	1	88
		1-13/16	1	38			1-11/16	1-1/2	89
		1-13/16	1-1/16	39			1-11/16	1-3/4	90
		1-13/16	1-1/2	40			1-11/16	2	91
		1-13/16	2	41			1-3/4	1	13
		1-13/16	2-1/2	42			1-3/4	1-1/4	14
		1-13/16	3	43			1-3/4	1-1/2	15
		1-15/16	1	44			1-3/4	1-5/8	16
		1-15/16	1-1/8	98			1-3/4	1-3/4	56
		1-15/16	1-1/4	99			1-3/4	2	17
		1-15/16	1-1/2	45			1-3/4	2-1/4	57
		1-15/16	2	46			1-3/4	2-1/2	18
		1-15/16	2-1/2	47			1-3/4	2-3/4	58
		1-15/16	3	48			1-3/4	3	19
		1-15/16	4	49			1-13/16	1	20
		2	1	50			1-13/16	1-1/4	21
		2	1-1/2	51			1-13/16	1-1/2	22
		2	2	52			1-13/16	1-5/8	23
		2	2-1/2	53			1-13/16	1-3/4	59
		2	3	54			1-13/16	2	24
		2-1/16	1	55			1-13/16	2-1/4	60
		2-1/16	1-1/2	56			1-13/16	2-1/2	61
		2-1/16	2	57			1-13/16	2-3/4	62
		2-1/16	2-1/2	58			1-13/16	3	63
		2-1/16	3	59			1-7/8	1	25
		2-1/16	4	60			1-7/8	1-1/4	26
		2-1/8	1	61			1-7/8	1-1/2	64
		2-1/8	2	62			1-7/8	1-3/4	65
		2-1/8	2-1/2	63			1-7/8	2	66
		2-3/16	1	64			1-7/8	2-1/4	67
		2-3/16	1-1/2	65			1-7/8	2-1/2	68
		2-3/16	2	66			1-7/8	2-3/4	69
		2-3/16	2-1/2	67			1-7/8	3	70
		2-3/16	3	68			1-15/16	1	27
		2-3/16	4	69			1-15/16	1-1/16	28
		2-1/4	1	70			1-15/16	1-1/4	29
		2-1/4	2	71					

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLIV - Boundary dimensions-IE (cont'd.)

Bore		O.D.	Width	O.D. and width code	Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
018	1-1/8	1-15/16	1-1/2	30	019	1-3/16	2	1-1/2	14
		1-15/16	1-3/4	31			2	1-3/4	15
		1-15/16	2	32			2	2	16
		1-15/16	2-1/4	33			2	2-1/2	17
		1-15/16	2-1/2	34			2	3	18
		1-15/16	2-3/4	71			2-1/16	1	19
		1-15/16	3	35			2-1/16	1-1/4	20
		2	2	92			2-1/8	1	21
		2	3	93			2-1/8	1-1/2	22
		2-1/16	1	36			2-1/8	2	23
		2-1/16	1-1/4	72			2-1/8	2-1/2	24
		2-1/16	1-1/2	37			2-1/8	3	25
		2-1/16	1-3/4	73			2-1/8	4	26
		2-1/16	2	38			2-3/16	1	27
		2-1/16	2-1/4	74			2-3/16	1-1/2	28
		2-1/16	2-1/2	39			2-3/16	2	29
		2-1/16	3	40			2-3/16	2-1/2	30
		2-1/16	4	41			2-3/16	3	31
		2-3/16	1	42			2-3/8	1	32
		2-3/16	1-1/4	78			2-3/8	1-1/2	33
		2-3/16	1-1/2	43			2-3/8	2	34
		2-3/16	1-3/4	79			2-3/8	2-1/2	35
		2-3/16	2	44			2-3/8	3	36
		2-3/16	2-1/4	80			2-3/8	4	37
		2-3/16	2-1/2	45			2-3/8	5	38
		2-3/16	2-3/4	81			3	1-1/4	39
		2-3/16	3	46			3	1-1/2	40
		2-3/16	3-1/2	82			3	1-3/4	41
		2-3/16	4	47			3	2	42
		2-5/16	1	48			3	2-1/4	43
		2-5/16	1-1/4	75			3	2-1/2	44
		2-5/16	1-1/2	49					
		2-5/16	1-3/4	76	020	1-1/4	1-1/2	1/2	01
		2-5/16	2	50			1-1/2	3/4	02
		2-5/16	2-1/4	77			1-1/2	1	03
		2-5/16	2-1/2	51			1-1/2	1-1/4	04
		2-5/16	3	52			1-3/4	3/4	05
		2-5/16	4	53			1-3/4	7/8	06
		2-3/8	1	54			1-3/4	1	07
		2-3/8	2	55			1-3/4	1-1/6	08
		2-11/16	1-1/4	83			1-3/4	1-1/8	09
		2-11/16	1-1/2	84			1-3/4	1-1/4	10
		2-11/16	1-3/4	85			1-3/4	1-3/4	82
		2-11/16	2	86			1-3/4	2-1/4	11
							1-13/16	1-1/16	12
019	1-3/16	1-1/2	5/8	45			1-7/8	1	13
		1-11/16	1	01			1-7/8	1-1/4	14
		1-11/16	1-1/4	02			1-7/8	2	15
		1-7/8	1	03			1-7/8	2-1/2	16
		1-7/8	1-1/4	04			1-7/8	3	84
		1-7/8	1-1/2	05			1-15/16	1	17
		1-7/8	2	06			1-15/16	1-1/4	18
		1-7/8	3	46			1-15/16	1-1/2	19
		1-15/16	1	07			1-15/16	1-5/8	20
		1-15/16	1-1/2	08			1-15/16	1-3/4	21
		1-15/16	2	09			1-15/16	2	22
		1-15/16	2-1/2	10			1-15/16	2-1/4	23
		1-15/16	3	11					
		2	1	12					
		2	1-1/4	13					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLIV - Boundary dimensions-IE (cont'd.)

Bore		O.D.	Width	O.D. and width code	Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
020	1-1/4	1-15/16	2-1/2	24	020	1-1/4	2-7/16	4	69
		1-15/16	3	25			2-7/16	5	70
		2	1	26			2-9/16	1-1/4	98
		2	1-1/4	85			2-9/16	1-1/2	99
		2	1-1/2	27			2-9/16	2	83
		2	1-5/8	28			2-11/16	1	71
		2	1-3/4	29			2-11/16	1-1/2	72
		2	2	30			2-11/16	2	73
		2	2-1/4	86			2-11/16	2-1/2	74
		2	2-1/2	31			2-11/16	3	75
		2	2-3/4	87			2-11/16	4	76
		2	3	32			2-11/16	5	77
		2	3-1/2	88			2-3/4	2-1/4	78
		2	4	89			2-7/8	1-1/2	79
		2-1/16	1	33			2-7/8	2	80
		2-1/16	1-1/16	34			2-7/8	2-1/2	81
		2-1/16	1-1/4	35					
		2-1/16	1-1/2	36	021	1-5/16	1-5/8	1/2	01
		2-1/16	2	37			1-5/8	5/8	19
		2-1/16	2-1/4	38			1-13/16	1	02
		2-1/16	2-1/2	39			1-13/16	1-1/4	03
		2-1/16	3	40			2-3/16	1	04
		2-1/8	1	41			2-3/16	1-1/4	05
		2-1/8	1-1/4	42			2-1/2	1	06
		2-1/8	1-13/32	43			2-1/2	1-1/2	07
		2-1/8	1-1/2	44			2-1/2	2	08
		2-1/8	1-3/4	45			2-1/2	2-1/2	09
		2-1/8	2	46			2-1/2	3	10
		2-3/16	1	47			2-1/2	4	11
		2-3/16	1-1/4	90			2-1/2	5	12
		2-3/16	1-1/2	48			3-1/8	1-1/4	13
		2-3/16	1-3/4	91			3-1/8	1-1/2	14
		2-3/16	2	49			3-1/8	1-3/4	15
		2-3/16	2-1/4	92			3-1/8	2	16
		2-3/16	2-1/2	50			3-1/8	2-1/4	17
		2-3/16	2-3/4	93			3-1/8	2-1/2	18
		2-3/16	3	51					
		2-3/16	3-1/2	94	022	1-3/8	1-5/8	3/4	01
		2-3/16	4	52			1-5/8	1-1/4	02
		2-5/16	1	53			1-3/4	1	03
		2-5/16	1-1/4	95			1-7/8	3/4	04
		2-5/16	1-1/2	54			1-7/8	7/8	05
		2-5/16	1-3/4	96			1-7/8	1	06
		2-5/16	2	55			1-7/8	1-1/8	07
		2-5/16	2-1/4	97			1-7/8	1-1/4	08
		2-5/16	2-1/2	56			1-7/8	2-1/4	09
		2-5/16	3	57			1-15/16	1-1/16	10
		2-5/16	4	58			2	1-3/4	56
		2-3/8	1	59			2-1/8	2-1/2	57
		2-3/8	1-1/2	60			2-1/4	1	11
		2-3/8	2	61			2-1/4	1-1/8	12
		2-3/8	2-1/2	62			2-1/4	1-1/4	13
		2-3/8	3	63			2-1/4	2-1/4	14
		2-7/16	1	64			2-5/16	1	15
		2-7/16	1-1/2	65			2-5/16	1-1/4	16
		2-7/16	2	66			2-5/16	2-1/4	17
		2-7/16	2-1/2	67			2-5/16	2	18
		2-7/16	3	68			2-5/16	2-1/2	19

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLIV - Boundary dimensions-IE (cont'd.)

Bore		O.D.	Width	O.D. and width code	Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
022	1-3/8	2-5/16	3	20	023	1-7/16	2-1/2	4	24
		2-5/16	4	21			2-1/2	5	25
		2-9/16	1	22			2-9/16	1	26
		2-9/16	1-1/4	37			2-9/16	1-1/2	27
		2-9/16	1-1/2	23			2-9/16	2	28
		2-9/16	1-3/4	38			2-9/16	2-1/2	29
		2-9/16	2	24			2-9/16	3	30
		2-9/16	2-1/4	39			2-9/16	3-1/2	31
		2-9/16	2-1/2	25			2-5/8	1	32
		2-9/16	2-3/4	40			2-5/8	1-1/2	33
		2-9/16	3	26			2-5/8	2	34
		2-9/16	3-1/2	41			2-5/8	2-1/2	35
		2-9/16	4	27			2-5/8	3	36
		2-9/16	5	28			2-5/8	4	37
		2-13/16	1	29			2-5/8	5	38
		2-13/16	1-1/4	55			2-3/4	1	39
		2-13/16	3	33			2-3/4	1-1/2	40
		2-13/16	4	34			2-3/4	2	41
		2-13/16	5	35			2-3/4	2-1/2	42
		2-11/16	1-1/4	42			2-3/4	3	43
		2-11/16	1-1/2	43			2-3/4	4	44
		2-11/16	1-3/4	44			2-3/4	5	45
		2-11/16	2	45			2-7/8	1	46
		2-11/16	2-1/4	46			2-7/8	1-1/2	47
		2-11/16	2-1/2	47			2-7/8	2	48
		2-11/16	2-3/4	48			2-7/8	2-1/2	49
		2-11/16	3	49			2-7/8	3	50
		2-7/8	2-1/4	36			2-7/8	4	51
		3-3/8	1-1/2	50			2-7/8	5	52
		3-3/8	1-3/4	51			3	1	53
		3-3/8	2	52			3	1-1/2	54
		3-3/8	2-1/4	53			3	2	55
		3-3/8	2-1/2	54			3	2-1/2	56
							3	3	57
023	1-7/16	1-15/16	1	01			3	4	58
		1-15/16	1-1/4	02			3	5	59
		2-1/8	1-1/2	03			3-1/8	1	60
		2-3/16	1	04			3-1/8	1-1/2	61
		2-3/16	1-1/4	05			3-1/8	2	62
		2-3/16	2	06			3-1/8	2-1/2	63
		2-1/4	1	07			3-1/8	3	64
		2-1/4	1-1/2	08			3-1/8	4	65
		2-1/4	2	09			3-1/8	5	66
		2-1/4	2-1/2	10			3-1/2	1-1/2	67
		2-1/4	3	11			3-1/2	2	68
		2-1/4	3-1/2	12			3-1/2	2-1/2	69
		2-5/16	1	13					
		2-5/16	1-1/4	14	024	1-1/2	1-7/8	5/8	70
		2-3/8	1-1/2	15			1-7/8	7/8	01
		2-3/8	1-3/4	16			1-7/8	1	02
		2-3/8	2	17			1-7/8	1-1/4	03
		2-3/8	2-1/2	18			2	3/4	04
		2-1/2	1	19			2	7/8	05
		2-1/2	1-1/2	20			2	1	06
		2-1/2	2	21			2	1-1/8	07
		2-1/2	2-1/2	22			2	1-1/4	08
		2-1/2	3	23			2	2-3/8	09

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLIV - Boundary dimensions-IE (cont'd.)

Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches	
024	1-1/2	2-1/16	1	10
		2-1/16	1-1/16	11
		2-1/16	1-1/4	12
		2-1/16	2-1/4	13
		2-1/8	1-1/2	14
		2-1/4	3/4	15
		2-1/4	2	16
		2-1/4	4	17
		2-5/16	1	18
		2-5/16	1-1/4	19
		2-5/16	1-1/2	20
		2-5/16	2	21
		2-5/16	2-1/2	22
		2-5/16	3	23
		2-5/16	3-1/2	24
		2-3/8	1	25
		2-3/8	1-1/4	26
		2-1/2	1-1/8	27
		2-1/2	1-1/2	28
		2-1/2	1-3/4	29
		2-1/2	2	30
		2-1/2	2-3/8	31
		2-1/2	2-1/2	32
		2-9/16	1	33
		2-9/16	1-1/4	34
		2-9/16	1-1/2	35
		2-9/16	2	36
		2-9/16	2-1/2	37
		2-9/16	3	38
		2-9/16	4	39
		2-9/16	5	40
		2-5/8	1	41
		2-5/8	1-1/2	42
		2-5/8	2	43
		2-5/8	2-1/2	44
		2-5/8	3	45
		2-5/8	3-1/2	46
		2-11/16	1	47
		2-11/16	1-1/2	48
		2-11/16	2	49
		2-11/16	2-1/2	50
		2-11/16	3	51
		2-11/16	4	52
		2-11/16	5	53
		2-13/16	1	54
		2-13/16	1-1/4	88
		2-13/16	1-1/2	55
		2-13/16	1-3/4	89
		2-13/16	2	56
		2-13/16	2-1/4	90
		2-13/16	2-1/2	57
		2-13/16	2-3/4	91
		2-13/16	3	58
		2-13/16	3-1/2	92
		2-13/16	4	59
		2-13/16	5	60
024	1-1/2	2-7/8	1-1/2	61
		2-7/8	2	62
		2-7/8	2-1/2	63
		2-15/16	1	64
		2-15/16	1-1/2	65
		2-15/16	2	66
		2-15/16	2-1/2	67
		2-15/16	3	68
		2-15/16	4	69
		3	1-1/4	93
		3	1-1/2	94
		3	1-3/4	95
		3	2	96
		3	2-1/4	97
		3	2-1/2	98
		3	2-3/4	99
		3-1/16	1	71
		3-1/16	1-1/2	72
		3-1/16	2	73
		3-1/16	2-1/2	74
		3-1/16	3	75
		3-1/16	4	76
		3-1/16	5	77
		3-3/16	1	78
		3-3/16	1-1/2	79
		3-3/16	2	80
		3-3/16	2-1/2	81
		3-3/16	3	82
		3-3/16	4	83
		3-3/16	5	84
		3-3/8	2-1/2	85
		3-1/2	1-1/2	86
		3-1/2	2	87
025	1-9/16	2-1/8	1	01
		2-1/8	1-1/4	02
		2-3/8	1	03
		2-3/8	1-1/2	04
		2-3/8	2	05
		2-3/8	2-1/2	06
		2-3/8	3	07
		2-7/16	1	08
		2-7/16	1-1/4	09
		2-9/16	1-1/4	10
		2-7/8	1	11
		2-7/8	1-1/2	12
		2-7/8	2	13
		2-7/8	2-1/2	14
		2-7/8	3	15
		2-7/8	4	16
		2-7/8	5	17
026	1-5/8	2	5/8	77
		2	1-1/4	78
		2-1/8	1-1/8	01
		2-1/8	2-3/8	02

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLIV - Boundary dimensions-IE (cont'd.)

Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches	
026	1-5/8	2-3/16	1	03
		2-3/16	1-1/4	04
		2-1/4	1-1/8	05
		2-1/4	2-1/4	06
		2-1/2	1	07
		2-1/2	1-1/4	08
		2-5/8	1-1/8	09
		2-5/8	2-3/8	10
		2-9/16	1-1/4	11
		2-9/16	1-1/2	77
		2-9/16	3	78
		2-13/16	1	12
		2-13/16	2	13
		2-13/16	3	14
		2-13/16	4	15
		2-13/16	5	16
		2-13/16	1	17
		2-15/16	1-1/4	42
		2-15/16	1-1/2	18
		2-15/16	1-3/4	43
		2-15/16	2	19
		2-15/16	2-1/4	44
		2-15/16	2-1/2	20
		2-15/16	2-3/4	45
		2-15/16	3	21
		2-15/16	3-1/2	46
		2-15/16	4	22
		2-15/16	5	23
		3	1-1/4	47
		3	1-1/2	48
		3	1-3/4	49
		3	2	50
		3	2-1/4	51
		3	2-1/2	52
		3	2-3/4	53
		3	3	54
		3	3-1/2	55
		3	4	56
		3-1/16	1	24
		3-1/16	2	25
		3-1/16	3	26
		3-1/16	4	27
		3-1/16	5	28
		3-1/8	1-1/4	57
		3-1/8	1-1/2	58
		3-1/8	1-3/4	59
		3-1/8	2	60
		3-1/8	2-1/4	61
		3-1/8	2-1/2	62
		3-1/8	2-3/4	63
		3-1/8	3	64
		3-1/8	3-1/2	65
		3-1/8	4	66
		3-3/16	1	29
		3-3/16	1-1/2	30
		3-3/16	2	31
		3-3/16	2-1/2	32
		3-3/16	3	33
026	1-5/8	3-3/16	4	34
		3-3/16	5	35
		3-5/16	1	36
		3-5/16	2	37
		3-5/16	3	38
		3-5/16	4	39
		3-5/16	5	40
		3-1/2	1-1/4	41
		3-1/2	1-1/2	67
		3-1/2	1-3/4	68
		3-1/2	2	69
		3-1/2	2-1/4	70
		3-1/2	2-1/2	71
		3-3/4	1-1/2	72
		3-3/4	1-3/4	73
		3-3/4	2	74
		3-3/4	2-1/4	75
		3-3/4	2-1/2	76
027	1-11/16	2-1/4	1	01
		2-1/4	1-1/4	02
		2-17/32	1-1/2	03
		2-9/16	1	04
		2-9-16	1-1/2	05
		2-9/16	2-1/2	29
		2-7/8	2	06
		2-7/8	2-1/2	07
		2-7/8	3	08
		2-7/8	4	09
		2-7/8	5	10
		3	2	11
		3	2-1/2	12
		3	3	13
		3	4	14
		3	5	15
		3	6	16
		3-1/8	2	17
		3-1/8	2-1/2	18
		3-1/8	3	19
		3-1/8	4	20
		3-1/8	5	21
		3-1/8	6	22
		3-3/8	2	23
		3-3/8	2-1/2	24
		3-3/8	3	25
		3-3/8	4	26
		3-3/8	5	27
		3-3/8	6	28
028	1-3/4	2-1/8	3/4	88
		2-1/8	1	01
		2-1/8	1-1/2	02
		2-1/4	1-1/8	03
		2-1/4	2-3/8	04
		2-5/16	1	05
		2-5/16	1-1/4	06
		2-3/8	1-13/32	07
		2-7/16	2	89

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLIV - Boundary dimensions-IE (cont'd.)

Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches	
028	1-3/4	2-1/2	1-1/8	86
		2-1/2	2-3/8	87
		2-17/32	1-1/2	08
		2-9/16	1	09
		2-9/16	1-1/2	10
		2-9/16	2	11
		2-9/16	2-1/2	12
		2-3/4	1	13
		2-3/4	1-1/8	14
		2-3/4	1-1/2	15
		2-3/4	2	16
		2-3/4	2-3/8	17
		2-3/4	2-1/2	18
		2-3/4	3	19
		2-3/4	3-1/2	20
		2-3/4	4	21
		2-7/8	1-1/2	22
		2-7/8	2	23
		2-7/8	2-1/2	24
		2-15/16	2	25
		2-15/16	2-1/2	26
		2-15/16	3	27
		2-15/16	4	28
		2-15/16	5	29
		3	1-1/2	30
		3	1-3/4	31
		3-1/16	2	32
		3-1/16	2-1/2	33
		3-1/16	3	34
		3-1/16	4	35
		3-1/16	5	36
		3-1/16	6	37
		3-1/8	1	38
		3-1/8	1-1/2	39
		3-1/8	2	40
		3-1/8	2-1/2	41
		3-1/8	3	42
		3-1/8	3-1/2	43
		3-1/8	4	44
		3-3/16	1-1/2	63
		3-3/16	1-3/4	64
		3-3/16	2	45
		3-3/16	2-1/4	65
		3-3/16	2-1/2	46
		3-3/16	2-3/4	66
		3-3/16	3	90
		3-3/16	3-1/2	67
		3-3/16	4	48
		3-3/16	5	49
		3-3/16	6	50
		3-1/4	1-1/2	68
		3-1/4	1-3/4	69
		3-1/4	2	70
		3-1/4	2-1/4	71
		3-1/4	2-1/2	72
		3-1/4	2-3/4	73
		3-1/4	3	74
		3-1/4	3-1/2	75
028	1-3/4	3-1/4	4	76
		3-3/8	1-1/2	77
		3-3/8	1-3/4	78
		3-3/8	2	79
		3-3/8	2-1/4	80
		3-3/8	2-1/2	81
		3-3/8	2-3/4	82
		3-3/8	3	83
		3-3/8	3-1/2	84
		3-3/8	4	85
		3-7/16	2	51
		3-7/16	2-1/2	52
		3-7/16	3	53
		3-7/16	4	54
		3-7/16	5	55
		3-7/16	6	56
		3-15/32	1-7/8	62
		3-5/8	1-1/4	57
		3-5/8	2-1/2	58
		3-3/4	1-1/2	59
		3-3/4	2	60
		3-3/4	2-1/2	61
029	1-13/16	2-3/8	1	01
		2-3/8	1-1/4	02
		2-1/2	1-1/8	03
		2-1/2	2-3/8	04
		3	1-3/4	05
030	1-7/8	2-1/4	1/2	01
		2-1/4	1	46
		2-7/16	1/2	26
		2-7/16	1	02
		2-7/16	1-1/4	03
		2-1/2	1-3/16	04
		2-1/2	2-3/8	05
		2-1/2	1-1/2	06
		2-5/8	1-1/8	07
		2-5/8	2-3/8	08
		3	1-3/16	09
		3	1-3/4	10
		3	2-3/8	11
		3-3/16	1-1/2	29
		3-3/16	1-3/4	30
		3-3/16	2	12
		3-3/16	2-1/4	31
		3-3/16	2-1/2	13
		3-3/16	2-3/4	32
		3-3/16	3	14
		3-3/16	3-1/2	33
		3-3/16	4	15
		3-3/16	5	16
		3-3/16	6	17
		3-1/4	2	47
		3-1/4	2-1/2	48
		3-1/4	3	49
		3-1/2	1-1/2	34
		3-1/2	1-3/4	35

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLIV - Boundary dimensions-IE (cont'd.)

Bore		O.D.	Width	O.D. and width code	Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
030	1-7/8	3-1/2	2	27	031	1-15/16	3-15/16	6	38
		3-1/2	2-1/4	36			4-1/8	1-1/2	39
		3-1/2	2-1/2	37			4-1/8	2	40
		3-1/2	2-3/4	38			4-1/8	2-1/2	41
		3-1/2	3	28			4-1/8	3	42
		3-1/2	3-1/2	39					
		3-1/2	4	40	032	2	2-3/8	1	65
		3-9/16	2	18			2-3/8	1-3/4	66
		3-9/16	2-1/2	19			2-9/16	1	01
		3-9/16	3	20			2-9/16	1-1/4	02
		3-9/16	4	21			2-3/4	1-1/8	03
		3-9/16	5	22			2-3/4	1-3/16	04
		3-9/16	6	23			2-3/4	2-3/8	05
		3-3/4	1-1/4	24			3	1	06
		3-3/4	2-1/2	25			3	1-1/2	07
		4-1/2	2	41			3	2	08
		4-1/2	2-1/4	42			3	2-1/2	09
		4-1/2	2-1/2	43			3	3	10
		4-1/2	2-3/4	44			3	3-1/2	11
		4-1/2	3	45			3	4	12
							3	5	13
031	1-15/16	2-1/2	1	01			3-3/16	1-3/4	67
		2-1/2	1-1/4	02			3-3/16	2-1/2	68
		2-15/16	1	03			3-3/16	4	69
		2-15/16	1-1/2	04			3-1/4	1-3/16	14
		2-15/16	2	05			3-1/4	1-1/2	15
		2-15/16	2-1/2	06			3-1/4	1-3/4	16
		2-15/16	3	07			3-1/4	2	46
		2-15/16	3-1/2	08			3-1/4	2-1/4	47
		2-15/16	4	09			3-1/4	2-3/8	17
		2-15/16	5	10			3-1/4	2-1/2	48
		3-1/4	1	11			3-1/4	2-3/4	49
		3-1/4	1-1/2	12			3-1/4	3	50
		3-1/4	1-3/4	13			3-1/4	3-1/2	51
		3-1/4	2	14			3-1/4	4	52
		3-1/4	2-1/2	15			3-3/8	1	18
		3-5/16	1-1/2	16			3-3/8	1-1/2	19
		3-5/16	2	17			3-3/8	2	20
		3-5/16	2-1/2	18			3-3/8	2-1/2	21
		3-5/16	3	19			3-3/8	3	22
		3-5/16	3-1/2	20			3-3/8	3-1/2	23
		3-5/16	4	21			3-3/8	4	24
		3-5/16	5	22			3-3/8	5	25
		3-7/16	2	23			3-1/2	1-1/2	26
		3-7/16	2-1/2	24			3-1/2	1-3/4	53
		3-7/16	3	25			3-1/2	2	27
		3-7/16	4	26			3-1/2	2-1/4	54
		3-7/16	5	27			3-1/2	2-1/2	28
		3-7/16	6	28			3-1/2	2-3/4	55
		3-1/2	1-1/2	29			3-1/2	3	29
		3-1/2	2	30			3-1/2	3-1/2	56
		3-1/2	2-1/2	31			3-1/2	4	30
		3-1/2	3	32			3-1/2	5	31
		3-15/16	2	33			3-1/2	6	32
		3-15/16	2-1/2	34			3-3/4	1-1/2	57
		3-15/16	3	35			3-3/4	1-3/4	58
		3-15/16	4	36			3-3/4	2	45
		3-15/16	5	37					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLIV - Boundary dimensions-IE (cont'd.)

Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches	
032	2	3-3/4	2-1/4	59
		3-3/4	2-1/2	60
		3-3/4	2-3/4	61
		3-3/4	3	62
		3-3/4	3-1/2	63
		3-3/4	4	64
		4	2	33
		4	2-1/2	34
		4	3	35
		4	4	36
		4	5	37
		4	6	38
		4-1/8	1-1/2	39
		4-1/8	2	40
		4-1/8	2-1/2	41
		4-1/8	3	42
		4-3/4	1-1/2	43
		4-3/4	3	44
033	2-1/16	2-17/32	1-1/2	01
034	2-1/8	2-1/2	1	03
		2-1/2	1-1/2	01
		3-1/8	1-1/2	02
		3-1/4	1-3/4	04
		3-1/2	1-1/2	05
		3-1/2	2	06
		3-1/2	2-1/2	07
		3-5/8	2	08
		3-5/8	2-1/2	09
		3-5/8	3	10
		3-5/8	4	11
		3-5/8	5	12
		3-5/8	6	13
		3-5/8	7	14
		4-1/4	1-3/8	15
		4-1/4	2-3/4	16
		5	2	17
		5	2-1/4	18
		5	2-1/2	19
		5	2-3/4	20
		5	3	21
		5	3-1/2	22
035	2-3/16	3-1/2	1-1/2	01
		3-1/2	1-3/4	02
		3-11/16	2	03
		3-11/16	2-1/2	04
		3-11/16	3	05
		3-11/16	4	06
		3-11/16	5	07
		3-11/16	6	08
		4-3/16	3	09
		4-3/16	4	10
		4-3/16	5	11
		4-3/16	6	12
		4-3/16	7	13

Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches	
036	2-1/4	2-5/8	3/4	53
		2-5/8	1-1/2	54
		3	1-3/16	01
		3	1-1/2	02
		3	1-3/4	03
		3	2-3/8	04
		3	2-1/2	05
		3-5/16	1	06
		3-5/16	1-1/2	07
		3-5/16	2	08
		3-5/16	2-1/2	09
		3-5/16	3	10
		3-5/16	3-1/2	11
		3-5/16	4	12
		3-5/16	5	13
		3-1/2	13/16	14
		3-1/2	1-3/16	52
		3-1/2	1-3/8	15
		3-1/2	1-1/2	16
		3-1/2	1-3/4	17
		3-1/2	2-1/2	18
		3-3/4	1	19
		3-3/4	1-1/2	20
		3-3/4	2	21
		3-3/4	2-1/2	22
		3-3/4	3	23
		3-3/4	3-1/2	24
		3-3/4	4	25
		3-3/4	5	26
		3-3/4	6	27
		4-1/4	2	40
		4-1/4	2-1/4	41
		4-1/4	2-1/2	42
		4-1/4	2-3/4	43
		4-1/4	3	28
		4-1/4	3-1/2	44
		4-1/4	4	29
		4-1/4	5	30
		4-1/4	6	31
		4-1/4	7	32
		4-3/8	1-1/2	33
		4-3/8	2	34
		4-3/8	2-1/2	35
		4-3/8	2-3/4	36
		4-3/8	3	37
		4-1/2	2	45
		4-1/2	2-1/4	46
		4-1/2	2-1/2	47
		4-1/2	2-3/4	48
		4-1/2	3	49
		4-1/2	3-1/2	50
		4-1/2	4	51
		4-3/4	3	38
		5	3	39
038	2-3/8	3-3/8	2	01
		3-3/8	3	02

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLIV - Boundary dimensions-IE (cont'd.)

Bore		O.D.	Width	O.D. and width code	Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
038	2-3/8	3-3/8	4	03	040	2-1/2	3-3/4	1-1/4	12
		3-3/4	1-1/2	04			3-3/4	1-1/2	53
		3-3/4	1-3/4	05			3-3/4	1-3/4	13
		5-1/4	2	06			3-3/4	2-1/2	14
		5-1/4	2-1/4	07			4	1-1/2	15
		5-1/4	2-1/2	08			4	1-3/4	16
		5-1/4	2-3/4	09			4	2	17
		5-1/4	3	10			4	3	18
		5-1/4	3-1/2	11			4	3-1/2	19
		5-1/4	4	12			4	4	20
							4	5	21
039	2-7/16	3-1/2	1-1/2	01			4-1/8	2	22
		3-1/2	2	02			4-1/8	2-1/2	23
		3-1/2	2-1/2	03			4-1/8	3	24
		3-1/2	3	04			4-1/8	3-1/2	25
		3-3/4	1-3/4	05			4-1/8	4	26
		3-7/8	1-1/2	06			4-1/8	5	27
		3-7/8	2	07			4-1/8	6	28
		3-7/8	2-1/2	08			4-1/8	7	29
		3-7/8	3	09			4-3/8	3-1/2	30
		3-15/16	2	10			4-5/8	3	31
		3-15/16	3	11			4-5/8	4	32
		3-15/16	3-1/2	12			4-5/8	5	33
		3-15/16	4	13			4-5/8	6	34
		3-15/16	5	14			4-5/8	7	35
		4-1/16	2	15			4-3/4	2	36
		4-1/16	2-1/2	16			4-3/4	2-1/4	42
		4-1/16	3	17			4-3/4	2-1/2	37
		4-1/16	4	18			4-3/4	2-3/4	43
		4-1/16	5	19			4-3/4	3	38
		4-1/16	6	20			4-3/4	3-1/2	44
		4-1/16	7	21			4-3/4	4	45
		4-1/8	2	22			4-7/8	4	52
		4-1/8	2-1/2	23			5	2	39
		4-1/8	3	24			5	2-1/4	46
		4-1/8	3-1/2	25			5	2-1/2	47
		4-9/16	3	26			5	2-3/4	48
		4-9/16	4	27			5	3	49
		4-9/16	5	28			5	3-1/2	50
		4-9/16	6	29			5-3/8	1-3/4	40
		4-9/16	7	30			5-3/8	2-1/2	41
		4-3/4	2	31					
		4-3/4	2-1/2	32	042	2-5/8	3	1	01
		4-3/4	3	33			3-1/2	1-3/8	02
		4-3/4	3-1/2	34			4	1-3/4	03
							4-1/4	1-3/4	09
040	2-1/2	2-7/8	1-1/2	51			5-1/2	2-1/2	04
		3-1/4	1-3/16	01			5-1/2	2-3/4	05
		3-1/4	1-1/4	02			5-1/2	3	06
		3-1/4	1-1/2	03			5	3-1/2	07
		3-1/4	1-3/4	04			5-1/2	4	08
		3-1/4	2-3/8	05					
		3-1/4	2-1/2	06	043	2-11/16	3-3/4	2	01
		3-9/16	1-1/2	07			3-3/4	3	02
		3-9/16	2	08			4-5/16	2	03
		3-9/16	2-1/2	09			4-5/16	2-1/2	04
		3-9/16	3	10			4-5/16	3	05
		3-9/16	4	11			4-5/16	4	06

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLIV - Boundary dimensions-IE (cont'd.)

Bore		O.D.	Width	O.D. and width code	Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
043	2-11/16	4-5/16	5	07	044	2-3/4	5-1/4	3	46
		4-5/16	6	08			5-1/4	3-1/2	47
		4-5/16	7	09			5-1/4	4	48
		4-13/16	2	10					
		4-13/16	2-1/2	11	046	2-7/8	3-15/16	2	01
		4-13/16	3	12			3-15/16	3	02
		4-13/16	4	13			4-1/2	2	03
		4-13/16	5	14					
		4-13/16	6	15	047	2-15/16	4	2	01
		4-13/16	7	16			4	3	02
							4	4	03
044	2-3/4	3-1/8	1	01			4-1/2	1-3/4	04
		3-1/8	1-1/4	02			4-1/2	2	05
		3-1/8	1-1/2	49			4-11/16	2	06
		3-1/2	1	50			4-11/16	2-1/2	07
		3-1/2	1-3/16	03			4-11/16	3	08
		3-1/2	1-1/4	04			4-11/16	4	09
		3-1/2	1-1/2	05			4-11/16	5	10
		3-1/2	1-3/4	06			4-11/16	6	11
		3-1/2	2-1/2	07			4-11/16	7	12
		3-1/2	2-3/4	08			4-3/4	2	13
		4	1-1/4	09			4-3/4	2-1/2	14
		4	1-1/2	10			4-3/4	3	15
		4	2	11			4-3/4	3-1/2	16
		4	2-1/2	12			4-3/4	4	17
		4	2-3/4	13			5-3/16	2	18
		4	3	14			5-3/16	2-1/2	19
		4-1/4	1-3/4	15			5-3/16	3	20
		4-1/4	2	16			5-3/16	4	21
		4-3/8	2	17			5-3/16	5	22
		4-3/8	2-1/2	18			5-3/16	6	23
		4-3/8	3	19			5-3/16	7	24
		4-3/8	3-1/2	20			5-1/2	2	25
		4-3/8	4	21			5-1/2	2-1/2	26
		4-3/8	5	22			5-1/2	3	27
		4-3/8	6	23			5-1/2	3-1/2	28
		4-3/8	7	24			5-1/2	4	29
		4-1/2	1-1/2	25					
		4-1/2	2	26	048	3	3-3/4	1-1/4	01
		4-1/2	2-1/2	27			3-3/4	1-1/2	02
		4-1/2	3	28			3-3/4	1-3/4	03
		4-7/8	2-1/2	29			3-3/4	2-1/2	04
		4-7/8	3	30			3-7/8	1-3/8	05
		4-7/8	4	31			3-7/8	2-3/4	06
		4-7/8	5	32			4-1/4	1-1/2	07
		4-7/8	6	33			4-1/4	1-3/4	58
		4-7/8	7	34			4-1/4	2	08
		5	2	35			4-1/4	2-1/2	09
		5	2-1/4	39			4-1/4	3	10
		5	2-1/2	36			4-1/4	3-1/2	11
		5	2-3/4	40			4-1/4	4	12
		5	3	37			4-1/2	1-3/8	13
		5	3-1/2	38			4-1/2	2	14
		5	4	41			4-1/2	2-3/4	15
		5-1/4	2	42			4-1/2	4	16
		5-1/4	2-1/4	43			4-3/4	1-1/2	17
		5-1/4	2-1/2	44			4-3/4	2	18
		5-1/4	2-3/4	45			4-3/4	2-1/2	19

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLIV - Boundary dimensions-IE (cont'd.)

Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches	
048	3	4-3/4	3	20
		4-3/4	3-1/2	21
		4-3/4	4	22
		4-3/4	5	23
		4-3/4	6	24
		4-3/4	7	25
		5	2	26
		5	3	27
		5	4	28
		5-1/4	2-1/2	29
		5-1/4	2-3/4	45
		5-1/4	3	30
		5-1/4	3-1/2	46
		5-1/4	4	31
		5-1/4	4-1/2	47
		5-1/4	5	32
		5-1/4	6	33
		5-1/4	7	34
		5-3/8	1-3/4	35
		5-3/8	3-1/2	36
		5-3/8	4	59
		5-1/2	2	37
		5-1/2	2-1/2	38
		5-1/2	2-3/4	48
		5-1/2	3	39
		5-1/2	3-1/2	40
		5-1/2	4	41
		5-1/2	4-1/2	49
		5-1/2	5	50
		5-7/8	2	42
		5-7/8	3	43
		5-7/8	4	44
		6-3/8	2-1/2	51
		6-3/8	2-3/4	52
		6-3/8	3	53
		6-3/8	3-1/2	54
		6-3/8	4	55
		6-3/8	4-1/2	56
		6-3/8	5	57
050	3-1/8	4	1-1/2	01
		4	1-3/4	02
		4-3/4	1-3/4	03
		4-3/4	2	04
		4-3/4	2-1/2	05
		4-3/4	3	06
		4-3/4	3-1/2	07
		4-3/4	4	08
052	3-1/4	4	1-1/4	01
		4	2-3/4	02
		4-1/8	1-3/8	03
		4-1/8	2-3/4	04
		4-1/4	1-3/4	05
		4-1/4	2	06
		4-1/2	1-1/2	07
		4-1/2	2	08

Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches	
052	3-1/4	4-1/2	2-1/2	09
		4-1/2	3	10
		4-1/2	3-1/2	11
		4-3/4	1-3/8	12
		4-3/4	2	13
		4-3/4	2-3/4	14
		4-3/4	4	15
		5	1-1/2	16
		5	2	17
		5	2-1/2	18
		5	3	19
		5	3-1/2	20
		5	4	21
		5-1/4	2	22
		5-1/4	3	23
		5-1/4	4	24
		5-5/8	3-1/2	25
		5-3/4	2	26
		5-3/4	2-1/2	27
		5-3/4	3	28
		5-3/4	4	29
		6-1/8	2	30
		6-1/8	3	31
		6-1/8	4	32
054	3-3/8	5	1-3/4	01
		5	2	02
		5	3	03
		5	4	04
055	3-7/16	5-3/8	2	01
		5-3/8	2-1/2	02
		5-3/8	3	03
		5-3/8	4	04
		6-1/8	2	05
		6-1/8	2-1/2	06
		6-1/8	3	07
		6-1/8	4	08
056	3-1/2	4	3/4	01
		4-3/8	1-3/8	02
		4-3/8	3	03
		4-1/2	1-3/8	04
		4-1/2	1-3/4	05
		4-1/2	2	06
		4-1/2	2-3/4	07
		4-1/2	4	08
		4-3/4	2	09
		4-3/4	2-1/2	10
		4-3/4	3	11
		4-3/4	3-1/2	12
		4-3/4	4	13
		4-3/4	5	14
		5	1-3/8	15
		5	2	16
		5	3	17
		5	4	18

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLIV - Boundary dimensions-IE (cont'd.)

Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches	
056	3-1/2	5-1/8	1-3/4	19
		5-1/8	2	20
		5-1/8	4	21
		5-1/4	2	22
		5-1/4	2-1/2	23
		5-1/4	3	24
		5-1/4	3-1/2	25
		5-1/4	4	26
		5-1/4	5	27
		5-3/8	2	28
		5-3/8	2-1/2	29
		5-3/8	3	30
		5-3/8	4	31
		5-3/4	2-1/2	32
		5-3/4	3	33
		5-3/4	4	34
		5-3/4	5	35
		6	4	64
		6		65
		6-1/8	2	36
		6-1/8	2-1/2	37
		6-1/8	2-3/4	47
		6-1/8	3	38
		6-1/8	3-1/8	48
		6-1/8	4	39
		6-1/8	4-1/2	49
		6-1/8	5	40
		6-1/8	6	41
		6-1/8	7	42
		6-3/8	2-1/2	50
		6-3/8	2-3/4	51
		6-3/8	3	52
		6-3/8	3-1/2	53
		6-3/8	4	54
		6-3/8	4-1/2	55
		6-3/8	5	56
		6-5/8	2-1/2	43
		6-5/8	3	44
		6-5/8	4	45
		6-5/8	5	46
		6-7/8	2-1/2	57
		6-7/8	2-3/4	58
		6-7/8	3	59
		6-7/8	3-1/2	60
		6-7/8	4	61
		6-7/8	4-1/2	62
		6-7/8	5	63
058	3-5/8	5-1/4	2	01
060	3-3/4	4-5/8	1-1/2	01
		4-5/8	3	02
		4-3/4	1-3/8	03
		4-3/4	1-3/4	04
		4-3/4	2	05
		4-3/4	2-3/4	06
		4-3/4	4	07
		5-1/4	1-1/2	08

Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches	
060	3-3/4	5-1/4	2	09
		5-1/4	2-1/2	10
		5-1/4	3	11
		5-1/4	3-1/2	12
		5-1/4	4	13
		5-1/2	2	14
		5-1/2	3	15
		5-5/8	2	16
		5-5/8	2-1/2	17
		5-5/8	3	18
		5-5/8	4	19
		5-3/4	2	20
		5-3/4	2-1/4	21
		5-3/4	2-1/2	22
		5-3/4	3	23
		5-3/4	3-1/2	24
		5-3/4	4	25
		5-3/4	4-1/2	26
		6	2	27
		6	2-1/4	28
		6	2-1/2	42
		6	5	43
		6-1/8	3	29
		6-1/8	4	30
		6-1/8	5	31
		6-1/8	7	32
		6-3/8	2	33
		6-3/8	2-1/2	34
		6-3/8	3	35
		6-3/8	4	36
		7-1/8	2-1/2	37
		7-1/8	3	38
		7-1/8	4	39
		7-1/8	5	40
		7-1/8	7	41
062	3-7/8	6	2-1/4	01
063	3-15/16	6	2	01
		6	2-1/2	02
		6	3	03
		6	4	04
		6-3/4	2	05
		6-3/4	2-1/2	06
		6-3/4	3	07
		6-3/4	4	08
064	4	4-7/8	1-1/2	01
		4-7/8	3	02
		5	1-3/8	03
		5	1-3/4	04
		5	2	05
		5	3	06
		5	4	07
		5-1/4	3	08
		5-1/4	4	09
		5-1/2	1-1/2	10
		5-1/2	2	11

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLIV - Boundary dimensions-IE (cont'd.)

Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches	
064	4	5-1/2	2-1/2	12
		5-1/2	3	13
		5-1/2	3-1/2	14
		5-1/2	4	15
		5-3/4	3	16
		5-3/4	4	17
		6	2	18
		6	2-1/4	19
		6	2-1/2	20
		6	3	21
		6	3-1/2	22
		6	4	23
		6	4-1/2	24
		6	5	25
		6	6	26
		6-3/8	2-1/2	27
		6-3/8	3	28
		6-3/8	4	29
		6-3/8	5	30
		6-3/8	7	31
		6-1/2	2	32
		6-1/2	2-1/4	33
		6-1/2	4	66
		6-1/2	5	67
		6-1/2	2-1/2	68
		6-5/8	2-1/2	47
		6-5/8	2-3/4	48
		6-5/8	3	49
		6-5/8	3-1/2	50
		6-5/8	4	34
		6-5/8	4-1/2	51
		6-5/8	5	35
		6-5/8	6	36
		6-5/8	7	37
		6-3/4	2	38
		6-3/4	2-1/2	39
		6-3/4	3	40
		6-3/4	4	41
		6-7/8	2-1/2	52
		6-7/8	2-3/4	53
		6-7/8	3	54
		6-7/8	3-1/2	55
		6-7/8	4	56
		6-7/8	4-1/2	57
		6-7/8	5	58
		7-3/8	2-1/2	42
		7-3/8	3	43
		7-3/8	4	44
		7-3/8	5	45
		7-3/8	7	46
		7-5/8	2-1/2	59
		7-5/8	2-3/4	60
		7-5/8	3	61
		7-5/8	3-1/2	62
		7-5/8	4	63
		7-5/8	4-1/2	64
		7-5/8	5	65
066	4-1/8	5-1/8	1-3/4	01
		5-1/8	2	02
		5-1/8	4	03
		5-3/8	1-1/4	04
068	4-1/4	5-1/4	1-1/2	01
		5-1/4	1-5/8	02
		5-1/4	2	03
		5-1/4	3	04
		5-1/4	3-1/4	05
		5-1/4	4	32
		5-1/4	1-5/8	06
		6	3-1/4	07
		6-1/8	3	08
		6-1/8	4	09
		6-1/4	2-1/4	10
		6-1/4	2-1/2	11
		6-1/4	3	12
		6-1/4	4	13
		6-1/4	4-1/2	14
		6-1/4	5	15
		6-1/2	2-1/4	16
		6-5/8	3	17
		6-5/8	4	18
		6-5/8	5	19
		6-5/8	7	20
		7	2-1/2	21
		7	3	22
		7	4	23
		7	5	24
		7-1/8	3	25
		7-1/8	4	26
		7-1/8	5	27
		7-5/8	3	28
		7-5/8	4	29
		7-5/8	5	30
		7-5/8	7	31
071	4-7/16	6-1/2	2-1/2	01
		6-1/2	3	02
		6-1/2	4	03
		6-1/2	5	04
		7-1/4	2-1/2	05
		7-1/4	3	06
		7-1/4	4	07
		7-14	5	08
072	4-1/2	5-1/2	1-1/2	01
		5-1/2	1-5/8	02
		5-1/2	3	03
		5-1/2	3-1/4	04
		5-3/4	2-1/4	05
		5-3/4	4-1/2	06
		6	2	07
		6	2-1/4	08
		6	2-1/2	09
		6	4	10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLIV - Boundary dimensions-IE (cont'd.)

Bore		O.D.	Width	O.D. and width code	Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
072	4-1/2	6	5	50	076	4-3/4	7-1/2	4	18
		6-1/4	1-5/8	11			7-1/2	5	19
		6-1/4	3-1/4	12			7-1/2	7	20
		6-3/8	3	13			8-3/4	3	21
		6-3/8	4	14			8-3/4	4	22
		6-1/2	2-1/4	15			8-3/4	5	23
		6-1/2	2-1/2	16			8-3/4	7	24
		6-1/2	3	17					
		6-1/2	4	18	078	4-7/8	6	1-5/8	01
		6-1/2	4-1/2	19			6	3-1/4	02
		6-1/2	5	20					
		7	1-5/8	21	079	4-15/16	7-3/8	3	01
		7	2-1/2	22			7-3/8	4	02
		7	3	23			7-3/8	5	03
		7	5	49			7-3/8	6	04
		7-1/4	2-1/2	24			7-3/8	8	05
		7-1/4	4	25			8-1/4	3	06
		7-1/4	4	26			8-1/4	4	07
		7-1/4	5	27			8-1/4	5	08
		7-1/4	7	28			8-1/4	6	09
		7-3/8	2-1/2	38			8-1/4	8	10
		7-3/8	2-3/4	39					
		7-3/8	3	29	080	5	6-1/4	1-3/4	01
		7-3/8	3-1/2	40			6-1/4	2-1/4	02
		7-3/8	4	30			6-1/4	3-1/2	03
		7-3/8	4-1/2	41			6-1/4	4-1/2	04
		7-3/8	5	31			6-1/2	1-1/8	39
		7-3/8	6	32			6-1/2	2	05
		7-3/8	7	33			6-1/2	2-1/4	06
		7-5/8	2-1/2	42			6-1/2	2-1/2	63
		7-5/8	2-3/4	43			6-1/2	5	65
		7-5/8	3	44			7	6	07
		7-5/8	3-1/2	45			7	2-1/4	08
		7-5/8	4	46			7	3-1/2	09
		7-5/8	4-1/2	47			7	4-1/2	10
		7-5/8	5	48			7	5-1/2	11
		8-1/2	3	34			7-3/8	3	12
		8-1/2	4	35			7-3/8	4	13
		8-1/2	5	36			7-3/8	5	14
		8-1/2	7	37			7-3/8	6	15
							7-3/8	7	16
076	4-3/4	6	1-5/8	01			7-1/2	1-3/4	17
		6	2-1/4	02			7-1/2	2-1/2	18
		6	3-1/4	03			7-1/2	3	19
		6	4-1/2	04			7-1/2	5	64
		6-3/4	1-5/8	05			7-3/4	4	60
		6-3/4	2-1/4	06			7-3/4	5	61
		6-3/4	2-1/2	07			7-3/4	6	62
		6-3/4	3	08			7-7/8	2-1/2	66
		6-3/4	3-1/4	09			7-7/8	2-3/4	40
		6-3/4	4	10			7-7/8	3	41
		6-3/4	4-1/2	11			7-7/8	3-1/2	42
		6-3/4	5	12			7-7/8	4	20
		7	1-5/8	13			7-7/8	4-1/2	43
		7	3	14			7-7/8	5	21
		7-1/4	3	15			7-7/8	6	22
		7-1/2	2-1/2	16			7-7/8	7	23
		7-1/2	3	17			8	3-1/2	24

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLIV - Boundary dimensions-IE (cont'd.)

Bore		O.D.	Width	O.D. and width code	Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
080	5	8	3-1/2	24	084	5-1/4	8-1/4	3	24
		8	4	25			8-1/2	4	25
		8	5	26			8-1/2	5	26
		8	6	27			8-1/2	6	27
		8	8	28			8-1/2	8	28
		8-1/8	2-1/2	44			9-1/2	3-1/2	29
		8-1/8	2-3/4	45			9-1/2	4	30
		8-1/8	3	46			9-1/2	5	31
		8-1/8	3-1/2	47			9-1/2	6	32
		8-1/8	4	48			9-1/2	8	33
		8-1/8	4-1/2	49					
		8-1/8	5	50	086	5-3/8	9-1/4	2-1/2	01
		8-1/8	6	51			9-1/4	2-3/4	02
		8-1/4	3	29			9-1/4	3	03
		8-1/4	4	30			9-1/4	3-1/2	04
		8-1/4	5	31			9-1/4	4	05
		8-1/4	6	32			9-1/4	4-1/2	06
		8-1/4	8	33			9-1/4	5	07
		9	2-1/2	52			9-1/4	6	08
		9	2-3/4	53					
		9	3	54	088	5-1/2	6	3/4	44
		9	3-1/2	55			6-3/4	1-5/8	01
		9	4	56			6-3/4	1-7/8	02
		9	4-1/2	57			6-3/4	2-1/4	03
		9	5	58			6-3/4	3-1/4	04
		9	6	59			6-3/4	3-3/4	05
		9-1/4	3-1/2	34			6-3/4	4-1/2	06
		9-1/4	4	35			7	1-5/8	07
		9-1/4	5	36			7	2-1/2	08
		9-1/4	6	37			7	3	09
		9-1/4	8	38			7	5	43
							7-1/2	1-7/8	10
082	5-1/8	6-1/4	1-5/8	01			7-1/2	2-3/4	11
		6-1/4	3-1/4	02			7-1/2	3-3/4	12
							7-1/2	4-1/2	13
084	5-1/4	6-1/2	1-3/4	01			7-1/2	5-1/2	14
		6-1/2	2-1/4	02			7-7/8	3	15
		6-1/2	3-1/2	03			7-7/8	4	16
		6-1/2	4-1/2	04			7-7/8	5	17
		7-1/4	1-3/4	05			7-7/8	6	18
		7-1/4	2-3/4	06			7-7/8	8	19
		7-1/4	3-1/2	07			8	1-7/8	20
		7-1/4	4	08			8	2-1/2	21
		7-1/4	4-1/2	09			8	3	22
		7-1/4	5	10			8	5	42
		7-1/4	5-1/2	11			8-3/8	4	23
		7-1/2	1-3/4	12			8-3/8	5	24
		7-1/2	3	13			8-3/8	6	25
		7-5/8	3	14			8-3/8	7	26
		7-5/8	4	15			8-1/2	3-1/2	27
		7-5/8	5	16			8-1/2	4	28
		7-5/8	6	17			8-1/2	5	29
		7-5/8	8	18			8-1/2	6	30
		8-1/4	3-1/2	19			8-1/2	8	31
		8-1/4	4	20			8-3/4	3	32
		8-1/4	5	21			8-3/4	4	33
		8-1/4	6	22			8-3/4	5	34
		8-1/4	8	23			8-3/4	6	35

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLIV - Boundary dimensions-IE (cont'd.)

Bore		O.D.	Width	O.D. and width code	Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
088	5-1/2	8-3/4	8	36	096	6	7-1/2	2-1/2	09
		9-3/4	3-1/2	37			7-1/2	3	10
		9-3/4	4	38			7-1/2	5	59
		9-3/4	5	39			8	2-3/4	11
		9-3/4	6	40			8	4-1/2	12
		9-3/4	8	41			8	5-1/2	13
							8-1/4	2	14
092	5-3/4	7	1-3/4	01			8-1/4	4	15
		7	2-1/4	02			8-1/2	3	16
		7	3-1/2	03			8-1/2	4	17
		7	4-1/2	04			8-1/2	5	18
		7	5-1/2	05			8-1/2	6	19
		7-1/8	1-7/8	06			8-1/2	8	20
		7-1/8	3-3/4	07			8-3/4	3	21
		7-1/4	3	08			8-7/8	2-1/2	42
		7-3/4	2-3/4	09			8-7/8	2-3/4	43
		7-3/4	4-1/2	10			8-7/8	3	44
		7-3/4	5-1/2	11			8-7/8	3-1/2	45
		8	1-7/8	12			8-7/8	4	22
		8	3	13			8-7/8	4-1/2	46
		8	3-3/4	14			8-7/8	5	23
		8-1/8	3	15			8-7/8	6	24
		8-1/8	4	16			8-7/8	7	25
		8-1/8	5	17			9	4	26
		8-1/8	6	18			9	5	27
		8-1/8	8	19			9	6	28
		8-1/2	3	20			9	8	29
		8-1/2	4	21			9-1/8	2	30
		8-5/8	2-1/2	30			9-1/8	2-1/2	31
		8-5/8	2-3/4	31			9-1/8	3	32
		8-5/8	3	32			9-1/8	6	58
		8-5/8	3-1/2	33			9-1/4	2-1/2	47
		8-5/8	4	22			9-1/4	2-3/4	48
		8-5/8	4-1/2	34			9-1/4	3	49
		8-5/8	5	23			9-1/4	3-1/2	50
		8-5/8	6	24			9-1/4	4	51
		8-5/8	7	25			9-1/4	4-1/2	52
		9	2-1/2	35			9-1/4	5	53
		9	2-3/4	36			9-1/4	6	54
		9	3	37			9-3/8	4	33
		9	3-1/2	38			9-3/8	5	34
		9	4	26			9-3/8	6	35
		9	4-1/2	39			9-3/8	8	36
		9	5	27			9-1/2	3	37
		9	6	28			9-1/2	4	38
		9	8	29			9-1/2	5	39
							9-1/2	6	40
094	5-7/8	8-1/4	5	01			9-1/2	8	41
		8-1/4	6	02			10-3/4	4	55
							10-3/4	5	56
096	6	7-1/4	1-3/4	01			10-3/4	6	57
		7-1/4	2-3/4	02					
		7-1/4	3-1/2	03	100	6-1/4	7-1/2	1-7/8	01
		7-1/4	4-1/2	04			7-1/2	2-3/4	02
		7-1/4	5-1/2	05			7-1/2	3-3/4	03
		7-3/8	2	06			7-1/2	4-1/2	04
		7-3/8	4	07			7-1/2	5-1/2	05
		7-1/2	1-3/4	08			8-1/2	2-3/4	06

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLIV - Boundary dimensions-IE (cont'd.)

Bore		O.D.	Width	O.D. and width code	Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
100	6-1/4	8-1/2	4-1/2	07	112	7	10	5	10
		8-1/2	5-1/2	08			10	6	11
							10	8	12
102	6-3/8	8-3/4	5	01			10-1/8	2	13
		8-3/4	6	02			10-1/8	2-1/2	14
							10-1/8	3	15
104	6-1/2	7-3/4	2-3/4	01			10-1/8	5	16
		7-3/4	4-1/2	02			10-1/8	6	31
		7-3/4	5-1/2	03			10-1/8	7	17
		8	1-7/8	04			10-3/4	4	18
		8	2-1/2	05			10-3/4	5	19
		8	3	06			10-3/4	6	20
		8	5	29			10-3/4	7	21
		9	3	07			10-3/4	9	22
		9	6	08			11	4	23
		9-1/2	4	09			11	5	24
		9-1/2	5	10			11	6	25
		9-1/2	6	11			11	7	28
		9-1/2	8	12			11	8	26
		9-5/8	2	13			12-1/4	4	27
		9-5/8	2-1/2	14			12-1/4	5	29
		9-5/8	3	15			12-1/4	6	30
		9-5/8	6	28					
		9-7/8	4	16	116	7-1/4	7-1/2	3/4	01
		9-7/8	5	17			7-3/4	3/4	06
		9-7/8	6	18			9-1/8	2	02
		9-7/8	8	19			9-1/8	2-1/2	03
		10-1/2	4	20			9-1/8	3	04
		10-1/2	5	21			9-1/2	6	05
		10-1/2	6	22					
		10-1/2	8	23	118	7-3/8	10-3/4	4	01
		11-1/4	4	24			10-3/4	5	02
		11-1/4	5	25			10-3/4	6	03
		11-1/4	6	26					
		11-1/4	8	27	120	7-1/2	9	3	01
							9	6	02
106	6-5/8	8	1-7/8	01			10-1/2	4	03
		8	3-3/4	02			10-1/2	5	04
							10-1/2	6	05
108	6-3/4	8	2-3/4	01			10-1/2	8	06
		8	4-1/2	02			10-5/8	2	07
		8	5-1/2	03			10-5/8	2-1/2	08
		9-3/4	4	04			10-5/8	3	09
		9-3/4	5	05			10-5/8	6	24
		9-3/4	6	06			11-1/4	4	10
							11-1/4	5	11
110	6-7/8	8-1/4	2	01			11-1/4	6	12
		8-1/4	4	02			11-1/4	7	13
							11-1/4	10	14
112	7	8-1/2	2-3/4	01			11-1/2	4	15
		8-1/2	4-1/2	02			11-1/2	5	16
		8-1/2	5-1/2	03			11-1/2	6	17
		9-7/8	4	04			11-1/2	8	18
		9-7/8	5	05			12-3/4	4	19
		9-7/8	6	06			12-3/4	5	20
		9-7/8	7	07			12-3/4	6	21
		10	3	08			12-3/4	7	22
		10	4	09			12-3/4	10	23

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLIV - Boundary dimensions-IE (cont'd.)

Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches	
124	7-3/4	9-5/8	2	01
		9-5/8	2-1/2	02
		9-5/8	3	03
		9-5/8	6	06
		11-1/8	2-1/2	04
		11-1/8	3	05
126	7-7/8	11-1/4	4	01
		11-1/4	5	02
		11-1/4	6	03
128	8	10	3	01
		10	6	02
		11	3	03
		11	4	04
		11	5	05
		11	6	06
		11	8	07
		11-1/8	2	08
		11-1/8	2-1/2	09
		11-1/8	3	10
		11-1/8	6	21
		12	4	11
		12	5	12
		12	6	13
		12	7	14
		12	8	15
		12	10	16
		13-1/2	5	17
		13-1/2	6	18
		13-1/2	7	19
		13-1/2	10	20
132	8-1/4	10-1/8	2	01
		10-1/8	2-1/2	02
		10-1/8	3	03
		10-1/8	6	04
136	8-1/2	11-1/2	4	01
		11-1/2	5	02
		11-1/2	6	03
		12-1/4	4	04
		12-1/4	5	05
		12-1/4	6	06
		14	5	07
		14	6	08
		14	7	09
140	8-3/4	10-5/8	2	01
		10-5/8	2-1/2	02
		10-5/8	3	03
		10-5/8	6	04
144	9	11	3	01
		11	6	02
		12	4	03
		12	5	04
		12	6	05
144	9	12-3/4	4	06
		12-3/4	6	07
		13	4	11
		13	5	12
		13	6	13
		13	7	14
		14-1/2	5	08
		14-1/2	6	09
		14-1/2	7	10
148	9-1/4	11-1/8	2	01
		11-1/8	2-1/2	02
		11-1/8	3	03
		11-1/8	6	04
160	10	14-1/4	4	01
		14-1/4	5	02
		14-1/4	6	03
		14-1/4	7	04
		14-1/4	8	05
		16-1/8	5	06
		16-1/8	6	07
		16-1/8	7	08
176	11	15-1/2	4	01
		15-1/2	5	02
		15-1/2	6	03
		15-1/2	7	04
		15-1/2	8	05
		17-1/8	5	06
		17-1/8	6	07
		17-1/8	7	08
192	12	16-1/2	4	01
		16-1/2	5	02
		16-1/2	6	03
		16-1/2	7	04
		16-1/2	8	05
		18-3/4	6	06
		18-3/4	7	07
		18-3/4	8	08
216	31-1/2	19-3/4	4-1/2	01
248	15-1/2	23	5-1/4	01

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLV - Boundary dimensions-IF

Bore		O.D.	Width	O.D. and width code	Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	MM	Inches		No. of 1/16	Inches	MM	Inches	
016	1	52	1	04	035	2-3/16	85	1-1/8	12
		52	1-3/16	14			85	1-3/16	07
							85	1-9/16	22
018	1-1/8	62	1-1/8	04					
		62	1-3/8	14	036	2-1/4	72	1-3/8	05
							100	1-5/16	03
020	1-1/4	62	1	07			100	1-9/16	13
		62	1-1/8	13					
					038	2-3/8	90	7/8	02
022	1-3/8	72	1-3/16	04			90	1-3/16	07
		72	1-3/8	07			90	1-1/4	12
							90	1-3/4	22
024	1-1/2	62	13/16	12			90	3-1/2	32
		62	15/16	07					
		62	1-1/8	22	040	2-1/2	72	15/16	05
		72	15/16	03			72	1-1/16	15
		72	1-3/16	13			72	1-3/16	25
							72	1-5/16	35
025	1-9/16	47	13/16	05			72	1-3/8	45
		47	1-5/8	15			72	1-7/8	55
							72	2-1/8	65
026	1-5/8	50	7/16	05			72	2-3/8	75
		80	1-3/8	04			110	1-7/16	03
							110	1-3/4	13
028	1-3/4	52	5/8	45					
		52	13/16	05	041	2-9/16	80	1-3/8	05
		52	7/8	15					
		52	1	25	042	2-5/8	80	1-3/8	05
		52	1-3/16	35			100	1	02
		52	1-3/4	55			100	1-5/16	12
		62	1-1/2	65			100	1-13/16	22
		72	15/16	12			100	3-5/8	32
		72	1-1/16	07					
		72	1-3/16	22	044	2-3/4	80	1	05
		80	1	03			80	1-3/16	15
		80	1-3/8	13			80	1-3/8	25
							80	2-3/4	35
032	2	62	1-1/8	05			120	1-15/16	13
		72	15/16	15					
		72	1-3/16	25	045	2-13/16	90	1-9/16	05
		80	1	12					
		80	1-3/16	07	046	2-7/8	110	1-1/64	02
		80	1-3/8	22			110	1-7/16	12
		90	1-1/4	03			110	1-15/16	22
		90	1-7/16	13			110	3-7/8	32
034	2-1/8	62	13/16	05	047	2-15/16	85	1-1/8	05
		62	15/16	15			85	1-3/16	15
		62	1	25			85	1-9/16	25
		62	1-1/8	35			85	2-3/8	35
		62	1-3/16	45					
		62	1-3/8	55	048	3	90	7/8	05
							90	1-3/16	15
		62	1-7/8	65			90	1-1/4	25
		62	2	75			90	1-7/16	35
		72	15/16	85			90	1-3/4	45

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLV - Boundary dimensions-IF (cont'd.)

Bore		O.D.	Width	O.D. and width code	Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	MM	Inches		No. of 1/16	Inches	MM	Inches	
048	3	90	1-15/16	55	060	3-3/4	140	5-1/4	32
		90	2-3/8	65			160	2-7/16	13
		90	2-7/8	75			160	2-11/16	23
		90	3	85					
		90	3-1/2	95	062	3-7/8	110	1-1/64	05
		120	1-1/2	12			110	1-1/16	15
		120	2-1/16	22			110	1-7/16	25
		120	4-1/8	32			110	1-3/4	35
							110	1-15/16	45
050	3-1/8	90	7/8	05			110	2-7/16	55
		90	1-1/4	25			110	2-7/8	65
		90	1-7/16	35			110	3-7/8	75
		90	1-3/4	45					
		90	1-15/16	55	063	3-15/16	120	2-1/8	05
		90	3	85					
		90	3-1/2	95	064	4	150	1-15/16	12
							150	2-3/4	22
050	3-1/8	120	1-1/2	12			150	5-1/2	32
		120	2-1/16	22			170	2-9/16	13
		120	4-1/8	32			170	2-11/16	23
052	3-1/4	100	1-3/4	05	065	4-1/16	120	1-15/16	05
		140	2-3/16	13					
		140	2-5/16	23	066	4-1/8	120	1-1/2	05
							120	1-15/16	15
053	3-5/16	125	1-9/16	07			120	2-1/16	25
		125	1-5/8	12			120	2-3/4	35
		125	2-3/8	22			120	3	45
		125	4-3/4	32			120	3-7/8	55
							120	4-1/8	65
054	3-3/8	100	1-9/16	05					
					068	4-1/4	130	2-5/16	05
056	3-1/2	100	1	05			160	2-1/16	12
		100	1-3/16	15			160	2-13/16	22
		100	1-5/16	25			160	5-5/8	32
		100	1-9/16	35			180	2-3/4	13
		100	1-13/16	45			180	2-7/8	23
		100	2	55					
		100	2-5/8	65	069	4-5/16	125	1-9/16	05
		100	3-1/8	75			125	1-5/8	15
		100	3-5/8	85			125	2-3/8	25
		130	1-1/64	02			125	3-1/8	35
		130	1-5/8	07			125	4-3/4	45
		130	1-3/4	12					
		130	2-5/8	22	070	4-3/8	120	1-15/16	05
		130	5-1/4	32			130	2-1/8	15
		150	2-5/16	13			130	4-1/4	25
		150	2-1/2	23					
					072	4-1/2	130	1-1/64	05
057	3-9/16	110	1-15/16	05			130	1-5/8	15
							130	1-3/4	25
059	3-11/16	110	1-3/4	05			130	2-1/16	35
							130	2-1/8	45
060	3-3/4	110	1-3/4	05			130	2-5/8	55
		110	3-1/2	15			130	3-1/4	65
		140	1-3/4	07			130	5-1/4	75
		140	1-13/16	12			170	2-3/16	12
		140	2-5/8	22			170	3	22

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLV - Boundary dimensions-IF (cont'd.)

Bore		O.D.	Width	O.D. and width code	Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	MM	Inches		No. of 1/16	Inches	MM	Inches	
072	4-1/2	170	6	32	090	5-5/8	160	5-3/8	55
		190	2-7/8	07			160	5-5/8	65
		190	3	13			215	2-13/16	12
							215	3	07
074	4-5/8	140	2-1/2	05			215	3-7/8	22
							215	7-3/4	32
075	4-11/16	140	2-5/16	05					
					092	5-3/4	170	2-11/16	05
076	4-3/4	180	2-5/16	12					
		180	2-3/8	07	095	5-15/16	180	3-1/8	05
		180	3-1/4	22					
		180	6-1/2	32	096	6	170	2-3/16	05
		200	3-1/16	23			170	2-9/16	15
		200	3-1/8	13			170	2-11/16	25
							170	3	35
078	4-7/8	140	1-3/4	05			170	4-3/8	45
		140	1-13/16	15			170	5-3/8	55
		140	2-3/16	25			170	6	65
		140	2-5/16	35			180	2-7/8	75
		140	2-5/8	45			215	4-7/8	22
		140	3-1/16	55			215	9-3/4	32
		140	3-1/2	65					
		140	4-5/8	75	097	6-1/16	230	3-1/8	12
		140	5-1/4	85			230	4-1/4	22
							230	8-1/2	32
080	5	150	2-5/8	05			260	4-1/8	13
		215	3-1/4	13					
					100	6-1/4	180	2-5/16	05
081	5-1/16	150	2-1/2	05			180	2-3/8	15
							180	2-3/4	25
082	5-1/8	160	2-11/16	05			180	2-7/8	35
							180	3-1/4	45
084	5-1/4	150	1-15/16	05			180	4-3/4	55
		150	2-5/16	15			180	5-3/4	65
		150	2-1/2	25			180	6-1/2	75
		150	2-3/4	35					
		150	3-7/8	45	102	6-3/8	190	3	05
		150	5	55					
		150	5-1/2	65	103	6-7/16	190	3-1/4	05
		200	2-9/16	12					
		200	2-3/4	07	104	6-1/2	180	2-5/16	05
		200	3-1/2	22			180	3-1/4	15
		200	7	32			180	6-1/2	25
							190	2-9/16	35
085	5-5/16	160	2-13/16	05			190	5-1/8	45
088	5-1/2	240	3-5/8	23	105	6-9/16	280	4-3/8	13
		240	3-3/4	13					
					106	6-5/8	190	2-7/8	05
089	5-9/16	160	2-1/16	05			190	3	15
		160	2-13/16	15			190	5-3/4	25
		160	5-5/8	25			250	3-1/4	12
							250	4-3/4	22
090	5-5/8	160	2-1/16	05			250	9-1/2	32
		160	2-7/16	15					
		160	2-11/16	25	108	6-3/4	200	3-1/16	05
		160	2-13/16	35					
		160	4-1/8	45	110	6-7/8	200	3-7/16	05

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLV - Boundary dimensions-IF (cont'd.)

Bore		O.D.	Width	O.D. and width code	Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	MM	Inches		No. of 1/16	Inches	MM	Inches	
111	6-15/16	200	2-9/16	05	132	8-1/4	240	3-5/8	05
		200	3-1/2	15			240	3-3/4	15
		200	7	25			240	7-1/4	25
112	7	200	2-9/16	05	134	8-3/8	235	2-5/8	05
		200	2-3/4	15			235	5-1/4	15
		200	3-1/16	25					
		200	3-1/8	35	138	8-5/8	250	3-1/4	05
		200	3-1/2	45			250	4-1/2	15
		200	5-1/2	55			250	4-3/4	25
		200	6-1/8	65			250	9-1/2	35
		200	7	75					
					140	8-3/4	250	3-1/4	05
113	7-1/16	270	3-1/2	12			250	4-3/4	15
		270	4-3/4	22			250	6-1/2	25
							250	9-1/2	35
114	7-1/8	210	3-5/8	05			260	4-1/8	45
116	7-1/4	215	3-1/4	05	141	8-13/16	260	4-1/8	05
							260	8-1/4	15
118	7-1/2	215	2-13/16	05					
		215	3	15	142	8-7/8	250	2-7/8	05
		215	3-1/4	25			250	5-3/4	15
		215	3-7/8	35					
		215	4-7/8	45	148	9-1/4	340	4-3/4	12
		215	6	55			340	6-7/8	22
		215	6-1/2	65					
		215	7-3/4	75	149	9-5/16	280	4-3/8	05
		215	9-3/4	85					
		225	3-7/8	95	150	9-3/8	270	3-1/2	05
							270	4-3/4	15
122	7-5/8	290	3-7/8	12					
		290	4-7/8	22	151	9-7/16	270	3-1/2	05
		290	9-3/4	32			270	4-3/4	15
							270	7	25
124	7-3/4	225	3-7/16	05					
		225	6-7/8	15	152	9-1/2	265	3	05
							265	6	15
126	7-7/8	220	2-1/2	05					
		220	5	15	153	9-9/16	280	4-3/8	05
							280	8-3/4	15
128	8	230	3-1/8	05					
		230	4-1/4	15	160	10	290	3-7/8	05
		230	8-1/2	25			290	4-7/8	15
		240	3-3/4	35			290	9-3/4	25
129	8-1/16	230	3-1/8	05	161	10-1/16	280	3-1/4	05
		230	4-1/4	15			280	6-1/2	15
		230	6-1/4	25					
		230	8-1/2	35	162	10-1/8	290	3-7/8	05
		310	4-1/8	07			290	4-7/8	15
		310	5-3/8	22			290	7-3/4	25
		310	10-3/4	32			290	9-3/4	35
130	8-1/8	240	4-3/16	05	164	10-1/4	300	4-1/2	05

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLV - Boundary dimensions-IF (cont'd.)

Bore		O.D.	Width	O.D. and width code	Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	MM	Inches		No. of 1/16	Inches	MM	Inches	
164	10-1/4	300	9	15	222	13-7/8	400	5-1/4	05
166	10-3/8	320	5-7/8	05	223	13-15/16	390	4-1/4	05
167	10-7/16	380	6-7/8	22	230	14-3/8	420	6-1/2	05
							420	13	15
170	10-5/8	300	3-3/8	05					
		300	6-3/4	15	233	14-9/16	410	4-3/8	05
172	10-3/4	310	5-3/8	05	234	14-5/8	420	5-1/2	05
		310	10-3/4	15					
					238	14-7/8	440	6-3/4	05
173	10-13/16	310	4-1/8	05					
		310	5-3/8	15	242	15-1/8	430	4-1/2	05
		310	8-1/4	25					
		310	9-1/2	35	245	15-5/16	440	5-3/4	05
		310	10-3/4	45					
					250	15-5/8	460	7	05
176	11	320	4-7/8	05					
		320	9-3/4	15	254	15-7/8	460	6	05
182	11-3/8	320	3-1/2	05	260	16-1/4	460	4-7/8	05
		320	7	15			480	7-1/4	15
188	11-3/4	340	5-1/4	05	266	16-5/8	480	6-1/4	05
		340	10-1/2	15					
					270	16-7/8	500	7-1/2	05
190	11-7/8	340	4-1/2	05					
		340	4-3/4	15	273	17-1/16	480	5	05
		340	6-7/8	25					
		340	9	35	278	17-3/8	500	6-1/2	05
192	12	340	4-3/4	05	284	17-3/4	520	7-3/4	05
		340	6-7/8	15					
					288	18	500	5-1/8	05
194	12-1/8	340	3-3/4	05					
					296	18-1/2	540	8	05
195	12-3/16	360	4-3/4	05					
		360	9-1/2	15	304	19	540	7	05
198	12-3/8	360	5-1/2	05	319	19-7/8	580	8-1/2	05
		360	11	15					
					324	20-1/4	580	7-1/2	05
200	12-1/2	350	3-7/8	05					
					332	20-3/4	620	9	05
208	13	380	5-3/4	05					
		380	11-1/2	15	352	22	660	9-1/2	05
211	13-3/16	380	5-1/4	05					
		380	6-7/8	15					
212	13-1/4	370	4	05					
		380	5	15					
218	13-5/8	400	6	05					
		400	12	15					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLVI - Boundary dimensions-IG

Bore		O.D.	Width	O.D. and width code	Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
004	1/4	1/4	7/16	01	008	1/2	1	1-7/8	30
							1	2	18
005	5/16	1/2	17/32	01			1	2-1/2	19
006	3/8	1/2	3/4	01	009	9/16	3/4	3/4	01
		9/16	3/4	05			13/16	3/4	02
		9/16	25/32	06			13/16	1	03
		5/8	3/4	07			1-1/16	1-1/2	04
		3/4	9/16	19			1-1/16	2	05
		3/4	5/8	20					
		3/4	11/16	21	010	5/8	7/8	25/32	01
		3/4	3/4	11			7/8	3/4	02
		3/4	7/8	12			7/8	1	03
		3/4	1	02			1	3/4	04
		3/4	1-1/8	13			1	55/64	20
		3/4	1-1/4	03			1	7/8	21
		3/4	1-3/8	14			1	1	05
		3/4	1-1/2	04			1	1-1/8	22
		3/4	1-5/8	15			1	1-1/4	06
		3/4	1-3/4	16			1	1-3/8	23
		3/4	1-7/8	17			1	1-1/2	07
		3/4	2	18			1	1-5/8	24
		13/16	1/2	08			1	1-3/4	08
		13/16	5/8	09			1	1-7/8	25
		13/16	3/4	10			1	2	09
							1-1/8	3/4	26
007	7/16	5/8	3/4	01			1-1/8	7/8	27
		5/8	25/32	02			1-1/8	1	10
		3/4	1-1/4	03			1-1/8	1-1/8	28
							1-1/8	1-1/4	11
008	1/2	3/4	3/4	01			1-1/8	1-3/8	29
		3/4	25/32	02			1-1/8	1-1/2	12
		3/4	1	03			1-1/8	1-5/8	30
		13/16	1/2	20			1-1/8	1-3/4	13
		7/8	1/2	04			1-1/8	1-7/8	31
		7/8	3/4	05			1-1/8	2	14
		7/8	7/8	21			1-1/8	2-1/8	32
		7/8	1	06			1-1/8	2-1/4	33
		7/8	1-1/8	22			1-1/8	2-1/2	15
		7/8	1-1/4	07			1-1/8	3	34
		7/8	1-3/8	23			1-3/16	3/4	16
		7/8	1-1/2	08			1-3/16	1	17
		7/8	1-5/8	24			1-3/16	1-1/4	18
		7/8	1-3/4	09			1-3/16	1-1/2	19
		7/8	1-7/8	25			1-3/8	2	35
		7/8	2	10					
		7/8	2-1/4	11	011	11/16	3/4	1-1/2	01
		1	1/2	12			7/8	3/4	02
		1	3/4	13			15/16	3/4	03
		1	7/8	26			15/16	1	04
		1	1	14			1	55/64	05
		1	1-1/8	27			1-3/16	1-13/16	06
		1	1-1/4	15					
		1	1-3/8	28	012	3/4	1	3/4	01
		1	1-1/2	16			1	1	02
		1	1-5/8	29			1	1-1/32	03
		1	1-3/4	17			1	1-3/8	04

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLVI - Boundary dimensions-IG (cont'd.)

Bore		O.D.	Width	O.D. and width code	Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
012	3/4	1	2	05	014	7/8	1-1/8	2	05
		1	2-3/8	06			1-1/8	2-3/8	06
		1-1/8	3/4	07			1-1/4	3/4	07
		1-1/8	7/8	32			1-1/4	7/8	33
		1-1/8	1	08			1-1/4	1	08
		1-1/8	1-1/8	33			1-1/4	1-1/8	34
		1-1/8	1-1/4	09			1-1/4	1-1/4	09
		1-1/8	1-3/8	34			1-1/4	1-3/8	35
		1-1/8	1-1/2	10			1-1/4	1-1/2	10
		1-1/8	1-5/8	35			1-1/4	1-5/8	36
		1-1/8	1-3/4	11			1-1/4	1-3/4	11
		1-1/8	1-7/8	36			1-1/4	1-7/8	37
		1-1/8	2	12			1-1/4	2	12
		1-1/8	2-1/4	45			1-1/4	2-1/4	13
		1-1/8	2-1/2	46			1-1/4	2-1/2	47
		1-1/8	3	47			1-3/8	3/4	14
		1-1/4	9/16	30			1-3/8	7/8	15
		1-1/4	3/4	13			1-3/8	1	16
		1-1/4	7/8	14			1-3/8	1-1/8	17
		1-1/4	1	15			1-3/8	1-1/4	18
		1-1/4	1-1/8	16			1-3/8	1-3/8	38
		1-1/4	1-1/4	17			1-3/8	1-1/2	19
		1-1/4	1-3/8	44			1-3/8	1-5/8	20
		1-1/4	1-1/2	18			1-3/8	1-3/4	21
		1-1/4	1-5/8	19			1-3/8	1-7/8	39
		1-1/4	1-3/4	20			1-3/8	2	22
		1-1/4	1-7/8	37			1-3/8	2-1/4	23
		1-1/4	2	21			1-3/8	2-1/2	40
		1-1/4	2-1/8	31			1-1/2	1	24
		1-1/4	2-1/4	38			1-1/2	1-1/8	41
		1-1/4	2-3/8	48			1-1/2	1-1/4	25
		1-1/4	2-1/2	22			1-1/2	1-3/8	42
		1-3/8	1	23			1-1/2	1-1/2	26
		1-3/8	1-1/8	39			1-1/2	1-5/8	43
		1-3/8	1-1/4	24			1-1/2	1-3/4	27
		1-3/8	1-3/8	40			1-1/2	1-7/8	44
		1-3/8	1-1/2	25			1-1/2	2	28
		1-3/8	1-5/8	41			1-1/2	2-1/4	45
		1-3/8	1-3/4	26			1-1/2	2-3/8	48
		1-3/8	1-7/8	42			1-1/2	2-1/2	46
		1-3/8	2	27			1-1/2	2-3/4	49
		1-3/8	2-1/4	43			1-9/16	1-1/4	29
		1-3/8	2-1/2	28			1-9/16	1-1/2	30
		1-3/8	3	29			1-9/16	1-3/4	31
							1-9/16	2	32
013	13/16	7/8	1	01					
		1	1-3/4	02	015	15/16	1-1/8	1-1/8	01
		1	1	03			1-1/8	1-1/4	02
		1-1/16	1	04			1-3/16	1	03
		1-1/16	1-1/4	05			1-3/16	1-1/4	04
		1-5/16	1-1/2	06			1-7/16	1-3/4	05
							1-7/16	2	06
014	7/8	1-1/8	1	01					
		1-1/8	1-1/32	02	016	1	1-3/16	5/8	01
		1-1/8	1-1/4	03			1-3/16	1	02
		1-1/8	1-3/8	04			1-3/16	1-1/2	03

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLVI - Boundary dimensions-IG (cont'd.)

Bore		O.D.	Width	O.D. and width code	Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
016	1	1-1/4	1	04	016	1	1-3/4	1-1/2	44
		1-1/4	1-1/32	05			1-3/4	1-5/8	77
		1-1/4	1-1/8	06			1-3/4	1-3/4	45
		1-1/4	1-1/4	07			1-3/4	1-7/8	78
		1-1/4	1-1/2	08			1-3/4	2	46
		1-1/4	1-5/8	09			1-3/4	2-1/4	79
		1-1/4	2	10			1-3/4	2-1/2	47
		1-1/4	2-1/2	11			1-3/4	2-3/4	80
		1-1/4	2-15/16	12			1-3/4	3	48
		1-1/4	3-1/16	13			1-3/4	3-1/2	81
		1-5/16	3/4	83			1-3/4	4	49
		1-5/16	1	84			1-7/8	1	50
		1-3/8	3/4	14			1-7/8	1-1/2	51
		1-3/8	1	15			1-7/8	2	52
		1-3/8	1-1/2	16			1-7/8	2-1/2	53
		1-3/8	1-3/4	17			1-7/8	3	54
		1-3/8	2	18			1-7/8	4	55
		1-3/8	2-1/4	19			2	1	56
		1-3/8	2-3/8	85			2	1-1/2	57
		1-3/8	2-1/2	86			2	2	58
		1-3/8	2-5/8	20			2	2-1/2	59
		1-3/8	3	87			2	3	60
		1-1/2	3/4	21			2	4	61
		1-1/2	7/8	22			2-1/8	1-1/2	62
		1-1/2	1	23			2-1/8	2	63
		1-1/2	1-1/8	24			2-1/8	2-1/2	64
		1-1/2	1-1/4	25			2-1/4	1-1/2	65
		1-1/2	1-3/8	68			2-1/4	2	66
		1-1/2	1-1/2	26			2-1/4	2-1/2	67
		1-1/2	1-5/8	27					
		1-1/2	1-7/8	69	017	1-1/16	1-5/16	1	01
		1-1/2	1-3/4	28			1-5/16	1-1/4	02
		1-1/2	2	29			1-3/8	1-1/4	03
		1-1/2	2-1/4	30			1-9/16	1	14
		1-1/2	2-1/2	31			1-9/16	1-1/4	13
		1-1/2	2-3/4	82			1-9/16	1-1/2	11
		1-1/2	2-7/8	88			1-9/16	1-3/4	12
		1-1/2	3	32			1-9/16	2	16
		1-5/8	1	33			1-9/16	2-1/4	15
		1-5/8	1-1/8	70			1-9/16	2-1/2	17
		1-5/8	1-1/4	34			1-9/16	2-3/4	19
		1-5/8	1-3/8	71			1-9/16	3	18
		1-5/8	1-1/2	35			1-11/16	2-5/16	20
		1-5/8	1-5/8	72			1-11/16	2-9/16	21
		1-5/8	1-3/4	36			1-11/16	4-1/2	22
		1-5/8	1-7/8	73			1-13/16	2	23
		1-5/8	2	37			2-1/16	1	04
		1-5/8	2-1/4	38			2-1/16	1-1/2	05
		1-5/8	2-1/2	39			2-1/16	2	06
		1-5/8	2-3/4	74			2-1/16	2-1/2	07
		1-5/8	3	40			2-1/16	3	08
		1-5/8	3-1/2	89			2-1/16	4	09
		1-3/4	1	41			2-1/16	5	10
		1-3/4	1-1/8	75					
		1-3/4	1-3/16	42	018	1-1/8	1-5/16	7/8	01
		1-3/4	1-1/4	43			1-5/16	1	02
		1-3/4	1-3/8	76			1-5/16	1-1/2	03

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLVI - Boundary dimensions-IG (cont'd.)

Bore		O.D.	Width	O.D. and width code	Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
018	1-1/8	1-3/8	1	04	018	1-1/8	2-1/8	1-3/8	49
		1-3/8	1-1/4	05			2-1/8	2	50
		1-3/8	1-3/8	06			2-1/8	2-1/2	51
		1-1/2	1	07			2-1/8	3	52
		1-1/2	1-1/4	08			2-1/8	4	53
		1-1/2	1-1/2	09			2-3/8	3	55
		1-1/2	1-5/8	10					
		1-1/2	1-3/4	11	019	1-3/16	1-3/8	1	01
		1-1/2	2	12			1-3/8	1-1/2	02
		1-1/2	2-1/2	13			1-3/8	2	03
		1-1/2	2-7/8	14			1-3/8	2-1/2	04
		1-1/2	3-1/8	15			1-7/16	1	05
		1-1/2	3-3/16	16			1-7/16	2	06
		1-5/8	3/4	17			1-1/2	1	07
		1-5/8	7/8	18			1-1/2	1-1/4	08
		1-5/8	1	19			1-1/2	2-1/2	09
		1-5/8	1-1/8	20			1-5/8	1-3/8	10
		1-5/8	1-1/4	21			1-11/16	1	11
		1-5/8	1-3/8	54			1-11/16	1-1/4	39
		1-5/8	1-1/2	22			1-11/16	1-1/2	12
		1-5/8	1-5/8	23			1-11/16	1-3/4	38
		1-5/8	1-3/4	24			1-11/16	2	13
		1-5/8	1-7/8	57			1-11/16	2-1/4	40
		1-5/8	2	25			1-11/16	2-1/2	14
		1-5/8	2-1/4	26			1-11/16	2-3/4	41
		1-5/8	2-1/2	27			1-11/16	3	15
		1-5/8	2-3/4	60			1-13/16	1	16
		1-5/8	3	61			1-13/16	1-1/2	17
		1-3/4	1	28			1-13/16	2	18
		1-3/4	1-1/4	29			1-13/16	2-1/2	19
		1-3/4	1-1/2	30			1-13/16	3	20
		1-3/4	1-3/4	62			1-15/16	1	21
		1-3/4	2	31			1-15/16	1-1/2	22
		1-3/4	2-1/4	32			1-15/16	2	23
		1-3/4	2-1/2	33			1-15/16	2-1/2	24
		1-3/4	2-3/4	63			1-15/16	3	25
		1-3/4	3	34			1-15/16	4	26
		1-7/8	1	35			2	1-1/4	27
		1-7/8	1-1/2	36			2	1-1/2	28
		1-7/8	2	37			2	1-3/4	29
		1-7/8	2-1/4	56			2	2	30
		1-7/8	2-1/2	38			2-3/16	1	31
		1-7/8	3	39			2-3/16	1-1/8	42
		1-7/8	4	40			2-3/16	1-1/2	32
		2	1	41			2-3/16	2	33
		2	1-1/4	64			2-3/16	2-1/2	34
		2	1-1/2	42			2-3/16	3	35
		2	1-3/4	65			2-3/16	4	36
		2	2	43			2-3/16	5	37
		2	2-1/4	66					
		2	2-1/2	44	020	1-1/4	1-7/16	55/64	01
		2	2-3/4	67			1-9/16	1	02
		2	3	45			1-9/16	1-1/4	03
		2	3-1/2	68			1-9/16	1-1/2	04
		2	4	46			1-9/16	2	05
		2-1/8	1	47			1-9/16	2-1/2	06
		2-1/8	1-1/8	48			1-9/16	3	07

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLVI - Boundary dimensions-IG (cont'd.)

Bore		O.D.	Width	O.D. and width code	Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
020	1-1/4	1-5/8	3/4	85	020	1-1/4	2-1/8	1-1/4	49
		1-5/8	1	08			2-1/8	1-13/32	50
		1-5/8	1-1/4	09			2-1/8	1-1/2	51
		1-5/8	1-1/2	86			2-1/8	1-3/4	52
		1-5/8	1-5/8	10			2-1/8	2	53
		1-5/8	1-3/4	11			2-1/8	2-1/2	54
		1-5/8	2	12			2-1/8	3	55
		1-5/8	2-1/2	13			2-1/8	4	56
		1-5/8	2-7/8	14			2-1/4	1	57
		1-1/2	1-1/4	15			2-1/4	1-1/4	78
		1-1/2	1-9/32	16			2-1/4	1-1/2	58
		1-3/4	3/4	17			2-1/4	1-3/4	79
		1-3/4	7/8	18			2-1/4	2	59
		1-3/4	1	19			2-1/4	2-1/4	80
		1-3/4	1-1/8	20			2-1/4	2-1/2	60
		1-3/4	1-1/4	21			2-1/4	2-3/4	81
		1-3/4	1-1/2	22			2-1/4	3	61
		1-3/4	1-5/8	23			2-1/4	3-1/2	82
		1-3/4	1-3/4	24			2-1/4	4	62
		1-3/4	2	25			2-1/4	5	63
		1-3/4	2-1/4	26			2-3/8	1-1/4	92
		1-3/4	2-1/2	27			2-3/8	3	83
		1-3/4	2-3/4	84			2-1/2	1	64
		1-3/4	3	28			2-1/2	1-1/2	65
		1-7/8	1	29			2-1/2	2	66
		1-7/8	1-1/4	30			2-1/2	2-1/2	67
		1-7/8	1-1/2	31			2-1/2	3	68
		1-7/8	1-3/4	32			2-1/2	4	69
		1-7/8	2	33			2-1/2	5	70
		1-7/8	2-1/4	71					
		1-7/8	2-1/2	34	021	1-5/16	1-5/8	1	01
		1-7/8	2-3/4	72			1-5/8	1-1/4	02
		1-7/8	3	35			1-3/4	2-1/2	03
		1-7/8	3-1/2	73			1-3/4	3	04
		1-7/8	4	74			1-13/16	1	12
		1-7/8	4-1/2	87			1-13/16	1-1/4	13
		1-7/8	5-1/2	88			1-13/16	1-1/2	14
		2	1	36			1-13/16	1-3/4	15
		2	1-1/4	37			1-13/16	2	16
		2	1-1/2	38			1-13/16	2-1/4	17
		2	1-3/4	39			1-13/16	2-1/2	18
		2	2	40			1-13/16	2-3/4	19
		2	2-1/4	75			1-13/16	3	20
		2	2-3/8	89			1-15/16	2-1/16	21
		2	2-1/2	41			1-15/16	2-15/16	22
		2	2-9/16	90			2-1/16	3	23
		2	2-3/4	76			2-1/16	4	24
		2	3	42			2-5/16	1	05
		2	3-1/2	77			2-5/16	1-1/2	06
		2	4	43			2-5/16	2	07
		2	4-7/16	91			2-5/16	2-1/2	08
		2-1/16	1	44			2-5/16	3	09
		2-1/16	1-1/2	45			2-5/16	4	10
		2-1/16	2	46			2-5/16	5	11
		2-1/8	1	47					
		2-1/8	1-1/8	48	022	1-3/8	1-9/16	1	01

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLVI - Boundary dimensions-IG (cont'd.)

Bore		O.D.	Width	O.D. and width code	Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
022	1-3/8	1-9/16	1	01	022	1-3/8	2-3/8	3-1/2	61
		1-9/16	1-3/8	02			2-3/8	4	46
		1-9/16	1-1/2	03			2-3/8	5	47
		1-9/16	2	04			2-1/2	1	48
		1-9/16	2-3/8	05			2-1/2	1-1/2	49
		1-9/16	2-1/2	06			2-5/8	1	50
		1-11/16	1	07			2-5/8	1-1/2	51
		1-11/16	1-1/4	08			2-5/8	2	52
		1-11/16	2-1/4	09			2-5/8	2-1/2	53
		1-3/4	1	10			2-5/8	3	54
		1-3/4	1-1/4	11			2-5/8	4	55
		1-3/4	1-3/8	12			2-5/8	5	56
		1-3/4	1-1/2	13					
		1-3/4	1-3/4	15	023	1-7/16	1-11/16	1	01
		1-3/4	2	16			1-11/16	1-1/2	02
		1-3/4	2-1/2	17			1-11/16	2	03
		1-3/4	2-9/16	18			1-11/16	2-5/8	04
		1-3/4	2-7/8	19			1-3/4	1	05
		1-3/4	3	20			1-3/4	1-1/4	06
		1-3/4	3-25/64	21			1-3/4	1-7/16	08
		1-3/4	4-27/32	22			1-3/4	1-1/2	07
		1-7/8	3/4	23			1-3/4	2	09
		1-7/8	7/8	24			1-3/4	2-1/2	10
		1-7/8	1	25			1-3/4	4	11
		1-7/8	1-1/8	26			1-7/8	1	12
		1-7/8	1-1/4	27			1-7/8	1-1/2	13
		1-7/8	1-1/2	28			1-7/8	2	14
		1-7/8	1-9/16	29			1-15/16	1	15
		1-7/8	1-5/8	14			1-15/16	1-1/4	82
		1-7/8	1-3/4	30			1-15/16	1-1/2	16
		1-7/8	2	31			1-15/16	1-3/4	83
		1-7/8	2-1/4	62			1-15/16	2	17
		1-7/8	2-1/2	32			1-15/16	2-1/4	84
		1-7/8	2-3/4	63			1-15/16	2-1/2	18
		1-7/8	3	64			1-15/16	2-3/4	85
		1-7/8	3-1/2	65			1-15/16	3	19
		1-7/8	3-9/16	66			1-15/16	3-1/2	20
		2	1-3/4	33			1-15/16	3-13/16	86
		2	2	67			2-1/16	1-1/2	87
		2	2-1/2	34			2-1/8	1-1/2	21
		2	3	68			2-1/8	2	22
		2-1/8	1	35			2-1/8	2-1/2	23
		2-1/8	1-1/2	36			2-3/16	1	24
		2-1/8	2	37			2-3/16	1-1/2	25
		2-1/8	2-1/2	38			2-3/16	2	26
		2-1/8	3	39			2-3/16	2-9/16	88
		2-1/8	4	40			2-1/4	1	27
		2-3/8	1	41			2-1/4	1-1/2	28
		2-3/8	1-1/4	57			2-1/4	2	29
		2-3/8	1-1/2	42			2-5/16	1	30
		2-3/8	1-3/4	58			2-5/16	1-1/2	31
		2-3/8	2	43			2-5/16	2	32
		2-3/8	2-1/4	59			2-5/16	2-1/2	33
		2-3/8	2-1/2	44			2-5/16	3	34
		2-3/8	2-3/4	60			2-5/16	4	35
		2-3/8	3	45			2-5/16	5	36

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLVI - Boundary dimensions-IG (cont'd.)

Bore		O.D.	Width	O.D. and width code	Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
023	1-7/16	2-3/8	1-1/2	37	024	1-1/2	1-7/8	3/8	92
		2-3/8	1-3/4	38			1-7/8	1	11
		2-3/8	2	39			1-7/8	1-1/4	12
		2-3/8	2-1/2	40			1-7/8	1-1/2	13
		2-7/16	1	41			1-7/8	1-5/8	14
		2-7/16	1-1/2	42			1-7/8	1-3/4	15
		2-7/16	2	43			1-7/8	2	16
		2-7/16	2-1/2	44			1-7/8	2-5/16	17
		2-7/16	3	45			1-7/8	2-1/2	18
		2-7/16	4	46			1-7/8	2-7/8	19
		2-7/16	5	47			1-7/8	3	20
		2-9/16	1	48			2	5/8	93
		2-9/16	1-1/2	49			2	3/4	21
		2-9/16	2	50			2	7/8	22
		2-9/16	2-1/2	51			2	1	23
		2-9/16	3	52			2	1-1/8	24
		2-9/16	4	53			2	1-1/4	25
		2-9/16	5	54			2	1-1/2	26
		2-11/16	1	55			2	1-3/4	99
		2-11/16	1-1/2	56			2	2	27
		2-11/16	2	57			2	2-1/2	28
		2-11/16	2-1/2	58			2	3	29
		2-11/16	3	59			2	3-1/2	30
		2-11/16	4	60			2-1/8	3/4	31
		2-11/16	5	61			2-1/8	13/16	32
		2-13/16	1	62			2-1/8	15/16	33
		2-13/16	1-1/2	63			2-1/8	1-1/8	34
		2-13/16	2	64			2-1/8	1-1/4	35
		2-13/16	2-1/2	65			2-1/8	1-1/2	36
		2-13/16	3	66			2-1/8	1-3/4	37
		2-13/16	4	67			2-1/8	2	38
		2-13/16	5	68			2-1/8	2-1/2	39
		2-7/8	1-1/2	69			2-1/8	3	40
		2-7/8	2	70			2-1/8	4	41
		2-7/8	2-1/2	71			2-1/4	1-1/2	42
		2-15/16	1	72			2-1/4	2	43
		2-15/16	1-1/2	73			2-1/4	2-1/2	44
		2-15/16	2	74			2-5/16	1	45
		2-15/16	2-1/2	75			2-5/16	1-1/2	46
		2-15/16	3	76			2-5/16	2	47
		2-15/16	4	77			2-3/8	1	48
		2-15/16	5	78			2-3/8	1-1/2	49
		3	1-1/2	79			2-3/8	2	50
		3	2	80			2-3/8	2-1/2	51
		3	2-1/2	81			2-3/8	3	52
							2-3/8	4	53
024	1-1/2	1-11/16	1	01			2-3/8	5	54
		1-11/16	2	02			2-1/2	15/16	55
		1-11/16	2-1/2	03			2-1/2	1	56
		1-3/4	1-1/4	04			2-1/2	1-3/16	57
		1-3/4	1-1/2	05			2-1/2	1-1/2	58
		1-13/16	1	06			2-1/2	1-3/4	59
		1-13/16	1-1/4	07			2-1/2	2	60
		1-13/16	1-1/2	08			2-1/2	2-1/2	61
		1-13/16	2	09			2-1/2	3	62
		1-13/16	2-1/2	10			2-1/2	4	63

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLVI - Boundary dimensions-IG (cont'd.)

Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches	
024	1-1/2	2-1/2	5	64
		2-5/8	1	65
		2-5/8	1-1/4	94
		2-5/8	1-1/2	66
		2-5/8	1-3/4	95
		2-5/8	2	67
		2-5/8	2-1/4	96
		2-5/8	2-1/2	68
		2-5/8	2-3/4	97
		2-5/8	3	69
		2-5/8	3-1/2	98
		2-5/8	4	70
		2-5/8	5	71
		2-3/4	1	72
		2-3/4	1-1/2	73
		2-3/4	2	74
		2-3/4	2-1/2	75
		2-3/4	3	76
		2-3/4	4	77
		2-3/4	5	78
		2-7/8	1-1/2	79
		2-7/8	2	80
		2-7/8	2-1/2	81
		2-7/8	3	82
		2-7/8	4	83
		2-7/8	5	84
		3	1	85
		3	1-1/2	86
		3	2	87
		3	2-1/2	88
		3	3	89
		3	4	90
		3	5	91
025	1-9/16	1-7/8	1	01
		1-7/8	1-1/4	02
		1-15/16	3/4	28
		2	1-1/4	03
		2	2-1/2	04
		2	3	05
		2-1/16	1	06
		2-1/16	1-1/2	07
		2-1/16	2	08
		2-1/16	2-1/2	09
		2-1/16	3	10
		2-3/16	1	18
		2-3/16	1-1/4	19
		2-3/16	1-1/2	20
		2-3/16	1-3/4	21
		2-3/16	2	22
		2-3/16	2-1/4	23
		2-3/16	2-1/2	24
		2-3/16	2-3/4	25
		2-3/16	3	26
		2-3/16	3-1/2	27
		2-11/16	1	11
025	1-9/16	2-11/16	1-1/2	12
		2-11/16	2	13
		2-11/16	2-1/2	14
		2-11/16	3	15
		2-11/16	4	16
		2-11/16	5	17
026	1-5/8	1-7/8	1	01
		1-15/16	1	02
		1-15/16	1-1/4	03
		1-15/16	2	04
		1-15/16	2-3/8	05
		1-31/32	1-7/16	06
		2	1-1/4	07
		2	1-3/8	08
		2	1-3/4	09
		2	1-13/16	10
		2	2-3/4	11
		2	3-1/8	12
		2-1/4	1	44
		2-1/4	1-1/4	45
		2-1/4	1-1/2	46
		2-1/4	1-3/4	47
		2-1/4	2	48
		2-1/4	2-1/4	49
		2-1/4	2-1/2	50
		2-1/4	2-3/4	51
		2-1/4	3	52
		2-1/4	3-1/2	53
		2-3/8	1-1/2	54
		2-3/8	3	55
		2-3/8	3-1/4	56
		2-3/8	4	57
		2-3/8	4-7/16	58
		2-3/4	1	13
		2-3/4	1-1/4	39
		2-3/4	1-3/8	14
		2-3/4	1-1/2	15
		2-3/4	1-3/4	40
		2-3/4	2	16
		2-3/4	2-1/4	41
		2-3/4	2-1/2	17
		2-3/4	2-3/4	42
		2-3/4	3	18
		2-3/4	3-1/2	43
		2-3/4	4	19
		2-3/4	5	20
		2-7/8	1	21
		2-7/8	2	22
		2-7/8	3	23
		2-7/8	4	24
		2-7/8	5	25
		3	1	26
		3	1-1/2	27
		3	2	28
		3	2-1/2	29

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLVI - Boundary dimensions-IG (cont'd.)

Bore		O.D.	Width	O.D. and width code	Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
026	1-5/8	3	3	30	028	1-3/4	2	1-5/8	04
		3	4	31			2	2	05
		3	5	32			2	2-1/2	06
		3-1/8	1	33			2-1/32	1-1/64	07
		3-1/8	1-1/4	34			2-1/32	1-13/64	08
		3-1/8	2	35			2-3/64	1	11
		3-1/8	3	36			2-1/16	1-1/2	09
		3-1/8	4	37			2-1/16	1-5/8	10
		3-1/8	5	38			2-1/8	1	12
							2-1/8	1-3/8	13
027	1-11/16	2	1	01			2-1/8	1-1/2	14
		2	1-1/4	02			2-1/8	1-3/4	15
		2-1/16	3/4	41			2-1/8	2	16
		2-1/16	13/16	42			2-1/8	2-3/4	17
		2-1/16	1-1/2	03			2-1/8	3-1/8	18
		2-3/16	1	04			2-3/16	1-13/16	19
		2-3/16	1-1/2	05			2-1/4	1	20
		2-3/16	1-13/16	06			2-1/4	1-1/8	26
		2-3/16	2	07			2-1/4	1-1/4	83
		2-5/16	1	31			2-1/4	1-1/2	21
		2-5/16	1-1/4	32			2-1/4	1-3/4	22
		2-5/16	1-1/2	33			2-1/4	2	23
		2-5/16	1-3/4	34			2-1/4	2-1/2	24
		2-5/16	2	35			2-1/4	2-3/4	25
		2-5/16	2-1/4	36			2-1/4	2-15/16	84
		2-5/16	2-1/2	37			2-3/8	1	78
		2-5/16	2-3/4	38			2-3/8	1-1/4	79
		2-5/16	3	39			2-3/8	1-13/32	27
		2-5/16	3-1/2	40			2-3/8	1-1/2	28
		2-7/16	2-1/2	43			2-3/8	1-3/4	80
		2-11/16	2	08			2-3/8	2	29
		2-11/16	2-1/2	09			2-3/8	2-1/4	81
		2-11/16	3	10			2-3/8	2-1/2	30
		2-11/16	4	11			2-3/8	2-3/4	82
		2-11/16	5	12			2-3/8	3	31
		2-13/16	2	13			2-3/8	3-1/2	32
		2-13/16	2-1/2	14			2-3/8	4	33
		2-13/16	3	15			2-1/2	15/16	34
		2-13/16	4	16			2-1/2	1-1/16	85
		2-13/16	5	17			2-1/2	1-3/16	35
		2-13/16	6	18			2-1/2	1-1/2	36
		2-15/16	2	19			2-1/2	2	37
		2-15/16	2-1/2	20			2-1/2	2-1/2	38
		2-15/16	3	21			2-1/2	3	86
		2-15/16	4	22			2-5/8	1-1/2	39
		2-15/16	5	23			2-5/8	2-1/2	40
		2-15/16	6	24			2-3/4	1	41
		3-3/16	2	25			2-3/4	1-3/8	42
		3-3/16	2-1/2	26			2-3/4	1-1/2	43
		3-3/16	3	27			2-3/4	1-7/8	72
		3-3/16	4	28			2-3/4	2	44
		3-3/16	5	29			2-3/4	2-1/2	45
		3-3/16	6	30			2-3/4	3	46
							2-3/4	4	47
028	1-3/4	1-15/16	1	01			2-3/4	5	48
		2	1	02			2-7/8	2	49
		2	1-1/2	03					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLVI - Boundary dimensions-IG (cont'd.)

Bore		O.D.	Width	O.D. and width code	Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
028	1-3/4	2-7/8	2-1/2	50	030	1-7/8	2-1/2	2	34
		2-7/8	3	51			2-1/2	2-1/4	35
		2-7/8	4	52			2-1/2	2-1/2	36
		2-7/8	5	53			2-1/2	2-3/4	37
		2-7/8	6	54			2-1/2	3	38
		3	1-1/2	73			2-1/2	3-1/2	39
		3	1-3/4	74			3	1-1/2	25
		3	2	55			3	1-3/4	26
		3	2-1/4	75			3	2	11
		3	2-1/2	56			3	2-1/4	27
		3	2-3/4	76			3	2-1/2	12
		3	3	57			3	2-3/4	28
		3	3-1/2	77			3	3	13
		3	4	58			3	3-1/2	29
		3	5	59			3	4	14
		3	6	60			3	5	15
		3-1/8	1-1/2	61			3	6	16
		3-1/8	2	62			3-3/8	1-1/4	17
		3-1/8	2-1/2	63			3-3/8	2	18
		3-1/4	1-1/4	64			3-3/8	2-1/2	19
		3-1/4	1-1/2	65			3-3/8	3	20
		3-1/4	2	66			3-3/8	4	21
		3-1/4	2-1/2	67			3-3/8	5	22
		3-1/4	3	68			3-3/8	6	23
		3-1/4	4	69					
		3-1/4	5	70	031	1-15/16	2-3/16	1	01
		3-1/4	6	71			2-3/16	2	02
							2-1/4	1	03
029	1-13/16	2-1/4	1-3/4	01			2-1/4	1-1/2	04
		2-7/16	1	02			2-1/4	2	05
		2-7/16	1-1/4	03			2-1/4	2-1/2	06
		2-7/16	1-1/2	04			2-5/16	2	07
		2-7/16	1-3/4	05			2-5/16	3	08
		2-7/16	2	06			2-3/8	2	09
		2-7/16	2-1/4	07			2-1/2	1-1/2	10
		2-7/16	2-1/2	08			2-1/2	1-3/4	11
		2-7/16	2-3/4	09			2-1/2	3	12
		2-7/16	3	10			2-1/2	4	13
		2-7/16	3-1/2	11			2-9/16	1	14
							2-9/16	1-1/2	15
030	1-7/8	2-1/16	2	01			2-9/16	1-3/4	55
		2-1/8	1-1/2	02			2-9/16	2	16
		2-1/4	1	24			2-9/16	2-1/4	56
		2-1/4	1-1/16	40			2-9/16	2-1/2	17
		2-1/4	1-3/8	03			2-9/16	2-3/4	57
		2-1/4	1-3/4	04			2-9/16	3	58
		2-1/4	2-1/2	05			2-9/16	3-1/2	59
		2-1/4	2-3/4	06			2-9/16	4	60
		2-1/4	3-1/8	07			2-9/16	5	61
		2-3/8	1-7/8	08			2-5/8	1-1/2	18
		2-3/8	2	09			2-5/8	2	19
		2-3/8	2-1/2	10			2-5/8	2-1/2	20
		2-1/2	1	30			2-5/8	3	21
		2-1/2	1-1/4	31			2-5/8	3-13/16	22
		2-1/2	1-1/2	32			2-13/16	1-1/2	23
		2-1/2	1-3/4	33			2-13/16	2	24

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLVI - Boundary dimensions-IG (cont'd.)

Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches	
031	1-15/16	2-13/16	2-1/2	25
		2-13/16	3	26
		2-7/8	1	27
		2-7/8	1-1/2	28
		2-7/8	2	29
		2-7/8	2-1/2	30
		2-15/16	1	31
		2-15/16	1-1/2	32
		2-15/16	2	33
		2-15/16	2-1/2	34
		3-3/16	2	35
		3-3/16	2-1/2	36
		3-3/16	4	37
		3-3/16	5	38
		3-3/16	6	39
		3-1/2	1-1/2	40
		3-1/2	2	41
		3-1/2	2-1/2	42
		3-1/2	3	43
		3-11/16	2	44
		3-11/16	3	45
		3-11/16	4	46
		3-11/16	5	47
		3-11/16	6	48
		3-13/16	1-1/2	49
		3-13/16	2	50
		3-13/16	2-1/2	51
		3-13/16	3	52
		3-13/16	4	53
		3-13/16	5	54
032	2	2-3/16	3	01
		2-3/16	3-5/32	02
		2-1/4	1	03
		2-1/4	1-1/8	04
		2-1/4	1-1/4	05
		2-1/4	2	06
		2-3/8	3/4	23
		2-3/8	1	07
		2-3/8	1-1/2	08
		2-3/8	2	09
		2-3/8	2-1/2	10
		2-3/8	3	11
		2-3/8	4	12
		2-1/2	1-1/4	70
		2-1/2	1-5/16	13
		2-1/2	1-1/2	14
		2-1/2	1-3/4	15
		2-1/2	1-7/8	16
		2-1/2	3	17
		2-1/2	3-3/8	18
		2-5/8	1	19
		2-5/8	1-1/2	20
		2-5/8	1-3/4	67
		2-5/8	2	21
		2-5/8	2-1/4	68
		2-5/8	2-1/2	22

Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches	
032	2	2-5/8	2-3/4	69
		2-5/8	3-1/2	24
		2-5/8	4	25
		2-5/8	5	26
		2-3/4	1	27
		2-3/4	1-3/16	28
		2-3/4	1-3/8	29
		2-3/4	2-1/4	71
		2-3/4	2-1/2	72
		2-3/4	4	73
		2-7/8	1-1/2	30
		2-7/8	2	31
		2-7/8	2-1/2	32
		2-7/8	3	33
		3	1	34
		3	1-1/2	35
		3	1-3/4	56
		3	2	36
		3	2-1/4	57
		3	2-1/2	37
		3	2-3/4	58
		3	3	59
		3	3-1/2	60
		3	4	61
		3	4-11/16	74
		3-1/8	1-1/4	38
		3-1/8	1-7/16	39
		3-1/4	1-1/4	75
		3-1/4	1-1/2	62
		3-1/4	1-3/4	63
		3-1/4	2	40
		3-1/4	2-1/4	64
		3-1/4	2-1/2	41
		3-1/4	2-3/4	65
		3-1/4	3	42
		3-1/4	3-1/2	66
		3-1/4	4	43
		3-1/4	5	44
		3-1/4	6	45
		3-1/2	1-1/2	46
		3-1/2	2	47
		3-1/2	2-1/2	48
		3-1/2	3	49
		3-3/4	2	50
		3-3/4	2-1/2	51
		3-3/4	3	52
		3-3/4	4	53
		3-3/4	5	54
		3-3/4	6	55
033	2-1/16	2-9/32	1-3/4	01
		2-3/8	1	02
		2-3/8	1-1/2	03
		2-3/8	2	04
		2-3/8	2-1/2	05
		2-3/8	3	06

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLVI - Boundary dimensions-IG (cont'd.)

Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches	
034	2-1/8	2-1/4	1	01
		2-1/4	1-1/2	02
		2-1/4	2	03
		2-1/4	2-1/2	04
		2-3/8	1	05
		2-3/8	1-3/4	06
		2-3/8	2	07
		2-1/2	1	26
		2-1/2	1-1/4	08
		2-1/2	1-1/2	27
		2-1/2	1-3/4	09
		2-1/2	2	10
		2-1/2	2-1/4	11
		2-1/2	5	12
		2-3/4	1	13
		2-3/4	1-3/8	28
		2-3/4	1-1/2	14
		2-3/4	2	15
		2-7/8	3	29
		2-7/8	4-3/8	30
		3	1-1/2	16
		3	2	17
		3	2-1/2	18
		3-3/8	2	19
		3-3/8	2-1/2	20
		3-3/8	3	21
		3-3/8	4	22
		3-3/8	5	23
		3-3/8	6	24
		3-3/8	7	25
035	2-3/16	2-5/8	2-1/8	01
		2-3/4	1-1/2	02
		2-3/4	1-3/4	03
		2-15/16	1-1/8	04
		2-15/16	1-3/16	05
		2-15/16	1-9/16	06
		3-7/16	2	07
		3-7/16	2-1/2	08
		3-7/16	3	09
		3-7/16	4	10
		3-7/16	5	11
		3-7/16	6	12
		3-15/16	3	13
		3-15/16	4	14
		3-15/16	5	15
		3-15/16	6	16
		3-15/16	7	17
036	2-1/4	2-7/16	3	01
		2-5/8	1	02
		2-5/8	1-1/2	03
		2-5/8	1-13/16	04
		2-11/16	1	05
		2-11/16	1-1/2	06
		2-11/16	2	07
		2-11/16	2-1/2	08

Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches	
036	2-1/4	2-11/16	3	09
		2-3/4	1-1/2	10
		2-3/4	1-3/4	11
		2-3/4	1-7/8	12
		2-3/4	3	13
		2-3/4	3-3/8	14
		2-3/4	3-3/4	15
		2-7/8	1	16
		2-7/8	1-1/2	17
		2-7/8	2	18
		2-7/8	2-1/4	53
		2-7/8	2-1/2	19
		2-7/8	2-3/4	54
		2-7/8	3	20
		2-7/8	3-1/2	21
		2-7/8	4	22
		2-7/8	5	23
		3-1/8	2	24
		3-1/8	2-1/2	25
		3-1/8	3	26
		3-5/16	1	27
		3-5/16	1-1/2	28
		3-5/16	2	29
		3-5/16	2-1/2	30
		3-1/2	1-5/16	55
		3-1/2	1-3/8	31
		3-1/2	1-9/16	32
		3-1/2	2	33
		3-1/2	2-1/2	34
		3-1/2	3	35
		3-1/2	4	36
		3-1/2	5	37
		3-1/2	6	38
		3-3/4	1-1/2	39
		3-3/4	2	40
		3-3/4	2-1/2	41
		3-3/4	3	42
		4	2	49
		4	2-1/4	50
		4	2-1/2	51
		4	2-3/4	43
		4	3	44
		4	3-1/2	52
		4	4	45
		4	5	46
		4	6	47
		4	7	48
037	2-5/16	2-5/8	1	01
		2-5/8	1-1/2	02
		2-5/8	2	03
		2-5/8	2-1/2	04
		2-7/8	2-1/4	05
		2-63/64	1-3/4	06
		2-63/64	1-15/16	07
		2-63/64	2-1/2	08
		3	3-1/2	09

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLVI - Boundary dimensions-IG (cont'd.)

Bore		O.D.	Width	O.D. and width code	Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
038	2-3/8	2-5/8	1	01	039	2-7/16	3-13/16	7	32
		2-5/8	1-1/2	02			4-1/8	2	33
		2-5/8	2-15/16	03			4-1/8	2-1/2	34
		2-3/4	1-3/8	04			4-1/8	3	35
		2-3/4	1-1/2	05			4-1/8	3-1/2	36
		2-3/4	3	06			4-5/16	3	37
		2-7/8	2-1/8	07			4-5/16	4	38
		3	1	08			4-5/16	5	39
		3	1-1/2	09			4-5/16	6	40
		3	1-3/4	10			4-5/16	7	41
		3	2	11					
		3	2-1/8	12	040	2-1/2	2-3/4	1-1/8	01
		3	2-1/2	13			2-3/4	2	02
		3	3	14			2-3/4	2-1/4	03
		3	3-1/2	15			2-7/8	1	60
		3	4	16			2-7/8	1-1/2	04
		3-1/8	7/8	23			2-7/8	3	05
		3-1/8	1-1/8	24			2-15/16	1-1/2	06
		3-1/8	1-3/16	17			2-15/16	2	07
		3-1/8	1-1/4	18			2-15/16	2-1/2	08
		3-1/8	1-3/4	19			2-15/16	3	09
		3-1/4	1-1/2	20			2-15/16	4	10
		3-1/4	2	21			3	1-1/16	61
		3-1/4	2-1/2	22			3	1-3/4	11
							3	2	12
039	2-7/16	2-13/16	1-1/2	01			3	2-1/8	13
		2-13/16	2	02			3	2-1/4	14
		2-13/16	2-1/2	03			3	2-1/2	15
		2-13/16	3	04			3	3	16
		2-7/8	2	05			3	3-1/2	17
		2-7/8	3	06			3	3-7/8	18
		3	3-1/2	07			3-1/8	1-1/2	19
		3-1/16	1-1/4	42			3-1/8	1-3/4	20
		3-1/16	1-1/2	08			3-1/8	2	21
		3-1/16	2	09			3-1/8	2-1/4	56
		3-1/16	2-1/2	10			3-1/8	2-1/2	22
		3-1/16	3	11			3-1/8	2-3/4	57
		3-1/8	2	12			3-1/8	3	23
		3-1/8	2-3/8	13			3-1/8	3-1/2	24
		3-1/8	2-1/2	14			3-1/8	4	58
		3-1/8	3	15			3-1/8	5	59
		3-1/8	3-1/2	16			3-1/2	2	25
		3-7/16	1-1/2	17			3-1/2	2-1/2	26
		3-7/16	2	18			3-1/2	3	27
		3-7/16	2-1/2	19			3-1/2	3-1/2	28
		3-7/16	3	20			3-1/2	1-1/2	29
		3-7/16	3-1/2	21			3-9/16	2	30
		3-1/2	1-1/2	22			3-9/16	2-1/2	31
		3-1/2	2	23			3-9/16	3	32
		3-1/2	2-1/2	24			3-7/8	1-7/16	33
		3-1/2	3	25			3-7/8	1-3/4	34
		3-13/16	2	26			3-7/8	3	35
		3-13/16	2-1/2	27			3-7/8	4	36
		3-13/16	3	28			3-7/8	5	37
		3-13/16	4	29			3-7/8	6	38
		3-13/16	5	30			3-7/8	7	39
		3-13/16	6	31			4-1/8	2	40

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLVI - Boundary dimensions-IG (cont'd.)

Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches	
040	2-1/2	4-1/8	2-1/2	41
		4-1/8	3	42
		4-1/8	3-1/2	43
		4-3/8	3	44
		4-3/8	4	45
		4-3/8	5	46
		4-3/8	6	47
		4-3/8	7	48
		4-1/2	2	49
		4-1/2	2-1/4	50
		4-1/2	2-1/2	51
		4-1/2	2-3/4	52
		4-1/2	3	53
		4-1/2	3-1/2	54
		4-1/2	4	55
042	2-5/8	2-7/8	1-1/8	01
		2-7/8	2	02
		2-7/8	2-1/4	03
		2-7/8	2-1/2	04
		2-7/8	3-1/8	05
		3	2	06
		3	3	07
		3-1/8	7/8	17
		3-1/8	1-1/4	16
		3-1/4	1-3/4	08
		3-1/2	1	18
		3-1/2	1-5/16	15
		3-1/2	1-13/16	19
		3-5/8	1-5/16	09
		3-5/8	1-1/2	10
		3-5/8	1-13/16	11
		3-5/8	2	12
		3-5/8	2-1/2	13
		3-5/8	3	14
043	2-11/16	3-1/8	1-1/2	01
		3-1/8	2-3/8	02
		3-5/16	1	03
		3-5/16	1-1/2	04
		3-5/16	2	05
		3-5/16	2-1/2	06
		3-5/16	3	07
		3-3/4	2	08
		3-3/4	2-1/2	09
		3-3/4	3	10
		3-3/4	4	11
		3-3/4	5	12
		3-3/4	6	13
		3-3/4	7	14
		4-9/16	2	15
		4-9/16	2-1/2	16
		4-9/16	3	17
		4-9/16	4	18
		4-9/16	5	19
		4-9/16	6	20
		4-9/16	7	21
044	2-3/4	3-1/8	1-1/2	01
		3-1/8	2	02
		3-1/4	1-1/2	03
		3-1/4	1-3/4	04
		3-1/4	2	05
		3-1/4	2-1/8	06
		3-1/4	2-1/2	07
		3-1/4	3	08
		3-1/4	3-1/2	09
		3-1/4	3-7/8	10
		3-3/8	2-1/2	11
		3-3/8	3	12
		3-3/8	3-1/2	13
		3-1/2	1-1/2	14
		3-1/2	2	15
		3-1/2	2-1/2	16
		3-1/2	3	17
		3-3/4	2	18
		3-3/4	2-1/2	19
		3-3/4	3	20
		3-3/4	3-1/2	21
		4	1-1/2	22
		4	2	23
		4	2-1/2	24
		4	3	25
		4-1/8	1-15/16	26
		4-1/8	2	27
		4-1/8	2-1/2	28
		4-1/8	3	29
		4-1/8	4	30
		4-1/8	5	31
		4-1/8	6	32
		4-1/8	7	33
		4-3/8	2	34
		4-3/8	2-1/2	35
		4-3/8	3	36
		4-3/8	3-1/2	37
		4-5/8	2-1/2	38
		4-5/8	3	39
		4-5/8	4	40
		4-5/8	5	41
		4-5/8	6	42
		4-5/8	7	43
		4-3/4	2	44
		4-3/4	2-1/4	45
		4-3/4	2-1/2	46
		4-3/4	2-3/4	47
		4-3/4	3	48
		4-3/4	3-1/2	49
		4-3/4	4	50
046	2-7/8	3-1/4	1-1/4	01
		3-1/4	1-1/2	02
		3-1/4	2	03
		3-1/4	2-1/2	04
		3-1/2	1-1/2	15
		3-1/2	1-9/16	16

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLVI - Boundary dimensions-IG (cont'd.)

Bore		O.D.	Width	O.D. and width code	Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
046	2-7/8	3-1/2	2	05	048	3	3-3/8	2-1/2	04
		3-1/2	3	06			3-3/8	3	05
		3-1/2	4	07			3-3/8	4	06
		3-3/4	1-1/2	08			3-1/2	1-1/2	07
		3-3/4	2	09			3-1/2	1-3/4	08
		3-3/4	2-1/2	10			3-1/2	2	09
		3-3/4	3	11			3-1/2	2-1/2	10
		3-7/8	13/16	14			3-1/2	2-5/8	11
		3-7/8	1-1/16	17			3-1/2	2-15/16	12
		3-7/8	1-5/16	18			3-1/2	3	13
		3-7/8	1-7/16	12			3-1/2	3-3/8	14
		3-7/8	1-3/4	19			3-1/2	4	15
		3-7/8	1-15/16	13			3-1/2	4-3/8	16
047	2-15/16	3-5/16	2	01			3-1/2	5-3/8	17
		3-5/16	3	02			3-1/2	6-3/8	18
		3-1/2	1-3/4	03			3-1/2	6-5/8	19
		3-1/2	2	04			3-1/2	7-3/8	20
		3-1/2	2-15/16	05			3-5/8	1-1/8	72
		3-9/16	1-1/2	06			3-3/4	1-1/2	21
		3-9/16	2	07			3-3/4	1-7/8	64
		3-9/16	2-1/2	08			3-3/4	2	22
		3-9/16	3	09			3-3/4	2-1/4	68
		3-9/16	4	10			3-3/4	2-1/2	23
		3-3/4	2-1/2	11			3-3/4	2-3/4	69
		3-3/4	3	12			3-3/4	3	24
		3-3/4	3-1/2	13			3-3/4	3-1/2	25
		3-3/4	4	14			3-3/4	4	26
		3-15/16	2	15			3-3/4	5	70
		3-15/16	2-1/2	16			3-7/8	2	27
		3-15/16	3	17			3-7/8	3	28
		3-15/16	3-1/2	18			3-7/8	4	29
		3-15/16	4	19			4	2	30
		4-7/16	2	20			4	2-1/2	31
		4-7/16	2-1/2	21			4	3	32
		4-7/16	3	22			4	3-1/2	33
		4-7/16	4	23			4	4	34
		4-7/16	5	24			4-1/4	1-1/2	35
		4-7/16	6	25			4-1/4	2	36
		4-7/16	7	26			4-1/4	2-1/2	37
		4-3/4	2	27			4-1/4	3	38
		4-3/4	2-1/2	28			4-1/4	4	39
		4-3/4	3	29			4-1/2	2	40
		4-3/4	3-1/2	30			4-1/2	2-1/16	41
		4-3/4	4	31			4-1/2	2-1/8	42
		4-15/16	2-1/2	32			4-1/2	2-1/2	43
		4-15/16	3	33			4-1/2	3	44
		4-15/16	4	34			4-1/2	4	45
		4-15/16	5	35			4-1/2	5	46
		4-15/16	6	36			4-1/2	6	47
		4-15/16	7	37			4-1/2	7	48
							4-3/4	2	49
048	3	3-3/8	1	71			4-3/4	2-1/2	50
		3-3/8	1-1/4	01			4-3/4	3	51
		3-3/8	1-1/2	02			4-3/4	3-1/2	52
		3-3/8	2	03			4-3/4	4	53
							5	2	54

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLVI - Boundary dimensions-IG (cont'd.)

Bore		O.D.	Width	O.D. and width code	Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
048	3	5	2-1/2	55	052	3-1/4	4-1/4	3	22
		5	2-3/4	65			4-1/4	4	23
		5	3	56			4-1/2	1-1/2	24
		5	3-1/2	66			4-1/2	2	25
		5	4	57			4-1/2	2-1/2	26
		5	4-1/2	67			4-1/2	3	27
		5	5	58			4-1/2	4	28
		5	6	59			4-7/8	2-3/16	29
		5	7	60			4-7/8	2-5/16	30
		5-1/8	2	61			5	2	31
		5-1/8	3	62			5	2-1/2	32
		5-1/8	4	63			5	3	33
							5	4	34
049	3-1/16	3-7/16	1-1/4	01			5-1/4	2	35
		3-7/16	1-3/8	02			5-1/4	3	36
							5-1/4	3-1/2	45
050	3-1/8	3-1/2	1-1/4	01			5-1/4	4	37
		3-1/2	1-3/4	02			5-1/4	5	38
		3-1/2	2-1/2	03			5-1/4	6	39
		3-1/2	3	04			5-1/4	7	40
		3-3/4	1-3/4	05			5-3/8	2	41
		3-3/4	2	06			5-3/8	3	42
		3-7/8	2	07			5-3/8	4	43
		3-7/8	2-1/16	08					
		4-1/8	1-1/2	09	053	3-5/16	3-3/4	2	01
		4-1/8	2	10			3-3/4	3	02
		4-1/8	2-1/16	14			4-5/16	1-9/16	03
		4-1/8	2-1/2	11			4-5/16	1-5/8	04
		4-1/8	3	12			4-5/16	2-3/8	05
		4-1/8	3-1/2	13					
					054	3-3/8	3-3/4	1-1/4	01
051	3-3/16	3-7/16	1-1/4	01			3-3/4	1-1/2	02
		3-9/16	1-3/4	02			3-3/4	1-7/8	03
							3-3/4	2	04
052	3-1/4	3-5/8	1-1/4	01			3-3/4	2-1/8	05
		3-5/8	2	02			4	1-1/8	13
		3-5/8	2-1/2	03			4	1-3/4	06
		3-5/8	3	04			4	2	07
		3-3/4	1-1/2	05			4	4	08
		3-3/4	2	06			4-3/8	2	09
		3-3/4	2-1/2	07			4-3/8	2-1/2	10
		3-3/4	3	08			4-3/8	3	11
		3-3/4	3-1/2	09			4-3/8	3-1/2	12
		3-3/4	4	10					
		3-7/8	1-1/16	44	055	3-7/16	4-1/4	2	01
		4	1-1/2	11			4-1/4	2-1/2	02
		4	2	12			4-1/4	3	03
		4	2-1/2	13			4-1/4	3-1/8	04
		4	3	14			4-1/4	4	05
		4	3-1/2	15			4-9/16	2	06
		4	4	16			4-9/16	2-1/2	07
		4-1/8	2	17			4-9/16	3	08
		4-1/8	3	18			4-9/16	4	09
		4-1/8	4	19			5-3/8	2	10
		4-1/4	2	20			5-3/8	2-1/2	11
		4-1/4	2-1/2	21			5-3/8	3	12

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLVI - Boundary dimensions-IG (cont'd.)

Bore		O.D.	Width	O.D. and width code	Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
055	3-7/16	5-3/8	4	13	056	3-1/2	5-3/8	2-1/2	54
							5-3/8	3	55
056	3-1/2	3-7/8	1-3/8	01			5-3/8	4	56
		3-7/8	1-3/4	02			5-3/4	2-1/2	57
		3-15/16	1	03			5-3/4	2-3/4	67
		3-15/16	1-5/16	04			5-3/4	3	58
		3-15/16	1-9/16	05			5-3/4	3-1/2	68
		3-15/16	1-13/16	06			5-3/4	4	59
		3-15/16	2	07			5-3/4	4-1/2	69
		3-15/16	3	08			5-3/4	5	60
		3-15/16	3-5/8	09			5-3/4	6	61
		4	1	71			5-3/4	7	62
		4	1-1/2	10			5-7/8	2-1/2	63
		4	1-5/8	11			5-7/8	3	64
		4	2	12			5-7/8	4	65
		4	2-1/2	13			5-7/8	5	66
		4	3	14					
		4	3-3/8	15	057	3-9/16	4	2	01
		4	3-1/2	16			4	3	02
		4	4	17			4	4	03
		4	4-3/8	18			4-3/16	1-1/4	04
		4	5-3/8	19					
		4	6-3/8	20	058	3-5/8	3-7/8	1	01
		4	7-3/8	21			3-7/8	1-1/2	02
		4-1/8	1-3/4	22			3-15/16	1-1/2	03
		4-1/8	2	23			3-15/16	1-9/16	04
		4-1/8	4	24			4	1-1/2	05
		4-1/4	2	25			4	3	06
		4-1/4	2-1/2	26			4-1/4	2	07
		4-1/4	2-3/4	70					
		4-1/4	3	27	060	3-3/4	4-1/8	1-3/8	01
		4-1/4	3-1/2	28			4-1/8	2	02
		4-1/4	4	29			4-1/8	2-3/4	03
		4-1/4	5	30			4-1/8	3	04
		4-3/8	2-1/2	31			4-1/8	3-1/2	05
		4-3/8	3	32			4-1/4	2	06
		4-3/8	4	33			4-1/4	2-1/2	07
		4-3/8	5	34			4-1/4	3	08
		4-1/2	1-5/8	35			4-1/4	3-1/2	09
		4-1/2	1-3/4	36			4-1/4	4	10
		4-1/2	2-5/8	37			4-1/4	4-3/8	11
		4-5/8	2	38			4-1/2	2	12
		4-5/8	2-1/2	39			4-1/2	2-1/4	13
		4-5/8	3	40			4-1/2	2-1/2	14
		4-5/8	4	41			4-1/2	3	15
		4-3/4	1-1/2	42			4-1/2	4	16
		4-3/4	2	43			4-1/2	4-1/2	17
		4-3/4	2-1/2	44			4-3/4	2	18
		4-3/4	3	45			4-3/4	2-1/2	19
		4-3/4	3-1/2	46			4-3/4	3	20
		4-3/4	4	47			4-3/4	3-1/2	21
		5	2-1/2	48			4-3/4	4	22
		5	3	49			4-3/4	5	23
		5	4	50			4-3/4	7	24
		5	5	51			4-7/8	1-3/4	25
		5-1/4	2-1/2	52			4-7/8	1-13/16	26
		5-3/8	2	53			4-7/8	2-1/2	27

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLVI - Boundary dimensions-IG (cont'd.)

Bore		O.D.	Width	O.D. and width code	Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
060	3-3/4	4-7/8	2-5/8	28	063	3-15/16	6	4	18
		4-7/8	3	29					
		4-7/8	4	30	064	4	4-1/4	2-1/2	01
		4-7/8	5-1/4	31			4-3/8	1-3/8	02
		5-1/4	2	32			4-3/8	2-3/4	03
		5-1/4	2-1/2	33			4-1/2	1	68
		5-1/4	3	34			4-1/2	1-1/2	69
		5-1/4	3-1/2	35			4-1/2	2	04
		5-1/4	4	36			4-1/2	2-1/2	05
		5-1/4	5	37			4-1/2	3	06
		5-5/8	2	38			4-1/2	3-3/8	07
		5-5/8	2-7/16	53			4-1/2	3-1/2	08
		5-5/8	2-1/2	39			4-1/2	4	09
		5-5/8	2-11/16	40			4-1/2	4-3/8	10
		5-5/8	3	41			4-1/2	5-3/8	11
		5-5/8	4	42			4-1/2	6-3/8	12
		6-1/8	2-1/2	43			4-1/2	7-3/8	13
		6-1/8	3	44			4-3/4	2	14
		6-1/8	4	45			4-3/4	2-1/4	15
		6-1/8	5	46			4-3/4	2-1/2	16
		6-1/8	7	47			4-3/4	3	17
		6-1/4	2-1/2	48			4-3/4	3-1/4	18
		6-1/4	3	49			4-3/4	3-1/2	19
		6-1/4	4	50			4-3/4	4	20
		6-1/4	5	51			4-3/4	4-3/8	21
		6-1/4	7	52			4-3/4	4-1/2	22
							5	2	23
062	3-7/8	4-1/4	1-3/8	01			5	2-1/4	24
		4-1/4	1-5/8	02			5	2-1/2	25
		4-1/4	2	03			5	3	26
		4-1/4	2-3/4	04			5	3-1/2	27
		4-21/64	1-3/4	05			5	4	28
		4-21/64	2-1/2	06			5	5	29
		4-1/2	2-1/4	07			5	6	67
		4-5/8	1-5/16	11			5	7	30
		5-1/8	2	08			5-1/4	1-15/16	31
		5-1/8	3	09			5-1/4	2	32
		5-1/8	4	10			5-1/4	2-1/2	33
							5-1/4	2-3/4	34
063	3-15/16	4-3/4	2	01			5-1/4	3	35
		4-3/4	2-5/16	02			5-1/4	4	36
		4-3/4	2-1/2	03			5-1/2	2	37
		4-3/4	3	04			5-1/2	2-1/2	38
		4-3/4	3-1/16	05			5-1/2	3	39
		4-3/4	3-1/8	06			5-1/2	3-1/2	40
		4-3/4	3-1/4	07			5-1/2	4	41
		4-3/4	3-5/8	08			5-1/2	5	42
		5	3-1/4	09			6	2	43
		5-1/8	3-1/4	10			6	2-1/2	44
		5-3/16	2	11			6	2-11/16	45
		5-3/16	2-1/2	12			6	3	46
		5-3/16	3	13			6	4	47
		5-3/16	4	14			6-1/4	2-1/2	63
		6	2	15			6-1/4	2-3/4	64
		6	2-1/2	16			6-1/4	3	48
		6	3	17			6-1/4	3-1/2	65
							6-1/4	4	49

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLVI - Boundary dimensions-IG (cont'd.)

Bore		O.D.	Width	O.D. and width code	Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
064	4	6-1/4	4-1/2	66	068	4-1/4	5-7/8	2-13/16	52
		6-1/4	5	50			6-1/4	2-3/8	34
		6-1/4	6	51			6-1/4	2-1/2	35
		6-1/4	7	52			6-1/4	2-3/4	36
		6-3/8	2-1/2	53			6-1/4	2-7/8	53
		6-3/8	3	54			6-1/4	3	37
		6-3/8	4	55			6-1/4	4	38
		6-3/8	5	56			6-1/4	5	39
		6-3/8	7	57			6-1/2	4	41
		6-1/2	2-1/2	58			6-1/2	5	42
		6-1/2	3	59			6-5/8	3	43
		6-1/2	4	60			6-5/8	4	44
		6-1/2	5	61			6-5/8	5	45
		6-1/2	7	62			6-5/8	7	46
							6-3/4	3	47
066	4-1/8	4-3/4	2	01			6-3/4	4	48
		4-3/4	3	02			6-3/4	5	49
		4-7/8	1-3/16	06			6-3/4	7	50
		4-7/8	1-1/4	07					
		5-3/8	2	03	070	4-3/8	4-3/4	1-1/2	01
		5-3/8	3	04			4-3/4	3	02
		5-3/8	4	05			4-3/4	4	03
							4-7/8	4	04
068	4-1/4	4-3/8	3	01			5	2	05
		4-3/8	4	02			5	3	06
		5	2-1/4	03			5-7/8	2-1/2	07
		5	2-1/2	04			5-7/8	3	08
		5	3	05			5-7/8	4	09
		5	4	06			5-7/8	5	10
		5	4-3/8	07					
		5	4-1/2	08	071	4-7/16	5-1/4	2-1/2	01
		5	5	09			5-1/4	3	02
		5	5-3/8	10			5-1/4	3-7/8	03
		5	6-3/8	11			5-1/4	4	04
		5	7-3/8	12			5-1/4	5	05
		5-1/4	2	13			5-11/16	2-1/2	06
		5-1/4	2-1/2	14			5-11/16	3	07
		5-1/4	3	15			5-11/16	4	08
		5-1/4	3-1/2	16			5-11/16	5	09
		5-1/4	4	17			6-1/2	2-1/2	10
		5-1/4	5	18			6-1/2	3	11
		5-1/4	7	19			6-1/2	4	12
		5-3/8	2	20			6-1/2	5	13
		5-3/8	2-1/2	21					
		5-3/8	3	22	072	4-1/2	4-7/8	2	01
		5-3/8	4	23			5	3	02
		5-1/2	2-1/2	24			5-1/8	2-7/8	03
		5-1/2	3	25			5-1/4	1-1/4	55
		5-1/2	4	26			5-1/4	2-1/4	04
		5-1/2	5	27			5-1/4	2-1/2	05
		5-5/8	2-1/16	28			5-1/4	3	06
		5-5/8	2-13/16	29			5-1/4	4	07
		5-3/4	3	30			5-1/4	4-3/8	08
		5-3/4	3-1/2	31			5-1/4	4-1/2	09
		5-3/4	4	32			5-3/8	5	10
		5-3/4	5	33			5-1/2	1-1/8	11
		5-7/8	2-1/16	51			5-1/2	2	12

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the currentversion before use.

Table XLVI - Boundary dimensions-IG (cont'd.)

Bore		O.D.	Width	O.D. and width code	Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
072	4-1/2	5-1/2	2-1/2	13	076	4-3/4	5-1/2	4-1/2	10
		5-1/2	3	14			5-1/2	5	11
		5-1/2	3-1/2	15			5-3/4	3	12
		5-1/2	4	16			6	2-1/2	13
		5-5/8	2	17			6	3	14
		5-5/8	2-1/2	18			6	4	15
		5-5/8	3	19			6	5	16
		5-5/8	4	20			6	7	17
		5-3/4	2-1/2	21			6-1/4	2-5/16	18
		5-3/4	3	22			6-1/4	2-3/8	19
		5-3/4	4	23			6-1/4	2-1/2	20
		5-3/4	5	24			6-1/4	3	21
		5-3/4	7	25			6-1/4	3-1/4	22
		6	2-3/16	26			6-1/4	3-1/2	23
		6	3	27			6-1/4	4	24
		6-1/4	3	28			6-1/4	5	25
		6-1/4	3-1/2	29			6-1/2	3	26
		6-1/4	4	30			6-1/2	3-1/2	27
		6-1/4	5	31			6-1/2	4	28
		6-1/2	2-1/2	32			6-1/2	5	29
		6-1/2	3	33			6-3/4	2-1/2	30
		6-1/2	4	34			6-3/4	3	31
		6-1/2	5	35			6-3/4	4	32
		6-5/8	2-7/8	36			6-3/4	5	33
		6-5/8	3	37			7	3-1/16	34
		7	2	56			7	3-1/8	43
		7	2-1/2	51			7-1/2	3	35
		7	2-3/4	52			7-1/2	4	36
		7	3	38			7-1/2	5	37
		7	3-1/2	53			7-1/2	7	38
		7	4	39			7-3/4	3	39
		7	4-1/2	54			7-3/4	4	40
		7	5	40			7-3/4	5	41
		7	6	41			7-3/4	7	42
		7	7	42					
		7-1/4	3	43	079	4-15/16	5-7/8	3	01
		7-1/4	4	44			5-7/8	4	02
		7-1/4	5	45			5-7/8	5	03
		7-1/4	7	46			5-7/8	6	04
		7-1/2	3	47			5-7/8	8	05
		7-1/2	4	48			6-1/16	4-5/8	06
		7-1/2	5	49			6-7/16	3	07
		7-1/2	7	50			6-7/16	4	08
							6-7/16	5	09
074	4-5/8	5	1-1/2	01			6-7/16	6	10
		5	3	02			7-3/8	3	11
							7-3/8	4	12
076	4-3/4	5-1/4	1-1/2	01			7-3/8	5	13
		5-1/4	3	02			7-3/8	6	14
		5-1/4	4	03			7-3/8	8	15
		5-1/2	1-5/8	04					
		5-1/2	2	05	080	5	5-3/8	1-3/4	01
		5-1/2	2-1/4	06			5-3/8	2-1/2	02
		5-1/2	2-1/2	07			5-3/8	3	03
		5-1/2	3	08			5-1/2	4	04
		5-1/2	4	09			5-3/4	2-1/2	05

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLVI - Boundary dimensions-IG (cont'd.)

Bore		O.D.	Width	O.D. and width code	Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
080	5	5-3/4	3	06	084	5-1/4	5-5/8	1-3/4	01
		5-3/4	4	07			5-5/8	2	02
		5-3/4	4-3/8	08			5-5/8	2-1/2	03
		5-3/4	4-1/2	09			5-5/8	3-1/2	04
		5-3/4	5-3/8	10			6	1-3/4	05
		5-3/4	5-1/2	11			6	2-3/4	06
		5-3/4	6-3/8	12			6	3	07
		5-3/4	7-3/8	13			6	4-1/2	08
		5-7/8	3	14			6	5-3/8	09
		5-7/8	4	15			6	5-1/2	10
		5-7/8	5	16			6-1/8	3	11
		5-7/8	6	17			6-1/8	4	12
		5-7/8	8	18			6-1/8	5	13
		6	1-3/4	19			6-1/8	6	14
		6	2-1/2	20			6-1/8	8	15
		6	3	21			6-1/4	1-7/16	47
		6	3-1/2	56			6-1/2	2-1/2	16
		6	3-7/8	22			6-1/2	3	17
		6	4	57			6-1/2	3-1/2	18
		6	4-7/8	23			6-1/2	4	19
		6	5	58			6-1/2	5	20
		6	6	59			6-1/2	6	21
		6-1/4	2-1/2	24			6-1/2	8	22
		6-1/4	3	25			6-3/4	3	23
		6-1/4	3-1/2	26			6-3/4	3-1/2	24
		6-1/4	4	27			6-3/4	4	25
		6-1/4	5	28			6-3/4	5	26
		6-1/4	6	29			6-3/4	6	27
		6-1/4	8	30			6-3/4	7	28
		6-1/2	2-1/2	31			7	2-9/16	29
		6-1/2	3	32			7	2-3/4	30
		6-1/2	3-1/2	33			7	3-1/2	31
		6-1/2	4	34			7-1/4	3-1/2	32
		6-1/2	5	35			7-1/4	4	33
		6-1/2	6	36			7-1/4	5	34
		7	3-1/2	37			7-1/4	6	35
		7	4	38			7-5/8	3	36
		7	5	39			7-5/8	4	37
		7	6	40			7-5/8	5	38
		7-3/8	3	41			7-5/8	6	39
		7-3/8	4	42			7-5/8	8	40
		7-3/8	5	43			8-1/4	3-1/2	41
		7-1/2	2-1/2	51			8-1/4	4	42
		7-1/2	2-3/4	52			8-1/4	5	43
		7-1/2	3	53			8-1/4	6	44
		7-1/2	3-1/4	44			8-1/4	8	45
		7-1/2	3-1/2	54			8-1/2	3-1/2	46
		7-1/2	4	45					
		7-1/2	4-1/2	55	086	5-3/8	6-1/8	3	01
		7-1/2	5	46			6-1/8	4	02
		7-1/2	6	47					
		7-1/2	7	48	087	5-7/16	6-5/8	5-1/8	01
		8	3-1/2	49					
		8-1/4	3-1/2	50	088	5-1/2	6	3	01
							6	4	02
082	5-1/8	6-3/8	1-7/16	01			6-1/4	2-3/4	03

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLVI - Boundary dimensions-IG (cont'd.)

Bore		O.D.	Width	O.D. and width code	Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
088	5-1/2	6-1/4	4-1/2	04	092	5-3/4	6-5/8	3	09
		6-1/4	5-1/2	05			6-5/8	4	10
		6-3/8	3	06			6-5/8	5	11
		6-3/8	4	07			6-5/8	6	12
		6-3/8	5	08			6-5/8	8	13
		6-3/8	6	09			7-1/4	3	14
		6-3/8	8	10			7-1/4	4	15
		6-1/2	1-7/8	11			7-1/4	5	16
		6-1/2	2-1/2	12			7-1/4	6	17
		6-1/2	3	13			7-1/2	3	18
		6-1/2	2-1/2	14			7-1/2	3-1/2	19
		6-3/4	3	15			7-1/2	4	20
		6-3/4	3-1/2	16			7-1/2	5	21
		6-3/4	4	17			8-1/8	3	22
		6-3/4	5	18			8-1/8	4	23
		6-3/4	6	19			8-1/8	5	24
		6-3/4	8	20			8-1/8	6	25
		7	3	21			8-1/8	8	26
		7	4	22			8-1/4	2-1/2	31
		7	5	23			8-1/4	2-3/4	32
		7	6	24			8-1/4	3	33
		7-1/2	3-1/2	25			8-1/4	3-1/2	34
		7-1/2	4	26			8-1/4	4	27
		7-1/2	5	27			8-1/4	4-1/2	35
		7-1/2	6	28			8-1/4	5	28
		7-7/8	3	29			8-1/4	6	29
		7-7/8	4	30			8-1/4	7	30
		7-7/8	5	31					
		7-7/8	6	32	094	5-7/8	7-3/8	3	01
		7-7/8	8	33			7-3/8	4	02
		8	4	34			7-3/8	5	03
		8	5	35			7-3/8	6	04
		8	6	36					
		8	7	37	095	5-15/16	7-1/16	5-3/8	01
		8-1/4	3-5/8	38					
		8-1/4	3-3/4	39	096	6	6-3/4	2-1/4	01
		8-1/2	3-1/2	40			6-3/4	3	02
		8-1/2	4	41			6-3/4	4	03
		8-1/2	5	42			6-3/4	4-1/2	04
		8-3/4	3-1/2	43			6-3/4	5-1/2	05
		8-3/4	4	44			7	3	06
		8-3/4	5	45			7	4	07
							7	5	08
090	5-5/8	6-3/8	3	01			7	5-3/8	09
		6-3/8	4	02			7	6	10
		7-1/2	2-13/16	03			7	7	11
		7-1/2	3	04			7	7-3/8	12
		7-1/2	3-7/8	05			7	8	13
							7-1/16	4-3/4	14
092	5-3/4	6-1/8	2	01			7-1/4	2	15
		6-3/8	2	02			7-1/4	2-1/2	16
		6-3/8	4	03			7-1/4	3	17
		6-1/2	1-7/8	04			7-3/8	4	18
		6-1/2	2-3/4	05			7-3/8	5	19
		6-1/2	3	06			7-3/8	6	20
		6-1/2	4-1/2	07			7-3/8	8	21
		6-1/2	5-1/2	08			7-1/2	3	22

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLVI - Boundary dimensions-IG (cont'd.)

Bore		O.D.	Width	O.D. and width code	Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
096	6	7-1/2	4	23	102	6-3/8	7-7/8	5	04
		7-1/2	4-7/8	24			7-7/8	6	05
		7-1/2	5	25					
		7-1/2	6	26	103	6-7/16	7-5/8	5-1/2	01
		7-3/4	3	27					
		7-3/4	3-1/2	28	104	6-1/2	7-1/4	4	01
		7-3/4	4	29			7-1/4	5	02
		7-3/4	5	30			7-3/8	3	03
		8	4	31			7-3/8	4	04
		8	5	32			7-1/2	3	05
		8	6	33			7-1/2	3-1/2	06
		8-1/4	4	34			7-1/2	4	07
		8-1/4	5	35			7-1/2	5	08
		8-1/4	6	36			7-1/2	6	09
		8-1/2	2-1/4	47			7-1/2	8	10
		8-1/2	2-1/2	43			7-3/4	2	11
		8-1/2	2-3/4	44			7-3/4	2-1/2	12
		8-1/2	3	37			7-3/4	3	13
		8-1/2	3-1/2	45			7-7/8	5	14
		8-1/2	4	38			7-7/8	6	15
		8-1/2	4-1/2	46			7-7/8	8	16
		8-1/2	6	40			8-1/2	4	17
		8-1/2	7	41			8-1/2	5	18
		8-1/2	8	42			8-1/2	6	19
							8-3/4	4	20
097	6-1/16	7-9/16	3	01			8-3/4	5	21
		7-9/16	4	02			8-3/4	6	22
		7-9/16	5	03			9-1/2	4	23
		7-9/16	6	04			9-1/2	5	24
		8-1/16	3-1/8	05			9-1/2	6	25
		8-1/16	4-1/4	06			9-1/2	8	26
		8-13/16	4-1/8	07			9-7/8	4	27
							9-7/8	5	28
098	6-1/8	7-5/8	3	01			9-7/8	6	29
		7-5/8	4	02			9-7/8	8	30
		7-5/8	5	03					
		7-5/8	6	04	105	6-9/16	9-9/16	4-3/8	01
100	6-1/4	6-5/8	5	01	106	6-5/8	8-1/8	3	01
		6-3/4	1-1/2	02			8-1/8	4	02
		6-7/8	3	03			8-1/8	5	03
		6-7/8	4	04			8-1/8	6	04
		6-7/8	5	05			8-3/4	3-1/4	05
		7	2-3/4	06			8-3/4	4-3/4	06
		7	4	07					
		7	4-1/2	08	108	6-3/4	7-1/2	4	01
		7	5	09			7-1/2	5	02
		7	5-1/2	10			7-5/8	3	03
		8-1/4	4	12			7-5/8	4	04
		8-1/4	5	13			8-3/4	3-1/2	05
		8-1/4	6	14			8-3/4	4	06
		8-1/2	3-1/2	11			8-3/4	5	07
							8-3/4	6	08
102	6-3/8	7-7/8	3	01					
		7-7/8	3-1/2	02	111	6-15/16	9-15/32	6-1/2	01
		7-7/8	4	03					

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLVI - Boundary dimensions-IG (cont'd.)

Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches	
112	7	7-3/4	4	01
		7-3/4	5	02
		7-3/4	6	03
		8	3	04
		8	4	05
		8	5	06
		8	6	07
		8	8	08
		8-1/4	2	09
		8-1/4	2-1/2	10
		8-1/4	3	11
		8-1/2	4	12
		8-1/2	5	13
		8-1/2	6	14
		8-1/2	7	15
		8-1/2	9	16
		8-3/4	3	17
		8-3/4	4	18
		8-3/4	5	19
		8-3/4	6	20
		9	4	21
		9	5	22
		9	6	23
		9-1/2	4	24
		9-1/2	4-1/2	25
		9-1/2	5	26
		9-1/2	6	27
		9-1/2	7	28
		9-3/4	5	29
		9-3/4	7	30
		10	4	31
		10	5	32
		10	6	33
		10	8	34
		10-1/4	4-1/2	35
		10-3/4	4	36
		10-3/4	5	37
		10-3/4	6	38
113	7-1/16	9-7/16	3-1/2	01
		9-7/16	4-3/4	02
118	7-3/8	8-1/4	5	01
		8-1/4	6	02
		9-5/8	4	03
		9-5/8	5	04
		9-5/8	6	05
120	7-1/2	8-1/4	4	01
		8-1/2	3	02
		8-1/2	4	03
		8-1/2	5	04
		8-1/2	6	05
		8-1/2	8	06
		8-3/4	2	07
		8-3/4	2-1/2	08
		8-3/4	3	09
120	7-1/2	9	4	10
		9	5	11
		9	6	12
		9	7	13
		9	10	14
		9-1/4	7-1/2	15
		10-1/2	4	16
		10-1/2	5	17
		10-1/2	6	18
		10-1/2	8	19
		11-1/4	4	20
		11-1/4	5	21
122	7-5/8	10-1/8	3-7/8	01
		10-1/8	4-7/8	02
124	7-3/4	8-3/4	3	01
		8-3/4	4	02
126	7-7/8	8-3/4	5	01
		8-3/4	6	02
128	8	9	3	01
		9	4	02
		9	5	03
		9	6	04
		9	8	05
		9-1/4	2	06
		9-1/4	2-1/2	07
		9-1/4	3	08
		9-1/2	5	09
		9-1/2	6	10
		9-1/2	7	11
		9-1/2	10	12
		10	4	13
		10	5	14
		10	6	15
		10-3/4	5	16
		10-3/4	6	17
		10-3/4	7	18
		11	4	19
		11	5	20
		11	6	21
		11	8	22
		12	5	23
		12	6	24
		12	7	25
		12	10	26
		12-1/4	5	27
129	8-1/16	10-13/16	4-1/8	01
		10-13/16	5-3/8	02
132	8-1/4	9	4	01
		9	5	02
		9	7	03
		9-1/4	4	04

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLVI - Boundary dimensions-IG (cont'd.)

Bore		O.D.	Width	O.D. and width code	Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
132	8-1/4	9-1/4	5	05	152	9-1/2	10-1/2	6	03
							12-1/4	5	04
136	8-1/2	9-1/2	4	01			12-1/4	6	05
		9-1/2	5	02			12-1/4	7	06
		10	5	03					
		10	6	04	154	9-5/8	10-3/4	4	01
		10	7	05			10-3/4	5	02
		10	10	06			10-3/4	6	03
		10-1/2	4	07					
		10-1/2	5	08	156	9-3/4	10-3/4	5	01
		10-1/2	6	09			10-3/4	7	02
		11	4	10					
		11	5	11	160	10	11	4	01
		11	6	12			11	5	02
		11	7	13			11	6	03
		12-1/2	5	14			11-3/4	5	04
		12-1/2	6	15			11-3/4	6	05
		12-1/2	7	16			11-3/4	7	06
		12-1/2	10	17			11-3/4	8	07
		12-3/4	5	18			11-3/4	10	08
		12-3/4	6	19			14-3/8	5	09
		12-3/4	7	20			14-3/8	6	10
		12-3/4	10	21			14-3/8	7	11
							14-3/8	8	12
140	8-3/4	9-3/4	4	01			14-3/8	10	13
		9-3/4	5	02			14-3/4	5	14
		9-3/4	6	03			14-3/4	6	15
							14-3/4	7	16
144	9	10	4	01			14-3/4	8	17
		10	5	02					
		10	6	03	162	10-1/8	11-1/4	4	01
		10-1/2	5	04			11-1/4	5	02
		10-1/2	6	05			11-1/4	6	03
		10-1/2	7	06					
		10-1/2	10	07	164	10-1/4	11-3/8	4	01
		11	4	08					
		11	5	09	167	10-7/16	13-3/16	5-1/4	01
		11	6	10			13-3/16	6-7/8	02
		11-1/2	4	11					
		11-1/2	5	12	168	10-1/2	11-1/2	4	01
		11-1/2	6	13			11-1/2	5	02
		11-1/2	7	14			11-1/2	6	03
		12	5	15					
		13	6	16	176	11	12	4	01
		13	7	17			12	5	02
		13	10	18			12	6	03
		13-1/4	5	19			12-1/4	5	04
		13-1/4	6	20			12-1/4	6	05
		13-1/4	7	21			12-3/4	5	06
		13-1/4	10	22			12-3/4	6	07
							12-3/4	7	08
148	9-1/4	12	4-3/4	01			12-3/4	8	09
		12	6-7/8	02			12-3/4	10	10
							15-3/8	5	11
152	9-1/2	10-1/2	4	01			15-3/8	6	12
		10-1/2	5	02			15-3/8	7	13

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLVI - Boundary dimensions-IG (cont'd.)

Bore		O.D.	Width	O.D. and width code	Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
176	11	15-3/8	8	14	196	12-1/4	13-1/2	5	01
		15-3/8	10	15			13-1/2	6	02
		15-3/4	5	16			13-1/2	7	03
		15-3/4	6	17					
		15-3/4	7	18	204	12-3/4	14	5	01
							14	6	02
184	11-1/2	12-3/4	4	01			14	7	03
		12-3/4	6	02					
					212	13-1/4	14-1/2	5	01
192	12	14	6	01			14-1/2	6	02
		14	7	02			14-1/2	7	03
		14	8	03					
		14	9	04	236	14-3/4	16-1/8	5	01
		14	12	05			16-1/8	6	02
		16-1/4	6	06			16-1/8	7	03
		16-1/4	7	07					
		16-1/4	8	08	252	15-3/4	17-1/8	5	01
		16-1/4	9	09			17-1/8	6	02
		16-1/4	12	10			17-1/8	7	03
		16-3/4	6	11					
		16-3/4	7	12	260	16-1/4	18-3/4	5	01
		16-3/4	8	13			18-3/4	7	02
		16-3/4	9	14			18-3/4	8	03
		16-3/4	12	15					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLVII - Boundary dimensions-MD

Bore MM	O.D.[1]	Width[1]	O.D. and width code	Bore MM	O.D.[1]	Width[1]	O.D. and width code
12	30mm	20mm	09	30	80mm	1-3/8	24
					90mm	1-9/16	34
15	35mm	20mm	09				
				35	1-11/16	1	05
17	37mm	20mm	09		1-11/16	1-1/4	15
					1-3/4	15/16	06
20	1-1/16	13/16	05		1-3/4	1	16
	1-1/16	1-5/8	15		1-3/4	1-1/16	26
	1-1/8	1-3/4	06		1-3/4	1-3/16	36
	1-3/8	1-3/8	07		1-3/4	1-5/16	46
	42mm	20mm	09		1-3/4	1-3/8	56
	1-3/4	7/8	47		1-3/4	2-1/8	66
	47mm	13/16	32		1-3/4	2-3/8	76
	47mm	1-5/8	52		1-3/4	2-3/4	86
	52mm	7/8	33		2-1/8	1-3/4	07
	52mm	1-3/4	53		2-1/4	1	08
	72mm	1-3/8	34		2-1/4	1-1/4	18
					58mm	22mm	09
25	1-1/4	13/16	05		72mm	15/16	22
	1-1/4	1	15		72mm	1-1/16	32
	1-1/4	1-1/8	25		72mm	1-3/16	42
	1-1/4	1-1/4	35		72mm	2-1/8	52
	1-1/4	1-5/8	45		80mm	1	73
	1-1/4	2	55		80mm	1-3/8	33
	1-3/8	1-3/16	06		80mm	2-3/4	53
	1-9/16	1-3/8	07		100mm	1-9/16	24
	1-3/4	1	08		100mm	1-3/4	34
	1-3/4	1-1/4	18				
	47mm	22mm	09	40	1-7/8	1	05
	52mm	13/16	32		1-7/8	1-1/4	15
	52mm	1-5/8	52		2	1	06
	62mm	1	33		2	1-3/16	16
	62mm	1-1/8	23		2	1-1/4	26
	62mm	2	53		2	1-3/8	36
	72mm	1-3/16	24		2	1-7/16	46
	80mm	1-3/8	34		2	2-3/8	56
					2	2-7/8	66
30	1-1/2	13/16	05		2-1/8	1-7/16	07
	1-1/2	15/16	15		2-5/16	1-15/16	47
	1-1/2	1	25		2-7/16	1	08
	1-1/2	1-1/8	35		2-7/16	1-1/4	18
	1-1/2	1-3/16	45		65mm	22mm	09
	1-1/2	1-1/4	55		80mm	1	22
	1-1/2	1-7/8	65		80mm	1-3/16	32
	1-1/2	2-/38	75		80mm	1-3/8	42
	1-5/8	1-3/8	06		80mm	2-3/8	52
	1-13/16	1-9/16	07		90mm	1-1/4	73
	52mm	22mm	09		90mm	1-7/16	33
	2-1/16	1	08		90mm	2-7/8	53
	2-1/16	1-1/4	18		110mm	1-3/4	24
	62mm	13/16	22		110mm	1-15/16	34
	62mm	15/16	32				
	62mm	1-1/8	42	45	2-3/16	1-1/8	05
	62mm	1-7/8	52		2-3/16	1-3/16	15
	72mm	15/16	13		2-3/16	1-9/16	25
	72mm	1-3/16	33		2-3/16	2-3/8	35
	72mm	2-3/8	53		2-3/16	3-1/8	45

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLVII - Boundary dimensions-MD (cont'd.)

Bore MM	O.D.[1]	Width[1]	O.D. and width code	Bore MM	O.D.[1]	Width[1]	O.D. and width code
45	2-1/4	9/16	06	55	2-3/4	1-3/4	16
	2-1/4	1-5/16	16		2-3/4	1-15/16	26
	2-1/4	1-1/2	26		2-3/4	2-3/16	36
	2-1/4	1-9/16	36		2-3/4	3-7/8	46
	2-1/4	1-3/4	46		2-13/16	1-15/16	07
	2-1/4	1-15/16	56		3	2-1/16	47
	2-1/4	3-1/8	66		3-1/8	2-1/2	57
	2-9/16	2-1/8	07		85mm	85mm	09
	72mm	22mm	09		3-1/2	1-1/2	08
	3	1-1/2	08		3-1/2	1-3/4	18
	3	1-3/4	18		100mm	1-5/16	32
	85mm	1-1/8	22		100mm	1-13/16	42
	85mm	1-3/16	32		100mm	2-5/8	52
	85mm	1-9/16	42		100mm	3-5/8	62
	85mm	2-3/8	52		120mm	1-15/16	33
	100mm	1-5/16	73		120mm	3-7/8	53
	100mm	1-9/16	33		140mm	2-3/16	24
	100mm	3-1/8	53		140mm	2-1/2	34
	120mm	1-15/16	24				
	120mm	2-1/8	34	60	2-7/8	1-7/16	05
					2-7/8	1-15/16	15
50	2-3/8	1-3/16	05		2-7/8	2-7/8	25
	2-3/8	1-1/4	15		2-7/8	3-7/8	35
	2-3/8	1-3/4	25		3	1-1/2	06
	2-3/8	2-3/8	35		3	1-3/4	16
	2-3/8	2-1/2	45		3	2-1/16	26
	2-3/8	2-17/32	55		3	2-1/8	36
	2-3/8	3-1/2	65		3	2-5/16	46
	2-1/2	1-7/16	06		3	4-1/4	56
	2-1/2	1-1/2	16		3-1/4	2-5/8	07
	2-1/2	1-3/4	26		90mm	28mm	09
	2-1/2	2-1/16	36		3-3/4	1-1/2	08
	2-1/2	3-1/2	46		3-3/4	1-3/4	18
	2-9/16	1-3/4	07		110mm	1-7/16	32
	2-3/4	2-5/16	47		110mm	1-15/16	42
	80mm	28mm	09		110mm	2-7/8	52
	3-1/4	1-1/2	08		110mm	3-7/8	62
	3-1/4	1-3/4	18		130mm	2-1/16	23
	90mm	1-3/16	32		130mm	2-1/8	33
	90mm	1-1/4	22		130mm	4-1/4	53
	90mm	1-3/4	42		150mm	2-15/16	24
	90mm	2-3/8	52		150mm	2-5/8	34
	90mm	3-1/2	62				
	110mm	1-7/16	73	65	3-1/8	1-1/2	05
	110mm	1-3/4	33		3-1/8	1-3/4	15
	110mm	3-1/2	53		3-1/8	2-1/16	25
	130mm	2-1/16	24		3-1/8	3	35
	130mm	2-5/16	34		3-1/8	4-1/8	45
					3-1/4	2-3/16	06
55	2-5/8	1-3/16	05		3-1/4	2-5/16	16
	2-5/8	1-5/16	15		3-1/4	4-5/8	26
	2-5/8	1-13/16	25		3-5/16	1-5/8	07
	2-5/8	1-15/16	35		3-5/16	2-5/16	17
	2-5/8	2-19/32	45		3-5/16	2-3/8	27
	2-5/8	2-5/8	55		3-5/16	4-3/4	37
	2-5/8	3-5/8	65		3-7/16	2-13/16	47
	2-3/4	1-1/2	06		95mm	28mm	09

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLVII - Boundary dimensions-MD (cont'd.)

Bore MM	O.D. [1]	Width [1]	O.D. and width code	Bore MM	O.D. [1]	Width [1]	O.D. and width code
65	4	1-1/2	08	75	160mm	2-7/16	23
	4	1-3/4	18		160mm	2-11/16	33
	120mm	1-1/2	32		160mm	5-3/8	53
	120mm	2-1/16	42		190mm	3-1/4	34
	120mm	3	52				
	120mm	4-1/8	62	80	3-3/4	1-3/4	05
	140mm	2-3/16	23		3-3/4	1-13/16	15
	140mm	2-5/16	33		3-3/4	2	25
	140mm	4-5/8	53		3-3/4	2-1/16	35
	160mm	2-13/16	34		3-3/4	2-7/16	45
					3-3/4	2-5/8	55
70	3-1/4	1-3/4	05		3-3/4	2-11/16	65
	3-1/4	2	15		3-3/4	3-1/2	75
	3-5/16	1-9/16	06		3-3/4	5-1/4	85
	3-5/16	1-5/8	16		4	2-9/16	06
	3-5/16	2-3/8	26		4	2-11/16	16
	3-5/16	3-1/8	36		4	5-3/8	26
	3-5/16	4-3/4	46		4-1/8	2-11/16	07
	3-1/2	2-5/16	07		4-3/8	3-7/16	47
	3-1/2	2-1/2	17		115mm	32mm	09
	3-1/2	5	27		4-3/4	1-3/4	08
	3-9/16	2-1/2	47		4-3/4	2	18
	100mm	28mm	09		140mm	26mm	02
	3-15/16	3-1/8	57		140mm	1-3/4	32
	4-1/4	1-3/4	67		140mm	1-13/16	22
	4-1/4	2	77		140mm	2-5/8	42
	4-1/2	1-3/4	08		140mm	3-1/2	52
	4-1/2	2	18		140mm	5-1/4	62
	125mm	1-9/16	32		170mm	39mm	03
	125mm	1-5/8	22		170mm	2-9/16	23
	125mm	2-3/8	42		170mm	2-11/16	33
	125mm	3-1/8	52		170mm	5-3/8	53
	125mm	4-3/4	62		200mm	3-7/16	34
	150mm	2-5/16	23				
	150mm	2-1/2	33	85	4	1-3/4	05
	150mm	5	53		4	1-15/16	15
	180mm	3-1/8	34		4	2	25
					4	2-3/4	35
75	3-1/2	1-5/8	05		4	3-7/8	45
	3-1/2	1-3/4	15		4	5-1/2	55
	3-1/2	2	25		4-1/4	2-3/4	06
	3-1/2	2-5/8	35		4-1/4	2-7/8	16
	3-1/2	3-1/4	45		4-1/4	5-3/4	26
	3-1/2	5-1/4	55		4-5/8	3-5/8	07
	3-3/4	2-7/16	06		120mm	32mm	09
	3-3/4	2-11/16	16		5	1-3/4	08
	3-3/4	5-3/8	26		5	2	18
	3-7/8	2-11/16	07		150mm	28mm	02
	4-3/16	3-1/4	47		150mm	1-15/16	32
	110mm	32mm	09		150mm	2-3/4	42
	4-1/2	1-3/4	08		150mm	3-1/2	92
	4-1/2	2	18		150mm	3-7/8	52
	130mm	1-5/8	32		150mm	5-1/2	62
	130mm	1-3/4	22		180mm	41mm	03
	130mm	2-5/8	42		180mm	2-3/4	23
	130mm	3-1/4	52		180mm	2-7/8	33
	130mm	5-1/4	62		180mm	5-3/4	53

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLVII - Boundary dimensions-MD (cont'd.)

Bore MM	O.D.[1]	Width[1]	O.D. and width code	Bore MM	O.D.[1]	Width[1]	O.D. and width code
85	210mm	3-5/8	34	100	4-3/4	3-1/16	25
					4-3/4	3-1/8	35
90	4-1/8	1-3/4	05		4-3/4	3-1/4	45
	4-1/8	2	15		4-3/4	4-3/4	55
	4-1/4	2-1/16	06		4-3/4	6-1/2	65
	4-1/4	2-13/16	16		5	2	06
	4-1/4	4-1/8	26		5	2-1/4	16
	4-1/4	5-5/8	36		5	3-1/4	26
	4-5/16	2-1/16	07		5	6-1/2	36
	4-5/16	2-13/16	17		5-1/8	3-1/4	07
	4-5/16	5-5/8	27		5-1/4	3-1/4	47
	4-1/2	2-7/8	47		135mm	32mm	09
	4-1/2	3	57		5-3/8	4-1/2	57
	4-1/2	5-3/4	67		6-1/2	2	08
	4-3/4	3-7/8	77		6-1/2	2-1/4	18
	125mm	32mm	09		180mm	34mm	02
	5-1/8	1-3/4	08		180mm	2-5/16	22
	5-1/8	2	18		180mm	2-3/8	32
	160mm	30mm	02		180mm	3-1/4	42
	160mm	2-1/16	32		180mm	4-3/4	52
	160mm	2-13/16	42		180mm	6-1/2	62
	160mm	4-1/8	52		215mm	47mm	03
	160mm	5-5/8	62		215mm	3-1/4	33
	190mm	43mm	03		215mm	6-1/2	53
	190mm	2-7/8	33		250mm	4-1/2	34
	190mm	3	23				
	190mm	5-3/4	53	105	5	2-9/16	05
	225mm	3-7/8	34		5	5-1/8	15
					5-1/4	3-7/16	06
95	4-1/2	2	05		5-1/4	6-7/8	16
	4-1/2	2-3/16	15		190mm	36mm	02
	4-1/2	2-1/4	25		190mm	2-9/16	32
	4-1/2	3	35		190mm	5-1/8	52
	4-1/2	4-3/8	45		225mm	49mm	03
	4-1/2	6	55		225mm	3-7/16	33
	4-3/4	3-1/16	06		225mm	6-7/8	53
	4-3/4	3-1/8	16				
	4-3/4	6-1/8	26	110	5-1/4	2-1/2	25
	4-7/8	3-1/16	07		5-1/4	2-9/16	05
	130mm	32mm	09		5-1/4	2-3/4	15
	5-1/8	4-3/16	47		5-1/4	3-1/2	35
	6	2	08		5-1/4	5-1/2	45
	6	2-1/4	18		5-1/4	7	55
	170mm	32mm	02		5-5/16	2-9/16	06
	170mm	2-3/16	32		5-5/16	3-1/2	16
	170mm	3	42		5-5/16	7	26
	170mm	4-3/8	52		5-1/2	3-5/8	07
	170mm	6	62		5-1/2	3-3/4	17
	200mm	45mm	03		5-1/2	7-1/4	27
	200mm	3-1/16	33		150mm	40mm	09
	200mm	3-1/8	23		200mm	38mm	02
	200mm	6-1/8	53		200mm	2-9/16	22
	240mm	4-3/16	34		200mm	2-3/4	32
					200mm	3-1/2	42
100	4-3/4	2-5/16	05		200mm	5-1/2	52
	4-3/4	2-3/8	15		200mm	7	62

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLVII - Boundary dimensions-MD (cont'd.)

Bore MM	O.D.[1]	Width[1]	O.D. and width code	Bore MM	O.D.[1]	Width[1]	O.D. and width code
110	240mm	50mm	03	140	190mm	52mm	09
	240mm	3-3/4	23		220mm	2-1/2	01
	240mm	3-5/8	33		220mm	5	11
	240mm	7-1/4	53		250mm	42mm	02
					250mm	3-1/4	32
120	5-5/8	2-13/16	05		250mm	4-3/4	42
	5-5/8	3	15		250mm	6-1/2	52
	5-5/8	3-7/8	25		250mm	9-1/2	62
	5-5/8	6	35		300mm	62mm	03
	5-5/8	7-3/4	45		300mm	4-1/2	33
	5-3/4	2-13/16	06		300mm	9	53
	5-3/4	3-7/8	16				
	5-3/4	7-3/4	26	150	6-7/8	2-5/8	05
	6-1/16	4-1/8	07		6-7/8	5-1/4	15
	6-1/16	8-1/4	17		7-1/16	3-1/2	06
	6-1/4	4-1/8	47		7-1/16	4-3/4	16
	160mm	40mm	09		7-1/16	7	26
	215mm	40mm	02		7-1/8	3-1/2	07
	215mm	2-13/16	22		7-1/8	4-3/4	17
	215mm	3	32		7-1/2	4-7/8	47
	215mm	3-7/8	42		7-1/2	9-3/4	57
	215mm	6	52		200mm	52mm	09
	215mm	7-3/4	62		235mm	2-5/8	01
	260mm	55mm	03		235mm	5-1/4	11
	260mm	4-1/8	33		270mm	45mm	02
	260mm	8-1/4	53		270mm	3-1/2	32
					270mm	4-3/4	42
130	6	4-7/8	05		270mm	7	52
	6	9-3/4	15		320mm	65mm	03
	6-1/16	3-1/8	06		320mm	4-7/8	33
	6-1/16	4-1/4	16		320mm	9-3/4	53
	6-1/16	6-1/4	26				
	6-1/16	8-1/2	36	160	7-1/4	2-7/8	05
	6-1/4	3-1/8	07		7-1/4	5-3/4	15
	6-1/4	4-1/4	17		7-5/8	3-7/8	06
	6-1/4	8-1/2	27		7-5/8	4-7/8	16
	6-9/16	4-3/8	47		7-5/8	7-3/4	26
	6-9/16	8-3/4	57		7-5/8	9-3/4	36
	180mm	52mm	09		7-3/4	3-7/8	07
	215mm	4-7/8	21		7-3/4	4-7/8	17
	215mm	9-3/4	31		7-3/4	9-3/4	27
	230mm	40mm	02		8	5-1/4	47
	230mm	3-1/8	32		8	10-1/4	57
	230mm	4-1/4	42		250mm	2-7/8	01
	230mm	6-1/4	52		250mm	5-3/4	11
	230mm	8-1/2	62		290mm	48mm	02
	280mm	58mm	03		290mm	3-7/8	32
	280mm	4-3/8	33		290mm	4-7/8	42
	280mm	8-3/4	53		290mm	7-3/4	52
					290mm	9-3/4	62
140	6-3/8	2-1/2	05		340mm	68mm	03
	6-3/8	5	15		340mm	5-1/4	33
	6-5/8	3-1/4	06		340mm	10-1/2	53
	6-5/8	4-3/4	16				
	6-5/8	6-1/2	26	170	7-5/8	3	05
	6-5/8	9-1/2	36		7-5/8	6	15
	7	4-1/2	07		8-1/16	4-1/8	06
	7	9	17		8-1/16	5-3/8	16

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLVII - Boundary dimensions-MD (cont'd.)

Bore MM	O.D.[1]	Width[1]	O.D. and width code	Bore MM	O.D.[1]	Width[1]	O.D. and width code
170	8-1/16	8-1/4	26	200	9-7/16	4-3/4	47
	8-1/16	9-1/2	36		9-7/16	9-1/2	57
	8-1/16	10-3/4	46		10-1/8	6-1/2	67
	8-1/8	5-3/8	07		10-1/8	13	77
	8-1/8	10-3/4	17		320mm	3-1/2	01
	8-5/8	5-1/2	47		320mm	7	11
	8-5/8	11	57		340mm	4-3/4	22
	265mm	3	01		340mm	6-7/8	21
	265mm	6	11		360mm	58mm	02
	310mm	52mm	02		360mm	4-3/4	32
	310mm	4-1/8	32		360mm	9-1/2	52
	310mm	5-3/8	42		420mm	80mm	03
	310mm	8-1/4	52		420mm	6-1/2	33
	310mm	10-3/4	62		420mm	13	53
	360mm	72mm	03				
	360mm	5-1/2	33	210	9-5/8	3-3/4	05
	360mm	11	53		9-5/8	7-1/2	15
					10-1/4	5	06
180	8-1/16	3-1/4	05		10-1/4	10	16
	8-1/16	6-1/2	15		10-5/8	6-3/4	07
	8-15/32	4-1/4	06		10-5/8	13-1/2	17
	8-15/32	5-7/8	16		340mm	3-3/4	01
	8-15/32	8-1/2	26		340mm	7-1/2	11
	8-1/2	5-7/8	07		380mm	62mm	02
	9	5-3/4	47		380mm	5	32
	9	11-1/2	57		380mm	10	52
	280mm	3-1/4	01		440mm	6-3/4	33
	280mm	6-1/2	11		440mm	13-1/2	53
	320mm	52mm	02				
	320mm	4-1/4	32	220	10	3-7/8	05
	320mm	5-7/8	42		10	7-3/4	15
	320mm	8-1/2	52		10-7/16	6-7/8	06
	380mm	75mm	03		10-7/16	10-3/4	16
	380mm	5-3/4	33		10-5/8	5-1/4	07
	380mm	11-1/2	53		10-5/8	10-1/2	17
					11-1/8	7	47
190	8-5/8	3-3/8	05		11-1/8	14	57
	8-5/8	6-3/4	15		350mm	3-7/8	01
	9-1/8	4-1/2	06		350mm	7-3/4	11
	9-1/8	9	16		380mm	6-7/8	21
	9-5/8	6	07		400mm	65mm	02
	9-5/8	12	17		400mm	5-1/4	32
	300mm	3-3/8	01		400mm	10-1/2	52
	300mm	6-3/4	11		460mm	88mm	03
	340mm	55mm	02		460mm	7	33
	340mm	4-1/2	32		460mm	14	53
	340mm	9	52				
	400mm	78mm	03	230	10-1/2	4	05
	400mm	6	33		10-1/2	8	15
	400mm	12	53		11-1/8	5-1/2	06
					11-1/8	11	16
200	9-1/8	3-1/2	05		11-3/4	7-1/4	07
	9-1/8	7	15		11-3/4	14-1/2	17
	9-1/4	4-3/4	06		370mm	4	01
	9-1/4	6-7/8	16		370mm	8	11
	9-3/8	4-3/4	07		420mm	69mm	02
	9-3/4	6-7/8	17		420mm	5-1/2	32

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLVII - Boundary dimensions-MD (cont'd.)

Bore MM	O.D. [1]	Width [1]	O.D. and width code	Bore MM	O.D. [1]	Width [1]	O.D. and width code
230	420mm	11	52	280	500mm	6-1/2	32
	480mm	7-1/4	33		500mm	13	52
	480mm	14-1/2	53		580mm	8-1/2	33
					580mm	17	53
240	10-15/16	4-1/4	05				
	10-15/16	8-1/2	15	300	13-9/16	5	05
	11-9/16	5-3/4	06		13-9/16	10	15
	11-9/16	11-1/2	16		14-1/2	7	06
	12-1/8	7-1/2	07		14-1/2	14	16
	12-1/8	15	17		15	9	07
	390mm	4-1/4	01		15	18	17
	390mm	8-1/2	11		480mm	5	01
	440mm	72mm	02		480mm	10	11
	440mm	5-3/4	32		540mm	85mm	02
	440mm	11-1/2	52		540mm	7	32
	500mm	95mm	03		540mm	14	52
	500mm	7-1/2	33		620mm	9	33
	500mm	15	53		620mm	18	53
250	11-9/16	4-3/8	05	320	14-1/2	5-1/8	05
	11-9/16	8-3/4	15		14-1/2	10-1/4	15
	12-1/8	6	06		15-1/4	7-1/2	06
	12-1/8	12	16		15-1/4	15	16
	13	7-3/4	07		16	9-1/2	07
	13	15-1/2	17		16	19	17
	410mm	4-3/8	01		500mm	5-1/8	01
	410mm	8-3/4	11		500mm	10-1/4	11
	460mm	76mm	02		580mm	7-1/2	32
	460mm	6	32		580mm	15	52
	460mm	12	52		660mm	9-1/2	33
	520mm	7-3/4	33		660mm	19	53
	520mm	15-1/2	53				
260	12-1/8	4-1/2	05				
	12-1/8	9	15				
	12-5/8	6-1/4	06				
	12-5/8	12-1/2	16				
	13-1/2	8	07				
	13-1/2	16	17				
	430mm	4-1/2	01				
	430mm	9	11				
	480mm	80mm	02				
	480mm	6-1/4	32				
	480mm	12-1/2	52				
	540mm	102mm	03				
	540mm	8	33				
	540mm	16	53				
280	13	4-7/8	05				
	13	9-3/4	15				
	13-1/8	6-1/2	06				
	13-1/8	13	16				
	14-3/8	8-1/2	07				
	14-3/8	17	17				
	460mm	4-7/8	01				
	460mm	9-3/4	11				
	500mm	80mm	02				

[1] Dimensions are in inches unless otherwise shown.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

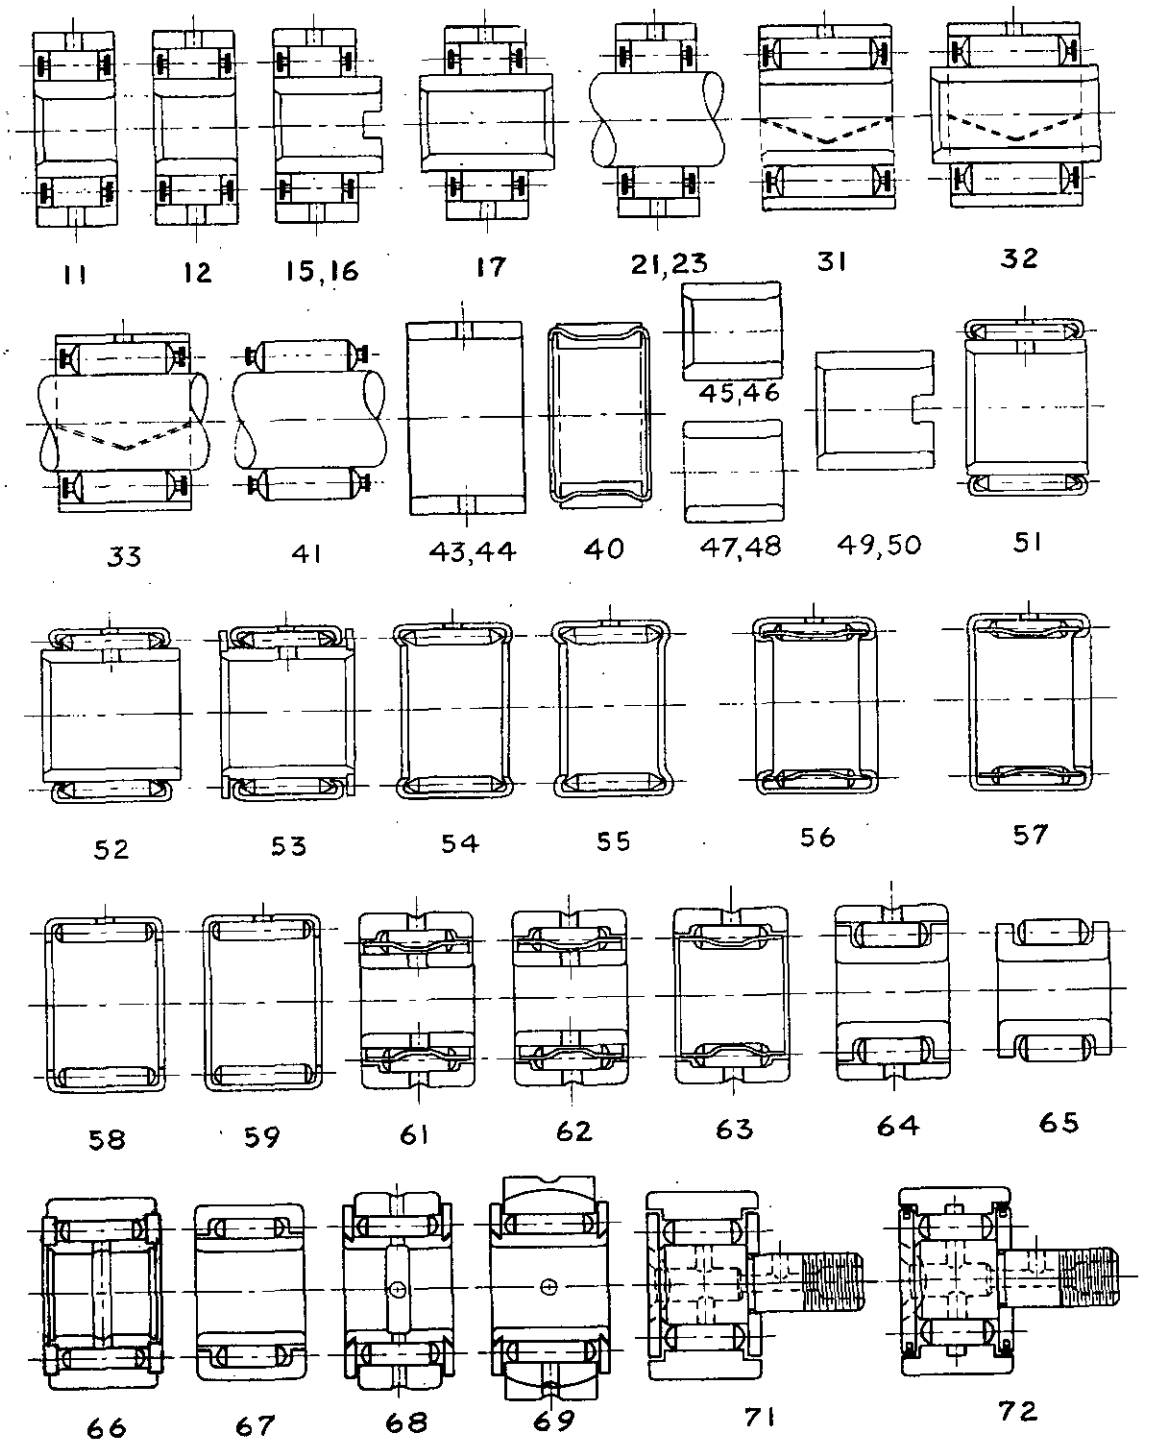


Figure 23 - Illustrations of group 3 bearing types.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 This section covers pure thrust bearings - group 4 (see figure 28).

2. REFERENCED DOCUMENTS

2.1 This section is not applicable.

3. NUMBER STRUCTURE

3.1 Digit position. Example of digit positions is shown on figure 24.

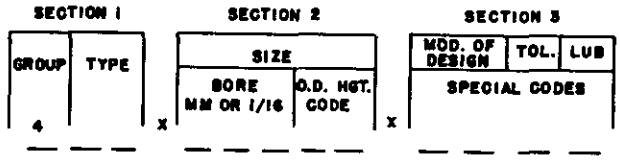


Figure 24 - Group 4, number structure.

4. CLASSIFICATION

4.1 Standard types. The following features are to be considered as "standard":

(a) Retainer type.
(b) Hardened and ground races.

4.2 Tolerances. Tolerances specified in tables XLVIII and XLIX are applicable to thrust ball and roller bearings in this group.

5. GROUP AND TYPE CODES

5.1 Digit positions. Example of digit position is shown on figure 25.

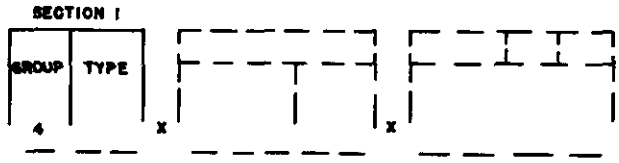


Figure 25 - Group 4, section 1.

5.2 Group code. Group code for first position shall be as follows:

4-Pure thrust bearings (ball and roller).

5.3 Type codes. Type codes for second and third position shall be as specified in 5.3.1 through 5.3.7.

5.3.1 Single direction inch types. Single direction-inch types shall be as follows:

Type		Dimension table
11	Flat race surface, in line ball retainer, rigid or flat seat type, inch bore, O.D. and height.	IH (table LI)
12	Flat race surface, staggered ball retainer, rigid or flat seat type, inch bore, O.D. and height.	IH (table LI)
13	Grooved raceways, rigid or flat seat type, inch bore, O.D. and height.	IH (table LI)
15	Grooved raceways, self-aligning type, inch bore, O.D. and height.	IH (table LI)
17	Grooved raceways for 4-point ball contact, rigid or flat seat type, inch bore, O.D. and height.	IH (table LI)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Type		Dimension table
19	Grooved raceways for 4-point ball contact, self-aligning type, inch bore, O.D. and height.	IH (table LI)
21	Grooved raceways, double row, rigid or flat seat type, inch bore, O.D. and height.	IH (table LI)
23	Grooved raceways, double row, self-aligning type, inch bore, O.D. and height.	IH (table LI)

5.3.2 Double direction-inch types. Double direction-inch types shall be as follows:

Type		Dimension table
31	Grooved raceways, large O.D. center washer, rigid or flat seat type, inch bore, O.D. and height.	IH (table LI)
33	Grooved raceways, small bore in center washer, rigid or flat seat type, inch bore, O.D. and height.	IH (table LI)
35	Grooved raceways, large O.D. center washer, rigid or flat seat type with sleeves and nut, inch bore, O.D. and height.	IH (table LI)

5.3.3 Single direction metric types. Single direction metric types shall be as follows:

Type		Dimension table
41	Flat race surface, rigid or flat seat type, metric bore, O.D. and height.	ME (table LII)
43	Grooved raceways, rigid or flat seat type, metric bore, O.D. and height.	ME (table LII)
45	Grooved raceways, self-aligning type, metric bore, O.D. and height.	ME (table LII)

5.3.4 Double direction metric types. Double direction metric types shall be as follows:

Type		Dimension table
51	Grooved raceways, large O.D. center washer, rigid or flat seat type, metric bore, O.D. and height.	ME (table LII)
53	Grooved raceways, small bore center washer, rigid or flat seat type, metric bore, O.D. and height.	ME (table LII)
55	Grooved raceways, large, O.D. center washer, self-aligning, metric bore, O.D. and height.	ME (table LII)
57	Grooved raceways, small bore center washer, self-aligning type, metric bore, O.D. and height.	ME (table LII)
59	Grooved raceways, small bore center washer, self-aligning type enclosed in housing, metric bore, O.D. and height.	ME (table LII)

5.3.5 Cylindrical rollers-inch types. Cylindrical rollers-inch type shall be as follows:

Type		Dimension table
61	Flat race surface, single direction, rigid or flat seat type, inch bore, O.D. and height.	IH (table LI)
63	Flat race surface, double direction, rigid or flat seat type with inner sleeve, inch bore, O.D. and height.	IH (table LI)
65	Flat race surface, simplified double acting, rigid or flat seat type, inch bore, O.D. and height.	IH (table LI)
67	Flat race surface, single direction, self-aligning type, inch bore, O.D. and height.	IH (table LI)
69	Flat race surface, double direction, self-aligning type with inner sleeve, inch bore, O.D. and height.	IH (table LI)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

5.3.6 Tapered rollers-inch types. Tapered rollers-inch types shall be as follows:

Type		Dimension table
73	Two channeled race surface, rigid or flat seat type, inch bore, O.D. and height.	IH (table LI)

5.3.7 Spherical rollers-metric types. Spherical rollers-metric types shall be as follows:

Type		Dimension table
81	Two grooved race surface, rigid or flat seat type, metric bore, O.D. and height.	ME (table LII)

6. BORE SIZE - O.D. AND HEIGHT CODE

6.1 Digit position. Example of digit position is shown on figure 26.




Figure 26 - Group 4, section 2.

6.2 Bore size (4, 5 and 6th positions). The bore size of thrust bearings is either expressed as metric or inch. Type descriptions and boundary dimension tables indicate which method of expression is used.

6.2.1 Metric. Metric bores are expressed as the actual number of mm.

Example: 4mm = 004, 25mm - 025, 120mm - 125

6.2.2 Inch. Inch bores are expressed as the number of 1/16th in the bore size.

Example: 15/16 inch = 015; 1 inch = 016,
1-3/8 inches = 022; 10 inches = 160

6.3 O.D. and height code (7 and 8th positions). The O.D. and height dimensions of a bearing are expressed by a code, as shown on the boundary dimension tables (see tables LI and LII).

6.3.1 Application. The type description carries a reference to the appropriate boundary dimension table. These tables are arranged by bore size, and within each bore size; the O.D.'s and heights are arranged in numerical sequence. Opposite each set of dimensions is the appropriate "Code" for the O.D. and height. Where bearing dimensions correspond to AFBMA basic standards, the O.D. and height code is identical with their series code.

6.3.2 Interpretation of O.D. and height codes. A bearing number-443 X 01043 is decoded as:

443 = Thrust ball bearing, grooved raceways, flat washer. Boundary dimension table - ME (see table LII).
01043 = 10mm bore size; O.D. and height code 43.

Reference to boundary dimension table ME (see table LII) bore size of 010 and code 43 indicates that the O.D. is 30mm and height is 12mm.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

7. VARIATIONS OF THE GROUP 4 BASE BEARING NUMBER

7.1 Digit position. Example of digit positions is shown on figure 27.

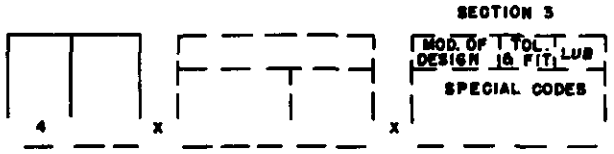


Figure 27 - Group 4, section 3.

7.2 Additional variations. Section 3 codes any additional variations, modifications or special features of a bearing, as described by the base number which are necessary for complete identification. When section 3 is required it may be either a "Significant Code" covering those common features itemized in table L, or an arbitrarily assigned number known as a "Special Code" covering all other variations, modifications, etc.

7.2.1 Significant codes. Significant codes may be either two or four digits and will begin with the numerals 0 through 7. These codes are constant in meaning within the group, regardless of the base number with which they are used. Reference to table L will furnish the significance of each code.

7.2.2 Special codes. Special codes are arbitrarily assigned numbers of four digits only that begin with the numerals 8 and 9. These four digit numbers are assigned in numerical sequence as they are required to code additional features (not covered by the significant codes) of a particular base number. The more common features significantly coded in the "Table of Variation" (see table L) may occur in conjunction with some additional feature or features, in which case all of the additional features are coded by a special code.

7.2.2.1 Special codes are assigned only by the central agency responsible for the numbering system. A 0 digit in any position of a significant type number indicates the "standard" for the feature coded in that number position.

8. BOUNDARY DIMENSION TABLES

8.1 Use. Use of the boundary dimension tables is as follows:

Dimension table	Bearing types
IH (table LI)	11, 12, 13, 15, 17, 19, 21, 23, 31, 33, 35, 61, 63, 65, 67, 69, 73
ME (table LII)	41, 43, 45, 51, 53, 55, 57, 59, 81

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLVIII - Standard tolerance limits for thrust ball bearings

(Tolerance limits in 0.0001 inch)

Tolerance limits of metric dimension thrust ball bearings identified by 3-digit series number.[1]

Basic bore diameter d		Bore tolerance limits[2]		Height tolerance limits		Basic O.D. D, D_1		O.D. tolerance limits[2]	
Mm				H,	Hl	Mm		D,	D_1
Over	Incl.	d_{min} -	d_{max} +	High (+)	Low (-)	Over	Incl.	D_{max} +	D_{min} -
0	18	3	2	50	50	10	18	0	4
18	30	4	3	50	50	18	30	0	5
30	50	5	4	50	50	30	50	0	6
50	80	6	5	50	50	50	80	0	7
80	120	8	6	100	100	80	120	0	9
120	180	10	7	100	100	120	180	0	10
						180	200	0	12

Tolerance limits of metric dimension thrust ball bearings identified by 2-digit series number.[1]

Basic bore diameter d		Bore tolerance limits[2]				Height tolerance limits				Basic O.D. D, D_1		O.D. tolerance limits[2]			
Mm		d		d4		H		Hl		Mm		D		Dl	
Over	Incl.	d_{min} -	d_{max} +	d_{min}	d_{max} -	High	Low -	High +	Low -	Over	Incl.	d_{max}	d_{min} -	d_{max}	d_{min} -
0	18	3	2	0	28	0	30	20	30	10	18	0	4	0	12
18	30	4	3	0	28	0	30	20	30	18	30	0	5	0	12
30	50	5	4	0	33	0	39	20	39	30	50	0	6	0	14
50	80	6	5	0	39	0	49	30	49	50	80	0	7	0	18
80	120	8	6	0	47	0	59	30	59	80	120	0	9	0	24
120	180	10	7	0	55	0	69	39	69	120	180	0	10	0	30
180	250	12	9	0	55	0	79	39	79	180	250	0	12	0	35
250	315	14	10	0	63	0	89	49	89	250	315	0	14	0	41
315	400	16	11	0	71	0	118	59	108	315	400	0	16	0	47
400	500	18	13	0	71					400	500	0	18	0	53
500	630	20	14							500	630	0	20	0	71
630	800	30	15							630	800	0	30		
800	1000	40	17							800	1000	0	40		
1000	1250	49	19							1000	1250	0	49		
										1250	1600	0	59		

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLVIII - Standard tolerance limits for thrust ball bearings


(Tolerance limits in 0.0001 inch)(Continued)

Tolerance limits of thrust ball bearings - inch dimensions - dimension series 030[1]

Basic bore diameter d Inches		Bore tolerance limits		Height tolerance limits H		Basic O.D. D Inches		O.D. tolerance limits	
Over	Incl.	d_{min} +	d_{max} +	High +	Low -	Over	Incl.	D_{max} +	D_{min} -
0	0.9375	40	60	50	50	0	4.71875	0	20
0.9375	1.9375	50	70	50	50	4.71875	5.21875	0	20
1.9375	3.0000	60	80	50	50	-	-	-	-
3.0000	3.5000	80	100	100	100	-	-	-	-
Tolerance limits of thrust ball bearings - inch dimensions - dimension series 031[1]									
0	1.3750	0	08	50	50	0	5.3125	0	20
1.3750	2.3750	0	10	50	50	5.3125	17.3750	0	30
2.3750	3.0000	0	12	50	50	-	-	-	-
3.0000	12.0000	0	12	100	100	-	-	-	-
Tolerance limits of thrust ball bearings - inch dimensions - dimension series 032[1]									
0	0.9375	40	60	50	50	0	5.0000	0	20
0.9375	1.9375	50	70	50	50	5.0000	10.3750	0	30
1.9375	3.0000	60	80	50	50	-	-	-	-
3.0000	3.1250	60	80	100	100	-	-	-	-
3.1250	7.3750	80	100	100	100	-	-	-	-

[1] Dimension digit series number as designated in AFBMA Standard section no. 5-Identification Code.

[2] These values are valid for two-point measurement only.

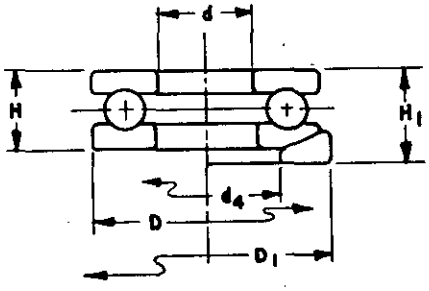

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table XLIX - Standard tolerance limits for roller thrust bearings - inch dimensions
(Tolerance limits in 0.0001 inch)

Extra light series - type TP [1]

Basic bore diameter d		Bore tolerance limits		Height H tolerance limits		Basic O.D. D		O.D. tolerance limits	
Over	Incl.	d_{min} +	d_{max} +	High +	Low -	Over	Incl.	D_{max} +	D_{min} -
0	0.9375	40	60	50	50	0	4.71875	0	20
0.9375	1.9375	50	70	50	50	4.71875	5.21875	0	20
1.9375	3.0000	60	80	50	50	-	-	-	-
3.0000	3.5000	80	100	100	100	-	-	-	-

Light series - types TP and TR [1]

Basic bore diameter d		Bore tolerance limits		Basic O.D. D		O.D. tolerance limits D		Basic O.D. D_1		O.D. tolerance limits	
Over	Incl.	d_{max} +	d_{min} -	Over	Incl.	D_{max} +	D_{min} -	Over	Incl.	D_{max} +	D_{min} -
0	1.1870	0	5	0	2.8750	5	0	0	3.0000	7	0
1.1870	1.3750	0	6	2.8750	3.3750	7	0	3.0000	3.3750	9	0
1.3750	1.5620	0	7	3.3750	3.7500	9	0	3.3750	3.6250	11	0
1.5620	1.7500	0	8	3.7500	4.1250	11	0	3.6250	3.8750	13	0
1.7500	1.9370	0	9	4.1250	4.7180	13	0	3.8750	4.5312	15	0
1.9370	2.1250	0	10	4.7180	5.0000	15	0	4.5312	5.0000	17	0
2.1250	2.5000	0	11	-	-	-	-	-	-	-	-
2.5000	3.0000	0	12	-	-	-	-	-	-	-	-
3.0000	3.5000	0	13	-	-	-	-	-	-	-	-


Heavy series - types TP and TR [1]

Basic bore diameter d		Bore tolerance limits		Basic O.D. D		O.D. tolerance limits D		Basic O.D. D_1		O.D. tolerance limits	
Over	Incl.	d_{max} +	d_{min} -	Over	Incl.	D_{max} +	D_{min} -	Over	Incl.	D_{max} +	D_{min} -
2.0000	3.0000	0	10	5.0000	10.0000	15	0	5.0000	10.5000	19	0
3.0000	3.5000	0	12	10.0000	18.0000	20	0	10.5000	12.7500	21	0
3.5000	9.0000	0	15	18.0000	26.0000	25	0	12.7500	17.0000	23	0
9.0000	12.0000	0	18	26.0000	34.0000	30	0	17.0000	27.0000	25	0
12.0000	18.0000	0	20	-	-	-	-	27.0000	35.0000	30	0
18.0000	22.0000	0	25	-	-	-	-	-	-	-	-

Height tolerances - types TP and TR [1]

Basic bore diameter d		Height H tolerance limits		Height H_1 tolerance limits	
Over	Incl.	High +	Low -	High +	Low -
0	2.0000	0	60	0	80
2.0000	3.0000	0	80	0	100
3.0000	6.0000	0	100	0	150
6.0000	10.0000	0	150	0	200
10.0000	18.0000	0	200	0	250
18.0000	-	0	250	0	300

[1] Type description given in AFBMA Standard section No. 5-Identification Code.

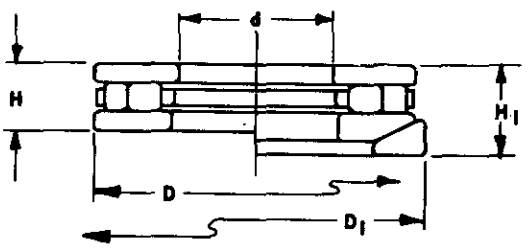

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table L - Significant codes for variations of group 4 base bearing numbers

1st and 2nd position code XX--	Modification (1st position)	Retainer (2nd position)
00--	No variation	Manufacturer's standard retainer for type bearing involved
01--		Pressed steel
02--		Machined brass or bronze
03--		Machined porous bronze
04--		Full type (no retainer)
10--	Ball and/or retainer protrudes	Manufacturer's standard retainer for type bearing involved
11--		Pressed steel
12--		Machined brass or bronze
13--		Machined porous bronze
14--		Full type (no retainer)
20--	Banded I.D.	Manufacturer's standard retainer for type bearing involved
21--		Pressed steel
22--		Machined brass or bronze
23--		Machined porous bronze
24--		Full type (no retainer)
30--	Banded O.D.	Manufacturer's standard retainer for type bearing involved
31--		Pressed steel
32--		Machined brass or bronze
33--		Machined porous bronze
34--		Full type (no retainer)
40--	Self-aligning with seat ring	Manufacturer's standard retainer for type bearing involved
41--		Pressed steel
42--		Machined brass or bronze
43--		Machined porous bronze
44--		Full type (no retainer)
50--	Self-aligning with seat ring and banded I.D.	Manufacturer's standard retainer for type bearing involved
51--		Pressed steel
52--		Machined brass or bronze
53--		Machined porous bronze
54--		Full type (no retainer)
60--	Self-aligning with seat ring and banded O.D.	Manufacturer's standard retainer for type bearing involved
61--		Pressed steel
62--		Machined brass or bronze
63--		Machined porous bronze
64--		Full type (no retainer)
3rd and 4th position code -XX	Tolerances (3rd position)	Lubrication (4th position)
-XX	The third and fourth positions in this section are reserved for possible future coding of tolerance, lubrication or other variable. Pending use of these positions, significant digit codes are two digit numbers. Four digit numbers are arbitrary "Special Codes."	

Arbitrary special codes

8000 and 9000 series	Arbitrary "Special Codes" assigned to a given condition or series of conditions, are in the 8000 and 9000 series of numbers. They are nonrepetitive in meaning and apply only to the base number with which they are used. All conditions, other than (a) variations of basic dimensions, and (b) conditions covered by the above significant codes are coded as "Special Codes." A variation of basic dimensions puts the bearing into group 9.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table LI - Boundary dimensions-IH

Bore		O.D. Inches	Height Inches	O.D. and height code	Bore		O.D. Inches	Height Inches	O.D. and height code
No. of 1/16	Inches				No. of 1/16	Inches			
003	3/16	7/16	3/16	01	006	3/8	1-3/32	1/2	12
		17/32	3/16	02			1-3/16	1/2	13
		5/8	1/4	03			1-1/4	23/32	14
		3/4	1/4	04			1-1/4	15/16	15
		7/8	3/8	07			1-5/16	1-1/4	16
		15/16	3/8	05			1-1/2	11/16	18
		15/16	7/16	06			1-1/2	1-3/32	19
							1-11/16	1-9/16	20
004	1/4	9/16	7/32	01			1-13/16	1-1/8	17
		5/8	3/8	02			2	1-3/8	21
		5/8	7/16	03			2	1-15/16	22
		21/32	1/4	04			2-1/4	2	23
		23/32	5/16	05			2-7/16	2	24
		3/4	1/4	06			2-1/2	2	25
		3/4	21/32	19			3	2	26
		49/64	3/8	07					
		13/16	3/8	08	007	7/16	43/64	5/16	01
		13/16	7/16	09			3/4	9/32	02
		27/32	21/64	18			13/16	5/16	03
		27/32	3/8	10			7/8	1/4	04
		7/8	17/32	11			15/16	5/16	05
		1	5/8	12			1	5/16	06
		1-1/16	11/16	13			1-3/64	23/64	16
		1-1/4	15/16	14			1-1/16	3/8	07
		1-9/32	1-1/8	15			1-3/32	1/2	08
		1-9/16	1-9/16	16			1-1/8	5/8	09
		1-3/4	1-3/4	17			1-1/4	23/32	10
							1-9/32	5/8	11
005	5/16	5/8	1/4	01			1-13/32	1-1/8	12
		11/16	9/32	02			1-1/2	27/32	13
		11/16	5/16	03			1-9/16	1-5/16	14
		3/4	1/4	04			1-3/4	1-1/4	15
		27/32	3/8	05					
		15/16	3/8	06	008	1/2	3/4	7/16	01
		1	3/8	07			7/8	1/4	02
		1	17/32	08			7/8	3/8	03
		1-1/16	5/8	09			7/8	9/16	04
		1-3/32	1/2	10			31/32	1/4	05
		1-1/4	23/32	11			1	9/32	07
		1-9/32	1-1/8	12			1	11/32	34
		1-5/16	1-1/4	13			1	3/8	06
		1-1/2	1-3/32	14			1-1/16	5/16	08
							1-3/32	3/8	09
006	3/8	9/16	1/4	01			1-1/8	5/8	10
		5/8	1/4	02			1-3/16	3/8	11
		11/16	9/32	03			1-3/16	7/16	12
		47/64	19/64	28			1-3/16	31/64	13
		3/4	9/32	04			1-3/16	5/8	14
		3/4	5/16	05			1-7/32	15/32	15
		13/16	1/4	06			1-7/32	9/16	16
		7/8	5/16	07			1-7/32	5/8	17
		1	5/16	08			1-1/4	17/32	18
		1	17/32	09			1-1/4	23/32	19
		1-1/32	1/2	10			1-17/64	7/16	33
		1-3/64	23/64	27			1-9/32	5/8	20
		1-1/16	5/8	11			1-3/8	9/16	21

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table LI - Boundary dimensions-IH (Continued)

Bore		O.D. Inches	Height Inches	O.D. and height code	Bore		O.D. Inches	Height Inches	O.D. and height code
No. of 1/16	Inches				No. of 1/16	Inches			
008	1/2	1-3/8	5/8	22	010	5/8	1-3/4	13/16	31
		1-7/16	5/8	23			1-3/4	29/32	32
		1-7/16	11/16	24			1-13/16	1-17/32	33
		1-1/2	27/32	25			1-15/16	1-9/16	34
		1-17/32	1-1/8	26			2	1-5/16	35
		1-9/16	1-1/8	27			2-1/8	1-15/16	36
		1-9/16	1-5/16	28			2-1/2	2-1/2	37
		1-3/4	1-1/4	29					
		1-13/16	1-9/16	30	011	11/16	1-11/32	9/16	01
		1-7/8	1-3/4	31			1-11/32	5/8	02
		2-1/4	2-5/16	32			1-9/16	5/8	03
							1-11/16	9/16	04
009	9/16	1	17/32	01			1-13/16	1-5/16	05
		1-1/32	5/16	02			1-15/16	13/16	06
		1-1/8	3/8	03			1-15/16	7/8	07
		1-7/32	9/16	04			2-1/16	1-3/4	08
		1-7/32	5/8	05					
		1-11/32	7/16	12	012	3/4	1-3/32	9/32	01
		1-3/8	17/32	06			1-1/4	7/16	02
		1-13/32	5/8	07			1-1/4	9/16	03
		1-7/16	5/8	08			1-9/32	5/16	04
		1-1/2	3/4	09			1-5/16	9/32	05
		1-3/4	29/32	10			1-11/32	5/8	06
		2	1-5/16	11			1-7/16	27/64	09
							1-15/32	9/16	07
010	5/8	1	9/32	01			1-15/32	5/8	08
		1	1/2	02			1-1/2	11/16	11
		1-1/8	5/16	03			1-17/32	5/8	12
		1-1/8	11/32	04			1-9/16	1/2	13
		1-1/8	7/16	05			1-9/16	35/64	14
		1-1/8	9/16	06			1-9/16	5/8	15
		1-3/32	9/32	07			1-5/8	19/32	16
		1-1/4	3/8	08			1-21/32	35/64	42
		1-1/4	9/16	09			1-11/16	5/8	17
		1-5/16	9/16	10			1-3/4	5/8	21
		1-5/16	5/8	11			1-3/4	21/32	18
		1-11/32	7/16	12			1-3/4	11/16	19
		1-11/32	9/16	13			1-3/4	23/32	20
		1-11/32	5/8	14			1-3/4	7/8	22
		1-3/8	15/32	15			1-25/32	1-1/8	23
		1-3/8	33/64	16			1-13/16	25/32	24
		1-3/8	5/8	17			1-13/16	1-1/8	25
		1-13/32	5/8	18			1-7/8	3/4	26
		1-27/64	29/64	38			1-7/8	1-1/4	27
		1-7/16	9/16	19			2	3/4	28
		1-7/16	11/16	20			2	1-1/16	29
		1-1/2	1/2	21			2	1-5/16	30
		1-1/2	11/16	22			2-1/16	1-11/16	31
		1-1/2	3/4	23			2-1/4	1-17/32	32
		1-9/16	19/32	24			2-1/4	1-15/16	33
		1-9/16	5/8	25			2-5/16	7/8	34
		1-9/16	43/64	26			2-7/16	2	35
		1-9/16	1-1/4	27			2-7/8	2-3/4	36
		1-5/8	23/32	28			3-1/4	7/8	37
		1-21/32	1-1/8	29			3-1/2	1-3/4	38
		1-11/16	1-1/8	30			3-1/2	2	39

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table LI - Boundary dimensions-IH (Continued)

Bore		O.D. Inches	Height Inches	O.D. and height code	Bore		O.D. Inches	Height Inches	O.D. and height code
No. of 1/16	Inches				No. of 1/16	Inches			
012	3/4	4-7/16	2	40	015	15/16	1-1/2	1/2	01
		6	2-1/8	41			1-5/8	9/16	03
							1-5/8	5/8	02
013	13/16	1-1/4	1/2	01			1-27/32	5/8	04
		1-9/32	1/2	02			1-27/32	3/4	05
		1-3/8	17/32	03			1-15/16	3/4	06
		1-13/32	9/16	04			1-15/16	13/16	07
		1-15/32	9/16	05			2	11/16	08
		1-15/32	5/8	06			2	23/32	09
		1-1/2	7/16	07			2	13/16	10
		1-11/16	5/8	08			2-1/8	3/4	11
		1-15/16	13/16	09			2-7/16	1	12
014	7/8	1-3/8	9/16	01	016	1	1-1/2	5/8	01
		1-1/2	9/32	02			1-5/8	3/8	02
		1-1/2	3/8	03			1-5/8	9/16	03
		1-1/2	1/2	04			1-11/16	1/2	04
		1-1/2	17/32	05			1-3/4	9/16	05
		1-1/2	11/16	06			1-3/4	5/8	06
		1-9/16	9/16	07			1-25/32	5/8	07
		1-5/8	1/2	08			1-27/32	3/4	08
		1-5/8	9/16	09			1-7/8	3/8	09
		1-5/8	5/8	10			1-7/8	9/16	10
		1-21/32	5/8	11			1-7/8	5/8	11
		1-11/16	1/2	12			1-7/8	11/16	12
		1-11/16	19/32	13			1-7/8	3/4	13
		1-3/4	9/16	14			1-15/16	1/2	14
		1-3/4	5/8	15			1-15/16	9/16	15
		1-3/4	21/32	16			1-15/16	5/8	16
		1-3/4	11/16	17			1-15/16	11/16	17
		1-3/4	3/4	18			1-15/16	3/4	18
		1-13/16	11/16	19			1-15/16	13/16	19
		1-27/32	5/8	20			1-31/32	19/32	20
		1-27/32	3/4	21			1-31/32	5/8	21
		1-7/8	23/32	22			1-31/32	3/4	22
		1-57/64	19/32	42			2	5/8	23
		1-29/32	1-1/8	23			2	11/16	24
		1-15/16	11/16	24			2	13/16	25
		1-15/16	3/4	25			2-1/64	41/64	57
		1-15/16	49/64	26			2-1/16	3/4	26
		1-15/16	1-1/8	27			2-1/16	1-1/8	27
		1-31/32	1/2	28			2-3/32	1-1/4	28
		2	1	29			2-1/8	23/32	29
		2-1/16	27/32	30			2-1/8	13/16	30
		2-1/8	5/16	32			2-1/4	21/32	31
		2-1/8	11/16	31			2-1/4	3/4	32
		2-3/16	1-11/16	33			2-1/4	13/16	33
		2-1/4	1-3/16	34			2-1/4	7/8	34
		2-1/4	1-9/16	35			2-1/4	29/32	35
		2-1/2	1-3/4	36			2-1/4	1	36
		2-1/2	2-3/16	37			2-1/4	1-1/16	37
		2-9/16	15/16	38			2-1/4	1-5/16	38
		2-11/16	2-5/16	39			2-5/16	1-1/8	39
		3-1/8	3-3/16	40			2-7/16	1-13/16	40
		4-3/4	2	41			2-1/2	1-3/8	41

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table LI - Boundary dimensions-IH (Continued)

Bore		O.D. Inches	Height Inches	O.D. and height code	Bore		O.D. Inches	Height Inches	O.D. and height code
No. of 1/16	Inches				No. of 1/16	Inches			
016	1	2-1/2	1-3/4	42	018	1-1/8	2-7/32	1-1/4	21
		2-3/4	2-1/2	43			2-1/4	13/16	22
		2-7/8	1-1/8	44			2-5/16	25/32	23
		2-7/8	1-3/16	45			2-5/16	55/64	24
		2-7/8	1-13/32	46			2-11/32	15/16	25
		2-7/8	2	47			2-3/8	1-1/16	26
		3	1	48			2-25/64	11/16	42
		3	2-5/8	49			2-7/16	15/16	27
		3-1/8	2-1/16	50			2-1/2	1-9/16	28
		3-1/4	7/8	51			2-9/16	7/8	29
		3-3/8	.822	52			2-9/16	15/16	30
		3-1/2	3-5/8	53			2-9/16	1-1/16	31
		4	2	54			2-9/16	1-5/16	32
		6-1/2	2-1/4	55			2-5/8	1-13/16	33
		7-1/2	2-1/2	56			2-13/16	1-1/2	34
							3	5/8	35
017	1-1/16	1-11/16	5/8	01			3-1/8	2-5/16	36
		1-3/4	5/8	02			3-3/16	1-1/4	37
		1-7/8	9/16	03			3-3/16	1-5/16	38
		1-7/8	11/16	04			3-3/16	1-9/16	39
		1-29/32	11/16	05			3-3/8	2-7/16	40
		1-15/16	3/4	06			3-1/2	.822	41
		1-31/32	5/8	07					
		1-31/32	3/4	08	019	1-3/16	1-15/16	17/32	01
		2	5/8	19			1-15/16	5/8	02
		2	11/16	09			2-1/16	5/8	03
		2-1/16	3/4	10			2-3/32	5/8	04
		2-1/8	5/8	11			2-3/32	3/4	05
		2-1/8	3/4	12			2-1/8	.779	06
		2-1/8	13/16	13			2-3/16	11/16	07
		2-3/16	7/16	14			2-3/16	3/4	08
		2-3/16	5/8	15			2-1/4	13/16	09
		2-3/16	13/16	16			2-11/32	15/16	10
		2-1/4	1-1/16	17			2-3/8	1-1/16	11
		2-7/16	1	18			2-13/32	15/16	12
							2-11/16	1-1/8	13
018	1-1/8	1-3/4	3/8	01					
		1-27/32	3/4	02	020	1-1/4	2	13/16	01
		1-7/8	9/16	03			2-1/16	1/2	02
		1-7/8	5/8	04			2-3/32	23/32	03
		1-29/32	5/8	05			2-1/8	11/16	04
		1-31/32	5/8	06			2-3/16	11/16	05
		2	23/32	07			2-1/4	5/8	06
		2-1/16	19/32	08			2-1/4	11/16	07
		2-1/16	21/32	09			2-1/4	29/32	08
		2-3/32	5/8	10			2-5/16	3/4	09
		2-3/32	3/4	11			2-11/32	5/8	10
		2-1/8	5/8	12			2-11/32	3/4	11
		2-1/8	23/32	13			2-11/32	15/16	12
		2-1/8	13/16	14			2-11/32	1-1/4	13
		2-1/8	7/8	15			2-3/8	13/16	14
		2-3/16	9/16	16			2-3/8	1	15
		2-3/16	11/16	17			2-13/32	15/16	16
		2-3/16	3/4	18			2-7/16	5/8	17
		2-3/16	15/16	19			2-7/16	3/4	18
		2-3/16	1-1/8	20			2-7/16	13/16	19

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table LI - Boundary dimensions-IH (Continued)

Bore		O.D.	Height	O.D. and height	Bore		O.D.	Height	O.D. and height
No. of 1/16	Inches	Inches	Inches	code	No. of 1/16	Inches	Inches	Inches	code
020	1-1/4	2-7/16	1-1/4	20	022	1-3/8	2-15/32	3/4	11
		2-1/2	13/16	21			2-15/32	13/16	12
		2-1/2	15/16	22			2-15/32	1-1/4	13
		2-1/2	1-1/16	23			2-1/2	13/16	14
		2-33/64	45/64	46			2-1/2	15/16	15
		2-5/8	1	24			2-1/2	1	16
		2-3/4	5/8	25			2-5/8	13/16	17
		2-3/4	1-3/4	26			2-5/8	1-1/4	18
		2-3/4	1-13/16	27			2-11/16	27/32	19
		2-7/8	1	28			2-11/16	61/64	20
		2-7/8	1-11/16	29			2-3/4	13/16	21
		2-7/8	1-1/4	30			2-13/16	7/8	22
		2-7/8	1-1/2	31			2-13/16	1-1/16	23
		2-7/8	2	32			2-7/8	13/16	24
		3	1-7/16	33			2-7/8	1-13/16	25
		3-1/8	1-11/16	34			2-15/16	1-3/16	26
		3-1/4	2-3/4	35			3	1-1/16	27
		3-3/8	1-1/4	36			3	1-1/2	28
		3-3/8	2-7/16	37			3-1/4	1-1/4	29
		3-1/2	1-3/8	38			3-1/4	1-11/16	30
		3-1/2	1-7/16	39			3-5/16	2-1/4	31
		3-1/2	1-23/32	40			3-1/2	1-1/2	32
		3-1/2	2-5/8	41			3-5/8	2-7/16	33
		3-1/2	3-1/16	42			3-5/8	2-5/8	34
		3-11/16	1.010	43			3-11/16	1-1/4	35
		4	1	44			4	3-1/2	36
		4	4-3/16	45					
					023	1-7/16	2-7/32	5/8	16
021	1-5/16	2-1/32	9/16	01			2-13/32	11/16	01
		2-7/32	23/32	03			2-7/16	5/16	03
		2-5/16	3/4	02			2-7/16	3/4	02
		2-11/32	3/8	04			2-15/32	5/8	04
		2-11/32	5/8	16			2-15/32	3/4	05
		2-11/32	3/4	05			2-1/2	15/16	06
		2-3/8	3/4	06			2-19/32	15/16	07
		2-3/8	13/16	07			2-5/8	13/16	08
		2-7/16	15/16	08			2-11/16	7/8	09
		2-1/2	13/16	09			2-7/8	13/16	10
		2-1/2	1-1/16	10			2-15/16	1-1/8	11
		2-11/16	1-1/8	11			3	1-1/16	12
		2-3/4	1-1/4	12			3	1-1/4	13
		2-13/16	11/16	13			3-1/4	1-1/4	14
		2-13/16	15/16	14			3-1/4	1-5/16	15
		3-1/2	13/16	15					
					024	1-1/2	2-1/8	1/2	01
022	1-3/8	2	1	01			2-1/4	3/4	02
		2-3/16	1/2	02			2-1/4	1-1/4	03
		2-7/32	23/32	03			2-5/16	1/2	04
		2-1/4	7/32	04			2-11/32	23/32	05
		2-1/4	5/8	05			2-1/2	5/8	06
		2-11/32	3/4	06			2-17/32	15/16	07
		2-3/8	21/32	07			2-9/16	11/16	08
		2-3/8	47/64	08			2-9/16	3/4	09
		2-13/32	11/16	09			2-9/16	49/64	10
		2-7/16	3/4	10			2-19/32	5/8	11
		2-15/32	5/8	37			2-19/32	11/16	12

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table LI - Boundary dimensions-IH (Continued)

Bore		O.D. Inches	Height Inches	O.D. and height code	Bore		O.D. Inches	Height Inches	O.D. and height code
No. of 1/16	Inches				No. of 1/16	Inches			
024	1-1/2	2-19/32	3/4	13	025	1-9/16	3-1/4	1-1/16	11
		2-19/32	15/16	14			6-5/16	2-1/4	12
		2-5/8	5/8	15					
		2-5/8	27/32	16	026	1-5/8	2-7/16	1/2	01
		2-11/16	11/16	17			2-15/32	5/8	02
		2-11/16	13/16	18			2-15/32	23/32	03
		2-11/16	7/8	19			2-1/2	1	04
		2-11/16	1-5/16	20			2-19/32	11/16	05
		2-3/4	1-1/8	21			2-21/32	13/16	06
		2-7/8	29/32	22			2-3/4	15/64	08
		2-7/8	1	23			2-3/4	23/32	07
		2-15/16	1-3/16	24			2-13/16	7/8	09
		3	13/16	25			2-13/16	29/32	10
		3	27/32	57			2-13/16	1-5/8	11
		3	1-3/32	26			2-7/8	1-1/8	12
		3-1/16	1-7/8	27			2-7/8	1-1/4	13
		3-1/8	1-1/16	28			2-31/32	13/16	14
		3-1/8	1-1/4	29			2-31/32	7/8	15
		3-1/4	1-1/8	30			2-31/32	1-15/16	16
		3-1/4	1-3/16	31			3	27/32	36
		3-1/4	1-3/8	32			3	1-3/16	17
		3-1/4	1-13/32	33			3-1/16	15/16	18
		3-1/4	2	34			3-1/16	1-3/64	19
		3-3/8	1-3/4	35			3-3/32	13/32	20
		3-1/2	1-1/4	36			3-3/16	1-5/32	21
		3-3/4	2	37			3-1/4	1	22
		3-3/4	2-7/16	38			3-5/16	2	23
		3-3/4	3-1/4	39			3-3/8	1-5/16	24
		4	1	40			3-1/2	1-1/4	25
		4	1.010	41			3-1/2	1-3/4	26
		4	3-1/16	42			3-11/16	1-1/4	27
		4-1/32	1-5/8	43			3-11/16	2-1/2	28
		4-1/4	1-5/8	44			3-7/8	2	29
		4-1/4	1-11/16	45			3-7/8	2-7/16	30
		4-1/4	2-1/32	46			4-1/8	3-1/16	31
		4-1/2	4-5/8	47			4-1/8	3-1/2	32
		4-5/8	1-11/16	48			4-5/8	4	33
		5	1-3/4	49			5	1-5/8	34
		5	2	51			5-1/4	5-1/4	35
		5	2-3/6	50					
		6-3/4	1.385	52	027	1-11/16	2-1/2	3/4	01
		8	1.385	53			2-19/32	11/16	02
		8	2-1/2	54			2-11/16	13/16	03
		9	1.385	55			2-11/16	7/8	04
		10	3	56			2-3/4	13/16	05
							2-13/16	7/8	06
025	1-9/16	2-9/16	3/4	01			2-31/32	13/16	07
		2-19/32	5/8	02			2-31/32	7/8	08
		2-19/32	3/4	03			3-1/8	13/16	09
		2-3/4	1	04			3-1/8	1-1/8	10
		2-25/32	7/8	05			3-3/16	1-1/8	11
		2-7/8	27/32	06			3-3/16	1-5/16	14
		3	13/16	07			3-1/4	1	12
		3	1	08			3-3/8	1-3/16	13
		3-1/32	1-1/2	09					
		3-1/8	1-1/16	10	028	1-3/4	2-5/8	5/8	01

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table LI - Boundary dimensions-IH (Continued)

Bore		O.D.	Height	O.D. and height	Bore		O.D.	Height	O.D. and height
No. of 1/16	Inches	Inches	Inches	code	No. of 1/16	Inches	Inches	Inches	code
028	1-3/4	2-11/16	3/4	02	029	1-13/16	3-3/32	13/16	07
		2-25/32	3/4	03			3-3/32	7/8	08
		2-7/8	11/16	04			3-1/8	1-1/8	09
		2-15/16	3/4	05			3-3/16	1-1/8	10
		2-15/16	53/64	06			3-3/8	1	11
		2-15/16	7/8	07			3-1/2	1-5/16	12
		2-31/32	1-1/8	08					
		3	15/16	09	030	1-7/8	2-3/8	1/2	01
		3-1/16	3/4	10			2-3/4	5/8	02
		3-3/32	13/16	12			2-3/4	13/16	03
		3-3/32	7/8	13			2-13/16	3/4	04
		3-3/16	13/16	14			3-1/16	25/32	05
		3-3/16	15/16	15			3-1/16	7/8	06
		3-3/16	1	16			3-1/8	13/16	07
		3-3/16	1-1/8	17			3-3/16	31/32	08
		3-3/16	1-1/4	18			3-3/16	1-5/16	09
		3-7/32	1	19			3-7/32	3/4	10
		3-7/32	1-9/16	20			3-7/32	13/16	11
		3-1/4	15/16	21			3-7/32	7/8	12
		3-1/4	31/32	22			3-5/16	1-1/4	13
		3-1/4	1-3/32	23			3-11/32	1-9/16	14
		3-3/8	1	24			3-7/16	15/16	15
		3-3/8	1-7/32	25			3-7/16	1-1/32	16
		3-1/2	1	26			3-7/16	1-9/64	17
		3-1/2	1-1/4	27			3-1/2	1	18
		3-1/2	1-5/16	28			3-9/16	1-1/4	19
		3-5/8	1-1/4	29			3-5/8	1-5/16	20
		3-5/8	1-5/16	30			3-3/4	1-1/4	21
		3-5/8	1-9/16	31			3-3/4	2-1/4	22
		3-5/8	2-1/4	32			4	1-1/4	23
		3-11/16	1-5/16	11			4	2	24
		3-3/4	7/8	33			4-1/4	1-3/8	25
		3-3/4	1-1/4	34			4-1/4	2-7/16	26
		3-3/4	1-5/8	35			4-1/4	3	27
		3-3/4	2-1/4	36			4-1/2	2-5/16	28
		3-3/4	4	37			4-5/8	3-1/2	29
		3-7/8	2	38			5-1/4	4-7/16	30
		4	1-1/2	39					
		4	2-7/16	40	031	1-15/16	2-15/16	1	01
		4-5/16	1.010	41			3	13/16	02
		4-3/8	2-5/16	42			3	7/8	03
		4-1/2	3-1/2	44			3	1-3/16	04
		4-5/8	1-1/8	45			3-1/16	7/8	05
		4-21/32	1	43			3-3/16	1-3/16	06
		4-13/16	1-7/8	46			3-7/32	13/16	07
		4-13/16	1-15/16	47			3-7/32	7/8	08
		4-13/16	2-11/32	48			3-1/4	1-3/16	09
		4-7/8	1-1/8	49			3-1/4	1-1/4	10
		4-7/8	4	50			3-7/16	1-1/4	11
		5-7/8	5-11/16	51			3-1/2	1	12
							3-19/32	1-1/8	13
029	1-13/16	2-3/4	11/16	01			3-5/8	1-5/16	14
		2-13/16	3/4	02			3-3/4	1-1/4	15
		2-15/16	7/8	03			4	1-1/2	16
		2-15/16	5/16	04			4	1-5/8	17
		3-1/16	3/4	05			6	1-3/4	18
		3-3/32	7/16	06					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table LI - Boundary dimensions-IH (Continued)

Bore		O.D. Inches	Height Inches	O.D. and height code	Bore		O.D. Inches	Height Inches	O.D. and height code
No. of 1/16	Inches				No. of 1/16	Inches			
032	2	2-7/8	5/8	01	032	2	5-3/4	2-13/16	57
		2-15/16	3/4	02			5-3/4	4-7/8	58
		2-31/32	3/4	03			6	1-3/8	59
		3	13/16	04			6-5/16	1-13/16	60
		3-1/16	11/16	05			6-5/16	3-5/8	61
		3-1/16	3/4	06			6-3/8	6-1/4	62
		3-3/32	3/4	07			7	1-3/8	63
		3-3/16	7/8	08			7-5/16	1-13/16	64
		3-3/16	1	09			7-5/16	3-7/8	65
		3-3/16	1-3/16	10			8	1-3/8	66
		3-1/4	3/4	11			8-5/16	1-13/16	67
		3-1/4	13/16	12					
		3-1/4	29/32	13	033	2-1/16	3-3/16	7/8	01
		3-1/4	15/16	14			3-3/16	1-1/8	02
		3-1/4	1-3/16	15			3-1/4	3/4	03
		3-5/16	1-5/16	16			3-1/4	1	04
		3-11/32	13/16	17			3-21/64	13/64	10
		3-11/32	7/8	18			3-11/32	13/16	05
		3-11/32	1-1/4	19			3-11/32	7/8	06
		3-3/8	13/16	20			3-3/8	3/4	07
		3-3/8	1	21			3-3/8	13/16	08
		3-1/2	13/16	22			4	1-1/4	09
		3-1/2	1-5/8	23					
		3-19/32	1-3/4	24	034	2-1/8	3	9/16	01
		3-5/8	1	25			3	11/16	29
		3-5/8	1-1/16	26			3-1/8	3/4	02
		3-5/8	1-3/16	27			3-3/16	11/16	03
		3-11/16	1-3/8	28			3-3/16	7/8	04
		3-3/4	7/8	29			3-7/32	15/16	05
		3-3/4	1	30			3-1/4	13/16	06
		3-3/4	1-3/32	31			3-5/16	7/8	07
		3-3/4	1-5/16	32			3-3/8	3/4	08
		3-15/16	1	33			3-7/16	27/32	09
		4	1-3/8	34			3-7/16	15/16	10
		4	1-7/16	35			3-1/2	1-1/32	11
		4	1-23/32	36			3-19/32	13/16	12
		4	2-7/16	37			3-19/32	7/8	13
		4-1/8	13/16	38			3-5/8	1-9/16	14
		4-1/8	1-11/16	39			3-23/32	1-3/4	15
		4-1/8	2-1/2	40			3-3/4	1	16
		4-7/16	1-3/8	41			3-3/4	1-3/32	17
		4-1/2	1-3/8	42			3-13/16	1-15/64	18
		4-1/2	2-1/4	43			3-7/8	1-5/16	19
		4-17/32	2-7/16	44			3-15/16	1-3/8	20
		4-9/16	1.010	45			4-1/8	2-7/16	21
		4-3/4	1-5/8	46			4-3/8	1-7/32	22
		4-3/4	3-1/2	47			4-21/32	2-7/16	23
		4-7/8	1-1/8	48			4-15/16	1.010	24
		5	1-3/8	49			5	1-1/2	25
		5	2-5/8	50			5-1/8	1-3/8	26
		5-1/4	4	51			5-3/4	1-1/4	27
		5-3/8	4-3/4	52			7-1/2	1-7/8	28
		5-1/2	7/8	53					
		5-1/2	1-5/8	54	035	2-3/16	3-1/4	1	02
		5-3/4	2-1/4	55			3-5/16	7/8	03
		5-3/4	2-3/8	56			3-1/2	1-1/8	04

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table LI - Boundary dimensions-IH' (Continued)

Bore		O.D.	Height	O.D. and height	Bore		O.D.	Height	O.D. and height
No. of 1/16	Inches	Inches	Inches	code	No. of 1/16	Inches	Inches	Inches	code
035	2-3/16	3-19/32	13/16	05	036	2-1/4	5-1/16	1.010	46
		3-19/32	7/8	06			5-1/8	2-1/2	47
		3-3/4	1-1/4	07			5-1/4	1	48
		3-13/16	13/16	01			5-1/4	1-3/8	49
		3-27/32	13/16	08			5-5/8	3	50
		3-7/8	1-1/4	09			5-5/8	4	51
		4	1-1/2	10			5-3/4	1-1/4	52
		5	2-1/4	11			5-7/8	4-7/16	53
		6	2	12			6	4-7/8	54
		7	1-3/8	13			6-3/8	2-1/2	55
							6-3/8	2-5/8	56
036	2-1/4	3-1/8	5/8	01			6-3/8	3-1/8	57
		3-1/4	13/16	02					
		3-5/16	11/16	03	037	2-5/16	3-1/4	13/16	01
		3-5/16	3/4	04			3-7/16	7/8	02
		3-5/16	7/8	05			3-23/32	13/16	03
		3-11/32	7/8	06			3-23/32	7/8	04
		3-7/16	3/4	07			3-15/16	1-1/4	05
		3-7/16	7/8	08			4-11/32	1	06
		3-17/32	13/16	09					
		3-5/8	3/4	10	038	2-3/8	3-7/16	11/16	01
		3-5/8	7/8	11			3-9/16	7/8	02
		3-5/8	63/64	12			3-9/16	1	03
		3-5/8	1-1/4	13			3-3/4	29/32	04
		3-11/16	1-1/16	14			3-3/4	1-1/64	05
		3-23/32	13/16	15			3-27/32	13/16	06
		3-23/32	7/8	16			3-27/32	7/8	07
		3-23/32	1-1/4	17			3-7/8	1-1/8	08
		3-3/4	7/8	18			4	1	09
		3-3/4	15/16	19			4	1-3/4	10
		3-3/4	1-3/32	20			4-1/32	1-3/4	11
		3-3/4	1-1/4	21			4-1/8	1-5/16	12
		3-3/4	1-9/16	22			4-3/16	1-1/16	13
		3-27/32	1-3/4	23			4-3/16	1-21/64	14
		3-7/8	1	24			4-5/16	1-15/32	15
		3-7/8	1-1/4	25			4-1/2	2-7/16	16
		4	1	26			5	5/8	17
		4	1-5/32	27					
		4	1-1/4	28	039	2-7/16	2-15/32	11/16	02
		4	1-9/32	29			3-7/16	3/4	01
		4	1-5/16	30			3-1/2	1-1/8	03
		4-7/64	5/16	31			3-9/16	13/16	04
		4-1/8	1-5/8	32			3-9/16	7/8	05
		4-1/8	1-11/16	33			3-3/4	7/8	06
		4-3/16	1-13/32	34			3-27/32	13/16	07
		4-1/4	1	35			3-27/32	7/8	08
		4-1/4	1-1/4	36			3-15/16	1-1/4	09
		4-1/4	2-7/16	37			3-15/16	1-1/2	10
		4-1/2	1-9/16	38			4	1-1/2	11
		4-11/16	1-5/8	39			4-1/2	7/8	12
		4-11/16	1-11/16	40			4-1/2	1-5/8	13
		4-11/16	2-1/32	41			4-5/8	1-5/8	14
		4-7/8	3	42			5	1-3/8	15
		4-31/32	2-7/16	43			5	2	16
		5	1-1/4	44			6-1/2	2-1/2	17
		5	3-1/2	45					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table LI - Boundary dimensions-IH (Continued)

Bore		O.D. Inches	Height Inches	O.D. and height code	Bore		O.D. Inches	Height Inches	O.D. and height code
No. of 1/16	Inches				No. of 1/16	Inches			
040	2-1/2	3-1/2	13/16	01	040	2-1/2	9	1.385	59
		3-9/16	11/16	02			9	2-1/2	58
		3-11/16	15/16	03			10	1.385	60
		3-11/16	1	04					
		3-23/32	1	05	041	2-9/16	3-13/16	13/16	01
		3-15/16	15/16	06			3-31/32	13/16	02
		3-15/16	1-3/64	07			3-31/32	7/8	03
		3-31/32	13/16	08			4	3/4	04
		3-31/32	7/8	09			4	1-1/8	05
		3-31/32	1-3/8	10			4-5/32	1	06
		4	1-1/8	11			10-5/8	11/16	07
		4	1-1/4	12					
		4-1/32	1	13	042	2-5/8	3-15/32	1/2	01
		4-1/16	1-5/32	14			3-15/32	1	02
		4-1/8	1	15			3-1/2	1	03
		4-1/8	1-3/4	16			3-19/32	3/4	04
		4-5/32	1-3/4	17			3-3/4	3/4	05
		4-1/4	1	18			3-13/16	1	06
		4-1/4	1-1/8	19			3-31/32	13/16	07
		4-1/4	1-1/4	20			4-1/8	31/32	08
		4-1/4	1-5/16	21			4-1/8	1-5/64	09
		4-3/8	1-3/8	22			4-1/8	1-1/8	10
		4-1/2	1	23			4-1/4	1-3/16	11
		4-9/16	1-17/32	24			4-1/4	1-3/4	12
		4-5/8	2	25			4-11/32	1	13
		4-5/8	2-7/16	26			4-11/32	1-1/8	14
		4-3/4	1-3/16	27			4-3/8	2	15
		5	1-3/8	28			4-17/32	1-5/16	16
		5	1-1/2	29			4-9/16	1-9/32	17
		5-7/32	2-7/16	30			4-9/16	1-27/64	18
		5-5/16	1.010	31			4-3/4	1-9/16	19
		5-3/8	1-7/8	32			4-13/16	2-3/4	20
		5-3/8	2	33			5	2-1/4	21
		5-3/8	2-11/32	34			5-3/8	1-3/4	22
		5-3/8	3-1/2	35					
		5-7/16	2	36					
		5-1/2	1	37	043	2-11/16	4-1/8	1-1/8	01
		5-1/2	1-5/8	38			4-11/32	1	02
		5-5/8	2-3/4	39			4-11/32	1-1/8	03
		5-5/8	4	40			4-1/2	1-1/2	04
		5-3/4	1-1/4	41			4-3/4	1-3/4	05
		6	1-3/8	42			6	1-3/4	06
		6	1-7/8	43					
		6-1/4	2	44	044	2-3/4	3-7/8	3/4	01
		6-1/4	3-1/4	45			4	1	02
		6-1/4	5-1/4	46			4-1/32	1	03
		6-3/8	4-7/8	47			4-7/32	1-1/4	04
		6-1/2	2-1/2	48			4-1/4	1-1/8	05
		6-3/4	1.385	49			4-5/16	1	06
		6-7/8	2-3/4	50			4-5/16	1-1/8	07
		6-7/8	2-7/8	51			4-7/16	1-1/4	08
		6-7/8	3-7/16	52			4-15/32	1	09
		6-7/8	5-7/8	53			4-15/32	1-1/8	10
		7	1-7/8	54			4-1/2	1-3/4	11
		7-1/2	7-1/2	55			4-5/8	1-1/2	12
		7-3/4	12-1/2	56			4-21/32	1-5/16	13
		8	1-3/8	57			4-3/4	1-1/8	14

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table LI - Boundary dimensions-IH (Continued)

Bore		O.D. Inches	Height Inches	O.D. and height code	Bore		O.D. Inches	Height Inches	O.D. and height code
No. of 1/16	Inches				No. of 1/16	Inches			
044	2-3/4	4-3/4	1-1/4	15	047	2-15/16	4-3/4	1-5/8	06
		4-3/4	1-5/16	16			5-1/8	1-3/4	07
		4-3/4	1-13/32	17					
		4-3/4	1-15/32	18	048	3	3-3/4	9/16	01
		4-13/16	2-3/4	21			4	1/2	02
		4-7/8	1-1/4	19			4-1/8	3/4	03
		4-7/8	2	20			4-5/16	1-1/8	04
		4-15/16	1-5/8	22			4-3/8	1-1/8	05
		5	1	23			4-15/32	1-3/8	06
		5	1-1/2	24			4-1/2	9/16	07
		5-1/4	3-1/8	25			4-1/2	1-1/8	08
		5-15/32	2-7/16	26			4-17/32	1-1/8	09
		5-9/16	1.010	27			4-19/32	1	10
		5-5/8	3-1/2	28			4-5/8	1	11
		5-7/8	2-3/4	29			4-5/8	1-1/16	12
		6	1-3/8	30			4-5/8	1-3/16	13
		6	1-5/8	31			4-5/8	1-1/2	14
		6-7/16	4-1/2	32			4-23/32	1	15
		6-1/2	3-1/4	33			4-23/32	1-1/8	16
		6-5/8	4-7/8	34			4-3/4	1-1/8	17
		6-3/4	1-3/8	35			4-3/4	1-3/16	18
		6-3/4	1-3/4	36			4-3/4	1-5/16	19
		7-7/8	7	37			4-3/4	1-13/32	20
							4-3/4	1-3/4	21
045	2-13/16	4-3/32	5/8	01			4-13/16	2	22
		4-1/4	1-1/8	02			4-31/32	1-5/16	23
		4-15/32	1	03			5	1-1/4	24
		4-15/32	1-1/8	04			5-1/16	2-1/4	25
		4-1/2	1-1/2	05			5-1/8	1-13/32	26
		4-3/4	1-3/8	06			5-1/8	1-37/64	27
							5-5/16	1-3/4	28
046	2-7/8	3-27/32	3/4	01			5-1/2	1-1/2	29
		4	3/4	02			5-1/2	2-1/4	30
		4-1/8	1	03			5-1/2	3-1/8	31
		4-7/16	1-1/32	04			5-15/16	1.010	32
		4-7/16	1-1/8	05			6	1-3/8	33
		4-7/16	1-5/32	06			6	1-3/4	34
		4-15/32	1	07			6	2	35
		4-19/32	7/8	08			6-1/4	3	36
		4-19/32	1	09			6-1/4	4	37
		4-9/16	1-9/32	10			6-5/16	1-13/16	38
		4-5/8	1-3/4	11			6-3/8	1-5/16	39
		4-3/4	1-1/8	12			6-3/8	2-1/4	40
		4-15/16	1-11/32	13			6-3/8	2-3/8	41
		4-15/16	1-33/64	14			6-3/8	2-13/16	42
		4-15/16	2-1/4	15			6-3/4	1-3/8	43
		5-1/8	1-11/16	16			6-3/4	3-3/8	44
		5-1/2	1-3/8	17			6-7/8	3-3/8	64
		6-1/16	1-3/4	18			7	1-3/8	45
		8-3/4	2-1/2	19			7	1-3/4	46
							7-1/4	5-3/4	47
047	2-15/16	4-7/16	1-1/8	01			7-5/16	1-13/16	48
		4-1/2	1-1/2	02			7-7/16	1-3/8	49
		4-19/32	1	03			7-1/2	4	50
		4-19/32	1-1/8	04			7-1/2	5-7/8	51
		4-5/8	1-1/2	05			8	1-3/8	52

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table LI - Boundary dimensions-IH (Continued)

Bore		O.D. Inches	Height Inches	O.D. and height code	Bore		O.D. Inches	Height Inches	O.D. and height code
No. of 1/16	Inches				No. of 1/16	Inches			
048	3	8-1/8	3-1/4	53	052	3-1/4	11	1.760	37
		8-1/8	3-3/8	54					
		8-1/8	4-1/16	55	053	3-5/16	4-31/32	1-3/16	01
		8-5/16	1-13/16	56			5-1/8	1-13/32	02
		8-3/8	4-5/8	57					
		8-3/4	8-3/4	58	054	3-3/8	4-1/2	3/4	01
		9	1-3/8	59			4-5/8	3/4	02
		9	2-5/8	60			4-7/8	1-1/8	03
		9-5/16	1-13/16	61			4-7/8	1-1/4	04
		9-3/8	4-3/4	62			5	3/4	05
		10-1/2	5-1/4	63			5-1/4	1-3/8	06
							5-11/16	2-1/2	07
049	3-1/16	4-23/32	1	01			6	1-3/8	08
							7	1-3/8	09
051	3-3/16	4-22/32	1	01					
		4-25/32	1-3/16	02	055	3-7/16	5	1	01
		4-27/32	1	03			5-7/32	1	02
		5-3/8	1-1/2	04			5-3/8	1-1/2	03
		5-1/2	1-3/4	05			5-1/2	1-1/2	04
							5-1/2	1-3/4	05
052	3-1/4	4-1/8	11/16	01			5-3/4	1-7/8	06
		4-3/16	1/4	02			6-1/4	2	07
		4-15/64	13/16	03			8	1-3/4	08
		4-1/4	27/32	04					
		4-3/4	3/4	05	056	3-1/2	4-7/16	5/8	02
		4-1/2	1-1/8	06			4-5/8	3/4	01
		4-5/8	3/4	07			5	1-1/8	03
		4-3/4	1-1/8	08			5	1-1/4	04
		4-3/4	1-1/4	09			5-1/16	1-1/4	05
		4-31/32	1	10			5-1/8	1	06
		4-31/32	1-1/8	11			5-7/32	1	07
		5	1-1/8	12			5-7/32	1-1/8	08
		5	1-17/64	13			5-5/16	1-3/16	09
		5-1/8	1-13/32	14			5-5/16	1-21/64	10
		5-7/32	1-5/16	15			5-5/16	1-13/32	11
		5-1/4	1-1/4	16			5-7/16	1-15/32	12
		5-1/4	1-3/8	17			5-15/32	1-5/16	13
		5-1/4	1-9/16	18			5-1/2	2-1/4	14
		5-1/4	2-1/4	19			5-3/4	1-3/8	15
		5-5/16	2-1/4	20			5-3/4	1-1/2	16
		5-1/2	1-15/32	21			5-3/4	1-23/32	17
		5-1/2	1-21/32	22			5-13/16	2-1/2	18
		5-11/16	1-27/32	23			5-7/8	1-9/16	19
		5-3/4	3-1/8	24			5-7/8	1-49/64	20
		6-1/16	2-1/8	25			6-1/64	1-5/8	21
		6-1/8	1-1/2	26			6-1/16	1-15/16	22
		6-3/16	1-3/4	27			6-1/4	3-3/8	23
		7	3-3/8	28			6-5/16	2-1/2	24
		7-1/4	5	29			6-3/4	1-5/8	25
		7-3/4	1-1/2	30			7-1/8	2-1/2	26
		7-3/4	4	31			7-1/8	2-5/8	27
		7-3/4	5-7/8	32			7-1/8	3-1/8	28
		8	1.760	33			7-1/4	4-1/2	29
		9	1.760	34			7-3/4	1-1/2	30
		9-1/8	7-7/8	35			7-3/4	4	31
		10	1.760	36			8	1-3/4	32

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table LI - Boundary dimensions-IH (Continued)

Bore		O.D. Inches	Height Inches	O.D. and height code
No. of 1/16	Inches			
056	3-1/2	8	2	33
		8-1/8	6-1/2	34
		8-1/2	2-1/2	35
		8-3/4	4-5/8	36
		8-3/4	7	37
		9-3/8	3-3/4	38
		9-3/8	3-15/16	39
		9-3/8	4-11/16	40
		10	1-3/4	41
		10	9-7/8	42
057	3-9/16	5-7/32	1	01
058	3-5/8	4-3/4	3/4	01
		4-27/32	7/8	02
		5-1/8	1-1/4	03
		5-7/32	1-1/4	04
		5-5/8	1-3/8	05
059	3-11/16	5-1/2	1	01
		6-1/8	1-7/8	02
060	3-3/4	4-5/8	5/8	01
		4-7/8	3/4	02
		5-1/16	1-9/32	03
		5-1/4	1-1/8	04
		5-1/4	1-1/4	05
		5-1/2	13/16	06
		5-11/16	1-1/4	07
		5-11/16	1-13/16	08
		5-3/4	1-3/8	09
		5-3/4	2-1/4	10
		5-13/16	1-9/16	11
		6-1/8	1-3/4	12
		6-1/4	1-21/32	13
		6-1/4	1-55/64	14
		6-5/16	3-1/16	15
		6-7/16	2-1/16	16
		6-7/8	2-13/16	17
		7-1/8	1-7/8	18
		8	4	19
		8-3/8	6	20
		8-3/4	1-5/8	21
		9	1-3/8	22
		9	4-5/8	23
		9	7	24
		10-5/16	8-3/4	25
061	3-13/16	4-19/32	11/16	01
		5-7/16	13/16	02
		5-7/16	1-1/4	03
		5-7/8	13/16	04
		6	1-1/2	05
062	3-7/8	5	3/4	01
		5-1/4	1-1/8	02
062	3-7/8	5-5/8	1-3/8	03
		5-7/8	1-3/8	04
		6	1	05
		6-1/16	1-3/4	06
063	3-15/16	5-7/16	13/16	01
		5-7/8	1-1/2	02
		6-1/16	1-3/4	03
		6-1/2	2	04
		9	1-3/4	05
064	4	5-1/4	7/8	01
		5-3/4	3/4	02
		5-3/4	7/8	03
		5-3/4	1	04
		5-3/4	1-3/8	05
		5-13/16	1-3/8	06
		6	1-5/16	07
		6	1-3/8	08
		6	1-15/32	09
		6-3/16	1-5/8	10
		6-1/4	1-1/2	11
		6-1/4	1-5/8	12
		6-1/4	1-7/8	13
		6-1/4	2-1/2	14
		6-1/2	1	15
		6-1/2	2	16
		6-9/16	3-1/16	17
		6-5/8	1-23/32	18
		6-5/8	1-61/64	19
		6-13/16	2-5/32	20
		6-7/8	2	21
		7	1-3/4	22
		7	4	23
		7-1/8	2-13/16	24
		7-3/8	2-5/16	25
		7-3/4	2-3/4	26
		7-3/4	2-7/8	27
		7-3/4	3-7/16	28
		8	1-3/4	29
		8	2	30
		8-1/8	5	31
		8-3/8	2-5/16	32
		8-1/2	1-13/16	33
		8-1/2	4-3/8	34
		8-3/4	1-5/8	35
		9	1-3/4	36
		9	4-1/2	37
		9-1/4	7-1/2	38
		9-3/8	2-5/16	39
		9-1/2	4-5/8	40
		9-1/2	7	41
		10	1-3/4	42
		10	5-1/4	43
		10	7-7/8	44
		10-1/2	2-5/16	45
		10-5/8	4-7/16	47

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table LI - Boundary dimensions-IH (Continued)

Bore		O.D. Inches	Height Inches	O.D. and height code
No. of 1/16	Inches			
064	4	10-5/8	4-1/2	46
		10-5/8	5-5/16	48
		10-3/4	2-1/2	49
		11-7/16	9-3/4	50
		11-1/2	5-1/4	51
		12-1/2	5-1/2	52
		16	5	53
		16	5-1/2	54
066	4-1/8	5-7/8	1-1/2	01
		6	1	02
		6-1/8	1-3/8	03
067	4-3/16	6-7/8	2-1/4	01
068	4-1/4	5-1/2	7/8	01
		5-9/16	5/8	02
		6-1/16	1-5/16	03
		6-1/4	1-3/8	04
		6-1/4	1-3/4	05
		8-11/64	2	06
		9	1.760	07
		9-1/2	1-3/4	08
		10	1.760	09
		11	1.760	10
		12	1.760	11
		12-1/4	4-3/4	12
		13	1.760	13
070	4-3/8	6-3/8	1-3/8	01
071	4-7/16	6-1/4	1-1/2	01
		6-1/2	1-5/8	02
		6-7/8	2-1/4	03
		7-1/4	2-3/8	04
072	4-1/2	5-3/4	7/8	01
		5-3/4	1	02
		5-13/16	1-1/2	03
		6-1/4	1-3/8	04
		6-1/2	1-3/4	05
		6-3/4	1-5/8	06
		7	3-1/16	07
		7-1/4	1-3/4	08
		7-1/4	1-15/16	09
		7-1/4	2-3/16	10
		7-5/16	3-9/16	11
		7-15/32	1-3/4	12
		7-3/4	4-5/8	13
		8-1/8	2	14
		8-1/4	3-3/8	15
		9-1/4	3-1/4	16
		9-1/4	3-7/16	17
		9-1/4	4-1/16	18
		9-1/4	6	19
		9-1/2	1-3/4	20
072	4-1/2	9-1/2	2	21
		9-7/8	2-1/8	22
		10-3/16	5	23
		10-3/8	7-1/2	24
		10-3/8	8-3/4	25
		11-1/4	5-7/8	26
		11-1/4	8-3/4	27
		11-15/16	9-3/4	28
		12	4-3/4	29
		12	5	30
		12	5-15/16	31
074	4-5/8	6-7/8	1-5/8	01
075	4-11/16	7-1/4	2-3/8	01
		7-1/2	2-3/8	02
076	4-3/4	6	1	01
		7	1-5/8	02
		7	2	03
		7-1/2	15/16	04
		7-3/4	2-1/2	05
		10-1/4	1-7/8	06
077	4-13/16	6-7/8	1-1/4	01
078	4-7/8	7-1/8	1-5/8	01
		9-3/8	1-3/4	02
079	4-15/16	7	1-1/2	01
		7-1/4	2	02
		7-1/2	2-3/8	03
		8-1/8	2-5/8	04
		11	2	05
		12	3	06
080	5	6-1/4	1	01
		6-1/2	1-1/8	02
		7	1-1/4	03
		7-1/4	1-5/8	04
		7-1/4	2	05
		7-1/4	3-9/16	06
		8	1-3/4	07
		8-1/16	3-7/8	08
		8-1/4	2	09
		8-1/4	2-1/4	10
		8-1/4	2-1/2	11
		8-1/2	2-5/16	12
		8-1/2	5	13
		9	1-3/4	14
		9-5/32	2-1/4	15
		9-3/8	4	16
		9-1/2	1-7/8	17
		9-1/2	2-5/16	18
		9-1/2	4-7/8	19
		10	2	20

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table LI - Boundary dimensions-IH (Continued)

Bore		O.D. Inches	Height Inches	O.D. and height code	Bore		O.D. Inches	Height Inches	O.D. and height code
No. of 1/16	Inches				No. of 1/16	Inches			
080	5	10-1/4	1-7/8	21	088	5-1/2	9-1/4	5-1/4	09
		10-3/8	7	22			10	1-3/4	10
		10-1/2	2-5/16	23			10	2	11
		10-1/2	2-5/8	24			10-1/4	4-1/4	12
		10-1/2	3-3/4	25			10-1/2	2-1/2	13
		10-1/2	4	26			11-1/4	2-1/4	14
		10-1/2	4-11/16	27			11-1/4	7-1/2	15
		10-1/2	5-1/8	28			11-1/2	2	16
		11	2	29			11-13/16	5-5/8	17
		11-1/8	8	30			12	10	18
		11-1/4	9-1/2	31			12-1/4	2-1/2	19
		11-5/16	5-5/8	32			12-7/8	5-1/2	20
		11-1/2	2-5/8	33			13	6-1/2	21
		12	2	34					
		12-3/8	9-3/4	35	090	5-5/8	8-3/8	1-7/8	01
		12-1/2	2-5/8	36					
		12-1/2	5-1/4	37	091	5-11/16	9-1/4	3	01
		12-1/2	6-1/2	38					
		13-1/4	5-1/4	39	092	5-3/4	7-1/4	1-1/8	01
		13-1/4	5-1/2	40			8	1-1/2	02
		13-1/4	6-9/16	41			8-1/2	1-7/8	03
		13-3/4	11-3/4	42			12-1/2	2-1/2	04
		14	2-3/4	43					
					093	5-13/16	10-5/8	11/16	01
081	5-1/16	6-3/4	1-1/4	01					
					094	5-7/8	8-5/8	1-7/8	01
082	5-1/8	7	1-1/2	01					
		7-3/8	1-5/8	02	095	5-15/16	8	1-3/4	01
							9-1/2	3	02
083	5-3/16	8-1/2	2-3/4	01			9-3/4	3-1/4	03
084	5-1/4	6-15/32	1	01	096	6	7-1/4	1	01
		6-3/4	1-1/8	02			7-5/8	1-1/4	02
		7-1/2	1-5/8	03			8-5/8	2-3/8	03
		8-9/16	2-1/4	04			8-3/4	1-7/8	04
		10	2.010	05			9	2	05
		11	2.010	06			9	2-1/4	06
		11-1/4	2-1/4	07			9-1/4	2-1/4	07
		12	2.010	08			9-1/4	2-7/16	08
		13	2.010	09			9-1/4	2-13/16	09
							9-1/4	4-1/8	10
086	5-3/8	7-7/8	1-5/8	01			9-1/2	2-5/8	11
		15-3/16	3-3/4	02			10	2	12
							10-1/2	2-5/8	13
							10-1/2	4-7/8	14
087	5-7/16	7-1/2	1-3/4	01			11	2	15
		8-1/4	1-3/8	02			11	4-1/2	16
		8-7/8	3	03			11-5/32	3	17
							11-1/2	2-5/8	18
088	5-1/2	7	1-1/8	01			11-1/2	5-1/8	19
		8	2-3/16	02			12	2	20
		8-1/16	1-3/8	03			12	4-1/4	21
		8-1/4	1-7/8	04			12	4-1/2	22
		8-1/2	1-1/2	05			12	5-5/16	23
		8-1/2	3-7/8	06			12	8	24
		8-11/16	4-1/8	07			12-1/2	2-1/2	25
		8-3/4	1-3/4	08					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table LI - Boundary dimensions-IH (Continued)

Bore		O.D. Inches	Height Inches	O.D. and height code
No. of 1/16	Inches			
096	6	12-1/2	2-5/8	26
		12-1/2	2-3/4	27
		12-3/4	7-1/4	28
		13-1/8	3	29
		13-5/8	6-3/4	30
		14	3	31
		14-3/4	7-1/2	32
		14-3/4	11-3/4	33
		15	6	34
		15	6-5/16	35
		15	7-1/2	36
		15	7-7/8	37
		16	3-1/4	38
098	6-1/8	8	1-1/8	01
		8-7/8	1-7/8	02
099	6-3/16	10-1/8	3-3/8	01
100	6-1/4	8-5/8	1-1/8	01
		9	1-7/8	02
		11	2.010	03
		12	2.010	04
		13	2.010	05
		13-3/4	2-3/4	06
		15	3.015	07
102	6-3/8	9-1/8	1-7/8	01
103	6-7/16	10-5/8	3-3/4	01
104	6-1/2	8	1-1/16	01
		8-1/8	1-1/4	02
		8-1/4	1-1/4	03
		8-3/4	1-1/2	04
		9-1/2	2-1/4	05
		10-1/8	4-5/8	06
		10-1/2	2-7/8	07
		12-1/4	3-1/2	08
		13-3/4	2-3/4	09
		18	6-3/4	10
106	6-5/8	9-5/8	2-1/4	01
		12	2-3/4	02
108	6-3/4	9	1-1/8	01
		9-3/4	2-1/4	02
109	6-13/16	12-3/4	7-1/2	01
110	6-7/8	9-7/8	2-1/4	01
		14-1/8	3-1/4	02
111	6-5/16	10-1/2	1	01
112	7	8-3/4	1-3/8	01
112	7	9-3/4	1-7/8	02
		10	2	03
		10	2-1/4	04
		10	2-5/8	05
		10-1/2	2-5/8	06
		10-3/4	4-5/8	07
		11	2	08
		11-1/2	2-5/8	09
		12	2	10
		12-1/2	2-5/8	11
		12-5/8	5	12
		12-3/4	7-1/8	13
		13	3.015	14
		14	3	15
		14-1/2	3-1/4	16
		14-3/4	4	17
		15	3.015	18
		17	3.015	19
114	7-1/8	10-1/8	2-1/4	01
		11-3/4	2	02
116	7-1/4	10-1/4	2-1/4	01
118	7-3/8	10-3/8	2-1/4	01
120	7-1/2	9-1/4	1-3/8	01
		11-1/2	2-1/2	02
		11-5/8	5-1/4	03
126	7-7/8	22-7/8	4	01
128	8	10	1-1/2	01
		11-1/2	3	02
		12	3	03
		12-1/4	5-1/4	04
		12-3/4	4	05
		14	3	06
		14-1/4	5-5/8	07
		14-3/4	4	08
		15	4	09
		16	3	10
		16-1/2	3-5/8	11
		16-1/2	4-3/4	12
		16-7/8	4	13
		16-7/8	7-1/2	14
132	8-1/4	10	1-3/4	01
136	8-1/2	10-1/2	1-1/2	01
140	8-3/4	11	1-3/4	01
144	9	11-1/4	1-7/8	01
		13	3-1/2	02
		14	3	03

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table LII - Boundary dimensions-ME

Bore Mm	O.D. Mm	Height Mm	O.D. and height code	Bore Mm	O.D. Mm	Height Mm	O.D. and height code
4	12	4	70	12	28	12	42
	12	6	10		28	13	52
	16	6	72		32	9	73
	16	8	12		32	14	13
	20	7	73		32	14.5	53
	20	11	13		32	16	63
					32	20	83
5	30	23.5	06				
	30	28	16				
				13	40	26	06
	30	29.5	26		40	26.5	16
	35	29	36		40	34.5	36
					42	30.5	26
6	16	5	70		45	34.5	46
	16	7	10				
	20	6	72	15	26	5	70
	20	9	12		26	7	10
	24	8	73		26	9	60
	24	12	13		28	6	71
8	18	5	70		28	9	11
	18	7	10		31	12	06
	22	6	72		31	13	16
	22	9	12		32	8	72
	26	8	73		32	12	12
	26	12	13		35	13.7	26
					35	14	36
10	20	5	70		35	14.5	46
	20	7	10		35	15	56
	24	6	71		35	15.5	66
	24	9	11		35	16	76
	25	12	06		35	17	86
	25	14	16		35	20	96
	26	7	72		35	22	07
	26	11	12		37	10	73
	26	12	82		37	15	13
	30	9	73		38	17	17
	30	12	43		40	18	27
	30	12.7	83		40	25	37
	30	13.5	53		40	26	47
	30	14	13		40	29	57
	30	15	63		40	30	67
	30	20	93		43	26	77
	35	15	26		43	30	87
	35	25	36		43	34	97
	35	25.5	46		44.5	22	08
	35	26	66		45	33	18
	35	27	56		45	34	28
	35	28	76		47	27	38
	35	31.5	86		48	29	48
	38	31	07		48	32	58
	38	31.5	17		48	37	68
					50	33	78
12	22	5	70		50	37	88
	22	7	10		50	39	98
	23	9	06		52	26	09
	26	6	71		52	29	19
	26	9	11		52	35	29
	28	7	72		55	41	39
		11	12		55	45	49

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table LII - Boundary dimension-ME (Continued)

Bore Mm	O.D. Mm	Height Mm	O.D. and height code
17	28	5	70
	28	7	10
	28	9.5	60
	30	6	71
	30	9	11
	35	8	72
	35	12	12
	37	18	06
	37	19	16
	37	20	26
	37	22	36
	39	19	46
	40	10	73
	40	16	13
	44.5	22	56
	52	21	95
18	35	12	06
	35	13	16
	38	14.5	26
20	32	6	70
	32	8	10
	35	7	71
	35	10	11
	37	12	06
	37	13	16
	39	13.2	26
	40	9	72
	40	14	12
	40	14.4	52
	40	15	62
	40	16	82
	43	19	36
	44	30	46
	45	18	56
	45	21	66
	45	23	76
	45	24	86
	45	26	96
	45	30	07
	45	36	17
	47	12	73
	47	18	13
	48	26	27
	48	28	37
	48	30	47
	48	31	57
	48	34	67
	50	18	77
	50	21	87
	50	26	97
	50	35	08
	52	32	18
	53	27	28
	53	33	38
	53	37	48
	55	24	58
20	59	37	68
	60	24	95
	60	35	55
	60	39	65
	60	41	75
	60	47	85
	65	45	78
	65	53	88
	73	49	98
	73	55	09
	78	61	19
22	42	14	06
	42	15	16
	45	17	26
25	37	6	70
	37	8	10
	42	8	71
	42	11	11
	45	14	06
	45	15	16
	45	16	26
	47	10	72
	47	15	12
	48	14.9	36
	48	15	46
	48	15.5	56
	48	16	66
	48	17	76
	50	19	86
	52	12	73
	52	16	53
	52	18	13
	52	19	63
	53	22	96
	53	26	07
	53	27	17
	53	28	27
	53	30	37
	53	33	47
	53	36	57
	55	22	67
	58	28	77
	58	30	87
	58	32	97
	59	37	08
	60	16	74
	60	21	94
	60	22	44
	60	24	14
	60	25	54
	60	39	64
	62	31	18
	62	31.5	28
	62	32	38
	62	37.5	48
	62	41.5	58

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table LII - Boundary dimensions-ME (Continued)

Bore Mm	O.D. Mm	Height Mm	O.D. and height code	Bore Mm	O.D. Mm	Height Mm	O.D. and height code
25	63	32	68	30	90	63	39
	65	28	78		90	71	49
	67	41.5	88		95	77	59
	68	40	09				
	68]	44	19	35	47	6	70
	73	29	95		47	8	10
	75	50	29		53	8	71
	80	55	39		53	12	11
	80	61	49		55	16	06
	85	67	59		55	17	16
					57	17.3	26
30	42	6	70		60	19	36
	42	8	10		62	12	72
	47	8	71		62	18	12
	47	11	11		62	19.1	52
	50	14	06		62	21	62
	50	15	16		67	23	46
	53	10	72		68	15	73
	53	15	22		68	22	53
	53	15.5	32		68	24	13
	53	15.9	82		68	24.5	63
	53	16	12		70	24	56
	53	16	42		70	32	66
	53	17	52		70	38	76
	53	18	62		70	44	86
	59	20	26		72	35	96
	60	14	73		72	37	07
	60	19	53		72	38	17
	60	21	13		72	41	27
	60	36	63		73	36	37
	62	24.5	36		73	36.5	47
	62	27	46		73	38	57
	62	33	56		73	40	67
	62	39	66		73	44	77
	64	31	76		73	46	87
	64	31.5	86		73	46.5	97
	64	32	96		73	50.5	08
	64	33	07		75	27	18
	64	34	17		75	48	28
	64	36	27		78	51	38
	64	37.5	37		79	41	48
	64	38	47		80	20	74
	64	41.5	57		80	27	94
	65	24	67		80	30	34
	69	41.5	77		80	32	14
	69	42	87		80	33	44
	70	18	74		80	46	54
	70	24	94		80	52	64
	70	28	14		85	36	58
	71	36	97		85	52	68
	72	40	08		85	56	78
	72	44	18		85	61	88
	73	27	28		100	39	95
	73	30	38		100	71	75
	76	46	09		100	77	85
	76	50	19		110	85	98
	78	33	29				
	85	34	95	40	53	6	70
	85	56	85		53	9	10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table LII - Boundary dimensions-ME (Continued)

Bore Mm	O.D. Mm	Height Mm	O.D. and height code
40	60	9	71
	60	13	11
	60	16	61
	60	17	61
	64	18	06
	64	19	16
	64	20	26
	64	21	36
	65	19	46
	68	13	72
	68	19	12
	69	23	56
	72	24	66
	75	28	76
	75	32	86
	75	38	96
	75	44	07
	76	25	17
	76	27	27
	78	17	73
	78	22	93
	78	26	13
	78	36	23
	78	36.5	33
	78	38.5	43
	78	40	53
	78	44.5	63
	78	46	83
	78	46.5	03
	78	50.5	37
	83	49.5	47
	83	51	57
	85	30	67
	85	38	77
	85	41.5	87
	85	44	97
	85	47	08
	85	52	18
	90	23	74
	90	30	94
	90	34	44
	90	36	14
	90	38	54
	90	46	64
	92	57	28
	92	61	38
	95	41	48
	95	47	58
	100	61	68
	100	65	78
	100	67	88
	110	42	95
	110	73	65
	110	79	75
	110	87	85
	128	95	98
45	60	7	70
45	60	10	10
	65	9	71
	65	14	11
	68	16	06
	68	17	16
	72	19	26
	72	22.5	36
	73	13	72
	73	20	12
	73	22	52
	73	23	62
	73	25	82
	78	27	46
	80	28	56
	85	18	73
	85	24	93
	85	28	13
	85	30	33
	85	36	43
	85	46	53
	85	52	63
	88	42	66
	88	42.5	76
	88	45	86
	88	48	96
	88	50	07
	88	51	17
	88	53	27
	88	57	37
	94	55	47
	94	57	57
	95	33	67
	95	47	77
	95	50	87
	95	53	97
	95	58	08
	100	25	74
	100	34	94
	100	39	14
	100	42	54
	100	54	64
	106	65	18
	106	69	28
	110	46	38
	111	53	48
	115	77	58
	120	45	95
	120	87	75
	120	95	85
	130	103	68
50	65	7	70
	65	10	10
	70	9	71
	70	14	11
	74	18	06
	74	19	16
	78	13	72

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table LII - Boundary dimensions-ME (Continued)

Bore Mm	O.D. Mm	Height Mm	O.D. and height code
50	78	20	42
	78	21	52
	78	22	12
	78	23.1	62
	78	25	82
	80	24.5	26
	83	27	36
	85	28	46
	85	31.5	56
	90	36	66
	90	42	76
	90	44	86
	90	45	96
	90	46	07
	90	48	17
	90	49.5	27
	90	50	37
	90	52	47
	90	53	57
	90	57	67
	92	31	77
	92	33	87
	95	20	97
	95	27	08
	95	31	18
	96	53.5	28
	96	57	38
	100	36	48
	100	58	58
	110	27	74
	110	36	94
	110	43	14
	110	47	24
	110	50	34
	110	54	44
	110	55	54
	110	56	64
	110	59	84
	112	67	68
	112	71	78
	127	59	88
	128	51	98
	130	79	09
	130	93	19
	130	103	29
	135	51	95
	140	103	39
	140	111	49
	140	113	59
	150	121	69
55	70	7	70
	70	10	10
	78	10	71
	78	16	11
	78	18	51
	78	19	61
	82	21.5	06
55	88	24	16
	88	24.5	26
	88	25.7	36
	88	28	46
	90	16	72
	90	21	92
	90	25	12
	94	30	56
	95	32	66
	95	35	76
	100	33	86
	100	35	96
	100	42	07
	100	48	17
	100	48.5	27
	100	50	37
	100	58	47
	100	58.5	57
	100	62.5	67
	103	48	77
	103	55	87
	103	58	97
	105	23	73
	105	30	93
	105	35	13
	105	62.5	63
	109	62	08
	110	39	18
	115	66	28
	120	29	74
	120	39	94
	120	48	14
	120	52	04
	120	59	24
	120	60	34
	120	63	44
	120	64	54
	120	67	64
	120	71	84
	120	75	38
	130	56	48
	130	83	58
	132	83	68
	150	58	95
	150	109	75
	150	119	85
	160	127	78
60	75	7	70
	75	10	10
	82	18	06
	82	19	16
	85	11	71
	85	17	11
	86	21.5	26
	90	24	36
	90	24.5	46
	90	25	56

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table LII - Boundary dimension-ME (Continued)

Bore Mm	O.D. Mm	Height Mm	O.D. and height code	Bore Mm	O.D. Mm	Height Mm	O.D. and height code
60	90	26	66	65	100	32	82
	90	28	76		103	31.5	16
	95	16	72		105	34	26
	95	21	92		110	36	36
	95	26	12		110	48	46
	96	30	86		110	52.5	56
	98	30.5	96		110	58	66
	100	32	07		110	62.5	76
	103	38	17		110	66	86
	103	48	19		110	66.5	96
	103	48.5	27		112	36	07
	103	58.5	37		112	38	17
	103	62.5	47		112	41.5	27
	105	42	57		112	52.5	37
	105	50	67		114	66.5	47
	105	58	77		115	23	73
	106	35	87		115	30	93
	106	37	97		115	36	13
	109	62	08		115	51.5	33
	110	23	73		115	52	43
	110	30	93		115	60	53
	110	35	13		115	63.5	63
	110	48	43		115	65	83
	110	55	53		120	42	57
	110	58	63		124	67.5	67
	114	62	18		125	68	77
	115	41	28		130	42	87
	120	66	38		130	66	97
	125	60	48		136	81	08
	128	76	58		136	85	18
	128	80	68		140	34	74
	130	32	74		140	45	94
	130	42	94		140	56	14
	130	51	14		140	61	34
	130	56	34		140	65	44
	130	62	44		140	73	54
	130	66	54		140	74	64
	130	68	64		140	77	84
	130	71	84		145	93	28
	140	60	78		170	63	95
	140	88	88		170	124	75
	150	71	98		170	136	85
	160	60	95		180	131	38
	160	119	75		180	143	48
	160	129	85		180	146	58
	170	139	09		190	153	68
65	80	7	70	70	85	7	70
	80	10	10		85	10	10
	90	11	71		95	11	71
	90	20	51		95	18	11
	90	22	61		95	20	51
	95	24.5	06		95	22	61
	100	16	72		100	24.5	06
	100	21	92		103	27	16
	100	26	52		103	29.5	26
	100	27	12		103	32	36
	100	29.3	62		105	16	72

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table LII - Boundary dimension-ME (Continued)

Bore Mm	O.D. Mm	Height Mm	O.D. and height code
70	105	21	92
	105	27	12
	108	32	46
	109	34	56
	115	36	66
	115	48	76
	115	57.5	86
	115	58	96
	115	65.5	07
	115	66	17
	115	69.5	27
	120	38	37
	120	40	47
	122	41.5	57
	124	79.5	67
	125	25	73
	125	34	93
	125	40	13
	125	56	43
	125	58	53
	125	66	63
	125	71	83
	130	44	77
	135	74	87
	138	75	97
	140	44	08
	140	72	18
	145	87	28
	145	91	38
	150	36	74
	150	48	94
	150	60	14
	150	65	34
	150	70	44
	150	78	54
	150	80	64
	150	84	84
	155	101	48
	160	69	58
	170	91	68
	180	67	95
	180	84	85
	190	140	78
	190	152	88
	200	162	98
75	90	7	70
	90	10	10
	100	11	71
	100	19	11
	100	20	51
	100	22	61
	105	25	06
	110	16	72
	110	21	92
	110	27	12
	110	28	52
	110	29.5	62
75	110	32	82
	112	32.5	16
	114	34	26
	120	36	36
	125	41.5	46
	125	48	56
	125	58	66
	125	62.5	76
	125	74.5	86
	128	41	96
	128	43	07
	128	66	17
	128	70.5	27
	132	62	37
	132	68	47
	135	27	73
	135	36	93
	135	44	13
	135	57.5	53
	135	66	63
	135	72.5	83
	138	73.5	57
	140	47	67
	140	76	77
	141	76.5	87
	150	72	97
	155	92	08
	155	96	18
	160	38	74
	160	51	94
	160	65	14
	160	70	34
	160	80	44
	160	84	54
	160	86	64
	160	90	84
	165	106	28
	170	75	38
	190	69	95
	190	90	85
	195	146	48
	195	158	58
	210	170	68
80	95	7	70
	95	10	10
	105	11	71
	105	19	11
	110	22	06
	110	24	16
	115	16	72
	115	21	92
	115	27	32
	115	28	12
	115	29	42
	115	31	52
	115	32.6	62
	115	35	82

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table LII - Boundary dimension-ME (Continued)

Bore Mm	O.D. Mm	Height Mm	O.D. and height code
80	118	34	26
	124	37	36
	125	39	46
	130	52	56
	130	60	66
	130	68	76
	134	45	86
	135	64.5	96
	135	65	07
	135	68.5	17
	135	72.5	27
	136	44	37
	136	46	47
	140	27	73
	140	36	93
	140	44	13
	140	60.5	43
	140	67	53
	140	73	63
	140	77.5	83
	141	72.5	57
	145	50	67
	150	81	77
	151	82.5	87
	160	80	97
	165	98	08
	165	102	18
	170	41	74
	170	54	94
	170	68	14
	170	74	34
	170	86	44
	170	88	54
	170	90	64
	170	94	84
	172	104	28
	172	108	38
	175	112	48
	180	79	58
	185	118	68
	200	73	95
	200	94	85
	205	152	78
	205	164	88
	210	108	98
	220	176	09
85	100	7	70
	100	10	10
	110	11	71
	110	19	11
	115	22	06
	115	24	16
	120	27	26
	125	18	72
	125	24	92
	125	30.5	42
	125	31	12
85	125	34	52
	125	38	62
	135	42	36
	138	40	46
	140	45	56
	140	58	66
	140	66	76
	140	68	86
	140	74	96
	140	79	07
	145	47	17
	145	49	27
	148	68	37
	148	76	47
	150	29	73
	150	39	93
	150	49	13
	150	61	63
	150	78	83
	151	79	57
	155	54	67
	156	84	77
	160	84	87
	170	80	97
	180	42	74
	180	58	94
	180	72	14
	180	78	24
	180	89	34
	180	92	44
	180	95	54
	180	100	64
	180	109	84
	180	113	04
	190	83	08
	195	123	18
	210	100	28
	215	78	38
90	105	7	70
	105	10	10
	120	14	71
	120	22	11
	120	24	61
	125	27	06
	132	36	16
	132	39	26
	134	38	36
	135	20	72
	135	27	92
	135	30	22
	135	30.5	32
	135	33	42
	135	35	12
	135	35.6	52
	135	36	62
	135	38	82
	139	40	46

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table LII - Boundary dimensions-ME (Continued)

Bore Mm	O.D. Mm	Height Mm	O.D. and height code	Bore Mm	O.D. Mm	Height Mm	O.D. and height code
90	140	43	56	95	164	52	77
	141	40	66		165	54	87
	145	62	76		165	56	97
	145	68	86		170	88	08
	145	76	96		175	61	18
	150	68	07		185	86	38
	150	74	17		195	80	28
	150	80	27		200	120	48
	155	29	73		200	124	58
	155	39	93		210	92	68
	155	50	13		215	136	78
	155	52	43				
	155	72	53	100	120	9	70
	155	78	63		120	14	10
	155	84	83		135	16	71
	155	91	03		135	20	51
	156	80	37		135	21	91
	158	52	47		135	25	11
	163	90	57				
	165	57	67	100	135	27	61
	165	62	77		140	30	06
	165	88	87		148	38	16
	190	45	74		148	42	26
	190	60	94		150	23	72
	190	77	14		150	30	92
	190	83	24		150	32.5	42
	190	94	34		150	37	52
	190	97	44		150	38	12
	190	100	54		150	38.6	62
	190	104	64		150	41	82
	190	115	84		154	41.5	36
	190	119	04		156	44	46
	200	87	97		156	46	56
	205	129	08		158	44	66
	220	160	18		160	46	76
	220	172	28		165	68	86
	222	104	38		165	76	96
	225	82	95		165	77.5	07
	225	119	85		165	80	17
	230	184	48		165	84	27
					165	89.5	37
95	130	25	06		170	32	73
	130	27	16		170	42	93
	140	32.5	26		170	55	13
	140	35	36		172	57	47
	140	38	46		172	59	57
	140	38.6	56		173	95.5	67
	140	41	66		175	90	77
	150	45	76		176	55.5	87
	151	43.5	86		185	64	97
	153	43.5	96		205	83	08
	155	67	07		205	89	18
	155	73	17		210	50	74
	155	81	27		210	67	94
	155	85	37		210	85	14
	160	72	47		210	125	54
	160	78	57		210	131	64
	163	91	67		215	99	28

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table LII - Boundary dimension-ME (Continued)

Bore Mm	O.D. Mm	Height Mm	O.D. and height code	Bore Mm	O.D. Mm	Height Mm	O.D. and height code
100	215	109	38	110	190	48	93
	215	110	48		190	63	13
	215	114	58		190	65	53
	220	95	68		190	100	63
	225	143	78		205	70	37
	240	162	88		230	54	74
	240	176	98		230	73	94
	250	90	95		230	95	14
	250	131	75		270	95	95
	250	188	85				
	256	114	09	115	150	25	06
					165	43	16
105	140	25	06		165	45	26
	140	27	16		165	46.2	36
	145	30	26		165	49	46
	155	40	36		173	52	56
	155	42.8	46		175	50	66
	155	43	56		180	76	76
	155	46	66		190	86	86
	163	49	76		190	90	96
	165	48	86		200	66	07
	165	78.5	96		200	68	17
	165	90.5	07		205	102	27
	170	72	27		215	74	37
	170	80	37		220	87	47
	170	84	47		220	93	57
	173	96.5	57		230	99	67
	180	60	67		240	108	77
	180	62	77		240	119	87
	180	94	87		240	120	97
	195	67	97		240	125	08
	260	136	08		275	125	18
110	130	9	70	120	140	9	70
	130	14	10		140	14	10
	145	16	71		155	16	71
	145	21	91		155	21	91
	145	25	11		155	25	11
	145	27	61		160	27	67
	150	30	06		165	31	77
	160	23	72		170	23	72
	160	30	92		170	30	92
	160	38	12		170	39	12
	160	40	42		170	46	42
	160	43	52		170	48	52
	160	46	62		170	49	62
	170	48	16		180	52	06
	175	72	36		180	53	16
	175	81.5	46		185	80	26
	175	82	56		200	90.5	36
	175	88	66		200	92	46
	175	94.5	76		200	93.5	56
	180	83	86		200	98	66
	180	96	96		200	106.5	76
	180	102	07		200	109.5	86
	186	100.5	17		200	110.5	96
	186	102	27		210	41	73
	190	36	73		210	54	93

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table LII - Boundary dimension-ME (Continued)

Bore Mm	O.D. Mm	Height Mm	O.D. and height code	Bore Mm	O.D. Mm	Height Mm	O.D. and height code
120	210	69	53	140	160	9	70
	210	70	13		160	14	10
	210	72	63		180	18	71
	212	113.5	07		180	24	91
	215	112	17		180	31	11
	225	78	27		195	38	06
	250	58	74		200	27	72
	250	78	94		200	36	92
	250	102	14		200	46	12
	260	168	37		200	52	42
	260	182	47		200	55	52
	270	196	57		200	56.8	62
	300	109	95		200	60	82
					212	62	16
125	165	27	06		215	62	26
	175	46	16		220	92	36
	175	46.5	26		240	45	73
	175	49	36		240	60	93
	175	53	46		240	80	13
	180	46.5	56		280	63	74
	180	49.8	66		280	85	94
	186	56	76		280	112	14
	190	54	86		285	176	46
	195	82	96		285	190	56
	270	122	07		300	131	66
	270	130	17		300	140	76
	270	135	67		300	145	86
	310	135	37		300	204	96
					340	122	95
130	150	9	70		340	145	85
	150	14	10				
	170	18	71	150	170	9	70
	170	24	91		170	14	10
	170	30	11		190	18	71
	180	37	07		190	24	91
	180	53	17		190	31	11
	190	27	72		215	29	72
	190	36	92		215	39	92
	190	45	12		215	50	12
	190	50	42		220	58	06
	190	52	52		220	60	16
	190	56	62		220	62	26
	205	58	06		220	65	36
	210	86	16		235	69	46
	220	98	26		240	98	56
	220	106	36		250	45	73
	225	42	73		250	60	93
	225	58	93		250	80	13
	225	75	13		260	92	66
	235	120	46		260	99	76
	240	88	56		270	106	86
	240	95	66		300	67	74
	250	101	76		300	90	94
	270	63	74		300	120	14
	270	85	94		360	125	95
	270	110	14				
	320	115	95	155	300	179	06

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table LII - Boundary dimension-ME (Continued)

Bore Mm	O.D. Mm	Height Mm	O.D. and height code	Bore Mm	O.D. Mm	Height Mm	O.D. and height code
155	300	195	16	180	300	54	73
	320	211	26		300	73	93
					300	95	13
160	180	9	70		360	82	74
	180	14	10		360	109	94
	200	18	71		360	140	14
	200	24	91		420	145	95
	200	31	11				
	215	42	06	185	300	98	06
	225	29	72		300	106	16
	225	39	92		320	114	26
	225	51	12				
	235	65	16	190	215	11	70
	235	70	26		215	17	10
	270	50	73		240	23	71
	270	67	93		240	30	91
	270	87	13		240	37	11
	320	73	74		270	36	72
	320	95	94		270	48	92
	320	130	14		270	62	12
	380	132	95		320	58	73
					320	78	93
170	190	9	70		320	105	13
	190	14	10		345	189	06
	215	20	71		345	207	16
	215	27	91		360	225	26
	215	34	11		380	85	74
	240	32	72		380	115	94
	240	42	92		380	150	14
	240	55	12		440	150	95
	250	70	06				
	250	75	16	200	225	11	70
	280	50	73		225	17	10
	280	67	93		250	23	71
	280	87	13		250	30	91
	285	97	26		250	37	11
	285	104	36		260	51	06
	300	111	46		280	36	72
	315	182	56		280	48	92
	315	198	66		280	62	12
	330	214	76		315	100	16
	340	78	74		315	108	26
	340	103	94		330	116	36
	340	135	14		340	63	73
	400	140	95		340	85	93
					340	110	13
180	200	9	70		400	90	74
	200	14	10		400	122	94
	225	20	71		400	155	14
	225	27	91		460	155	95
	225	34	11				
	240	52	06	205	305	70	06
	250	32	72				
	250	42	92	210	370	198	06
	250	56	12		370	216	16
	260	70	16		390	234	26
	260	75	26				
	270	65	36	220	250	14	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table LII - Boundary dimension-ME (Continued)

Bore Mm	O.D. Mm	Height Mm	O.D. and height code
220	250	22	10
	270	23	71
	270	30	91
	270	37	11
	285	59	06
	300	36	72
	300	48	92
	300	63	12
	360	63	73
	360	85	93
	360	112	13
	420	90	74
	420	122	94
	420	160	14
	500	170	95
225	345	104	06
	345	113	16
	360	122	26
230	400	207	06
	400	227	16
	420	247	26
235	345	80	06
	355	90	16
240	270	14	70
	270	22	10
	300	27	71
	300	36	91
	300	45	11
	310	60	06
250	370	109	06
	370	118	16
	390	127	26
	430	216	36
	430	236	46
	450	256	56
260	290	14	70
	290	22	10
	320	27	71
	320	36	91
	320	45	11
	335	65	06
	360	45	72
	360	60	92
	360	79	12
	420	73	73
	420	95	93
	420	130	13
	480	100	74
	480	132	94
	480	175	14
	580	190	95
270	400	100	06
275	400	113	06
	400	123	16
	420	133	26
280	310	14	70
	310	22	10
	350	32	71
	350	42	91
	350	53	11
	360	70	06
	380	45	72
	380	60	92
	380	80	12
	440	73	73
	440	95	93
	440	130	13
	520	109	74
	520	145	94
	520	190	14
	620	206	95
300	340	18	70
	340	24	90
	340	30	10
	380	36	71
	380	48	91
	380	62	11
	390	80	06
	420	54	72
	420	73	92
	420	95	12
	430	118	16
	430	128	26
	450	130	36
	480	82	73
	480	109	93
	480	140	13
	540	109	74
	540	145	94
	540	190	14
	670	224	95
305	445	110	06
320	360	18	70
	360	24	90
	360	30	10
	400	36	71
	400	48	91
	400	63	11
	415	85	06
	440	54	72
	440	73	92
	440	95	12
	500	82	73

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table LII - Boundary dimension-ME (Continued)

Bore Mm	O.D. Mm	Height Mm	O.D. and height code	Bore Mm	O.D. Mm	Height Mm	O.D. and height code
320	500	109	93	400	440	18	70
	500	140	13		440	24	90
	580	118	74		440	30	10
	580	155	94		480	36	71
	580	205	14		480	48	91
	710	236	95		480	65	11
					540	63	72
340	380	18	70		540	85	92
	380	24	90		540	112	12
	380	30	10		620	100	73
	420	36	71		620	132	93
	420	48	91		620	175	13
	420	64	11		710	140	74
	445	95	06		710	185	94
	460	54	72		710	243	14
	460	73	92		850	272	95
	460	96	12				
	540	90	73	420	460	18	70
	540	122	93		460	24	90
	540	160	13		460	30	10
	620	125	74		500	36	71
	620	170	94		500	48	91
	620	220	14		500	65	11
	750	243	95		580	73	72
					580	95	92
360	400	18	70		580	130	12
	400	24	90		630	140	74
	400	30	10		650	103	73
	440	36	71		650	140	93
	440	48	91		650	180	13
	440	65	11		730	185	94
	500	63	72		730	243	14
	500	85	92		900	290	95
	500	110	12				
	560	90	73	440	480	18	70
	560	122	93		480	24	90
	560	160	13		480	30	10
	640	125	74		540	45	71
	640	170	94		540	60	91
	640	220	14		540	80	11
	780	250	95		600	73	72
					600	95	92
380	420	18	70		600	130	12
	420	24	90		680	109	73
	420	30	10		680	145	93
	460	36	71		680	190	13
	460	48	91		780	155	74
	460	65	11		780	206	94
	520	63	72		780	265	14
	520	85	92		950	308	95
	520	112	12				
	600	100	73	460	500	18	70
	600	132	93		500	24	90
	600	175	13		500	30	10
	670	132	74		560	45	71
	670	175	94		560	60	91
	670	224	14		560	80	11
	820	265	95		620	73	72

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table LII - Boundary dimension-ME (Continued)

Bore Mm	O.D. Mm	Height Mm	O.D. and height code	Bore Mm	O.D. Mm	Height Mm	O.D. and height code
460	620	95	92	530	920	308	14
	620	130	12		1090	335	95
	710	112	73				
	710	150	93	560	610	23	70
	710	195	13		610	30	90
	800	155	74		610	38	10
	800	206	94		670	50	71
	800	265	14		670	67	91
	980	315	95		670	85	11
					750	85	72
480	520	18	70		750	115	92
	520	24	90		750	150	12
	520	30	10		850	132	73
	580	45	71		850	175	93
	580	60	91		850	224	13
	580	80	11		980	190	64
	650	78	72		980	250	94
	650	103	92		980	335	14
	650	135	12		1150	355	95
	730	112	73				
	730	150	93	600	650	23	70
	730	195	13		650	30	90
	850	165	74		650	38	10
	850	224	94		710	50	71
	850	290	14		710	67	91
	1000	315	95		710	85	11
					800	90	72
500	540	18	70		800	122	92
	540	24	90		800	160	12
	540	30	10		900	136	73
	600	45	71		900	180	93
	600	60	91		900	236	13
	600	80	11		1030	195	74
	670	78	72		1030	258	94
	670	103	92		1030	335	14
	670	135	12		1220	375	95
	750	112	73				
	750	150	93	630	680	23	70
	750	195	13		680	30	90
	870	165	74		680	38	10
	870	224	94		750	54	71
	870	290	14		750	73	91
	1060	335	95		750	95	11
					850	100	72
530	580	23	70		850	132	92
	580	30	90		850	175	12
	580	38	10		950	145	73
	640	50	71		950	190	93
	640	67	91		950	250	13
	640	85	11		1090	206	74
	710	82	72		1090	280	94
	710	109	92		1090	365	14
	710	140	12		1280	388	95
	800	122	73				
	800	160	93	670	730	27	70
	800	212	13		730	36	90
	920	175	74		730	45	10
	920	236	94		800	58	71

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table LII - Boundary dimension-ME (Continued)

Bore Mm	O.D. Mm	Height Mm	O.D. and height code	Bore Mm	O.D. Mm	Height Mm	O.D. and height code
670	800	78	91	800	1360	250	74
	800	105	11		1360	335	94
	900	103	72		1360	438	14
	900	140	92				
	900	180	12	850	920	32	70
	1000	150	73		920	42	90
	1000	200	93		920	53	10
	1000	258	13		1000	67	71
	1150	218	74		1000	90	91
	1150	290	94		1000	120	11
	1150	375	14		1120	122	72
	1320	388	95		1120	160	92
					1120	212	12
710	780	32	70		1250	180	73
	780	42	90		1250	243	93
	780	53	10		1250	315	13
	850	63	71				
	850	85	91	900	980	36	70
	850	112	11		980	48	90
	950	109	72		980	63	10
	950	145	92		1060	73	71
	950	190	12		1060	95	91
	1060	160	73		1060	130	11
	1060	212	93		1180	125	72
	1060	272	13		1180	170	92
	1220	230	74		1180	220	12
	1220	308	94		1320	190	73
	1220	400	14		1320	250	93
	1400	412	95		1320	335	13
750	820	32	70	950	1030	36	70
	820	42	90		1030	48	90
	820	53	10		1030	63	10
	900	67	71		1120	78	71
	900	90	91		1120	103	91
	900	120	11		1120	135	11
	1000	112	72		1250	136	72
	1000	150	92		1250	180	92
	1000	195	12		1250	236	12
	1120	165	73		1400	200	73
	1120	224	93		1400	272	93
	1120	290	13		1400	355	13
	1280	236	74				
	1280	315	94	1000	1090	41	70
	1280	412	14		1090	54	90
					1090	70	10
800	870	32	70		1180	82	71
	870	42	90		1180	109	91
	870	53	10		1180	140	11
	950	67	71		1320	145	72
	950	90	91		1320	190	92
	950	120	11		1320	250	12
	1060	118	72				
	1060	155	92	1060	1150	41	70
	1060	205	12		1150	54	90
	1180	170	73		1150	70	10
	1180	230	93		1250	85	71
	1180	300	13		1250	115	91

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

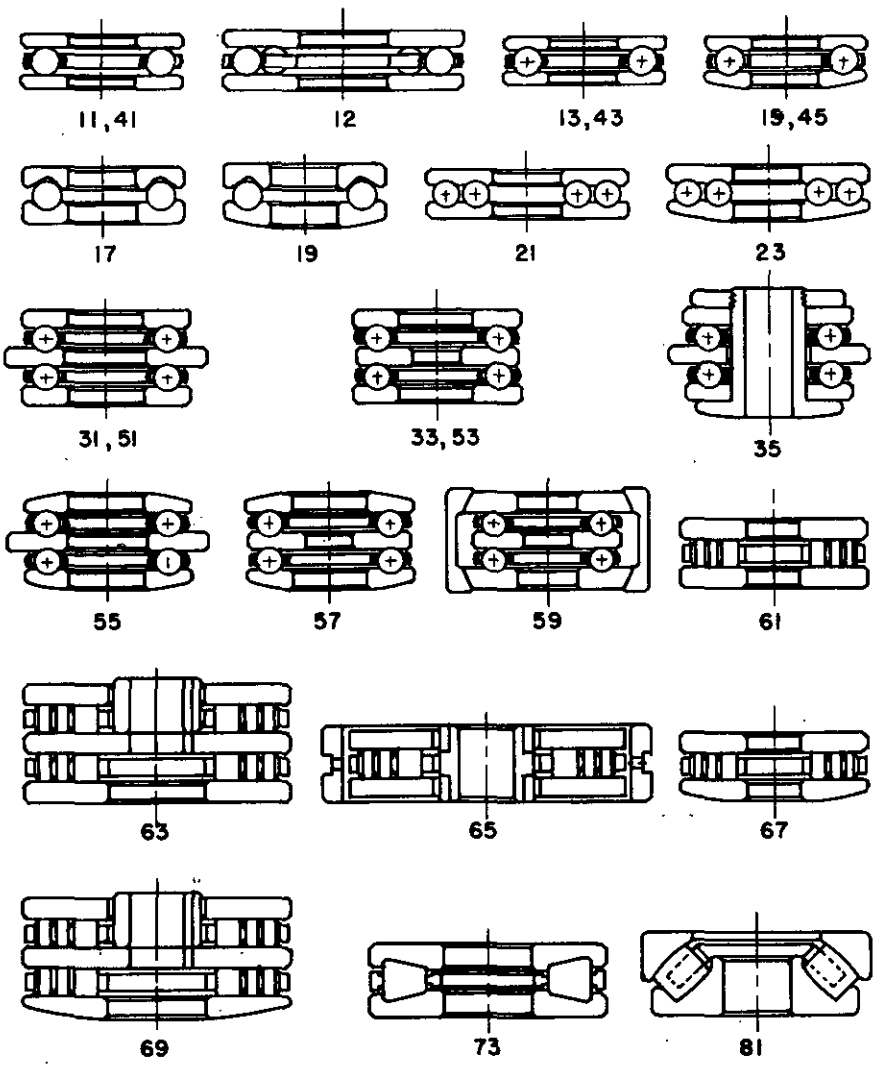


Figure 28 - Illustrations of group 4 bearing types.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 This section covers aircraft control and pulley bearings - group 5 (see figure 33).

2. REFERENCED DOCUMENTS

2.1 The issues of the following document in effect on the date of invitation for bids form a part of this standard to the extent specified herein.

GOVERNMENTAL
MIL-B-7949 - Bearing, Ball, Airframe, Antifriction.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

NONGOVERNMENTAL

NATIONAL BUREAU OF STANDARDS
Handbook H28 - Screw Thread Standards for Federal Services.

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, D.C. 20402.)

3. NUMBER STRUCTURE

3.1 Digit positions. Example of digit positions is shown on figure 29.

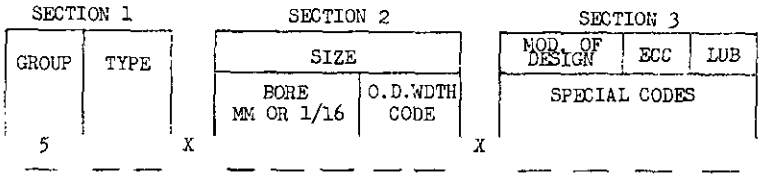


Figure 29 - Group 5, number structure.

4. CLASSIFICATION

4.1 Specialized types. This group includes certain specialized types commonly known as:

(a) Control bearings.
(b) Track roller bearings.
(c) Guide roller bearings.
(d) Fairlead bearings.
(e) Bell crank bearings.
(f) Rod end bearings.

4.2 Standard features. The following features are considered as "standard".

(a) Exposed surfaces, as mounted, cadmium plated.
(b) Shields and seal retaining washers are either steel cadmium plated or stainless steel.
(c) Threads are right hand unless otherwise indicated.
(d) Full type unless otherwise indicated.
(e) Made to AN, MS standards.
(f) Thread tolerances and gaging in accordance with Handbook H28.
(g) Ten degree self alignment (in either direction) for all internal self-aligning bearings.
(h) All sealed airframe bearings will be considered as having synthetic contact seals unless otherwise specified.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

4.3 Tolerances. Tolerances specified in table LIII are applicable to the aircraft control and pulley bearings in this group.

5. GROUP AND TYPE CODES

5.1 Digit positions. Example of digit positions is shown on figure 30.

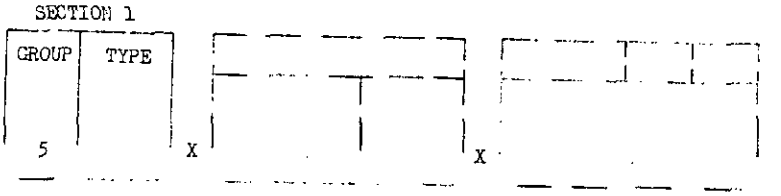


Figure 30 - Group 5, section 1.

5.2 Group code. Group code for first position is as follows:

5-Aircraft control and pulley bearings.

5.3 Type codes. Type codes for second and third position are as specified in 5.3.1 through 5.3.9.

5.3.1 Radial ball bearings-all inch dimensions shall be as follows:

Type		Dimension table
10	Single row, duplex pair, one contact seal each bearing	IJ (table LV)
11	Single row, deep groove, double metal shields	IJ (table LV)
12	Single row, deep groove, double contact seals	IJ (table LV)
13	Single row, internal self-aligning double metal shields	IJ (table LV)
14	Single row, internal self-aligning double contact seals	IJ (table LV)
15	Single row, external self-aligning double contact seals	IJ (table LV)
16	Single row, deep groove, no shields or seals	IJ (table LV)
17	Double row, deep groove, double metal shields	IJ (table LV)
18	Double row, deep groove, double contact seals	IJ (table LV)
19	Double row, internal self-aligning double metal shields	IJ (table LV)
20	Double row, internal self-aligning double contact seals	IJ (table LV)

5.3.2 Radial roller bearings-all inch dimensions shall be as follows:

Type		Dimension table
22	Single row (not self-aligning) double metal shields	IJ (table LV)
23	Single row, internal self-aligning, double contact seals	IJ (table LV)
24	Single row, internal self-aligning, double contact seals (for non-airframe type, see group 2 type 60)	IJ (table LV)
25	Double row, internal self-aligning, double metal shields	IJ (table LV)
27	Double row, internal self-aligning double contact seals	IJ (table LV)

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

5.3.3 Track roller-deep groove radial ball bearings-all inch dimensions shall be as follows:

Type		Dimension table
31	Single row, crowned O.D., double metal shields	IP (table LVII)
33	Single row, crowned O.D., double contact seals	IP (table LVII)
35	Double row, crowned O.D., double metal seals	IP (table LVII)
36	Double row, crowned O.D., double contact seals	IP (table LVII)

5.3.4 Guide roller-deep groove radial ball bearings-all inch dimensions shall be as follows:

Type		Dimension table
37	Single row, concave O.D., double metal shields	IP (table LVII)

5.3.5 Fairlead bearings-deep groove radial ball bearings-all dimensions shall be as follows:

Type		Dimension table
39	Single row, concave O.D., double metal shields	IP (table LVII)

5.3.6 Bell crank units-deep groove ball bearings-all inch dimensions shall be as follows:

Type		Dimension table
41	Double row, integral flange type, double metal or plastic shields	IJ (table LV)
42	Double row, integral flange type, double contact seals	IJ (table LV)

5.3.7 Rod end units-radial ball bearings-internal self-aligning with positive contact seals shall be as follows:

Type		Dimension table
51	Male shank - threaded	IN (table LVI)
53	Female hollow shank-no threads	IN (table LVI)
55	Female beaded shank-threaded	IN (table LVI)
57	Female hexagon end shank threaded	IN (table LVI)

5.3.8 Rod end units - radial ball bearings-rigid or deep groove with positive contact seals shall be as follows:

Type		Dimension table
59	Male shank - threaded	IN (table LVI)
60	Female shank-threaded	IN (table LVI)

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

5.3.9 Rod and units - radial roller bearings-single row-internal self-aligning with contact seals shall be as follows:

Type	Dimension table
61 Male shank - threaded	IN (table LVI)
63 Female hexagon end shank - threaded	IN (table LVI)

6. BORE SIZE - O.D. AND WIDTH CODE

6.1 Digit positions. Example of digit positions is shown on figure 31.

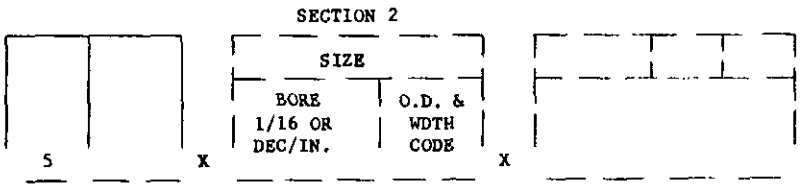


Figure 31 - Group 5, section 2.

6.2 Bore size (4, 5, and 6th positions). The bore size of aircraft control and pulley bearings is generally given in decimal/inch and is expressed as the number of 1/16ths in the bore size.

Example: 0.1900 = 003; 0.2500 = 004
.6250 = 010; 1.3750 = 022

6.3 O.D. and width code (7 and 8th positions). The O.D. and width dimensions of a bearing are expressed by a code, as shown on the boundary dimension tables (see tables LV through LVII).

6.3.1 Application. The type description carries a reference to the appropriate boundary dimension table. These tables are arranged by bore size, and within each bore size the O.D.'s and widths are arranged in numerical sequence. Opposite each set of dimensions is the appropriate "Code" for the O.D. and width. Where bearing dimensions correspond to AFBMA basic standards, the O.D. and width code is identical with their series code.

6.3.2 Interpretation of O.D. and width codes. A bearing number is decoded as follows:

511 = Radial ball bearing, single row, deep groove with double metal shields, all inch dimensions - boundary dimension table IJ (see table LV).
01207 = 0.7500 (3/4 inches) bore size; O.D. and width code 07

Reference to boundary dimension table IJ (see table LV), bore size of 012 and code 07 indicates that the O.D. is 1.6250 inches, outer ring width is 0.375 inch and inner ring width is 0.437 inch.

7. VARIATIONS OF THE GROUP 5 BASE BEARING NUMBER

7.1 Digit positions. Example of digit positions is shown on figure 32.

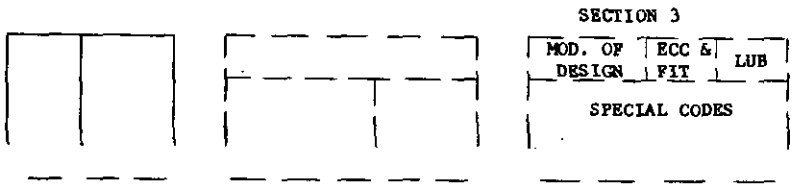


Figure 32 - Group 5, section 3.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

7.2 Additional variations. Section 3 codes any additional variations, modifications or special features of a bearing, as described by the base number, which are necessary for complete identification. When section 3 is required it may either be a "significant code" covering those common features itemized in table LIV, or an arbitrarily assigned number known as a "Special Code" (see table LIV) covering all other variations, modifications, etc.

7.2.1 Significant codes. Significant codes may be either two or four digits and will begin with the numerals 0 through 7. These codes are constant in meaning within the group, regardless of the base number with which they are used. Reference to table LIV will furnish the significance of each code.

7.2.2 Special codes. Special codes are arbitrarily assigned numbers of four digits only that begin with the numerals 8 and 9. These four digit numbers are assigned in numerical sequence as they are required to code additional features (not covered by the significant codes) of a particular base number. The more common features significantly coded in the "Table of Variation" (see table LIV) may occur in conjunction with some additional feature or features, in which case all of the additional features are coded by a special code.

7.2.2.1 Special codes are assigned only by the central agency responsible for the numbering system. A 0 digit in any position of a significant type number indicates the "standard" for the feature coded in that number position.

8. BOUNDARY DIMENSION TABLES

8.1 Use. Use of boundary dimension tables is as follows:

Dimension table	Bearing types
IJ (table LV)	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 22, 23, 24, 25, 27, 41, 42
IN (table LVI)	51, 53, 55, 57, 59, 61, 63
IP (table LVII)	31, 33, 35, 36, 37, 39

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table LIII - Standard tolerance limits for airframe ball bearings

tolerance limits in 0.0001 inch

Types		Bore diameter tolerance limits				O.D. tolerance limits				Width tolerance limits				Chamfer tolerate limits both rings	
		d_m				D_m				Outer ring		Inner ring			
Shielded	Sealed	Low −	High +	d_{min} −	d_{max} +	High +	Low −	D_{max} +	D_{min} −	High +	Low −	High +	Low −	High +	Low −
	KP	5	0	7	2	0	5	5	10	0	50	0	50	150	0
	KP-A	5	0	7	2	0	5	5	10	0	50	0	50	150	0
	KP-B	0	0	13	3	0	10	0	20	0	50	0	50	150	0
KS		5	0	7	2	0	5	5	10	0	50	0	50	150	0
	DP	5	0	7	2	0	5	5	10	0	50	0	50	150	0
	DSP	5	0	7	2	0	5	5	10	0	50	0	50	150	0
Open type															
Stainless steel	Ball bearing steel														
A538 through A543	B538 through B543	7	7	10	10	0	10	5	15	0	50		50	150	0
A544 through A546	B544 through B546	10	10	16	16	0	15	8	23	0	50	0	50	150	0

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table LIV - Significant codes for variations of group 5 base bearing numbers

1st and 2nd position code XX--	Modification (1st position)	Retainer (2nd position)
00-- 05--	No variation	No retainer type Retainer type
10-- 15--	Left hand threads	No retainer type Retainer type
20-- 25--	Chrome plated surfaces	No retainer type Retainer type
30-- 35--	Stainless steel construction	No retainer type Retainer type
40-- 45--	5-degree self alignment (in either direction)	No retainer type Retainer type

3rd and 4th position code --XX	Eccentricity and internal fit (3rd position)	Lubrication (4th position)
--00 --01 --02 --03 --04 --05 --06 --07 --08	Eccentricity and fit in accordance with MIL-B-7949	Regular slush Extra low temperature grease Low temperature oil High temperature grease Low temperature grease Medium temperature grease Water resistant grease Regular slush, heavy Instrument oil

ARBITRARY SPECIAL CODES

8000 and 9000 series	Arbitrary "Special Codes" assigned to a given condition or series of conditions, are in the 8000 and 9000 series of numbers. They are non-repetitive in meaning and apply only to the base number with which they are used. All conditions, other than (a) variations of basic dimensions, and (b) conditions covered by the above significant codes, are coded as "Special Codes". A variation of basic dimensions puts the bearing into group 9.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table LV - Boundary dimensions-IJ

Bore		O.D.	Width		O.D. and width code
No.of 1/16	Inches	Inches	I.R. Inches	O.R. Inches	
003	0.1895	0.7774	0.375	0.344	02
		1.0000	.344	.500	01
003	.1900	0.6250	.245	.203	03
		.6250	.297	.234	05
		.6250	.500	.406	07
		.7774	.297	.270	09
		.7774	.495	.406	13
		.7774	.495	.473	15
		.7774	.500	.392	11
		1.0000	.561	.500	17
004	.2495	0.9014	.484	.422	02
		1.0000	.344	.500	01
		1.2500	.547	.750	03
		1.2500	1.125	.750	05
004	.2500	0.6250	0.562	.500	10
		.7500	.281	.219	07
		.7500	.500	.437	09
		.7500	.875	.750	04
		.7505	.625	.408	11
		.8130	.625	.408	13
		.8130	.625	.517	15
		.9014	.484	.335	17
		.9014	.620	.422	19
		.9014	.620	.491	23
		.9014	.625	.464	06
		.9014	.687	.464	21
		1.0625	.625	.531	25
		1.2500	1.000	.750	26
		1.6250	0.562	.437	27
		1.6250	.625	.437	29
		1.6250	.625	.500	30
		1.6875	.562	.500	31
		1.6875	.625	.500	33
005	.3120	1.2500	.557	.547	02
		1.5625	.703	.844	01
		1.5625	1.250	.844	03
005	.3125	0.8125	0.297	.234	05
		.8125	.562	.500	07
		.8750	.938	.813	04
		1.2500	.558	.375	09
		1.2500	.745	.625	11
		1.2500	.745	.687	15
		1.2500	.812	.656	13
		1.2500	1.000	.875	17
		1.5625	1.187	.844	18
		1.6875	0.625	.500	19
		1.6875	.687	.500	21
		1.6875	.687	.562	22
		1.7500	.687	.625	23

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table LV - Boundary dimensions-IJ (cont'd.)

Bore		O.D.	Width		O.D. and width code
No. of 1/16	Inches	Inches	I.R. Inches	O.R. Inches	
006	0.3745	1.4375	0.620	0.547	02
		1.4375	.937	.750	01
		1.5625	.703	.844	03
		1.5625	1.312	.844	07
		1.5625	1.312	.880	05
006	.3750	0.8750	0.313	.250	09
		.8750	.562	.500	11
		1.0625	1.188	1.063	06
		1.4375	0.620	0.469	13
		1.4375	.870	.687	15
		1.4375	.870	.794	19
		1.4375	.937	.750	17
		1.4375	1.125	1.000	21
007	.4370	1.5625	0.703	0.844	01
		2.0000	1.562	1.000	03
007	.4375	2.0000	1.500	1.000	05
008	.4995	2.0000	0.875	1.000	01
		2.0000	1.625	1.000	03
008	.5000	1.1250	0.375	0.313	05
		1.1250	.625	.562	07
		1.2250	.624	.526	09
		1.4375	1.500	1.375	02
		1.6875	0.620	0.500	11
		1.6875	.932	.750	13
		1.6875	.932	.856	17
		1.6875	1.000	.812	15
		1.6875	1.188	1.063	19
		1.8750	0.682	0.562	21
		1.8750	1.120	1.000	23
		2.0000	1.500	1.000	25
009	.5620	2.0000	0.875	1.000	01
		2.3750	1.125	1.125	05
		2.3750	1.750	1.125	03
010	.6245	2.0000	0.875	1.000	01
		2.3750	1.875	1.125	03
010	.6250	1.0625	0.281	0.250	05
		1.3750	.406	.344	07
		1.3750	.687	.625	09
		1.9375	.620	.500	11
		1.9375	.813	.625	13
		1.9375	.932	.781	15
		1.9375	.995	.920	17
		1.9375	1.125	.937	19
		2.3125	0.870	.750	21
		2.3125	1.432	1.312	23
		2.3750	1.687	1.125	25

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table LV - Boundary dimensions-IJ (cont'd.)

Bore		O.D.	Width		O.D. and width code
No. of 1/16	Inches	Inches	I.R. Inches	O.R. Inches	
012	0.7495	2.3750	1.000	1.125	01
		2.6250	2.000	1.250	03
012	.7500	1.1875	0.281	0.250	05
		1.6250	.437	.375	07
		1.6250	.750	.687	09
		2.3750	1.312	1.125	02
		2.6250	1.875	1.250	10
		2.8125	1.057	0.812	11
		2.8125	1.687	1.437	13
014	.8750	1.3125	0.281	0.250	01
016	1.0000	1.9375	.437	.375	02
		2.0000	.500	.438	01
		2.0000	.812	.750	03
		3.7500	1.307	1.062	05
		3.7500	2.182	1.937	07
017	1.0625	1.5000	0.281	0.250	01
020	1.2500	2.2500	.500	.438	01
		2.2500	.812	.750	03
		4.6250	1.557	1.312	05
		4.6250	2.682	2.437	07
021	1.3125	1.7500	0.281	0.250	01
		2.0625	.437	.375	03
021	1.3130	2.2500	.437	.375	02
023	1.4375	2.1875	.437	.375	01
023	1.4380	2.3750	.437	.375	02
025	1.5625	2.0000	.281	.250	01
		2.3125	.437	.375	03
025	1.5630	2.5000	.437	.375	02
029	1.8125	2.2500	.281	.250	01
		2.5625	.437	.375	03
029	1.8130	2.7500	.437	.375	02
033	2.0625	2.6250	.281	.250	01
		2.8125	.437	.375	03
033	2.0630	3.0000	.437	.375	02
037	2.3125	2.8750	.281	.250	01
		3.0625	.437	.375	03
037	2.3130	3.2500	.437	.375	02

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table LV - Boundary dimensions-IJ (cont'd.)

Bore		O.D.	Width		O.D. and width code
No. of 1/16	Inches	Inches	I.R. Inches	O.R. Inches	
047	2.9375	3.875	0.531	0.469	01
047	2.9380	4.125	.531	.469	02
049	3.0625	3.875 4.000	.375 .531	.312 .469	03 01
049	3.0630	4.250	.531	.469	02
064	4.0000	5.125	1.250	1.250	02
080	5.0000	6.125	1.250	1.250	02
096	6.0000	7.125	1.250	1.250	02
108	8.0000	9.125	1.250	1.250	02
176	11.0000	12.500	1.500	1.500	02

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table LVI - Boundary dimensions-IN

Bore		O.D.	Width		Thread or shank diameter	O.D. and width code
No. of 1/16	Inches	Inches	O.R. Inches	I.R. Inches		
003	.1895	1.000	.344	.500	5/16-24	51
		1.000	.344	.500	3/8-24	53
	.1900	.6250	.203	.250	10-32	57
		.6250	.203	.250	0.190 inch	59
		.6250	.250	.344	10-32	61
		.7810	.218	.245	10-32	63
		.7810	.328	.437	10-32	52
		.7810	.328	.437	1/4-28	65
		.7810	.328	.437	0.250 inch	67
		.7810	.328	.437	5/16-24	54
		.7810	.328	.437	3/8-24	56
		.7810	.328	.437	0.430 inch	58
		.7810	.328	.500	1/4-28	60
		.7810	.334	.437	3/8-24	69
		.7810	.338	.437	10-32	71
		.7810	.338	.437	1/4-28	73
		.7810	.338	.437	0.272 inch	77
		.7810	.338	.437	5/16-24	75
		.7810	.338	.500	1/4-28	79
		.7810	.438	.500	1/4-28	81
		.9690	.407	.500	5/16-24	83
		.9690	.407	.500	3/8-24	62
004	.2495	1.000	.344	.500	5/16-24	51
		1.000	.344	.500	3/8-24	53
		1.312	.325	.594	5/16-24	57
	.2500	.9375	.468	.625	1/4-28	59
		.9375	.468	.625	0.250 inch	61
		.9375	.530	.625	1/4-28	63
		.9380	.438	.593	5/16-24	52
		.9380	.438	.593	3/8-20	54
		.9380	.438	.593	3/8-24	56
		.9380	.438	.593	7/16-20	58
		.9380	.438	.593	0.442 inch	60
		.9380	.438	.593	0.625 inch	62
		.9380	.448	.593	5/16-24	65
		.9380	.448	.593	0.386 inch	67
		.9690	.335	.484	5/16-24	64
		1.000	.438	.593	5/16-24	66
005	.3120	1.3125	.325	.375	5/16-24	51
		1.3125	.325	.594	3/8-24	53
	.3125	1.250	.651	.870	7/16-20	55
		1.250	.656	.812	5/16-24	57
		1.250	.656	.812	0.312 inch	59
		1.250	.656	.870	5/16-24	52
		1.250	.656	.870	3/8-24	54
		1.250	.656	.870	7/16-20	56
		1.250	.656	.870	5/8-18	58
		1.340	.340	.593	7/16-20	60
		1.410	.460	.687	1/2-20	62

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table LVI - Boundary dimensions-IN (cont'd.)

Bore		O.D.	Width		Thread or shank diameter	O.D. and width code
No. of 1/16	Inches	Inches	O.R. Inches	I.R. Inches		
006	0.3750	0.9690	0.328	0.609	3/8-24	52
		1.500	.750	.937	3/8-24	51
		1.500	.750	.937	0.375 inch	53
		1.660	.480	.812	7/16-20	54
		1.660	.550	.812	5/8-18	56
008	.5000	1.750	.812	1.000	1/2-20	51
		1.750	.812	1.000	0.509 inch	53
		2.270	.720	1.062	7/8-14	52
010	.6250	2.000	.937	1.125	5/8-18	51
		2.000	.937	1.125	0.625 inch	53
		2.800	.850	1.250	1-12	52

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table LVII - Boundary dimensions-IP

Bore		O.D.	Groove diameter	Width		Radius	O.D. and width code
No. of 1/16	Inches	Inches	Inches	I.R. Inches	O.R. Inches		
003	0.1900	0.635		0.245	0.203	0.550	91
		.687		.245	.203	.187	93
		.687		.245	.203	3.015	94
		.718		.297	.265	0.359	95
		.906	0.781	.297	.270	.062	96
		1.025	.755	.500	.406	.145	98
	.1905	.798	.510	.297	.234	.055	97
		1.250	.750	.484	.350	.112	99
004	.250	.901		.484	.335	1.000	91
		1.000		.390	.335	1.000	93
		1.005	.901	.745	.687	0.875	94
		1.032	.906	.625	.563	.531	95
		1.032	.906	.750	.625	.531	97
		1.062	.906	.484	.335	.0781	98
	.252	1.032	.906	.625	.563	.541	96
005	.3125	1.015	.901	.937	.812	.630	98
		1.015	.901	.937	.812	.895	96
		1.390	1.250	1.000	.875	.875	91
		1.393	1.3125	0.745	.687	1.156	92
		1.437	1.250	.558	.375	0.0937	93
		1.468	1.250	.558	.375	.1093	94
		1.500	1.250	.558	.375	.125	95
006	.375	1.125		.375	.313	3.015	91
		1.580	1.500	.870	.687	1.156	93
007	.4375	1.250		.630	.570	3.030	91
		1.250		.625	.600	0.375	92
		1.625		.625	.600	.375	94
008	.500	1.225		.625	.527	.515	92
		1.250		.344	.375	.252	91
		1.500		.625	.527	.515	93
		1.500		.625	.527	1.010	94

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

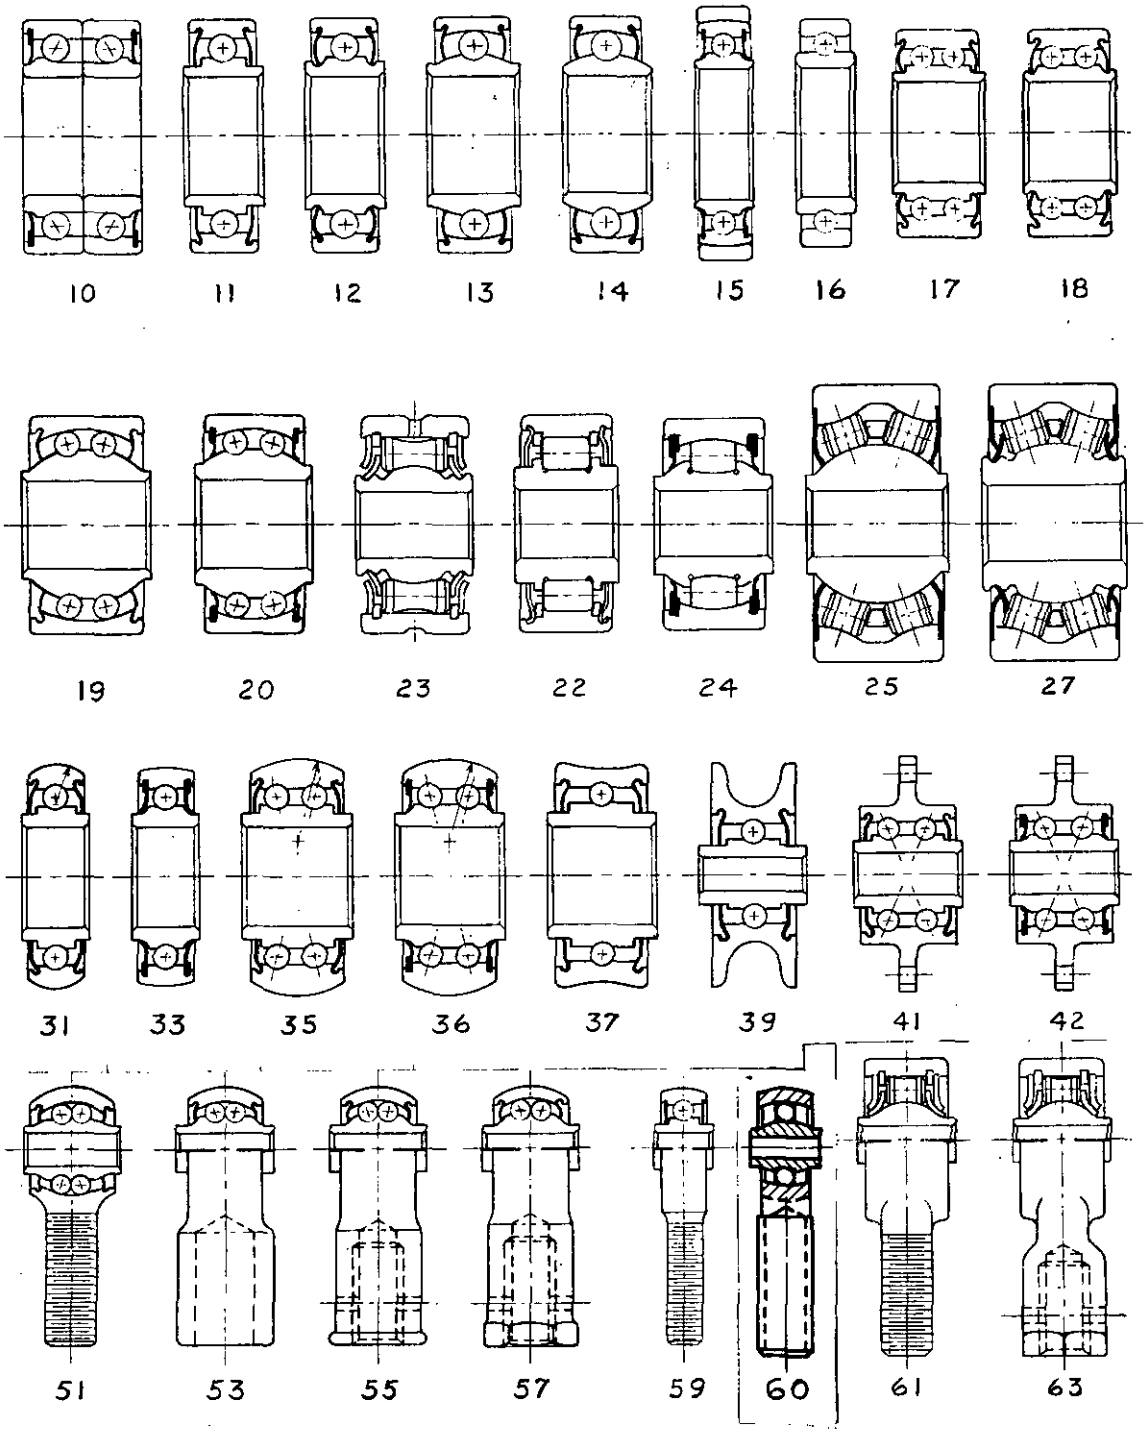


Figure 33 - Illustrations of group 5 bearing types.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 This section covers industrial power transmission ball and roller bearings and mounted units complete with bearings - group 6 (see figure 38).

2. REFERENCED DOCUMENTS

2.1 This section is not applicable.

3. *NUMBER STRUCTURE*

3.1 Digit positions. Example of digit positions is shown on figure 34.

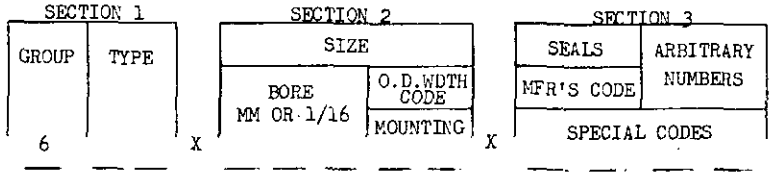


Figure 34 - Group 6, number structure.

4. GROUP AND TYPE CODES

4.1 Digit positions. Example of digit positions is shown on figure 35.

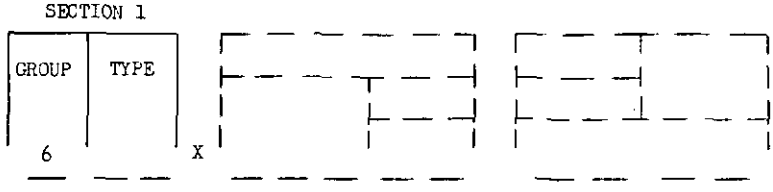


Figure 35 - Group 6 section 1

4.2 Group code. Group code for first position is as follows:

6 - Industrial power transmission ball and roller bearings and mounted units complete with bearings.

4.3 Type codes 00 through 69. Type codes 00 through 69 (2nd and 3rd positions). Bearings and bearing assemblies.

4.3.1 Annular ball bearing, double row, internal self-aligning extended inner ring, straight bore *shall be as follows:*

Type		Dimension table
11	Inner ring extended one side only with set screw in inner ring, inch bore, metric O.D., inch or metric width.	IC (table LIX)
13	Inner ring extended one side only with eccentric locking collar, inch bore, metric O.D., inch or metric width	IC (table LIX)

4.3.2 Annular ball bearing, single row, radial, external self-aligning, straight bore *shall be as follows:*

Type		Dimension table
16	Inner ring extended both sides with one set screw collar, inch bore, metric O.D., inch or metric width.	IC (table LIX)
17	Inner ring extended both sides with one set screw in inner ring, inch bore, metric O.D., inch or metric width.	IC (table LIX)
18	Inner ring extended both sides with eccentric locking collar, inch bore, metric O.D., inch or metric width.	IC (table LIX)

Source: https://assist.dla.mil -- Downloaded: 20260-26T07:25Z
Check the source to verify that this is the current version before use.

19	Inner ring extended both sides with one set screw in inner ring, external aligning ring, inch bore, metric O.D., inch or metric width.	IC (table LIX)
20	Inner ring extended both sides with eccentric locking collar and external aligning ring, inch bore, metric O.D., inch or metric width.	IC (table LIX)

4.3.3 Annular ball bearing, single row, radial, internal self-aligning, modified deep groove, extended inner ring, straight bore shall be as follows:

Type		Dimension table
23	Inner ring extended one side only with two set screws in inner ring, inch bore, metric O.D., inch or metric width.	IC (table LIX)
25	Inner ring extended both sides with two set screws in inner ring, inch bore, metric O.D., inch or metric width.	IC (table LIX)

4.3.4 Annular ball bearing, single row, radial, extended inner ring, straight bore, (not self-aligning) shall be as follows:

Type		Dimension table
31	Inner ring extended both sides with one set screw in inner ring, outer ring with grease groove and snap ring, inch bore, metric O.D., inch or metric width.	IC (table LIX)
32	Inner ring extended both sides wiht eccentric locking collar, inch bore, metric O.D., inch or metric width.	IC (table LIX)
33	Inner ring extended one side only with one set screw in inner ring, inch bore, metric O.D., inch or metric width.	IC (table LIX)
34	Inner ring extended one side only with eccentric locking collar, inch bore, metric O.D., inch or metric width.	IC (table LIX)

4.3.5 Roller bearing, double row, extended inner ring, straight bore, internal self-aligning shall be as follows:

Type		Dimension table
36	Inner ring extended both sides with two spring locking set screw collars, two cups and one cone, inch bore, metric O.D., inch or metric width.	IC (table LIX)
37	Inner ring extended both sides with one set screw collar, two cups, and one cone, inch bore, metric O.D., inch or metric width.	IC (table LIX)

4.3.6 Annular ball bearing with tapered bore and straight bored adapter (for same bearing without adapter see group 1, annular ball bearings) shall be as follows:

Type		Dimension table
45	Double row, internal self-aligning, inch bore, metric O.D., inch or metric width.	IC (table LIX)
47	Single row, deep groove (not self-aligning) inch bore, metric O.D., inch or metric width.	IC (table LIX)

4.3.7 Roller bearing, double row, internal self-aligning, tapered bore with straight bored adapter (for same bearing without adapter see group 2, cylindrical and self-aligning roller bearings) shall be as follows:

Type		Dimension table
55	Spherical roller bearing, double row, self contained, inner and outer raceways concave, inch bore, metric O.D., inch or metric width.	IC (table LIX)
57	Concave roller bearing, double row, self contained, inner and outer raceways convex, inch bore, metric O.D., inch or metric width.	IC (table LIX)

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

4.4 Type codes 70 through 99 (2nd and 3rd positions). Mounted units complete with bearings (boundary dimension tables not applicable) shall be as specified in 4.4.1 and 4.4.2.

4.4.1 Mounted units complete with bearings, inch shaft size.

Type	
71	Pillow block
72	Flange unit
73	Cylindrical cartridge unit
74	-
75	Knee type blower box
76	Spherical unit mount
77	Hanger box
78	Pedestal pillow block
79	Take up unit

4.4.2 Mounted units complete with bearings, metric shaft size shall be as follows:

Type	
81	Pillow block
82	Flange unit
83	Cylindrical cartridge unit
84	-
85	-
86	-
87	-
88	Pedestal pillow block
89	Take up unit

5. BORE SIZE - O.D. AND WIDTH CODE

5.1 Digit positions. Example of digit positions is shown on figure 36.

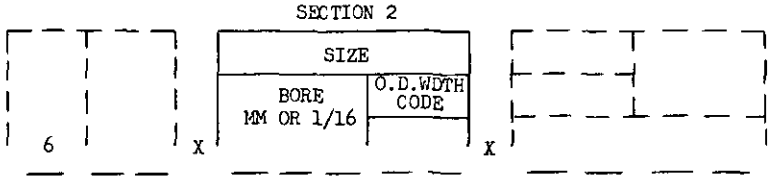


Figure 36 - Group 6 section 2.

5.2 Bore size (4, 5, and 6th positions). The bore sizes of industrial power transmission ball and roller bearings are usually expressed in inches, however, a few are supplied in metric dimensions. The type description and the boundary dimension table indicates which method of expression is used.

5.2.1 Inch. Inch bores are expressed as the number of 1/16ths in the bore size.

Example: 15/16 inch = 015; 1-1/2 inches = 024
1-7/8 inches = 030; 4 inches = 064

5.2.2 Metric. Metric bores are expressed as the actual number of mm.

Example: 4mm = 004; 25mm = 025
120mm = 120; 200mm = 200

5.3 O.D. and width code (7 and 8th positions). For use with type codes 00 through 79 bearings and bearing assemblies. The O.D. and width dimensions of a bearing are expressed by a code as shown on the boundary dimension table (see table LIX).

5.3.1 Application. The type description carries a reference to the appropriate boundary dimension table. These tables are arranged by bore size and within each bore size; the O.D.'s and widths are arranged in numerical sequence. Opposite each set of dimensions is the appropriate "Code" for the O.D. and width.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

5.3.2 Interpretation of O.D. and width code. A bearing number 613-01901 is decoded as follows:

613 = Annular ball bearing, double row, internal self-aligning, inner ring extended on one side only with eccentric locking collar, straight bore, inch, boundary dimension table IC (see table LIX).
01901 = (019) = 1-3/16 inch bore size; O.D. and width code 01. Reference to boundary dimension table IC (see table LIX), bore size 019 and code 01 indicates that the O.D. is 62mm and width is 16mm.

5.4 Bearing mounting (7 and 8th positions) for use with type codes 70 through 99. Mounted units complete with bearings.

5.4.1 Application. Application shall be as follows:

Code	Bearing mounting
70	Direct mounted ball bearings
74	Adapter mounted ball bearings
78	Direct mounted roller bearings
82	Adapter mounted roller bearings
86	Direct mounted tapered roller bearings
90	Adapter mounted tapered roller bearings
94	Straight sleeve mounted tapered roller bearings

5.4.2 Interpretation of bearing mounting code. A mounted unit number 671-01970 is de decoded as:

617 = Pillow block complete with bearing and seals, inch shaft size.
01970 = The bearing in the unit has a (019) 1-3/16 inch shaft size and (70) a direct mounted ball bearing.

6. VARIATIONS OF THE GROUP 6 BASE BEARING NUMBER

6.1 Digit positions. Example of digit positions is shown on figure 37.

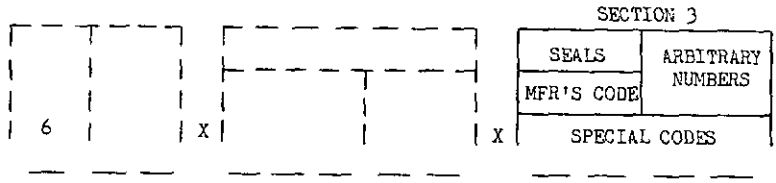


Figure 37 - Group 6, section 3.

6.2 Variations. Section 3 codes variations, modifications or special features of a bearing or a mounted unit, as described by the base number, which are necessary for complete identification. Section 3 may be either a "Significant Code" covering those common features in table LVIII or an arbitrarily assigned number known as a "Special Code" covering all other variations, modifications, etc.

6.2.1 Significant codes. Significant codes will be in two or four digits and will begin with the numerals 0 through 7. These codes will apply only to the type of bearing or mounted unit being described. The significant codes are divided into two groups and are described in table LVIII.

(a) Codes applicable to base numbers of bearings only (types 00 through 69).
(b) Codes applicable to base numbers of mounted units only (types 70 through 99).

6.2.2 Special codes. Special codes are arbitrarily assigned numbers of four digits only that begin with the numerals 8 and 9. These four digit numbers are assigned in numerical sequence as they are required to code additional features (not covered by the significant codes) of a particular base number. The more common features significantly coded in the "table of variation" (see table LVIII) may occur in conjunction with some additional feature or features, in which case all of the additional features are coded by a special code.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

6.2.2.1 Special codes are assigned only by the central agency responsible for the numbering system.

7. BOUNDARY DIMENSION TABLE

7.1 Use. Use of boundary dimension table is as follows:

Dimension table	Bearing types
IC (table LIX)	11, 13, 16, 17, 18, 19, 20, 23, 25, 31, 32, 33, 34, 36, 37, 45, 47, 55, 57

8. MANUFACTURERS SERIES CODE (NUMERICAL)

8.1 Mounted units complete with bearings. Numbers in the 3rd and 4th positions are arbitrarily assigned serial numbers identifying each manufacturer's established series of mounted units. These numbers only have significance when used with the manufacturer's code (table LVIII) types 70 through 99, in the 1st and 2nd position.

8.1.1 SKF Industries, Inc., Manufacturers code 50 for ball bearing units shall be as follows:

Code	Series
03	SAF-1500, pillow block - fixed
07	SAF-1600, pillow block - fixed
09	SAF-1300, pillow block - fixed
11	SAF-1500, pillow block - floating
15	SAF-1600, pillow block - floating
17	SAF-1300, pillow block -floating
20	GP, cylindrical cartridge
21	RP, cylindrical cartridge
22	SP, Pillow block, pressed steel, 2 bolt base
23	SRP, pillow block, pressed steel, rubber insert, 2 bolt base.
24	SYHP, Pillow Block, 2 bolt base
25	SYP, pillow block, 2 bolt base
26	TB, take-up unit
27	TBP, take-up unit
28	TBX, take-up unit
53	SAF-1500, pillow block, fixed, closed end
57	SAF-1600, pillow block, fixed, closed end
59	SAF-1300, pillow block, fixed, closed end
63	SAF-1500, pillow block, floating, closed end
67	SAF-1600, pillow block, floating, closed end
69	SAF-1300, pillow block, floating, closed end
71	FY-X, flanged mounting, eccentric lock, 4 bolt base
72	SY, pillow block, set screw collar, 2 bolt base
73	SYH-X, pillow block, eccentric lock, 2 bolt base
74	FYTP, flange unit, 2 bolt series
75	FYP, flange unit, 4 bolt series
76	F, flange, pressed steel, 3 bolt series
77	FT, flange, pressed steel, 2 bolt series
78	FY, flanged mounting, set screw collar, 4 bolt base

8.1.2 SKF Industries, Inc., Manufacturers' code 50 for roller bearing units shall be as follows:

Code	Series
01	FYR, flanged mounting unit, fixed, labyrinth seal
02	FYR, flanged mounting unit, floating, labyrinth seal
03	FYRP, flanged mounting unit, fixed, labyrinth seal
04	FYYRP, flanged mounting unit, floating, labyrinth seal
05	SYR, pillow block, fixed, labyrinth seal
06	SYR, pillow block, floating, labyrinth seal
07	SYRS, pillow block, fixed, labyrinth seal
08	SYRS, pillow block, floating, labyrinth seal
09	FYR, flanged mounting unit, fixed contact seals
10	FYR, flanged mounting unit, floating, contact seals

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Code	Series
11	SAF-22500, pillow block, fixed
12	SAF-23000K, pillow block, fixed 4-bolt base
13	SAF-22200, pillow block, fixed
14	SAF-23000K, pillow block, floating 4-bolt base
15	SAF-22600, pillow block, fixed
16	SAFS-22200, pillow block, fixed
17	SAF-22300, pillow block, fixed
18	SAFS-22200, pillow block, floating
19	SDAF-22500, pillow block, fixed 4-bolt base
20	SDAF-22200, pillow block, fixed 4-bolt base
21	SDAF-22600, pillow block, fixed 4-bolt base
22	SDAF-22300, pillow block, fixed 4-bolt base
23	SAFS-22500, pillow block, fixed
24	SAFS-22500, pillow block, floating
25	SDAF-23000K, pillow block, fixed, 4-bolt base
26	SDAF-23000K, Pillow block, floating, 4-bolt base
27	FYRP- flanged mounting unit, fixed, contact seals
28	FYRP- flanged mounting unit, floating, contact seals
29	SYR, pillow block, fixed, contact seals, 2-bolt base
30	SYR, pillow block, floating, contact seals, 2-bolt base
31	SYRS, pillow block, fixed, contact seals, 2-bolt base
32	SYRS, pillow block, floating, contact seals, 2-bolt base
36	SAF-22500, pillow block, floating
38	SAF-22200, pillow block, floating
40	SAF-22600, pillow block, floating
42	SAF-22300, pillow block, floating
44	SDAF-22500, pillow block, floating, 4-bolt base
45	SDAF-22200, pillow block, floating, 4-bolt base
46	SDAF-22600, pillow block, floating, 4-bolt base
47	SDAF-22300, pillow block, floating, 4-bolt base
61	SAF-22500, pillow block, fixed, closed end.
62	SAF-23000K, pillow block, fixed, closed end, 4-bolt base
63	SAF-22200, pillow block, fixed, closed end
64	SAF-23000K, pillow block, floating, closed end, 4-bolt base
65	SAF-22600, pillow block, fixed, closed end
66	SAFS-22200, pillow block, fixed, closed end
67	SAF-22300, pillow block, fixed, closed end
68	SAFS-22200, pillow block, floating, closed end
69	SDAF-22500, pillow block, fixed, closed end, 4-bolt base
70	SDAF-22200, pillow block, fixed, closed end, 4-bolt base
71	SDAF-22600, pillow block, fixed, closed end, 4-bolt base
72	SDAF-22300, pillow block, fixed, closed end, 4-bolt base
73	SAFS-22500, pillow block, fixed, closed end
74	SAFS-22500, pillow block, floating, closed end
75	SDAF-23000K, pillow block, fixed, closed end, 4-bolt base
76	SDAF-23000K, pillow block, floating, closed end, 4-bolt base
86	SAF-22500, pillow block, floating, closed end
88	SAF-22200, pillow block, floating, closed end
90	SAF-22600, pillow block, floating, closed end
92	SAF-22300, pillow block, floating, closed end
94	SDAF-22500, pillow block, floating, closed end, 4-bolt base
95	SDAF-22200, pillow block, floating, closed end, 4-bolt base
96	SDAF-22600, pillow block, floating closed end, 4-bolt base
97	SDAF-22300, pillow block, floating, closed end, 4-bolt base

8.1.3 Fafnir Bearing Company, Manufacturers' code 51 shall be as follows:

Code	Series
01	LAK, pillow block, standard series, self-aligning, 2-bolt base
02	SAK, pillow block, standard series
03	SA, pillow block, standard series, 2-bolt base
04	SAD, pillow block, standard series, 2-bolt base
05	SADD, pillow block, standard series, 2-bolt base
06	SAO, pillow block, heavy series
07	SAOD, pillow block, heavy series
08	SAODD, pillow block, heavy series
09	DSA, double pillow block, standard series, 2-bolt base

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Code	Series
10	DSADD, double pillow block, standard series, 2-bolt base
11	DSAO, double pillow block, heavy series, 2-bolt base
12	DSAODD, double pillow block, heavy series, 2-bolt base
13	SAL, pillow block, fixed, standard series, 2-bolt base
14	SAOL, pillow block, fixed, heavy series
15	TAK, pillow block, standard series, 2-bolt base
16	LCJ, flanged cartridge, standard series, 4-bolt base
17	TAS, pillow block, standard series, 2-bolt base
19	LC, cylindrical cartridge, standard series
20	C, cylindrical cartridge, standard series
21	CO, cylindrical cartridge, heavy series
22	MC, motor cartridge, open end
23	MC, motor cartridge, closed end
24	MC, motor cartridge, pairs
25	TU, take-up unit
26	TU, take-up frame
28	F, lineshaft or hanger box unit
29	TCJ, flange cartridge, standard series, 4-bolt base
30	TCJT, flange cartridge, standard series, 2-bolt base
33	SCS, countershaft box, single unit
34	SSS, countershaft box
35	PFD, flange cartridge, standard series
36	PFDR, flange cartridge, standard series
37	PFTD, flange cartridge, standard series, 2-bolt base
38	PFTDR, flange cartridge, standard series, 2-bolt base
39	PKD, pillow block, ductile iron type, 2-bolt base
43	SAL, pillow block, floating, standard series, 2-bolt base
44	SAOL, pillow block, floating, heavy series
47	LAO, pillow block, heavy series, 2-bolt base
48	LL, flangette, triangular, 3-bolt base
49	LSA, pillow block, standard series, 2-bolt base
51	PB, pillow block, light duty, 2-bolt base
53	LAS, pillow block, standard series, 2-bolt base
54	LSAO, pillow block, heavy series, 2-bolt base
55	PBS, pillow block, light duty, pressed steel type
56	DRN, double pillow block, double rigid, 4-bolt base
57	LCJO, flange cartridge, heavy series, 4-bolt base
58	FLCT, flange cartridge, cast iron type, 2-bolt base
61	LAKHL, pillow block, floating, standard series, 2-bolt base
62	LAKH, pillow block, standard series, 2-bolt base
63	LCJT, flange cartridge, standard series, 2-bolt base
64	LLT, flangette, 2-bolt base
65	LTU, take-up unit
66	MSTU, take-up unit, pressed steel type
67	NLTU, take-up frame, pressed steel, side mounted
68	PSD, pillow block, ductile iron type, 2-bolt base
70	Pulley, idler, V-belt, ball bearing
71	Pulley, idler, flat belt, ball bearing
72	Pulley, idler, chain belt, ball bearing
73	Sprocket, idler, ball bearing

8.1.4 Stephens-Adamson, Manufacturers' code 52 (sealmaster)

Code	Series
01	NP - pillow block, normal duty, 2-bolt base
02	SP - pillow block, standard duty, 2-bolt base
03	FMP -
04	EMP - pillow block, expansion type, 2-bolt base
05	MP - pillow block, medium duty, 2-bolt base
06	SF - flange unit, standard duty, 4-bolt base
07	MSF - flange unit, medium duty, 4-bolt base
08	ST - take-up unit, standard duty
09	MST - take-up unit, medium duty
10	SC - cartridge unit, standard duty
11	MSC - cartridge unit, medium duty
12	SCHB - hanger bearing for screw conveyors

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Code	Series
13	HB -
14	NPG-00-6, take-up unit, protected screw
15	NPG-00-9, take-up unit, protected screw
16	NPG-00-12, take-up unit, protected screw
17	NPG-00-18, take-up unit, protected screw
18	SPG-00-12, take-up unit, protected screw
19	SPG-00-18, take-up unit, protected screw
20	STH-00-6, take-up unit, steel frame
21	STH-00-9, take-up unit, steel frame
22	STH-00-12, take-up unit, steel frame
23	STH-00-18, take-up unit, steel frame
24	Type 9-24
25	Type 9-30
26	Type 9-36
27	Type 9-42
28	Type 9-48
29	MFP, pillow block, medium duty, 4-bolt base
30	MFC, flange cartridge unit, 4-bolt
31	SEHB, hanger bearing for eccentric drives
32	SFT, flange unit, standard duty, 2-bolt base
33	NPD, pillow block, double lock, 2-bolt base
34	S500M, pillow block, 2-bolt base
35	SPD, pillow block, double lock, 2-bolt base
36	MSFT, flange unit, medium duty, 2-bolt base
37	SRF, flange unit, rubber mounted, 2-bolt base
38	LP, pillow block, malleable 2-bolt base
39	LFT, flange unit, malleable, 2-bolt base
40	CRP, pillow block, rubber mounted, 2-bolt base
41	FB, flange bracket, single lock, 3-bolt base
42	RPB
43	LF flange unit, malleable, 3-bolt base
44	LRCS cartridge unit, rubber cushioned
45	LRP pillow block, stamped steel, 2-bolt base
46	MFPD pillow block, medium duty, 4-bolt base
47	MSFD flange unit, medium duty, 4-bolt base
48	MSFPD pillow block, double lock, 4-bolt base
49	MSPD, pillow block, double lock, 2-bolt base
50	SFC, flange cartridge, standard duty, 2-bolt base
51	SRC, cartridge unit, rubber mounted
52	SRP, pillow block, rubber mounted, 2-bolt base
53	SSF, flange, stamped steel, 3-bolt
54	SSFF, flange unit, stamped steel, 4-bolt
55	SSFT, flange unit, stamped steel, 2-bolt
56	SSP, pillow block, stamped steel, 2-bolt base
57	TB, pillow block, tapped base
58	TSSF, flange unit, stamped steel, 3-bolt base

8.1.5 Rex-Chain Belt (Shafer and Rex-Shafer) Manufacturers' code 53 shall be as follows:

Code	Series
01	A-000
02	A-2000
03	PR-000-PL-000
04	PR-000F-PL-000F
05	PR-2000
06	PR-2000F
07	PS-2000
08	PS-2000F
09	B-2000
10	BR-000
11	C-000-CN-000-CL-000
12	DSA400-12
13	DSA400-18
14	DSA400-24
15	DSA400-30
16	ZN-000
17	ZF-000

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Code	Series
18	L-2000
19	ZA-000
20	PAC-000
21	FS-000
22	FC-2000
23	TR-000-TL-000
24	MS-000-ML-000
26	PA-2000, fixed
27	PA-2000F, fixed
28	PB-2000, floating
29	PB-2000F, floating
30	FA-2000, fixed
31	FB-2000, floating
32	ZY-22500A
33	N-2000
34	N-2000C
35	NT3-000-6C
36	NT3-000-9C
37	NT3-000-12C
38	NT3-000-18C
39	ZMX
40	NT3-000-6
41	NT3-000-9
42	NT3-000-12
43	NT3-000-18
44	PD-0000, fixed
45	PD-0000-C, fixed
46	PD-0000-F, fixed
47	PD-0000-FC, fixed
48	PE-0000, floating
49	PE-0000-C, floating
50	PE-0000-F, floating
51	PE-0000-FC, floating
52	SP-000-SP-2000
53	SPE-000-SPE-2000
54	SF-000-SF-2000
55	SFE-000-SFE-2000
56	SC-000-SC-2000
57	SCE-000-SCE-2000
58	PW-000-PW-2000
59	PWE-000-PWE-2000
60	QM-2000
61	QM-2000C
62	QN-2000
63	QN-2000C
64	RN-2000
65	RN-2000C
66	ZB-2000
67	ZB-2000C
68	MA-2000, fixed
69	MB-2000, floating
70	QM-2000, fixed
71	QM-2000C, fixed
72	QN-2000, fixed
73	QN-2000C, fixed
74	RN-2000, fixed
75	RN-2000C, fixed
76	N-2000, fixed
77	N-2000C, fixed
78	RD-2000
79	ZB-000
80	APR-2000
81	APR-2000F
82	APS-2000
83	APS-2000F
84	BPR-2000
85	BPR-2000F
86	BPS-2000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Code	Series
87	BPS-2000F
88	ZC-000
89	ZP-000F
90	ZP-000
91	ZPS-000
92	ZBR

8.1.6 Link Belt Company, Manufacturers' code 54 for ball bearing units shall be as follows:

Code	Series
01	F300, flanged unit, fixed
02	FE300, flanged unit, floating
03	F300C, flanged unit, fixed, closed end
04	FE300C, flanged unit, floating, closed end
05	FC300, flanged cartridge unit, fixed
06	FCE300, flanged cartridge unit, floating
07	FC300C, flanged cartridge unit, fixed, closed end
08	FCE300C, flanged cartridge unit, floating, closed end
09	C300, cartridge unit, fixed
10	CE300, cartridge unit, floating
11	C300C, cartridge unit, fixed, closed end
12	CE300C, cartridge unit, floating, closed end
13	F3-U200N, flanged unit, fixed
14	F3-U200NC, flanged unit, fixed, closed end
15	F3-Y200H, flanged unit, fixed
16	F3-Y200HC, flanged unit, fixed, closed end
17	LP200, pillow block, fixed
18	LPE200, pillow block, floating
19	LP200C, pillow block, fixed, closed end
20	LPE200C, pillow block, floating, closed end
21	F3-Y200N, flanged unit, fixed
22	F3-Y200NC, flanged unit, fixed, closed end
23	FC200C, flanged cartridge unit, fixed, closed end
24	FC3-U200H, flanged cartridge unit, fixed
25	LP300, pillow block, fixed
26	LPE300, pillow block, floating
27	LP300C, pillow block, fixed, closed end
28	LPE300C, pillow block, floating closed end
29	FC3-U200HC, flanged cartridge unit, fixed, closed end
30	FC3-U200N, flanged cartridge unit, fixed
31	FC3-U200NC, flanged cartridge unit, fixed, closed end
32	FC3-Y200H, flanged cartridge unit, fixed
33	FC3-Y200HC, flanged cartridge unit, fixed, closed end
34	FC3-Y200N, flanged cartridge unit, fixed
35	NT3-U200HC-6, fixed, closed end
36	NT3-U200HC-9, fixed, closed end
37	NT3-U200HC-12, fixed, closed end
38	NT3-U200HC-18, fixed, closed end
39	FC3-Y200NC, flanged cartridge unit, fixed, closed end
40	NT3-U200H-6, fixed
41	NT3-U200H-9, fixed
42	NT3-U200H-12, fixed
43	NT3-U200H-18, fixed
44	FF200, flanged unit, fixed
45	FR-WG200U, flanged unit, fixed
46	F200, flanged unit, fixed
47	F200C, flanged unit, fixed, closed end
49	FR-W200U, flanged unit, fixed
50	FR-YG200N, flanged unit, fixed
52	FR-Y200N, flanged unit, fixed
53	F-WG200U, flanged unit, fixed
55	F-W200U, flanged unit, fixed
56	FXR-WG200U, flanged unit, fixed
58	FXR-W200U, flanged unit, fixed
59	FXR-YG200N, flanged unit, fixed
61	FXR-Y200N, flanged unit, fixed

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Code	Series
62	FX-WG200U, flanged unit, fixed
64	FX-W200U, flanged unit, fixed
65	FX-YG200N, flanged unit, fixed
67	FX-Y200N, flanged unit, fixed
70	FX3-U200H, flanged unit, fixed
71	FX3-U200HC, flanged unit, fixed, closed end
72	FX3-U200N, flanged unit, fixed
73	FX3-U200NC, flanged unit, fixed, closed end
74	F3-U200H, flanged unit, fixed
75	F3-U200HC, flanged unit, fixed, closed end
76	FX3-Y200H, flanged unit, fixed
77	FX3-Y200HC, flanged unit, fixed, closed end
78	FX3-Y200N, flanged unit, fixed
79	FX3-Y200NC, flanged unit, fixed, closed end
80	FC200, flanged cartridge unit, fixed
82	F-YG200N, flanged unit, fixed
84	F-Y200N, flanged unit, fixed

8.1.7 Link Belt Company, Manufacturer's code 64 for ball bearing units shall be as follows:

Code	Series
15	T3-Y200NC, take-up unit, fixed, closed end
16	T3-Y200N, take-up unit, fixed
17	T3-Y200HC, take-up unit, fixed, closed end
18	T3-Y200H, take-up unit, fixed
19	T3-U200NC, take-up unit, fixed, closed end
20	T3-U200N, take-up unit, fixed
21	P-Y200N, pillow block, fixed
23	P-YG200N, pillow block, fixed
24	P-W200U, pillow block, fixed
26	P-WG200U, pillow block, fixed
27	PS-Y200N, pillow block, fixed
28	PS-W200U, pillow block, fixed
31	PL3-Y200NC, pillow block, fixed, closed end
32	PL3-Y200N, pillow block, fixed
33	PL3-Y200HC, pillow block, fixed, closed end
34	PL3-Y200H, pillow block, fixed
35	PL3-U200NC, pillow block, fixed, closed end
36	PL3-U200N, pillow block, fixed
37	PL3-U200HC, pillow block, fixed, closed end
38	PL3-U200H, pillow block, fixed
39	PL-Y200N, pillow block, fixed
41	PL-YG200N, pillow block, fixed
42	PL-W200U, pillow block, fixed
44	P200, pillow block, fixed
45	P200C, pillow block, fixed, closed end
46	PL-WG200U, pillow block, fixed
47	PH3-Y200NC, pillow block, fixed, closed end
50	PH3-Y200N, pillow block, fixed
51	TAS3-U200H, take-up unit, fixed
53	PH3-Y200HC, pillow block, fixed, closed end
54	P300, pillow block, fixed
55	PE300, pillow block, floating
56	P300C, pillow block, fixed, closed end
57	PE300C, pillow block, floating, closed end
58	T300, take-up unit, fixed
59	T300C, take-up unit, fixed, closed end
60	PH3-Y200H, pillow block, fixed
61	PH3-U200NC, pillow block, fixed, closed end
62	PH3-U200N, pillow block, fixed
63	PH3-U200HC, pillow block, fixed, closed end
64	PH3-U200H, pillow block, fixed
65	P3-Y200NC, pillow block, fixed, closed end
66	P3-Y200N, pillow block, fixed
67	P3-Y200HC, pillow block, fixed, closed end
68	P3-Y200H, pillow block, fixed
69	P3-U200NC, pillow block, fixed, closed end

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Code	Series
70	P3-U200H, pillow block, fixed
71	P3-U200HC, pillow block, fixed, closed end
72	P3-U200N, pillow block, fixed
73	P2-300C, pillow block, fixed, closed end
74	P2-300, pillow block, fixed
76	T3-U200H, take-up unit, fixed
77	T3-U200HC, take-up unit, fixed, closed end

8.1.8 Link Belt Company, Manufacturers' code 54 for roller bearing units shall be as follows:

Code	Series
02	P-B22400H, pillow block, fixed
03	C-B22400H, cartridge unit, fixed
04	C-B22400HC, cartridge unit, fixed, closed end
05	P-B22500H, pillow block, fixed
06	P-B22500FH, pillow block, fixed
07	PE-B22500H, pillow block, floating
08	PE-B22500FH, pillow block, floating
09	F-B22400H, flanged unit, fixed
10	FC-B22400H, flanged cartridge, fixed
11	F-B22400HC, flanged unit, fixed, closed end
12	DS-B22400H-12
13	DS-B22400H-18
14	DS-B22400H-24
15	DS-B22400H-30
16	C-B22400A, cartridge unit, fixed
17	C-B22400AC, cartridge unit, fixed, closed end
18	C-B22400E, cartridge unit, fixed
19	C-B22400EC, cartridge unit, fixed, closed end
21	CS-B22400A, cartridge unit, fixed
22	CS-B22400E, cartridge unit, fixed
23	CS-B22400H, cartridge unit, fixed
25	CSE-B22400A, cartridge unit, floating
26	CSE-B22400E, cartridge unit, floating
27	CSE-B22400H, cartridge unit, floating
28	F-B22400A, flanged unit, fixed
29	F-B22400AC, flanged unit, fixed, closed end
30	F-B22400E, flanged unit, fixed
31	F-B22400EC, flanged unit, fixed, closed end
32	DS-LB6800H-12
33	DS-LB6800H-18
34	DS-LB6800H-24
35	DS-LB6800H-30
36	FC-B22400A, flanged cartridge, fixed
37	FC-B22400AC, flanged cartridge, fixed closed end
38	FC-B22400E, flanged cartridge, fixed
39	FC-B22400EC, flanged cartridge, fixed, closed end
40	FC-B22400HC, flanged cartridge, fixed, closed end
41	FE-B22400A, flanged unit, floating
42	FE-B22400E, flanged unit, floating
43	FE-B22400H, flanged unit, floating
44	P-B22400A, pillow block, fixed
45	P-B22500A, pillow block, fixed
46	P-B22400AC, pillow block, fixed, closed end
47	P-B22500AC, pillow block, fixed, closed end
48	P-B22400E, pillow block, fixed
49	P-B22500E, pillow block fixed
50	P-B22400EC, pillow block, fixed, closed end
51	P-B22500EC, pillow block, fixed, closed end
52	P-B22400FA, pillow block, fixed
53	P-B22500FA, pillow block, fixed
54	P-B22400FAC, pillow block, fixed, closed end
55	P-B22500FAC, pillow block, fixed, closed end
56	P-B22400FE, pillow block, fixed
57	P-B22500FE, pillow block, fixed

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Code	Series
58	P-B22400FEC, pillow block, fixed, closed end
59	P-B22500FEC, pillow block, fixed, closed end
60	P-B22400FH, pillow block, fixed
61	P-B22400FHC, pillow block, fixed, closed end
62	P-B22500FHC, pillow block, fixed, closed end
63	P-B22400HC, pillow block, fixed, closed end
64	P-B22500HC, pillow block, fixed, closed end
65	PE-22400A, pillow block, floating
66	PE-B22500A, pillow block, floating
67	PE-B22400E, pillow block, floating
68	PE-B22500E, pillow block, floating
69	PE-B22400FA, pillow block, floating
70	PE-B22500FA, pillow block, floating
71	PE-B22400FE, pillow block, floating
72	PE-B22500FE, pillow block, floating
73	PE-B22400FH, pillow block, floating
74	PE-B22400H, pillow block, floating
75	CS-B22500H, cartridge unit, fixed
76	DSH-B22500H-12
77	DSH-B22500H-18
78	DSH-B22500H-24
79	DSH-B22500H-30

8.1.9 Link Belt Company, Manufacturers' code 64, for roller bearing units shall be as follows:

Code	Series
02	PE-LB6800H, pillow block, floating
04	PE-LB6800HC, pillow block, floating, closed end
05	PE-LB6600FH, pillow block, floating
06	PE-LB6800FH, pillow block, floating
08	PE-LB6800FHC, pillow block, floating, closed end
10	PE-LB6600FA, pillow block, floating
11	PE-LB6800FA, pillow block, floating
12	PE-LB6900FA, pillow block, floating
13	PE-LB7600FA, pillow block, floating
14	PE-LB7800FA, pillow block, floating
15	PE-LB7900FA, pillow block, floating
17	PE-LB7600H, pillow block, floating
18	PE-LB6900H, pillow block, floating
19	PE-LB7600HC, pillow block, floating, closed end
20	PE-LB6900HC, pillow block, floating, closed end
21	PE-LB7600FHC, pillow block, floating, closed end
22	PE-LB6900FH, pillow block, floating
23	PE-LB7600FH, pillow block, floating
24	PE-LB6900FHC, pillow block, floating, closed end
25	PE-LB6600FAC, pillow block, floating, closed end
26	PE-LB6800FAC, pillow block, floating, closed end
27	PE-LB6900FAC, pillow block, floating, closed end
28	PE-LB7600FAC, pillow block, floating, closed end
29	PE-LB7800FAC, pillow block, floating, closed end
30	PE-LB7900FAC, pillow block, floating, closed end
34	PE-LB7800H, pillow block, floating
36	PE-LB7800HC, pillow block, floating, closed end
37	PE-LB7800FH, pillow block, floating
40	PE-LB7800FHC, pillow block, floating, closed end
41	PKE-B22400FE, pillow block, floating
42	PKE-B22500FE, pillow block, floating
43	PKE-B22400FH, pillow block, floating
44	PKE-B22500FH, pillow block, floating
45	PKE-B22400H, pillow block, floating
46	PKE-B22500H, pillow block, floating
50	PE-LB7900, pillow block, floating
52	PE-LB7900HC, pillow block, floating, closed end
54	PE-LB7900FH, pillow block, floating
55	PE-LB6600FHC, pillow block, floating, closed end

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Code	Series
56	PE-LB7900FHC, pillow block, floating, closed end
60	PE-LB6800A, pillow block, floating
61	PE-LB6900A, pillow block, floating
62	PE-LB7600A, pillow block, floating
63	PE-LB7800A, pillow block, floating
64	PE-LB7900A, pillow block, floating
65	PE-LB6800AC, pillow block, floating, closed end
66	PE-LB6900AC, pillow block, floating, closed end
67	PE-LB7600AC, pillow block, floating, closed end
68	PE-LB7800AC, pillow block, floating, closed end
69	PE-LB7900AC, pillow block, floating, closed end
70	PK-B22400A, pillow block, fixed
71	PK-B22500A, pillow block, fixed
72	PK-B22400AC, pillow block, fixed, closed end
73	PK-B22500AC, pillow block, fixed, closed end
74	PK-B22400E, pillow block, fixed
75	PK-B22500E, pillow block, fixed
76	PK-B22400EC, pillow block, fixed, closed end
77	PK-B22500EC, pillow block, fixed, closed end
78	PK-B22400FA, pillow block, fixed
79	PK-B22500FA, pillow block, fixed
80	PK-B22400FAC, pillow block, fixed, closed end
81	PK-B22500FAC, pillow block, fixed, closed end
82	PK-B22400FE, pillow block, fixed
83	PK-B22500FE, pillow block, fixed
84	PK-B22400FEC, pillow block, fixed, closed end
85	PK-B22500FEC, pillow block, fixed, closed end
86	PK-B22400FH, pillow block, fixed
87	PK-B22500FH, pillow block, fixed
88	PK-B22400FHC, pillow block, fixed, closed end
89	PK-22500FHC, pillow block, fixed, closed end
90	PK-B22400H, pillow block, fixed
91	PK-B22500H, pillow block, fixed
92	PK-B22400HC, pillow block, fixed, closed end
93	PK-B22500HC, pillow block, fixed, closed end
94	PKE-B22400A, pillow block, floating
95	PKE-B22500A, pillow block, floating
96	PKE-B22400E, pillow block, floating
97	PKE-B22500E, pillow block, floating
98	PKE-B22400FA, pillow block, floating
99	PKE-B22500FA, pillow block, floating

8.1.10 Link Belt Company, Manufacturer's code 74 for roller bearing units shall be as follows:

Code	Series
01	P-LB6800H, pillow block, fixed
02	T-B22400A, take-up unit, fixed
03	P-LB6800HC, pillow block, fixed, closed end
04	T-B22400AC, take-up unit, fixed, closed end
05	P-LB6800FH, pillow block, fixed
06	P-LB6600FHC, pillow block, fixed, closed end
07	P-LB6800 FHC, pillow block, fixed, closed end
08	T-B22400E, take-up unit, fixed
09	T-B22400EC, take-up unit, fixed, closed end
10	T-B22400HC, take-up unit fixed, closed end
11	T-B22400H, take-up unit, fixed
12	P-LB6800A, pillow block, fixed
13	P-LB6900A, pillow block, fixed
14	P-LB7600A, pillow block, fixed
15	P-LB7800A, pillow block, fixed
16	P-LB7900A, pillow block, fixed
17	P-LB6900H, pillow block, fixed
18	P-LB7600HC, pillow block, fixed, closed end
19	P-LB6900HC, pillow block, fixed, closed end
20	P-LB7600FH, pillow block, fixed

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Code	Series
21	P-LB6900FH, pillow block, fixed
22	P-LB7600FHC, pillow block, fixed, closed end
23	P-LB6900FHC, pillow block, fixed, closed end
24	PK-LB6800FA, pillow block, fixed
25	PK-LB7800FA, pillow block, fixed
26	PK-LB6800FAC, pillow block, fixed, closed end
27	PK-LB7800FAC, pillow block, fixed, closed end
28	PK-LB6800FH, pillow block, fixed
29	PK-LB7800FH, pillow block, fixed
30	PK-LB6800FHC, pillow block, fixed, closed end
31	PK-LB7800FHC, pillow block, fixed, closed end
32	P-LB7600H, pillow block, fixed
33	P-LB7800H, pillow block, fixed
35	P-LB7800HC, pillow block, fixed, closed end
38	P-LB7800FH, pillow block, fixed
39	P-LB7800FHC, pillow block, fixed, closed end
40	PKE-LB6800FA, pillow block, floating
41	PKE-LB7800FA, pillow block, floating
42	PKE-LB6800FAC, pillow block, floating, closed end
43	PKE-LB7800FAC, pillow block, floating, closed end
44	PKE-LB6800FH, pillow block, floating
45	PKE-LB7800FH, pillow block, floating
46	PKE-LB6800FHC, pillow block, floating, closed end
47	PKE-LB7800FHC, pillow block, floating, closed end
49	P-LB7900H, pillow block, fixed
51	P-LB7900HC, pillow block, fixed, closed end
53	P-LB7900FH, pillow block, fixed
55	P-LB7900FHC, pillow block, fixed, closed end
56	P-LB6800AC, pillow block, fixed, closed end
57	P-LB6900AC, pillow block, fixed, closed end
58	P-LB7600AC, pillow block, fixed, closed end
59	P-LB7800AC, pillow block, fixed, closed end
60	P-LB7900AC, pillow block, fixed, closed end
61	P-LB6600FA, pillow block, fixed
62	P-LB6800FA, pillow block, fixed
63	P-LB6900FA, pillow block, fixed
64	P-LB7600FA, pillow block, fixed
65	P-LB7800FA, pillow block, fixed
66	P-LB7900FA, pillow block, fixed
67	P-LB6600FAC, pillow block, fixed, closed end
68	P-LB6800FAC, pillow block, fixed, closed end
69	P-LB6900FAC, pillow block, fixed, closed end
70	P-LB7600FAC, pillow block, fixed, closed end
71	P-LB7800FAC, pillow block, fixed, closed end
72	P-LB7900FAC, pillow block, fixed, closed end
73	P-LB6600FH, pillow block, fixed

8.1.11 Dodge Manufacturing Company, Manufacturer's code 55 shall be as follows:

Code	Series
01	Type SCB, pillow block, fixed
02	Type SCB, steel end closure
03	Double interlock - pillow block, fixed 2-bolt
04	Double interlock - pillow block, fixed 4-bolt
05	Type SUP - pillow block, fixed
06	Type SUP - flange bearing, 2-bolt
07	Type SUP - flange bearing, 3-bolt
08	Type SUP - flange bearing, 4-bolt
09	Type C - pillow block, 2-bolt, fixed
10	Type C - pillow block, 2-bolt, floating
11	Type C - pillow block, 4-bolt, fixed
12	Type C - pillow block, 4-bolt, floating
13	Special duty - pillow block, fixed, 2-bolt
14	Special duty - pillow block, floating, 2-bolt
15	Special duty - pillow block, fixed, 4-bolt
16	Special duty - pillow block, floating, 4-bolt

Source: https://assist.dla.mil -- Downloaded: 20260-26T07:25Z
Check the source to verify that this is the current version before use.

Code	Series
17	Type SC - pillow block, fixed
18	Type SC - cylindrical unit
19	Type SC - flange bearing, 2-bolt
20	Type SC - flange bearing, 4-bolt
21	Type SC - hanger bearing
22	Type SC - hanger bearing, screw conveyor
23	Type SC - steel end closure
24	Type SC - take-up bearing
25	Type SC - take-up bearing, wide slot
26	Type SC - take-up unit
27	Type E - flange bearing
28	Type E - take-up bearing
29	Double interlock - flange bearing, floating
30	Double interlock - flange bearing, fixed
31	Double interlock - pillow block D unit only
32	Double interlock - pillow block S-1 unit only
33	Double interlock - pillow block B-1 unit only
34	Type C - flange bearing
35	Type C - take-up bearing
36	Type C - hanger bearing
37	Type C - pillow block D unit only
38	Type C - pillow block S-1 unit only
39	Type C - pillow block B-1 unit only
40	Special duty - pillow block D unit only
41	Special duty - pillow block S-1 unit only
42	Special duty - pillow block B-1 unit only
43	Type A - take-up unit
44	Type B - take-up unit
45	Type SXB - pillow block, fixed
46	Double interlock - pillow block, floating, 4-bolt
47	Double interlock - pillow block, floating, 2-bolt
48	Type E - pillow block, 2-bolt base
49	Type E - pillow block, 4-bolt base
50	Type SL - pillow block, fixed
51	Type SL - flange bearing, 2-bolt
52	Type SL - flange bearing, 3-bolt
53	Type K - pillow block, 2-bolt, fixed
54	Type K - pillow block, 4-bolt, fixed
55	Type K - pillow block, 2-bolt, floating
56	Type K - pillow block, 4-bolt, floating
57	Type K - pillow block, S-1 unit only
58	Type K - take-up bearing
59	Type SCM - pillow block, fixed
60	Type SCM - flange bearing, 2-bolt
61	Type SCM - flange bearing, 4-bolt
62	Type SCM - flange bearing, piloted
63	Type SCM - Steel end closure
64	Type SCM - take-up bearing
65	Type SCM - take-up bearing, wide slot
66	Type SCM - take-up unit
67	Type SU - pillow block, fixed
68	Type SX - pillow block, fixed
69	Type SX - cylindrical unit
70	Type SX - flange bearing, 2-bolt
71	Type SX - flange bearing, 4-bolt
72	Type SX - hanger bearing
73	Type SX - hanger bearing, screw conveyor
74	Type SX - take-up bearing
75	Type SX - take-up bearing, wide slot
76	Type SX - take-up unit
77	All steel - pillow block, fixed
78	All steel - pillow block, floating
79	All steel - cartridge unit, fixed
80	All steel - cartridge unit, floating
81	Angle babbitted pillow block
82	Angle bronze bushed pillow block
83	Base plate, plain, pillow block
84	Base plate, adjustable, pillow block

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Code	Series
85	Bronzoil pillow block
86	Bronzoil flange bearing
87	Plate type flange bearing
88	Rigid babbitted pillow block
89	Rigid bronze bushed pillow block
90	Sleevoil plain pillow block
91	Sleevoil SS plain pillow block
92	Special duty flange bearing
93	Spher-align-pillow block, 2-bolt
94	Spher-align-pillow block, 4-bolt
95	Top angle take-up frame

8.1.12 Medart Engineering and Equipment Company, Manufacturer's code 56 shall be as follows:

Code	Series
01	TS pillow block - adapter sleeve, fixed, 2-bolt base
02	TS pillow block - adapter sleeve, fixed, 4-bolt base
03	TS pillow block - adapter sleeve, floating, type A, 2-bolt base
04	TS pillow block - adapter sleeve, floating, type A, 4-bolt base
05	TS pillow block - adapter sleeve, floating type B, 2-bolt base
06	TS pillow block - adapter sleeve floating, type B, 4-bolt base
07	SAF 222 pillow block, spherical roller bearing, 2-bolt base
08	SAF 222 pillow block, spherical roller bearing, 4-bolt base
09	SAF 223 pillow block, spherical roller bearing, 2-bolt base
10	SAF 223 pillow block, spherical roller bearing, 4-bolt base
11	SS pillow block, clamp sleeve, fixed, 2-bolt base
12	SS pillow block, clamp sleeve, fixed, 4-bolt base
13	SS pillow block, clamp sleeve, floating-type A, 2-bolt base
14	SS pillow block, clamp sleeve, floating-type A, 4-bolt base
15	SS pillow block, clamp sleeve, floating-type B, 2-bolt base
16	SS pillow block, clamp sleeve, floating-type B, 4-bolt base
17	SAF 225A pillow block, spherical roller bearing, 2-bolt base
18	SAF 225A pillow block, spherical roll bearing, 4-bolt base
19	SAF 226A pillow block, spherical roller bearing, 2-bolt base
20	SAF 226A pillow block, spherical roller bearing, 4-bolt base
21	DM type J pillow block, direct mounted, fixed, 2-bolt base
22	DM type J pillow block, direct mounted, fixed 4-bolt base
23	DM type J pillow block, direct mounted, closed end, fixed, 2-bolt base
24	DM type J pillow block, direct mounted, closed end, fixed, 4-bolt base
25	DM type J pillow block, direct mounted, floating-type A, 2-bolt base
26	DM type J pillow block, direct mounted, floating-type A, 4-bolt base
27	DM type J pillow block, direct mounted, closed end, floating-type A, 2-bolt base
28	DM type J pillow block, direct mounted, closed end, floating-type A, 4-bolt base
29	DM type J pillow block, direct mounted, floating-type B, 2-bolt base
30	DM type J pillow block, direct mounted, floating-type B, 4-bolt base
31	DM type J pillow block, direct mounted, closed end, floating-type B, 2-bolt base
32	DM type J pillow block, direct mounted, closed end, floating-type B, 4-bolt base
33	DM type S pillow block, direct mounted, fixed, 2-bolt base
34	DM type S pillow block, direct mounted, fixed, 4-bolt base
35	DM type S pillow block, direct mounted, floating-type A, 2-bolt base
36	DM type S pillow block, direct mounted, floating-type A, 4-bolt base
37	DM type S pillow block, direct mounted, floating-type B, 2-bolt base
38	DM type S pillow block, direct mounted, floating-type B, 4-bolt base
39	SDAF 222 pillow block, spherical roller bearing, 4-bolt base
40	SDAF 223 pillow block, spherical roller bearing, 4-bolt base
41	SDAF 225A pillow block, spherical roller bearing, 4-bolt base
42	SDAF 226A pillow block, spherical roller bearing, 4-bolt base
47	SS take-up unit, clamp sleeve
49	SS clamp sleeve, hanger box
51	SS clamp sleeve, cylindrical unit mounts
52	SS clamp sleeve, four point adjustable unit mounts

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Code	Series
53	SS clamp sleeve, self aligning, floating unit mounts
54	SS clamp sleeve, self aligning, fixed unit mounts
61	SS clamp sleeve, rigid flange cartridge
63	SS clamp sleeve, self aligning, flange unit fixed
64	SS clamp sleeve, self aligning, flange unit, floating

8.1.13 W. A. Jones Foundry and Machine Co. (Hewitt-Robins) Manufacturer's code 59 shall be as follows:

Code	Series
01	Pillow block, non-expansion, adapter sleeve 2-bolt base
02	Pillow block, non-expansion, adapter sleeve 4-bolt base
03	Pillow block, expansion, adapter sleeve 2-bolt base
04	Pillow block, expansion, adapter sleeve 4-bolt base
11	Adapter sleeve, spherical, unit mount
13	Adapter sleeve, cylindrical, unit mount

8.1.14 Palmer Bee Manufacturer's code 60 shall be as follows:

Code	Series
01	P900 pillow block - timken tapered roller bearing - adapter sleeve - fixed - 2-bolt base
02	P400 pillow block normal duty - shafer roller bearing
03	P300 pillow block - standard duty - single fafnir ball bearing
04	P450 pillow block - standard duty - Shafer roller bearing - 4-bolt base.
06	P350 pillow block - heavy duty - single fafnir ball bearing
09	F400 flange unit - normal duty - Shafer roller bearing
11	P250 pillow block - heavy duty - double Fafnir ball bearing
12	P900 pillow block - timken tapered roller bearing - adapter sleeve - fixed - 4-bolt base
13	P900 Timken tapered roller bearing - cylindrical, unit mounts
14	P900 pillow block - Timken tapered roller bearing - adapter sleeve - floating - 4-bolt base
17	HB900 hanger box - double Shafer roller bearing
19	P200 pillow block - standard duty - double Fafnir ball bearing
21	P900 Timken tapered roller bearing - spherical, unit mounts
23	P450 pillow block - standard duty - Shafer roller bearing - 2 bolt base
28	HB400 hanger box - standard duty - double Fafnir ball bearing
29	HB450 hanger box - heavy duty - double Fafnir ball bearing
33	P900 pillow block - Timken tapered roller bearing - adapter sleeve - floating - 2-bolt base
91	P100 pillow block - Hyatt roller bearing - self-aligning
92	HB200 hanger box - split Hyatt roller bearing

8.1.15 Boston Gear Works, Manufacturer's code 62 shall be as follows:

Code	Series
01	L - pillow block - low base
03	H - pillow block - high base
15	F - four bolt - flanged cartridge
50	A - adjustable shaft support
52	SRB-00 - plain type
56	T - two bolt flanged cartridge

8.1.16 Royersford Foundry and Machine Co. Inc., Manufacturer's code 63 shall be as follows:

Code	Series
01	Pillow block - "Sells" split roller bearing - 2-bolt base
02	Pillow block - "Sells" split roller bearing - 4-bolt base
11	Hanger box - "Sells" split roller bearing - single structure
12	Hanger box - "Sells" split roller bearing - double structure

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

8.1.17 Nice Ball Bearing Manufacturer's code 65 shall be as follows:

Code	Series
01	F100 - pressed flanged housing

8.1.18 Browning Manufacturing Co. - Manufacturer's code 66 shall be as follows:

Code	Series
01	PB200 pillow block - low shaft - malleable housing - 2-bolt base
02	PB201 pillow block - high shaft - malleable housing - 2-bolt base
03	FB200 flange block - malleable housing eccentric locking collar - 4-bolt base
04	FB210 flange block - malleable housing eccentric locking collar - 2-bolt base
05	PB251 pillow block - high shaft - malleable housing - 2-bolt base
06	B100 adapter - bearing
07	B150 adapter - bearing
08	B200 eccentric locking collar - bearing
09	B220 eccentric locking collar - bearing
10	B250 setscrew locking collar - bearing
11	B350 adapter bearing - medium - setscrew locking
12	C950 flange cartridge - eccentric locking collar
13	FB100 flange block - malleable housing 2-bolt base
14	FB110 flange block - malleable housing 2-bolt base
15	FB150 flange block - malleable housing 3-bolt base
16	FB160 flange block, malleable housing 2-bolt base.
17	FB220 flange block, malleable housing eccentric locking collar - 4-bolt base
18	FB230 flange block - malleable housing eccentric locking collar - 2-bolt base
19	FB250 flange block - malleable housing setscrew locking - 4-bolt base
20	FB260 flange block - malleable housing setscrew locking - 2-bolt base
21	FB350 flange block - medium - malleable housing - 4-bolt base
22	FB900 flange block - malleable housing 4-bolt base
23	FB950E flange block - expansion type - 4-bolt base
24	FB950NE flange block - non-expansion type 4-bolt base
25	FC350 flange cartridge - medium - cast iron housing - 4-bolt base
26	FC900 flange cartridge - cast iron housing 4-bolt base
27	PB100 pillow block - high shaft - malleable housing - 2-bolt base
28	PB100L pillow block - low shaft - malleable housing - 2-bolt base
29	PB150 pillow block - high shaft - malleable housing - 2-bolt base
30	PB150L pillow block - low shaft - malleable housing - 2-bolt base
31	PB220 pillow block - low shaft - malleable housing - 2-bolt base
32	PB221 pillow block - high shaft - malleable housing - 2-bolt base
33	PB250 pillow block - low shaft - malleable housing - 2-bolt base
34	PB350 pillow block - medium - malleable housing - 2-bolt base
35	PB900 pillow block - tapered rollers - malleable - eccentric locking collar - 2-bolt base
36	PB950E pillow block - expansion type - malleable housing - 2-bolt base
37	PB950NE pillow block - non-expansion type - malleable housing - 2-bolt base
38	T200 take-up unit - side mounting frame
39	T210 take-up unit - protected screw type frame
40	TU200 take-up unit - malleable housing - eccentric locking collar
41	TU220 take-up unit - malleable housing eccentric locking collar
42	TU250 take-up unit - malleable housing setscrew locking collar
43	TU350 take-up unit - medium - malleable housing - setscrew locking

8.1.19 Marlin Rockwell Co., Manufacturer's code 69 shall be as follows:

Code	Series
01	PB - pillow block, medium duty
02	PZ - pillow block, medium duty
03	GT - pillow block, medium duty, relub. fitting
04	GR - pillow block, medium duty, relub. fitting
05	LB - flange unit, medium duty, 4-bolt

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Code	Series
06	LZ - flange unit, medium duty, 4-bolt
07	UT - flange unit, medium duty, 4-bolt, relub, fitting
08	UR - flange unit, medium duty, 4-bolt, relub. fitting
09	MS-3 - pressed steel flange unit, 3-bolt
10	MS-4 - pressed steel flange unit, 4-bolt
11	GMS-3 - pressed steel flange unit, 3-bolt, relub. fitting
12	GMS-4 - pressed steel flange unit, 4-bolt

8.1.20 Fafnir Bearing Co., Manufacturer's code 61 shall be as follows:

Code	Series
02	GPFD, flange cartridge, standard series
04	GPFDR, flange cartridge, standard series
06	GPFTD, flange cartridge, standard series, 2-bolt base
08	GPFTDR, flange cartridge, standard series, 2-bolt base
10	GPKD, pillow block, ductile iron type, 2-bolt base
12	GPSD, pillow block, ductile iron type, 2-bolt base
14	GRA, flangette, plya-seal type
16	GRFD, flange cartridge, standard series
18	GRFDR, flange cartridge, standard series
20	GRFTD, flange cartridge, standard series, 2-bolt base
22	GRFTDR, flange cartridge, standard series, 2-bolt base
24	GRKD, pillow block, ductile iron type, 2-bolt base
26	GRSD, pillow block, ductile iron type, 2-bolt base
28	RA, flangette, plya-seal type
30	RABR, spherical O.D. cartridge, molded rubber housing
32	RAK, pillow block, standard series, 2-bolt base
34	RAKH, pillow block, standard series, 2-bolt base
36	RAKHL, pillow block, floating, standard series, 2-bolt base
38	RAO, pillow block, heavy series 2-bolt base
40	RAS, pillow block, standard series 2-bolt base
42	RASC, pillow block, with concentric collar, 2-bolt base
44	RAT, flangette, two-bolt type
45	RATR, flangette, triangular, plya-seal type
46	RBG, pillow block, molded rubber housing, 2-bolt base
48	RBGF, flange cartridge, molded rubber housing, 4-bolt base
50	RBGU, pillow block, molded rubber housing, 2-bolt base
52	RC, cylindrical cartridge, standard series
54	RCJ, flange cartridge, standard series 4-bolt base
56	RCJC, flange unit, with concentric collar, 4-bolt base
58	RCJO, flange cartridge, heavy series, 4-bolt base
60	RCJT, flange cartridge, standard series, 2-bolt base
62	RCJTC, flange unit, with concentric collar, 2-bolt base
64	RCR, cylindrical cartridge, molded rubber housing
66	RCSM, cylindrical cartridge, molded rubber housing
68	RFC, piloted flange, with concentric collar, 4-bolt base
70	RFD, flange cartridge, standard series
72	RFDR, flange cartridge, standard series
74	RFTD, flange cartridge, standard series 2-bolt base
76	RFTDR, flange cartridge, standard series, 2-bolt base
78	RKD, pillow block, ductile iron type, 2-bolt base
80	RPB, pillow block, light duty, 2-bolt base
82	RR, flangette, R-seal
84	RRT, flangette, 2-bolt type
86	RRTR, flangette, triangular, R-seal type
88	RS, pillow block, molded rubber housing, 2-bolt base
90	RSA, pillow block, standard series, 2-bolt base
92	RSAO, pillow block, heavy series, 2-bolt base
94	RSC, cylindrical cartridge, molded rubber housing
96	RSD, pillow block, ductile iron type 2-bolt base
98	RSU, pillow block, molded rubber housing, 2-bolt base
99	RTU, take-up unit

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

8.1.21 Federal Bearings Co., Inc., Manufacturer's code 57 shall be as follows:

Code	Series
02	PB2000, pillow block, malleable iron casting, 2 bolt base

8.1.22 Roberts Manufacturing, Inc., Manufacturer's code 67 shall be as follows:

Code	Series
01	AG3F - Flange unit, sealed, 3-bolt
02	AG3FZ - flange unit, sealed, 3-bolt, relub fitting
10	EBA - cartridge unit, sealed, self-aligning
20	F3F - flange unit, sealed, 3-bolt
21	F3FZ - flange unit, sealed, 3-bolt, relub. fitting
30	GF - flange unit, self-aligning
31	GFZ - flange unit, self-aligning, relub. fitting
32	GP - pillow block, self-aligning
33	GPZ - pillow block, self-aligning, relub. fitting
34	GT - flange unit, self-aligning, 2-bolt
35	GTU - take-up unit, self-aligning
36	GTUF - take-up unit, self-aligning
37	GTUFZ - take-up unit, self-aligning, relub. fitting
38	GTUZ - take-up unit, self-aligning, relub. fitting
39	GTZ - flange unit, self-aligning, 2-bolt relub. fitting
40	GXP-16 - pillow block, self-aligning, no shim
50	JSF-KK - flange mount jack shaft unit
51	JSF-KT - flange mount jack shaft unit
52	JSH-KK - pillow block jack shaft unit
53	JSH-KT - pillow block jack shaft unit
54	JSP-KK - pillow block jack shaft unit
55	JSP-KT - pillow block jack shaft unit
60	RBF - flange unit, stamped
61	RFS - flange unit, self-aligning, sealed
62	RPS - pillow block, self-aligning
63	RTS - flange unit, self-aligning, sealed, 2-bolt
64	RTU - take-up unit, self-aligning, sealed
65	RTUF - take-up unit with frame
66	RXP-16 - pillow block, self-aligning, no shim
67	RX1 - hanger mount unit, sealed
68	RX2 - idler unit, sealed
80	STU - take-up unit, sealed, light duty
81	STUF - take-up unit with frame, sealed

9. MANUFACTURER'S SERIES CODE (ALPHABETICAL)

9.1 Mounted units complete with bearings. This series of code numbers for the 3rd and 4th positions of section 3 are identical to those contained in numerical sequence shown in 8.1.1 through 8.1.22.

9.1.1 SKF Industries, Inc., Manufacturer's code 50 for ball bearing units shall be as follows:

Series	Code
F - Flange - pressed steel - 3 bolt series	76
FT - Flange - pressed steel - 2 bolt series	77
FY - Flanged mounting-set screw collar 4-bolt base	78
FYP - Flange unit - 4 bolt series	75
FYTP - Flange unit - 2 bolt series	74
FY-X - Flanged Mounting - eccentric lock-4 bolt base	71
GP - Cylindrical cartridge	20
RP - Cylindrical cartridge	21
SAF-1300 pillow block-fixed	09
SAF-1300 pillow block-fixed-closed end	59
SAF-1300 pillow block-floating	17
SAF-1300 pillow block-floating-closed end	69
SAF-1500 pillow block-fixed	03
SAF-1500 pillow block-fixed-closed end	53

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Series	Code
SAF-1500 Pillow block-floating .	11
SAF-1500 Pillow block floating-closed end	63
SAF-1600 Pillow block-fixed	07
SAF-1600 Pillow block-fixed-closed end	57
SAF-1600 Pillow block-floating	15
SAF-1600 Pillow block-floating-closed end	67
SP Pillow block-pressed steel-2 bolt base	22
SRP - Pillow block-pressed steel-rubber insert-2 bolt base	23
SY - Pillow block-set screw collar 2 bolt base	72
SYHP - Pillow block-2 bolt base	24
SYH-X - pillow block-eccentric lock-2 bolt base	73
SYP - Pillow block-2 bolt base	25
TB - Take-up unit	26
TBP - Take-up unit	27
TBX - Take-up unit	28

9.1.2 SKF Industries, Inc., Manufacturers' code 50 for roller bearing units shall be as follows:

Series	Code
FYR - Flanged mounting unit, fixed, labyrinth seal	01
FYR - Flanged mounting unit, fixed, contact seals	09
FYR - Flanged mounting unit, floating, labyrinth seal	02
FYR - Flanged mounting unit, floating, contact seals	10
FYRP - Flanged mounting unit, fixed, labyrinth seal	03
FYRP - Flanged mounting unit, fixed, contact seals	27
FYRP - Flanged mounting unit, floating, labyrinth seal	04
FYRP - Flanged mounting unit, floating, contact seals	28
SAF-22200 Pillow block, fixed	13
SAF-22200 Pillow block, fixed, closed end	63
SAF-22200 Pillow block, floating	38
SAF-22200 Pillow block, floating, closed end	88
SAF-22300 Pillow block, fixed	17
SAF-22300 Pillow block, fixed, closed end	67
SAF-22300 Pillow block, floating	42
SAF-22300 Pillow block, floating, closed end	92
SAF-22500 Pillow block, fixed	11
SAF-22500 Pillow block, fixed, closed end	61
SAF-22500 Pillow block, floating	36
SAF-22500 Pillow block, floating, closed end	86
SAF-22600 Pillow block, fixed	15
SAF-22600 Pillow block, fixed, closed end	65
SAF-22600 Pillow block, floating	40
SAF-22600 Pillow block, floating, closed end	90
SAF-23000K Pillow block, fixed, 4 bolt base	12
SAF-23000K Pillow block, fixed, closed end, 4 bolt base	62
SAF-23000K Pillow block, floating, 4 bolt base	14
SAF-23000K pillow block, floating, closed end, 4 bolt base	64
SAFS-22200 Pillow block, fixed	16
SAFS-22200 Pillow block, fixed, closed end	66
SAFS-22200 Pillow block, floating	18
SAFS-22200 Pillow block, floating, closed end	68
SAFS-22500 Pillow block, fixed	23
SAFS-22500 Pillow block, fixed, closed end	73
SAFS-22500 Pillow block, floating	24
SAFS-22500 Pillow block, floating, closed end	74
SDAF-22200 Pillow block, fixed, 4 bolt base	20
SDAF-22200 Pillow block, fixed, closed end, 4 bolt base	70
SDAF-22200 Pillow block, floating, 4 bolt base	45
SDAF-22200 Pillow block, floating, closed end, 4 bolt base	95
SDAF-22300 Pillow block, fixed, 4 bolt base	22
SDAF-22300 Pillow block, fixed, closed end, 4 bolt base	72
SDAF-22300 Pillow block, floating, 4 bolt base	47
SDAF-22300 Pillow block, floating closed end, 4 bolt base	97
SDAF-22500 Pillow block, fixed, 4 bolt base	19
SDAF-22500 Pillow block, fixed, closed end, 4 bolt base	69

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Series	Code
SDAF-22500 Pillow block, floating 4 bolt base	44
SDAF-22500 Pillow block, floating, closed end, 4 bolt base	94
SDAF-22600 Pillow block, fixed, 4 bolt base	21
SDAF-22600 Pillow block, fixed, closed end, 4 bolt base	71
SDAF-22600 Pillow block, floating, 4 bolt base	46
SDAF-22600 Pillow block, floating, closed end, 4 bolt base	96
SDAF-23000K Pillow block, fixed, 4 bolt base	25
SDAF-23000K Pillow block, fixed, closed end, 4 bolt base	75
SDAF-23000K Pillow block, floating, 4 bolt base	26
SDAF-23000K Pillow block, floating closed end, 4 bolt base	76
SYR Pillow block, fixed, labyrinth seal	05
SYR Pillow block, fixed, contact seals, 2 bolt base	29
SYR - Pillow block, floating, labyrinth seal	06
SYR - Pillow block, floating, contact seals, 2 bolt base	30
SYRS - Pillow block, fixed, labyrinth seal	07
SYRS - Pillow block, fixed, contact seals, 2 bolt base	31
SYRS - Pillow block, floating, labyrinth seal	08
SYRS - Pillow block, floating, contact seals, 2 bolt base	32

9.1.3 Rafnir Bearing Co., Manufacturers' code 51 shall be as follows:

Series	Code
C - Cylindrical cartridge, standard series	20
CO - Cylindrical cartridge, heavy series	21
DRN - Double pillow block, double rigid, 4 bolt base	56
DSA - Double pillow block, standard series, 2 bolt base	09
DSADD - Double pillow block, standard series, 2 bolt base	10
DSAO - Double pillow block, heavy series, 2 bolt base	11
DSAODD - Double pillow block, heavy series, 2 bolt base	12
F - Lineshaft or hanger box unit	28
FLCT - Flange cartridge, cast iron type, 2 bolt base	58
LAK - Pillow block, standard series, self-aligning, 2 bolt base	01
LAKH - Pillow block, standard series, 2 bolt base	62
LAKHL - pillow block, floating, standard series, 2 bolt base	61
LAO - Pillow block, heavy series, 2 bolt base	47
LAS - Pillow block, standard series, 2 bolt base	53
LC - Cylindrical cartridge, standard series	19
LCJ - Flange cartridge, standard series, 4 bolt base	16
LCJO - Flange cartridge, heavy series 4 bolt base	57
LCJT - Flange cartridge, standard series, 2 bolt base	63
LL - Flangette, triangular, 3 bolt base	48
LLT - Flangette, 2 bolt base	64
LSA - Pillow block, standard series, 2 bolt base	49
LSAO - Pillow block, heavy series, 2 bolt base	54
LTU - Take-up unit	65
MC - Motor cartridge, closed end	23
MC - Motor cartridge, open end	22
MC - Motor cartridge, pairs	24
MSTU - Take-up unit, pressed steel type	66
NLTU - take-up frame, pressed steel, side mounted	67
PB - Pillow block, light duty, 2 bolt base	51
PBS - Pillow block, light duty, pressed steel type	55
PFD - Flange cartridge, standard series	35
PFDR - Flange cartridge, standard series	36
PFTD - Flange cartridge, standard series, 2 bolt base	37
PFTDR - Flange cartridge, standard series, 2 bolt base	38
PKD - Pillow block, ductile iron type, 2 bolt base	39
PSD - Pillow block, ductile iron type, 2 bolt base	68
SA - Pillow block, standard series, 2 bolt base	03
SAD - Pillow block, standard series, 2 bolt base	04
SADD - Pillow block, standard series, 2 bolt base	05
SAK - Pillow block, standard series	02
SAL - Pillow block, fixed, standard series, 2 bolt base	13
SAL - Pillow block, floating, standard series, 2 bolt base	43
SAO - Pillow block, heavy series	06
SAOD - Pillow block, heavy series	07
SAODD - Pillow block, heavy series	08

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Series	Code
SAOL - Pillow block, fixed, heavy series	14
SAOL - Pillow block, floating, heavy series	44
SCS - Countershaft box, single unit	33
SSS - Countershaft box	34
TAK - Pillow block, standard series, 2 bolt base	15
TAS - Pillow block, standard series, 2 bolt base	17
TCJ - Flange cartridge, standard series, 4 bolt base	29
TCJT - Flange cartridge, standard series, 2 bolt base	30
TU - Take-up unit	25
TU - Take-up frame	26
Pulley, idler, V belt, ball bearing	70
Pulley, idler, flat belt, ball bearing	71
Pulley, idler, chain belt, ball bearing	72
Sprocket, idler, ball bearing	73

9.1.4 Stephens-Adamson, Manufacturers' code 52 (sealmaster) shall be as follows:

Series	Code
CRP - Pillow block, rubber mounted, 2 bolt base	40
FMP - Pillow block, expansion type, 2 bolt base	04
FB - Flange bracket, single lock, 3 bolt base	41
FMP -	03
HB -	13
LF - Flange unit, malleable, 3 bolt base	43
LFT - Flange unit, malleable, 2 bolt base	39
LP - Pillow block, malleable, 2 bolt base	38
LRCS - Cartridge unit, rubber cushioned	44
LRP - Pillow block, stamped steel, 2 bolt base	45
MFC - Flange cartridge unit, 4 bolt	30
MFP - Pillow block, medium duty, 4 bolt base	29
MFPD - Pillow block, medium duty, 4 bolt base	46
MP - Pillow block, medium duty, 2 bolt base	05
MSC - Cartridge unit, medium duty	11
MSF - Flange unit, medium duty, 4 bolt base	07
MSFD - Flange unit, medium duty, 4 bolt base	47
MSFPD - Pillow block, double lock, 4 bolt base	48
MSFT - Flange unit, medium duty, 2 bolt base	36
MSPD - Pillow block, double lock, 2 bolt base	49
MST - Take-up unit, medium duty	09
NP - Pillow block, normal duty, 2 bolt base	01
NPD - Pillow block, double lock, 2 bolt base	33
NPG-00-6 - Take-up unit, protected screw	14
NPG-00-9 - Take-up unit, protected screw	15
NPG-00-12 - Take-up unit, protected screw	16
NPG-00-18 - Take-up unit, protected screw	17
RPB -	42
SC - Cartridge unit, standard duty	10
SCHB - Hanger bearing for screw conveyors	12
SEHB - Hanger bearing for eccentric drives	31
SF - Flange unit, standard duty, 4 bolt base	06
SFC - Flange cartridge, standard duty, 4 bolt base	50
SFT - Flange unit, standard duty, 2 bolt base	32
SP - Pillow block, standard duty, 2 bolt base	02
SPD - Pillow block, double lock, 2 bolt base	35
SPG-00-12 - Take-up unit, protected screw	18
SPG-00-18 - Take-up unit, protected screw	19
SRC - Cartridge unit, rubber mounted	51
SRF - Flange unit, rubber mounted, 2 bolt base	37
SRP - Pillow block, rubber mounted, 2 bolt base	52
SSF - Flange, stamped steel, 3 bolt	53
SSFF - Flange unit, stamped steel, 4 bolt	54
SSFT - Flange unit, stamped steel, 2 bolt	55
SSP - Pillow block, stamped steel, 2 bolt base	56
ST - Take-up unit, standard duty	08
STH-00-6 - Take-up unit, steel frame	20
STH-00-9 - Take-up unit, steel frame	21

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Series	Code
STH-00-12 - Take-up unit, steel frame	22
STH-00-18 - Take-up unit, steel frame	23
S500M - Pillow block, 2 bolt base	34
TB - Pillow block, tapped base	57
TSSF - Flange unit, stamped steel, 3 bolt base	58
Type 9-24	24
Type 9-30	25
Type 9-36	26
Type 9-42	27
Type 9-48	28

9.1.5 Rex Chain Belt (Shafer and Rex-Shafer) Manufacturers' code 53 shall be as follows:

Series	Code
A-000	01
A-2000	02
APR-2000	80
APR-2000F	81
APS-2000	82
APS-2000F	83
B-2000	09
BPR-2000	84
BPR-2000F	85
BPS-2000	86
BPS-2000F	87
BR-000	10
C-000-CN-000-CL-000	11
DSA400-12	12
DSA400-18	13
DSA400-24	14
DSA400-30	15
FA-2000, fixed	30
FB-2000, floating	31
FC-2000	22
FS-000	21
L-2000	18
MA-2000, fixed	68
MB-2000, floating	69
MS-000-ML-000	24
N-2000	33
N-2000, fixed	76
N-2000C	34
N-2000C	77
NT3-000-6	40
NT3-000-6C	35
NT3-000-9	41
NT3-000-9C	36
NT3-000-12	42
NT3-000-12C	37
NT3-000-18	43
NT3-000-18C	38
PA-2000, fixed	26
PA-2000F, fixed	27
PAC-000	20
PB-2000, floating	28
PB-2000F, floating	29
PD-0000, fixed	44
PD-0000-C, fixed	45
PD-0000-F, fixed	46
PD-0000-FC, fixed	47
PE-0000, floating	48
PE-0000-C, floating	49
PE-0000-F, floating	50
PE-0000-FC, floating	51
PR-000-PL-000	03
PR-000F-PL-000F	04
PR-2000	05

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Series	Code
PR-2000F	06
PS-2000	07
PS-2000F	08
PW-000-PW-2000	58
PWE-000-PWE-2000	59
QM-2000	60
QM-2000, fixed	70
QM-2000C	61
QM-2000C, fixed	71
QN-2000	62
QN-2000, fixed	72
QN-2000C	63
QN-2000C, fixed	73
RD-2000	78
RN-2000	64
RN-2000, fixed	74
RN-2000C	65
RN-2000C, fixed	75
SC-000-SC-2000	56
SCE-000-SCE-2000	57
SF-000-SF-2000	54
SFE-000-SFE-2000	55
SP-000-SP-2000	52
SPE-000-SPE-2000	53
TR-000-TL-000	23
ZA-000	19
ZB-000	79
ZB2000	66
ZB2000C	67
ZBR	92
ZC-000	88
ZF-000	17
ZMX	39
ZN-000	16
ZP-000	90
ZP-000F	89
ZPS-000	91
ZY-22500A	32

9.1.6 Link Belt Co., Manufacturers' code 54 for ball bearing units shall be as follows:

Series	Code
C300 - Cartridge unit, fixed	09
C300C - Cartridge unit, fixed, closed end	11
CE300 - Cartridge unit, floating	10
CE300C - Cartridge unit, floating, closed end	12
F200 - Flanged unit, fixed	46
F200C - Flanged unit, fixed, closed end	47
F3-U200H - Flanged unit, fixed	74
F3-U200HC - Flanged unit, fixed, closed end	75
F3-U200N - Flanged unit fixed	13
F3-U200NC - Flanged unit, fixed, closed end	14
F3-Y200H - Flanged unit, fixed	15
F3-Y200HC - Flanged unit, fixed, closed end	16
F3-Y200N - Flanged unit, fixed	21
F3-Y200NC - Flanged unit, fixed, closed end	22
F300 - Flanged unit, fixed	01
F300C - Flanged unit, fixed, closed end	03
FCE300 - Flanged cartridge unit, floating	06
FCE300C - Flanged cartridge unit, floating, closed end	08
FC200 - Flanged cartridge unit, fixed	80
FC200C - Flanged cartridge unit, fixed, closed end	23
FC3-U200H - Flanged cartridge unit, fixed	24
FC3-U200HC - Flanged cartridge unit, fixed, closed end	29
FC3-U200N - Flanged cartridge unit, fixed	30
FC3-U200NC - Flanged cartridge unit, fixed closed end	31

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Series	Code
FC3-Y200H - Flanged cartridge unit, fixed	32
FC3-Y200HC - Flanged cartridge unit, fixed, closed end	33
FC3-Y200N - Flanged cartridge unit, fixed	34
FC3-Y200NC - Flanged cartridge unit, fixed, closed end	39
FC300 - Flanged cartridge unit, fixed	05
FC300C - Flanged cartridge unit, fixed, closed end	07
FE300 - Flanged unit, floating	02
FE300C - Flanged unit, floating, closed end	04
FF200 - Flanged unit, fixed	44
FR-WG200U - Flanged unit, fixed	45
FR-W200U - Flanged unit, fixed	49
FR-YG200N - Flanged unit, fixed	50
FR-Y200N - Flanged unit, fixed	52
F-WG200U - Flanged unit, fixed	53
F-W200U - Flanged unit, fixed	55
FXR-WG200U - Flanged unit, fixed	56
FXR-W200U - Flanged unit, fixed	58
FXR-YG200N - Flanged unit, fixed	59
FXR-Y200N - Flanged unit, fixed	61
FX-WG200U - Flanged unit, fixed	62
FX-W200U - Flanged unit, fixed	64
FX-YG200N - Flanged unit, fixed	65
FX-Y200N - Flanged unit, fixed	67
FX3-U200H - Flanged unit, fixed	70
FX3-U200HC - Flanged unit, fixed, closed end	71
FX3-U200N - Flanged unit, fixed	72
FX3-U200H - Flanged unit, fixed, closed end	73
FX3-Y200H - Flanged unit, fixed	76
FX3-Y200HC - Flanged unit, fixed, closed end	77
FX3-Y200N - Flanged unit, fixed	78
FX3-Y200NC - Flanged unit, fixed, closed end	79
F-YG200N - Flanged unit, fixed	82
F-Y200N - Flanged unit, fixed	84
LPE200 - Pillow block, floating	18
LPE200C - Pillow Block, floating, closed end	20
LPE300 - Pillow block, floating	26
LPE300C - Pillow block, floating, closed end	28
LP200 - Pillow block, fixed	17
LP200C - Pillow block, fixed, closed end	19
LP300 - Pillow block, fixed	25
LP300C - Pillow block, fixed, closed end	27
NT3-U200H-6 - fixed	40
NT3-U200HC-6 - fixed, closed end	35
NT3-U200H-9 - fixed	41
NT3-U200HC-9 - fixed, closed end	36
NT3-U200H-12 - fixed	42
NT3-U200HC-12 - fixed, closed end	37
NT3-U200H-18 - fixed	43
NT3-U200HC-18 - fixed, closed end	38

9.1.7 Link Belt Co., Manufacturers' code 64 for ball bearing units shall be as follows:

Series	Code
P200 - Pillow block, fixed	44
P200C - Pillow block, fixed, closed end	45
P2-300 - Pillow block, fixed	74
P2-300C - Pillow block, fixed, closed end	73
P3-U200H - Pillow block, fixed	70
P3-U200HC - Pillow block, fixed, closed end	71
P3-U200N - Pillow block, fixed	72
P3-U200NC - Pillow block, fixed, closed end	69
P3-Y200H - Pillow block, fixed	68
P3-Y200HC - Pillow block, fixed, closed end	67
P3-Y200N - Pillow block, fixed	66
P3-Y200NC - Pillow block, fixed closed end	65

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Series	Code
P300 - Pillow block, fixed	54
P300C - Pillow block, fixed, closed end	56
PE300 - Pillow block, floating	55
PE300C - Pillow block, floating, closed end	57
PH3-U200H - Pillow block, fixed	64
PH3-U200HC - Pillow block, fixed, closed end	63
PH3-U200N - Pillow block, fixed	62
PH3-U200NC - Pillow block, fixed, closed end	61
PH3-Y200H - Pillow block, fixed	60
PH3-Y200HC - Pillow block, fixed, closed end	53
PH3-Y200N - Pillow block, fixed	50
PH3-Y200NC - Pillow block, fixed, closed end	47
PL-WG200U - Pillow block, fixed	46
PL-W200U - Pillow block, fixed	42
PL-YG200N - Pillow block, fixed	41
PL-Y200N - Pillow block, fixed	39
PL3-U200H - Pillow block, fixed	38
PL3-U200HC - Pillow block, fixed, closed end	37
PL3-U200N - Pillow block, fixed	36
PL3-U200NC - Pillow block, fixed, closed end	35
PL3-Y200H - Pillow block, fixed	34
PL3-Y200HC - Pillow block, fixed, closed end	33
PL3-Y200N - Pillow block, fixed	32
PL3-Y200NC - Pillow block, fixed, closed end	31
PS-W200U - Pillow block, fixed	28
PS-Y200N - Pillow block, fixed	27
P-WG200U - Pillow block, fixed	26
P-W200U - Pillow block, fixed	24
P-YG200N - Pillow block, fixed	23
P-Y200N - pillow block, fixed	21
T3-U200H - Take-up unit, fixed	76
T3-U200HC - Take-up unit, fixed, closed end	77
T3-U200N - Take-up unit, fixed	20
T3-U200NC - Take-up unit, fixed, closed end	19
T3-Y200H - Take-up unit, fixed	18
T3-Y200HC - Take-up unit, fixed, closed end	17
T3-Y200N - Take-up unit, fixed	16
T3-Y200NC - Take-up unit, fixed, closed end	15
T300 - Take-up unit, fixed	58
T300C - Take-up unit, fixed, closed end	59
TAS3-U200H - Take-up unit, fixed	51

9.1.8 Link Belt Co., Manufacturers' code 54 for roller bearing units shall be as follows:

Series	Code
C-B22400A - Cartridge unit, fixed	16
C-B22400AC - Cartridge unit, fixed, closed end	17
C-B22400E - Cartridge unit, fixed	18
C-B22400EC - Cartridge unit, fixed, closed end	19
C-B22400H - Cartridge unit, fixed	03
C-B22400HC - Cartridge unit, fixed, closed end	04
CS-B22400A - Cartridge unit, fixed	21
CS-B22400E - Cartridge unit, fixed	22
CS-B22400H - Cartridge unit, fixed	23
CS-B22500H - Cartridge unit, fixed	75
CSE-B22400A - Cartridge unit, floating	25
CSE-B22400E - Cartridge unit, floating	26
CSE-B22400H - Cartridge unit, floating	27
DS-B22400H-12	12
DS-B22400H-18	13
DS-B22400H-24	14
DS-B22400H-30	15
DSH-B22500H-12	76
DSH-B22500H-18	77
DSH-B22500H-24	78

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Series	Code
DSH-B22500H-30	79
DS-LB6800H-12	32
DS-LB6800H-18	33
DS-LB6800H-24	34
DS-LB6800H-30	35
F-B22400A - Flanged unit, fixed	28
F-B22400AC - Flanged unit, fixed, closed end	29
F-B22400E - Flanged unit, fixed	30
F-B22400EC - Flanged unit, fixed, closed end	31
F-B22400H - Flanged unit, fixed	09
F-B22400HC - Flanged unit, fixed, closed end	11
FC-B22400A - Flanged cartridge, fixed	36
FC-B22400AC - Flanged cartridge, fixed, closed end	37
FC-B22400E - Flanged cartridge, fixed	38
FC-B22400EC - Flanged cartridge, fixed, closed end	39
FC-B22400H - Flanged cartridge, fixed	10
FC-B22400HC - Flanged cartridge, fixed, closed end	40
FE-B22400A - Flanged unit, floating	41
FE-B22400E - Flanged unit, floating	42
FE-B22400H - Flanged unit, floating	43
P-B22400A - Pillow block, fixed	44
P-B22500A - Pillow block, fixed	45
P-B22400AC - Pillow block, fixed, closed end	46
P-B22500AC - Pillow block, fixed, closed end	47
P-B22400E - Pillow block, fixed	48
P-B22500E - Pillow block, fixed	49
P-B22400EC - Pillow block, fixed, closed end	50
P-B22500EC - Pillow block, fixed, closed end	51
P-B22400FA - Pillow block, fixed	52
P-B22500FA - Pillow block, fixed	53
P-B22400FAC - Pillow block, fixed, closed end	54
P-B22500FAC - Pillow block, fixed, closed end	55
P-B22400FE - Pillow block, fixed	56
P-B22500FE - Pillow block, fixed	57
P-B22400FEC - Pillow block, fixed, closed end	58
P-B22500FEC - Pillow block, fixed, closed end	59
P-B22400FH - Pillow block, fixed	60
P-B22500FH - Pillow block, fixed	06
P-B22400FHC - Pillow block, fixed, closed end	61
P-B22500FHC - Pillow block, fixed, closed end	62
P-B22400H - Pillow block, fixed	02
P-B22500H - Pillow block, fixed	05
P-B22400HC - Pillow block, fixed, closed end	63
P-B22500HC - Pillow block, fixed, closed end	64
PE-B22400A - Pillow block, floating	65
PE-B22500A - Pillow block, floating	66
PE-B22400E - Pillow block, floating	67
PE-B22500E - Pillow block, floating	68
PE-B22400FA - Pillow block, floating	69
PE-B22500FA - Pillow block, floating	70
PE-B22400FE - Pillow block, floating	71
PE-B22500FE - Pillow block, floating	72
PE-B22400FH - Pillow block, floating	73
PE-B22500FH - Pillow block, floating	08
PE-B22400H - Pillow block, floating	74
PE-B22500H - Pillow block, floating	07

9.1.9 Link Belt Company, Manufacturers's code 64 for roller bearing units shall be as follows:

Series	Code
PE-LB6800A - Pillow block, floating	60
PE-LB6900A - Pillow block, floating	61
PE-LB7600A - Pillow block, floating	62
PE-LB7800A - Pillow block, floating	63
PE-LB7900A - Pillow block, floating	64

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Series	Code
PE-LB6800AC - Pillow block, floating, closed end	65
PE-LB6900AC - Pillow block, floating, closed end	66
PE-LB7600AC - Pillow block, floating, closed end	67
PE-LB7800AC - Pillow block, floating, closed end	68
PE-LB7900AC - Pillow block, floating, closed end	69
PE-LB6600FA - Pillow block, floating	10
PE-LB6800FA - Pillow block, floating	11
PE-LB6900FA - Pillow block, floating	12
PE-LB7600FA - Pillow block, floating	13
PE-LB7600FA - Pillow block, floating	14
PE-LB7900FA - Pillow block, floating	15
PE-LB6600FAC - Pillow block, floating, closed end	25
PE-LB6800FAC - Pillow block, floating, closed end	26
PE-LB6900FAC - Pillow block, floating, closed end	27
PE-LB7600FAC - Pillow block, floating, closed end	28
PE-LB7800FAC - Pillow block, floating, closed end	29
PE-LB7900FAC - Pillow block, floating, closed end	30
PE-LB6600FH - Pillow block, floating	05
PE-LB6800FH - Pillow block, floating	06
PE-LB6900FH - Pillow block, floating	22
PE-LB7600FH - Pillow block, floating	23
PE-LB7800FH - Pillow block, floating	37
PE-LB7900FH - Pillow block, floating	54
PE-LB6600FHC - Pillow block, floating, closed end	55
PE-LB6800FHC - Pillow block, floating, closed end	08
PE-LB6900FHC - Pillow block, floating, closed end	24
PE-LB7600FHC - Pillow block, floating, closed end	21
PE-LB7800FHC - Pillow block, floating, closed end	40
PE-LB7900FHC - Pillow block, floating, closed end	56
PE-LB6800H - Pillow block, floating	02
PE-LB6900H - Pillow block, floating	18
PE-LB7600H - Pillow block, floating	17
PE-LB7800H - Pillow block, floating	34
PE-LB7900H - Pillow block, floating	50
PE-LB6800HC - Pillow block, floating, closed end	04
PE-LB6900HC - Pillow block, floating, closed end	20
PE-LB7600HC - Pillow block, floating, closed end	19
PE-LB7800HC - Pillow block, floating, closed end	36
PE-LB7900HC - Pillow block, floating, closed end	52
PK-B22400A - Pillow block, fixed	70
PK-B22500A - Pillow block, fixed	71
PK-B22400AC - Pillow block, fixed, closed end	72
PK-B22500AC - Pillow block, fixed, closed end	73
PK-B22400E - Pillow block, fixed	74
PK-B22500E - Pillow block, fixed	75
PK-B22400EC - Pillow block, fixed closed end	76
PK-B22500EC - Pillow block, fixed, closed end	77
PK-B22400FA - Pillow block, fixed	78
PK-B22500FA - Pillow block, fixed	79
PK-B22400FAC - Pillow block fixed, closed end	80
PK-B22500FAC - Pillow block, fixed, closed end	81
PK-B22400FE - Pillow block, fixed	82
PK-B22500FE - Pillow block, fixed	83
PK-B22400FEC - Pillow block, fixed, closed end	84
PK-B22500FEC - Pillow block, fixed, closed end	85
PK-B22400FH - Pillow block, fixed	86
PK-B22500FH - Pillow block, fixed	87
PK-B22400FHC - Pillow block, fixed, closed end	88
PK-B22500FHC - Pillow block, fixed, closed end	89
PK-B22400H - Pillow block, fixed	90
PK-B22500H - Pillow block, fixed	91
PK-B22400HC - Pillow block, fixed, closed end	92
PK-B22500HC - Pillow block, fixed, closed end	93
PKE-B22400A - Pillow block, floating	94
PKE-B22500A - Pillow block, floating	95
PKE-B22400E - Pillow block, floating	96
PKE-B22500E - Pillow block, floating	97
PKE-B22400FA - Pillow block, floating	98

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Series	Code
PKE-B22500FA - Pillow block, floating	99
PKE-B22400FE - Pillow block, floating	41
PKE-B22500FE - Pillow block, floating	42
PKE-B22400FH - Pillow block, floating	43
PKE-B22500FH - Pillow block, floating	44
PKE-B22400H - Pillow block, floating	45
PKE-B22500H - Pillow block, floating	46

9.1.10 Link Belt Company, Manufacturers' code 74 for roller bearing units shall be as follows:

Series	Code
PKE-LB6800FA - Pillow block, floating	40
PKE-LB7800FA - Pillow block, floating	41
PKE-LB6800FAC - Pillow block, floating, closed end	42
PKE-LB7800FAC - Pillow block, floating, closed end	43
PKE-LB6800FH - Pillow block, floating	44
PKE-LB7800FH - Pillow block, floating	45
PKE-LB6800FHC- Pillow block, floating, closed end	46
PKE-LB7800FHC - Pillow block, floating, closed end	47
PK-LB6800FA - Pillow block, fixed	24
PK-LB7800FA - Pillow block, fixed	25
PK-LB6800FAC - Pillow block, fixed, closed end	26
PK-LB7800FAC - Pillow block, fixed, closed end	27
PK-LB6800FH - Pillow block, fixed	28
PK-LB7800FH - Pillow block, fixed	29
PK-LB6800FHC - Pillow block, fixed, closed end	30
PK-LB7800FHC - Pillow block, fixed, closed end	31
P-LB6800A - Pillow block, fixed	12
P-LB6900A - Pillow block, fixed	13
P-LB7600A - Pillow block, fixed	14
P-LB7800A - Pillow block, fixed	15
P-LB7900A - Pillow block, fixed	16
P-LB6800AC - Pillow block, fixed, closed end	56
P-LB6900AC - Pillow block, fixed, closed end	57
P-LB7600AC - Pillow block, fixed, closed end	58
P-LB7800AC - Pillow block, fixed, closed end	59
P-LB7900AC - Pillow block, fixed, closed end	60
P-LB6600FA - Pillow block, fixed	61
P-LB6800FA - Pillow block, fixed	62
P-LB6900FA - Pillow block, fixed	63
P-LB7600FA - Pillow block, fixed	64
P-LB7800FA - Pillow block, fixed	65
P-LB7900FA - Pillow block, fixed	66
P-LB6600FAC - Pillow block, fixed, closed end	67
P-LB6800FAC - Pillow block, fixed, closed end	68
P-LB6900FAC - Pillow block, fixed closed end	69
P-LB7600FAC - Pillow block, fixed, closed end	70
P-LB7800FAC - Pillow block, fixed, closed end	71
P-LB7900FAC - Pillow block, fixed, closed end	72
P-LB6600FH - Pillow block, fixed	73
P-LB6800FH - Pillow block, fixed	05
P-LB6900FH - Pillow block, fixed	21
P-LB7600FH - Pillow block, fixed	20
P-LB7800FH - Pillow block, fixed	38
P-LB7900FH - Pillow block, fixed	53
P-LB6600FHC - Pillow block, fixed, closed end	06
P-LB6800FHC - Pillow block, fixed, closed end	07
P-LB6900FHC - Pillow block, fixed, closed end	23
P-LB7600FHC - Pillow block, fixed, closed end	22
P-LB7800FHC - Pillow block, fixed, closed end	39
P-LB7900FHC - Pillow block, fixed, closed end	55
P-LB6800H - Pillow block, fixed	01
P-LB6900H - Pillow block, fixed	17
P-LB7600H - Pillow block, fixed	32
P-LB7800H - Pillow block, fixed	33

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Series	Code
P-LB7900H - Pillow block, fixed	49
P-LB6800HC - Pillow Block, fixed, closed end	03
P-LB6900HC - Pillow block, fixed, closed end	19
P-LB7600HC - Pillow block, fixed, closed end	18
P-LB7800HC - Pillow block, fixed, closed end	35
P-LB7900HC - Pillow block, fixed, closed end	51
T-B22400A - Take-up unit, fixed	02
T-B22400AC - Take-up unit, fixed, closed end	04
T-B22400E - Take-up unit, fixed	08
T-B22400EC - Take-up unit, fixed, closed end	09
T-B22400H - Take-up unit, fixed	11
T-B22400HC - Take-up unit, fixed, closed end	10

9.1.11 Dodge Manufacturing Co., Manufacturers' code 55 shall be as follows:

Series	Code
Type A - Take-up unit	43
Type B - Take-up unit	44
Type C - Pillow block, 2-bolt, fixed	09
Type C - Pillow block, 4-bolt, fixed	11
Type C - Pillow block, 2-bolt floating	10
Type C - Pillow block, 4-bolt, floating	12
Type C - Flange bearing	34
Type C - Take-up bearing	35
Type C - Hanger bearing	36
Type C - Pillow block D unit only	37
Type C - Pillow block S-1 unit only	38
Type C - Pillow block B-1 unit only	39
Type E - Pillow block, 2-bolt base	48
Type E - Pillow block, 4-bolt base	49
Type E - Flange bearing	27
Type E - Take-up bearing	28
Type K - Pillow block, 2-bolt, fixed	53
Type K - Pillow block, 4-bolt, fixed	54
Type K - Pillow block, 2-bolt, floating	55
Type K - Pillow block, 4-bolt, floating	56
Type K - Pillow block S-1 unit only	57
Type K - Take-up bearing	58
Type SC - Pillow block, fixed	17
Type SC - Cylindrical unit	18
Type SC - Flange bearing, 2-bolt	19
Type SC - Flange bearing, 4-bolt	20
Type SC - Hanger bearing	21
Type SC - Hanger bearing, screw conveyor	22
Type SC - Steel end closure	23
Type SC - Take-up bearing	24
Type SC - Take-up bearing, wide slot	25
Type SC - Take-up unit	26
Type SCB - Pillow block, fixed	01
Type SCB - Steel end closure	02
Type SCM - Pillow block, fixed	59
Type SCM - Flange bearing, 2-bolt	60
Type SCM - Flange bearing, 4-bolt	61
Type SCM - Flange bearing, piloted	62
Type SCM - Steel end closure	63
Type SCM - Take-up bearing	64
Type SCM - Take-up bearing, wide slot	65
Type SCM - Take-up unit	66
Type SL - Pillow block, fixed	50
Type SL - Flange bearing, 2-bolt	51
Type SL - Flange bearing, 3-bolt	52
Type SU - Pillow block, fixed	67
Type SUP - Pillow block, fixed	05
Type SUP - Flange bearing, 2-bolt	06
Type SUP - Flange bearing, 3-bolt	07
Type SUP - Flange bearing, 4-bolt	08
Type SX - Pillow block, fixed	68

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Series	Code
Type SX - Cylindrical unit	69
Type SX - Flange bearing, 2-bolt	70
Type SX - Flange bearing, 4-bolt	71
Type SX - Hanger bearing	72
Type SX - Hanger bearing - screw conveyor	73
Type SX - Take-up bearing	74
Type SX - Take-up bearing, wide slot	75
Type SX - Take-up unit	76
Type SXB - Pillow block, fixed	45
All steel - Pillow block, fixed	77
All steel - Pillow block, floating	78
All steel - Cartridge unit, fixed	79
All steel - Cartridge unit, floating	80
Angle babbitted pillow block	81
Angle bronze bushed pillow block	82
Base plate, plain, pillow block	83
Base plate, adjustable, pillow block	84
Bronzoil pillow block	85
Bronzoil flange bearing	86
Double interlock-pillow block, fixed, 2-bolt	03
Double interlock-pillow block, fixed, 4-bolt	04
Double interlock-pillow block, floating, 2-bolt	47
Double interlock-pillow block, floating 4-bolt	46
Double interlock-pillow block, D unit only	31
Double interlock-pillow block, S-1 unit only	32
Double interlock-pillow block, B-1 unit	33
Double interlock-flange bearing, fixed	30
Double interlock-flange bearing, floating	29
Plate type flange bearing	87
Rigid babbitted pillow block	88
Rigid bronze bushed pillow block	89
Sleevoil plain pillow block	90
Sleevoil SS plain pillow block	91
Special duty pillow block, fixed, 2-bolt	13
Special duty pillow block, fixed, 4-bolt	15
Special duty pillow block, floating, 2-bolt	14
Special duty pillow block, floating, 4-bolt	16
Special duty pillow block, D unit only	40
Special duty pillow block, S-1 unit only	41
Special duty pillow block, B-1 unit only	42
Special duty flange bearing	92
Spher-align-pillow block, 2-bolt	93
Spher-align-pillow block, 4-bolt	94
Top angle take-up frame	95

9.1.12 Medart Engineer and Equipment Co., Manufacturers' code 56 shall be as follows:

Series	Code
DM type J - Pillow block, direct mounted, closed end, fixed, 2-bolt base	23
DM type J - Pillow block, direct mounted, closed end, fixed 4-bolt base	24
DM type J - Pillow block, direct mounted, closed end, floating, type A, 2-bolt base	27
DM type J - Pillow block, direct mounted, closed end, floating, type A, 4-bolt base	28
DM type J - pillow block, direct mounted, closed end, floating, type B, 2-bolt base	31
DM type J - Pillow block, direct mounted, closed end, floating, type B, 4-bolt base	32
DM type J - Pillow block, direct mounted, fixed, 2-bolt base	21
DM type J - Pillow block, direct mounted, fixed, 4-bolt base	22
DM type J - Pillow block, direct mounted, floating, type A, 2-bolt base	25

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Series	Code
DM type J - Pillow block, direct mounted, floating, type A, 4-bolt base	26
DM type J - Pillow block, direct mounted, floating, type B, 2-bolt base	29
DM type J - Pillow block, direct mounted, floating, type B, 4-bolt base	30
DM type S - Pillow block, direct mounted, fixed, 2-bolt base	33
DM type S - Pillow block, direct mounted, fixed, 4-bolt base	34
DM type S - Pillow block, direct mounted, floating, type A, 2-bolt base	35
DM type S - Pillow block, direct mounted, floating, type A, 4-bolt base	36
DM type S - Pillow block, direct mounted floating, type B, 2-bolt base	37
DM type S - Pillow block, direct mounted, floating, type B, 4-bolt base	38
SAF 222 - Pillow block, spherical roller bearing, 2-bolt base	07
SAF 222 - Pillow block, spherical roller bearing, 4-bolt base	08
SAF 223 - Pillow block, spherical roller bearing, 2-bolt base	09
SAF 223 - Pillow block, spherical roller bearing, 4-bolt base	10
SAF 225A - Pillow block, spherical roller bearing, 2-bolt base	17
SAF 225A - Pillow block, spherical roller bearing, 4-bolt base	18
SAF 226A - Pillow block, spherical roller bearing, 2-bolt base	19
SAF 226A - Pillow block, spherical roller bearing, 4-bolt base	20
SDAF 222 - Pillow block, spherical roller bearing, 4-bolt base	39
SDAF 223 - Pillow block, spherical roller bearing, 4-bolt base	40
SDAF 225A - Pillow block, spherical roller bearing, 4-bolt base	41
SDAF 226A - Pillow block, spherical roller bearing, 4-bolt base	42
SS - Pillow block, clamp sleeve floating, type B, 2-bolt base	15
SS - Pillow block, clamp sleeve floating, type B, 4-bolt base	16
SS - Take-up unit, clamp sleeve	47
TS - Pillow block, adapter sleeve fixed, 2-bolt base	01
TS - Pillow block, adapter sleeve fixed, 4-bolt base	02
TS - Pillow block, adapter sleeve floating, type A, 2-bolt base	03
TS - Pillow block, adapter sleeve floating, type A, 4-bolt base	04
TS - Pillow block, adapter sleeve floating, type B, 2-bolt base	05
TS - Pillow block, adapter sleeve floating, type B, 4-bolt base	06
SS - Clamp sleeve, cylindrical unit mounts	51
SS - Clamp sleeve, four point adjustable unit mounts	52
SS - Clamp sleeve - hanger box	49
SS - Clamp sleeve - rigid flange cartridge	61
SS - Clamp sleeve, self aligning, flange unit, fixed	63
SS - Clamp sleeve, self aligning, flange unit, floating	64
SS - Clamp sleeve, self aligning, fixed unit mounts	54
SS - Clamp sleeve, self aligning, floating unit mounts	53
SS - Pillow block, clamp sleeve, fixed, 2-bolt base	11
SS - Pillow block, clamp sleeve, fixed, 4-bolt base	12

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Series	Code
SS - Pillow block, clamp sleeve, floating, type A, 2-bolt base	13
SS - Pillow block, clamp sleeve, floating, type A, 4-bolt base	14

9.1.13 W. A. Jones Foundry and Machine Co., (Hewitt-Robins), Manufacturers' code 59 shall be as follows:

Series	Code
Adapter sleeve, cylindrical, unit mount	13
Adapter sleeve, spherical, unit mount	11
Pillow block, expansion, adapter sleeve, 2-bolt base	03
Pillow block, expansion, adapter sleeve, 4-bolt base	04
Pillow block, non-expansion, adapter sleeve, 2-bolt base	01
Pillow block, non-expansion, adapter sleeve, 4-bolt base	02

9.1.14 Palmer Bee, Manufacturers' code 60 shall be as follows:

Series	Code
F400 - Flange unit-normal duty-Shafer roller bearing	09
HB200 - Hanger box-split Hyatt roller bearing	92
HB400 - Hanger box-standard duty-double Fafnir ball bearing	28
HB450 - Hanger box-heavy duty-double Fafnir ball bearing	29
HB900 - Hanger box-double Shafer roller bearing	17
P100 - Pillow block-Hyatt roller bearing-self-aligning	91
P200 - Pillow block-standard duty-double Fafnir ball bearing	19
P250 - Pillow block-heavy duty-double Fafnir ball bearing	11
P300 - Pillow block-standard duty-single Fafnir ball bearing	03
P350 - Pillow block-heavy duty-single Fafnir ball bearing	06
P400 - Pillow block-normal duty-Shafer roller bearing	02
P450 - Pillow block-standard duty-Shafer roller bearing-2 bolt base	23
P450 - Pillow block-standard duty-Shafer roller bearing-4 bolt base	04
P900 - Pillow block-Timken tapered roller bearing-adapter sleeve-fixed-2 bolt base	01
P900 - Pillow block-Timken tapered roller bearing-adapter sleeve-fixed-4 bolt base	12
P900 - Pillow block-Timken tapered roller bearing-adapter sleeve-floating-2 bolt base	33
P900 - Pillow block-Timken tapered roller bearing-adapter sleeve-floating-4 bolt base	14
P900 - Timken tapered roller bearing-cylindrical, unit mounts	13
P900 - Timken tapered roller bearing-spherical, unit mounts	21

9.1.15 Boston Gear Works, manufacturers' code 62 shall be as follows:

Series	Code
A - Adjustable shaft support	50
F - Four bolt-flanged cartridge	15
H - Pillow block-high base	03
L - Pillow block-low base	01
SRB-00 - Plain type	52
T - Two bolt flanged cartridge	56

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

9.1.16 Royersford Foundry and Machine Co. Inc., Manufacturers' code 63 shall be as follows:

Series	Code
Hanger box - "Sells" split roller bearing-double structure	12
Hanger box - "Sells" split roller bearing-single structure	11
Pillow block - "Sells" split roller bearing-2 bolt base	01
Pillow block - "Sells" split roller bearing-4 bolt base	02

9.1.17 Nice Ball Bearing, Manufacturers' code 65 shall be as follows:

Series	Code
F100 - Pressed flanged housing	01

9.1.18 Browning Manufacturing Co., Manufacturers' code 66 shall be as follows:

Series	Code
B100 Adapter, bearing	06
B150 Adapter, bearing	07
B200 Eccentric locking collar-bearing	08
B220 Eccentric locking collar-bearing	09
B250 Setscrew locking collar-bearing	10
B350 Adapter bearing, medium, setscrew locking	11
C950 Flange cartridge-eccentric locking collar	12
FB100 Flange block-malleable housing-3 bolt base	13
FB110 Flange block-malleable housing-2 bolt base	14
FB150 Flange block-malleable housing-3 bolt base	15
FB160 Flange block-malleable housing-2 bolt base	16
FB200 Flange block-malleable housing-eccentric locking collars-4 bolt base	03
FB210 Flange block-malleable housing-eccentric locking collar-2 bolt base	04
FB220 Flange block-malleable housing-eccentric locking collar-4 bolt base	17
FB230 Flange block-malleable housing-eccentric locking collar-2 bolt base	18
FB250 Flange block-malleable housing-setscrew locking-4 bolt base	19
FB260 Flange block-malleable housing setscrew locking-2 bolt base	20
FB350 Flange block-medium-malleable housing-4 bolt base	21
FB900 Flange block-malleable housing-4 bolt base	22
FB950 Flange block-expansion type-4 bolt base	23
FB950NE Flange block-non-expansion type-4 bolt base	24
FC350 Flange cartridge-medium-cast iron housing-4 bolt base	25
FC900 Flange cartridge-cast iron housing-4 bolt base	26
PB100 Pillow block-high shaft-malleable housing-2 bolt base	27
PB100L Pillow block-low shaft-malleable housing-2 bolt base	28
PB150 Pillow block-high shaft-malleable housing-2 bolt base	29
PB150L Pillow block-low shaft-malleable housing-2 bolt base	30
PB200 Pillow block-low shaft-malleable housing-2 bolt base	01
PB201 Pillow block-high shaft-malleable housing-2 bolt base	02
PB220 Pillow block-low shaft-malleable housing-2 bolt base	31
PB221 Pillow block-high shaft-malleable housing-2 bolt base	32
PB250 Pillow block-low shaft-malleable housing-2 bolt base	33
PB251 Pillow block-high shaft-malleable housing-2 bolt base	05

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Series		Code
PB350	Pillow block-medium-malleable housing-2 bolt base	34
PB900	Pillow block-tapered rollers-malleable housing-eccentric locking collar-2 bolt base	35
PB950E	Pillow block-expansion type-malleable housing-2 bolt base	36
PB950NE	Pillow block-non-expansion type-malleable housing-2 bolt base	37
T200	Take-up unit-side mounting frame	38
T210	Take-up unit-protected screw type frame	39
TU200	Take-up unit-malleable housing-eccentric locking collar	40
TU220	Take-up unit-malleable housing-eccentric locking collar	41
TU250	Take-up unit-malleable housing-setscrew locking collar	42
TU350	Take-up unit-medium-malleable housing-setscrew locking	43

9.1.19 Marlin-Rockwell Co., Manufacturers' code 69 shall be as follows:

Series		Code
GMS-3	Pressed steel flange unit, 3 bolt, relub. fitting	11
GMS-4	Pressed steel flange unit, 4 bolt	12
GR	Pillow block, medium duty, relub. fitting	04
GT	Pillow block, medium duty, relub. fitting	03
LB	Flange unit, medium duty, 4 bolt	05
LZ	Flange unit, medium duty, 4 bolt	06
MS-3	Pressed steel flange unit, 3 bolt	09
MS-4	Pressed steel flange unit, 4 bolt	10
PB	Pillow block, medium duty	01
PZ	Pillow block, medium duty	02
UR	Flange unit, medium duty, 4 bolt, relub. fitting	08
UT	Flange unit, medium duty, 4 bolt, relub. fitting	07

9.1.20 Fafnir Bearing Co., Manufacturers' code 61 shall be as follows:

Series		Code
GPFD	Flange cartridge, standard series	02
GPFDR	Flange cartridge, standard series	04
GPFTD	Flange cartridge, standard series, 2 bolt base	06
GPFTDR	Flange cartridge, standard series, 2 bolt base	08
GPKD	Pillow block, ductile iron type, 2 bolt base	10
GPSD	Pillow block, ductile iron type, 2 bolt base	12
GRA	Flangette, plya-seal type	14
GRFD	Flange cartridge, standard series	16
GRFDR	Flange cartridge, standard series	18
GRFTD	Flange cartridge, standard series, 2 bolt base	20
GRFTDR	Flange cartridge, standard series, 2 bolt base	22
GRKD	Pillow block, ductile iron type, 2-bolt base	24
GRSD	Pillow block, ductile iron type, 2 bolt base	26
RA	Flangette, plya-seal type	28
RABR	Spherical O.D. cartridge, molded rubber housing	30
RAK	Pillow block, standard series, 2-bolt base	32
RAKH	Pillow block, standard series, 2 bolt base	34
RAKHL	Pillow block, floating, standard series, 2 bolt base	36
RAO	Pillow block, heavy series, 2 bolt base	38
RAS	Pillow block, standard series, 2 bolt base	40
RASC	Pillow block, with concentric collar, 2 bolt base	42
RAT	Flangette, two bolt type	44
RATR	Flangette, triangular, plya-seal type	45
RBG	Pillow block, molded rubber housing, 2 bolt base	46
RBGF	Flange cartridge, molded rubber housing, 4-bolt base	48
RBGU	Pillow block, molded rubber housing, 2 bolt base	50
RC	Cylindrical cartridge, standard series	52

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Series	Code
RCJ Flange cartridge, standard series, 4 bolt base	54
RCJC Flange unit, with concentric collar, 4 bolt base	56
RCJO Flange cartridge, heavy series, 4 bolt base	58
RCJT Flange cartridge, standard series, 2 bolt base	60
RCJTC Flange unit, with concentric collar, 2 bolt base	62
RCR Cylindrical cartridge, molded rubber housing	64
RCSM Cylindrical cartridge, molded rubber housing	66
RFC Piloted flange, with concentric collar, 4 bolt base	68
RFD Flange cartridge, standard series	70
RFDR Flange cartridge, standard series	72
RFTD Flange cartridge, standard series, 2 bolt base	74
RFTDR Flange cartridge, standard series, 2 bolt base	76
RKD Pillow block, ductile iron type, 2 bolt base	78
RPB Pillow block, light duty, 2 bolt base	80
RR Flangette, R-seal	82
RRT Flangette, 2 bolt type	84
RRTR Flangette, triangular, R-seal type	86
RS Pillow block, molded rubber housing, 2 bolt base	88
RSA Pillow block, standard series, 2 bolt base	90
RSAO Pillow block, heavy series, 2 bolt base	92
RSC Cylindrical cartridge, molded rubber housing	94
RSD Pillow block, ductile iron type, 2 bolt base	96
RSU Pillow block, molded rubber housing, 2 bolt base	98
RTU Take-up unit	99

9.1.21 Federal Bearings Co., Inc., Manufacturers' code 57 shall be as follows:

Series	Code
PB2000 Pillow block, malleable iron casting, 2 bolt base	02

9.1.22 Roberts Manufacturing, Inc., Manufacturers' code 67 shall be as follows:

Series	Code
AG3F Flange unit, sealed, 3 bolt	01
AG3FZ Flange unit, sealed, 3 bolt, relub. fitting	02
EBA Cartridge unit, sealed, self-aligning	10
F3F Flange unit, sealed, 3 bolt	20
F3FZ Flange unit, sealed, 3 bolt, relub, fitting	21
GF Flange unit, self-aligning	30
GFZ Flange unit, self-aligning, relub. fitting	31
GP Pillow block, self-aligning	32
GPZ Pillow block, self-aligning, relub. fitting	33
GT Flange unit, self-aligning, 2 bolt	34
GTU Take-up unit, self-aligning	35
GTUF Take-up unit, self-aligning	36
GTUFZ Take-up unit, self-aligning, relub. fitting	37
GTUZ Take-up unit, self-aligning, relub. fitting	38
GTZ Flange unit, self-aligning, 2 bolt, relub. fitting	39
GXP-16 Pillow block, self-aligning, no shim	40
JSF-KK Flange mount jack shaft unit	50
JSF-KT Flange mount jack shaft unit	51
JSH-KK Pillow block jack shaft unit	52
JSH-KT Pillow block jack shaft unit	53
JSP-KK Pillow block jack shaft unit	54
JSP-KT Pillow block jack shaft unit	55
RBF Flanged unit, stamped	60
RFS Flange unit, self-aligning, sealed	61
RPS Pillow block, self-aligning	62
RTS Flange unit, self-aligning, sealed, 2 bolt	63
RTU Take-up unit, self-aligning, sealed	64
RTUF Take-up unit with frame	65
RXP-16 Pillow block, self-aligning no shim	66
RX1 Hanger mount unit, sealed	67
RX2 Idler unit, sealed	68
STU Take-up unit, sealed, light duty	80
STUF Take-up unit with frame, sealed	81

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table LVIII - Significant codes for variations of group 6 base bearing numbers

1st and 2nd position code XX--	Types 00 through 69 bearings and bearing assemblies
00--	Nothing
11--	Std. dust cap, retaining wire, and eccentric locking collar (Fafnir)
12--	Std. dust cap, retaining wire, and eccentric locking dust seal collar (Fafnir)
13--	Standard felt seal caps (Fafnir)
14--	One (Mechani-seal) labyrinth seal (Fafnir)
15--	Two (Mechani-seal) labyrinth seals (Fafnir)
16--	One (Mechani-seal) labyrinth seal and plate (shield) (Fafnir)
17--	One (Mechani-seal) labyrinth seal, plate (shield) and lubrication hole (Fafnir)
18--	Two (Mechani-seal) labyrinth seals and lubrication hole (Fafnir)
19--	Two synthetic contact seals with lubrication hole (Fafnir)
22--	Piston ring seal (Dodge) (Link Belt) (Rex Chain Belt)
27--	Two cast iron 4 bolt cover plates, piston ring seals and shims (Link Belt) (Rex Chain Belt)
28--	Two cast iron 4 bolt cover plates, labyrinth seals and shims (Link Belt) (Rex Chain Belt)
30--	Synthetic rubber impregnated nylon fabric seals (Roberts)
35--	Sealmaster felt seals (Stephens-Adamson)
39--	Labyrinth seal inserted in set screw side of bearing (BCA-W.L.)
40--	Plate seal inserted in set screw side of bearing, soft steel collar (Federal)
41--	Two Synthetic contact seals
42--	One synthetic contact seal

3rd and 4th position code --XX	Types 00 through 69 bearings and bearing assemblies
--XX	Additional data as required will be covered by arbitrary numbers in these two positions.

1st and 2nd position code XX--	Types 70 through 99 mounted units complete with bearings (alphabetical by manufacturer)
62--	Boston gear - bearing units (8.1.15, 9.1.15)
66--	Browning - bearing units (8.1.18, 9.1.18)
55--	Dodge - bearing units (8.1.11, 9.1.11)
51--	Fafnir - bearing units (8.1.3, 9.1.3)
61--	Fafnir - bearing units (8.1.20, 9.1.20)
57--	Federal - bearing units (8.1.21, 9.1.21)
59--	Jones, Hewitt-Robins - bearing units (8.1.13, 9.1.13)
54--	Link belt - ball bearing units (8.1.6, 9.1.6)
64--	Link belt - ball bearing units (8.1.7, 9.1.7)
54--	Link belt - roller bearing units (8.1.8, 9.1.8)
64--	Link belt - roller bearing units (8.1.9, 9.1.9)
74--	Link belt - roller bearing units (8.1.10, 9.1.10)
69--	Marlin Rockwell - bearing unit (8.1.19, 9.1.19)
56--	Medart - bearing units (8.1.12, 9.1.12)
65--	Nice - bearing units (8.1.17, 9.1.17)
60--	Palmer, bee - bearing units 8.1.14, 9.1.14)
53--	Rex Chain Belt - Shafer-Rex Shafer - bearing units (8.1.5, 9.1.5)
67--	Roberts - ball bearing units (8.1.22, 9.1.22)
63--	Royersford - bearing units (8.1.16, 9.1.16)
50--	SKF - Ball bearing units (8.1.1, 9.1.1)
50--	SKF - roller bearing units (8.1.2, 9.1.2)
52--	Stephens-Adamson: Sealmaster, bearing units (8.1.4, 9.1.4)

3rd and 4th position code --XX	Types 70 through 99 mounted units complete with bearings
	See 8.1.1 through 9.1.22 for, manufacturer's series codes.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table LVIII - Significant codes for variations of group 6 base bearing numbers (cont'd.)

ARBITRARY SPECIAL CODES			
Types 00 through 69		Types 70 through 99	
8000 and 9000	Arbitrary "Special Codes" assigned to a given condition or series of conditions, are in the 8000 and 9000 series of numbers. They are non-repetitive in meaning and apply only to the base number with which they are used. All conditions, other than (a) variations of basic dimensions, and (b) conditions covered by the above significant codes, are coded as "Special Codes". A variation of basic dimensions would require classification of the bearing in group 9.	8000 and 9000	Arbitrary "Special Codes", when used with types 70 through 99 (mounted units), identify specific units that are not commonly known manufacturers' established series, or other specific units that are known commercial standard series with special variations that are not coded by a significant code.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table LIX - Boundary dimensions-IC

Bore		O.D.	Width[1]	O.D. and width code	Bore		O.D.	Width[1]	O.D. and width code
No. of 1/16	Inches	MM			No. of 1/16	Inches	MM		
008	1/2	40	12	01	015	15/16	62	7/8 inch	15
		47	14	03			62	15/16 inch	17
		47	5/8 inch	05			68	16	19
							68	17	21
009	9/16	40	12	01			72	19	23
		47	5/8 inch	03			72	27	25
							80	19	27
010	5/8	40	12	01					
		44	12	03	016	1	52	15	01
		47	14	05			52	3/4 inch	03
		47	5/8 inch	07			57	15	05
		52	14	09			62	16	07
		52	15	11			62	17	09
							62	20	11
011	11/16	40	12	01			68	16	13
		44	12	03			68	17	15
		47	14	05			72	19	17
		47	5/8 inch	07			72	27	19
		52	14	09			80	19	21
		52	15	11					
					017	1-1/16	62	16	01
012	3/4	47	14	01			62	18	02
		47	5/8 inch	03			68	16	03
		50	15	09			72	17	05
		52	14	05			72	19	07
		52	15	07			72	23	09
		57	15	10			72	1-1/16 inches	11
		60.325	1-3/16 inches	11			79	17	13
		62	17	13			80	19	15
		68	17	15			80	21	17
							80	31	19
013	13/16	52	15	01			88	21	21
		52	18	03					
		62	17	05	018	1-1/8	62	16	01
		68	17	07			62	18	02
							62	7/8 inch	03
014	7/8	52	15	01			68	16	05
		52	3/4 inch	03			72	17	07
		57	15	05			72	19	09
		62	16	07			72	23	11
		62	17	09			79	17	13
		62	20	11			80	19	15
		68	16	13			80	21	17
		68	17	15			80	31	19
		72	19	17			88	21	21
		72	27	19					
		80	19	21	019	1-3/16	62	16	01
							62	18	03
015	15/16	52	15	01			62	7/8 inch	05
		52	3/4 inch	03			66.675	1-5/16 inches	07
		57	15	05			68	16	09
		60.325	1-3/16 inches	07			72	17	11
		62	16	09			72	19	13
		62	17	11			72	23	15
		62	20	13			72	15/16 inch	17

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table LIX - Boundary dimensions-IC (cont'd.)

Bore		O.D.	Width [1]	O.D. and width code	Bore		O.D.	Width [1]	O.D. and width code
No. of 1/16	Inches	MM			No. of 1/16	Inches	MM		
019	1-3/16	79	17	19	023	1-7/16	93	19	25
		80	19	21			100	25	27
		80	21	23			100	36	29
		80	31	25			110	25	31
		88	21	27					
					024	1-1/2	72	1-5/16 inches	01
020	1-1/4	66.675	1-5/16 inches	01			80	18	03
		72	17	03			80	21	05
		72	19	04			80	1-3/32 inches	07
		72	23	05			85	19	09
		72	15/16 inch	07			85	23	11
		79	17	09			85	1-3/32 inches	13
		80	18	10			85	40.132	15
		80	19	11			88	18	17
		80	21	13			90	23	19
		80	1-3/16 inch	15			90	38.76	21
		80	31	17			93	19	23
		88	18	19			100	23	25
		88	21	21			100	25	27
		90	23	23			100	36	29
		100	23	25			110	25	31
021	1-5/16	72	17	01	025	1-9/16	80	18	01
		72	19	02			80	21	02
		79	17	03			80	1-3/32 inches	03
		80	18	05			85	19	05
		80	21	07			88	18	07
		88	18	09			89	23	09
		88	21	11			90	20	11
		90	23	13			90	23	13
		100	23	15			93	19	15
							100	23	17
022	1-3/8	72	17	01			100	25	19
		72	19	02			110	25	21
		72	15/16 inch	03			110	27	23
		79	17	05			110	40	25
		80	21	07					
		85	19	09	026	1-5/8	85	19	01
		88	21	11			85	22	02
		93	19	13			85	1-3/32 inches	03
		100	25	15			90	20	05
		110	25	17			90	23	07
							93	19	09
023	1-7/16	72	17	01			100	20	11
		72	19	03			100	25	13
		72	15/16 inch	05			110	25	15
		72	1-5/16 inches	07			110	27	17
		79	17	09			110	40	19
		80	21	11			120	27	21
		80	1-3/32 inches	13					
		85	19	15	027	1-11/16	85	19	01
		85	23	17			85	22	03
		85	1-3/16 inches	19			85	1-3/32 inches	05
		85	40.132	21			85	40	07
		88	21	23			85	40.132	09

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table LIX - Boundary dimensions-IC (cont'd.)

Bore		O.D.	Width[1]	O.D. and width code	Bore		O.D.	Width[1]	O.D. and width code
No. of 1/16	Inches	MM			No. of 1/16	Inches	MM		
027	1-11/16	90	20	11	031	1-15/16	90	38.76	07
		90	23	13			100	20	09
		90	1-3/32 inches	15			100	21	11
		90	1-3/16 inches	17			100	25	13
		90	38.76	19			100	1-3/16 inches	15
		93	19	21			100	1-5/16 inches	17
		100	20	23			100	1-21/32 inches	19
		100	25	25			110	21	21
		110	25	27			110	27	23
		110	27	29			120	27	25
		110	40	31			120	29	27
		120	27	33			120	43	29
							130	29	31
028	1-3/4	80	40	01					
		85	19	03	032	2	90	1-1/8 inches	01
		85	22	04			90	28.76	03
		85	1-3/32 inches	05			100	21	05
		90	20	07			100	25	07
		90	23	09			100	1-3/16 inches	09
		93	19	11			100	1-21/32 inches	11
		100	20	13			110	21	13
		100	25	15			110	22	15
		110	25	17			120	22	17
		110	27	19			120	29	19
		110	40	21			120	43	20
		120	47	23			125	43	21
							130	29	23
029	1-13/16	90	20	01			130	31	25
		90	23	02			145	31	27
		100	20	03					
		100	21	05	033	2-1/16	100	21	01
		100	25	07			100	25	02
		110	21	09			110	21	03
		110	27	11			110	22	05
		120	27	13			120	22	07
		120	29	15			120	29	09
		120	43	17			130	29	11
		130	29	19			130	31	13
							145	31	15
030	1-7/8	90	20	01					
		90	23	02	034	2-1/8	100	21	01
		90	1-1/8 inches	03			100	25	02
		100	20	05			100	1-3/16 inches	03
		100	21	07			110	21	05
		100	25	09			110	22	07
		110	21	11			120	22	09
		110	27	13			120	29	11
		120	27	15			130	29	13
		120	29	17			130	31	15
		120	43	19			145	31	17
		130	29	21					
					035	2-3/16	100	21	01
031	1-15/16	90	20	01			100	25	03
		90	23	03			100	1-3/16 inches	05
		90	1-1/8 inches	05			100	1-21/32 inches	07

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table LIX - Boundary dimensions-IC (cont'd.)

Bore		O.D.	Width[1]	O.D. and width code
No. of 1/16	Inches	MM		
035	2-3/16	110	21	09
		110	1-1/4 inches	11
		110	1-3/4 inches	13
		120	23	15
		120	29	17
		120	31	19
		120	1-1/2 inches	21
		130	29	23
		135	23	25
		140	33	27
		140	48	29
		155	33	31
036	2-1/4	110	22	01
		110	1-1/4 inches	03
		120	22	05
		120	23	07
		120	31	09
		130	31	10
		135	23	11
		140	33	12
		145	31	15
		155	33	17
		303	11	19
		403	30	21
037	2-5/16	110	22	01
		120	22	03
		120	23	05
		125	24	06
		130	25	07
		130	31	09
		135	23	11
		145	25	13
		145	31	15
		150	35	17
		160	37	19
		175	37	21
038	2-3/8	110	22	01
		110	1-1/4 inches	03
		120	22	05
		125	24	07
		130	25	09
		130	31	11
		145	25	13
		145	31	15
		150	35	17
		160	37	19
		175	37	21
039	2-7/16	110	22	01
		110	1-1/4 inches	03
		110	1-3/4 inches	05
		120	22	07
039	2-7/16	125	1-5/8 inches	09
		130	25	11
		130	31	13
		130	1-5/8 inches	15
		130	2-1/8 inches	17
		145	25	19
		145	31	21
		160	37	23
		160	55	25
		175	37	27
040	2-1/2	110	1-3/4 inches	01
		120	23	03
		125	1-5/8 inches	05
		130	25	07
		130	31	09
		130	2-1/8 inches	11
		135	23	13
		140	33	15
		145	25	17
		155	33	19
		160	37	21
		160	55	23
		175	37	25
041	2-9/16	120	23	01
		130	25	03
		135	23	05
		140	26	07
		140	33	09
		145	25	11
		155	33	13
		160	37	15
		170	39	17
		170	58	19
		175	37	21
042	2-5/8	120	23	01
		135	23	03
		140	26	05
		140	33	07
		150	35	09
		155	26	11
		165	35	13
		170	39	15
		170	58	17
		190	39	19
043	2-11/16	120	23	01
		125	1-5/8 inches	03
		130	1-1/2 inches	05
		130	58.649	07
		135	23	09
		140	26	11
		140	33	13

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table LIX - Boundary dimensions-IC (cont'd.)

Bore		O.D.	Width[1]	O.D. and width code
No. of 1/16	Inches	MM		
043	2-11/16	140	1-3/4 inches	15
		150	35	17
		150	58.649	19
		155	26	21
		165	35	23
		170	39	25
		170	58	27
		190	39	29
044	2-3/4	130	25	01
		140	26	03
		140	33	05
		145	25	07
		150	35	09
		155	26	11
		165	35	13
		170	39	15
		170	58	17
		190	39	19
045	2-13/16	130	25	01
		140	26	03
		145	25	05
		150	28	07
		150	36	09
		155	26	11
		160	37	13
		170	39	15
		175	37	17
		180	41	19
		180	60	21
		190	39	23
046	2-7/8	130	25	01
		130	1-1/2 inches	03
		145	25	05
		150	28	07
		150	36	09
		160	37	11
		165	28	13
		175	37	15
		180	41	17
		180	60	19
		200	41	21
047	2-15/16	130	25	01
		130	1-1/2 inches	03
		130	2-1/8 inches	05
		140	1-1/2 inches	07
		140	1-11/16 inches	09
		145	25	11
		150	28	13
		150	36	15
		150	1-15/16 inches	17
		150	58.649	19
047	2-15/16	160	37	21
		165	28	23
		175	37	25
		180	41	27
		180	60	29
		200	41	31
048	3	130	2-1/8 inches	01
		140	26	03
		140	1-11/16 inches	05
		150	28	07
		150	36	09
		155	26	11
		160	30	13
		170	39	15
		175	30	17
		180	41	19
		180	60	21
		190	39	23
		190	43	25
		210	43	27
062	3-7/8	265	50	19
063	3-15/16	161.93	2-3/4 inches	01
		180	34	03
		190	2-1/2 inches	05
		190	75.5	07
		200	34	09
		200	38	11
		200	53	13
		200	2-3/4 inches	15
		200	3 inches	17
		215	47	19
		220	38	21
		235	47	23
		240	50	25
		240	80	27
		265	50	29
064	4	161.93	2-3/4 inches	01
		180	34	03
		190	2-1/2 inches	05
		190	75.54	07
		200	34	09
		200	38	11
		200	53	13
		200	3 inches	15
		225	49	17
		240	50	19
		240	80	21
065	4-1/16	190	36	01
		190	2-1/2 inches	03
		210	36	05

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table LIX - Boundary dimensions-IC (cont'd.)

Bore		O.D.	Width[1]	O.D. and width code
No. of 1/16	Inches	MM		
065	4-1/16	215	58	07
		225	49	09
		260	86	11
066	4-1/8	190	36	01
		210	36	03
		225	49	05
067	4-3/16	190	36	01
		190	2-1/2 inches	02
		210	36	03
		215	42	05
		215	58	06
		225	49	07
		260	55	09
		260	86	11
068	4-1/4	190	36	01
		210	36	03
		215	42	05
		215	58	07
		240	50	09
		260	55	11
		260	86	13
		265	50	15
069	4-5/16	200	38	01
		220	38	03
		240	50	05
		265	50	07
070	4-3/8	200	38	01
		220	38	03
		240	50	05
		265	50	07
071	4-7/16	200	38	01
		215	2-3/4 inches	03
		220	38	05
		230	64	07
		240	50	09
		265	50	11
		280	93	13
072	4-1/2	215	2-3/4 inches	01
		230	64	03
		280	93	05
075	4-11/16	215	2-3/4 inches	02
		250	68	01
		300	102	03
076	4-3/4	215	2-3/4 inches	02
		225	40	01
		250	68	03

Bore		O.D.	Width[1]	O.D. and width code
No. of 1/16	Inches	MM		
076	4-3/4	280	59	05
		300	59	07
		300	102	09
077	4-13/16	225	40	01
		280	59	03
		300	59	05
078	4-7/8	225	40	01
		280	59	03
		300	59	05
079	4-15/16	225	40	01
		250	68	03
		280	59	05
		300	59	07
		300	102	09
080	5	225	40	01
		250	68	03
		280	59	05
		300	59	07
		300	102	09
081	5-1/16	225	40	01
		280	59	03
		300	59	05
082	5-1/8	250	50	03
		300	63	05
		320	108	01
083	5-3/16	250	50	05
		270	73	01
		300	63	02
		320	108	03
084	5-1/4	250	50	01
		300	63	03
085	5-5/16	250	50	01
		300	63	03
086	5-3/8	250	50	01
		300	63	03
087	5-7/16	250	50	05
		290	80	01
		300	63	07
		340	114	03
088	5-1/2	250	50	01
		300	63	03
095	5-15/16	310	86	01

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

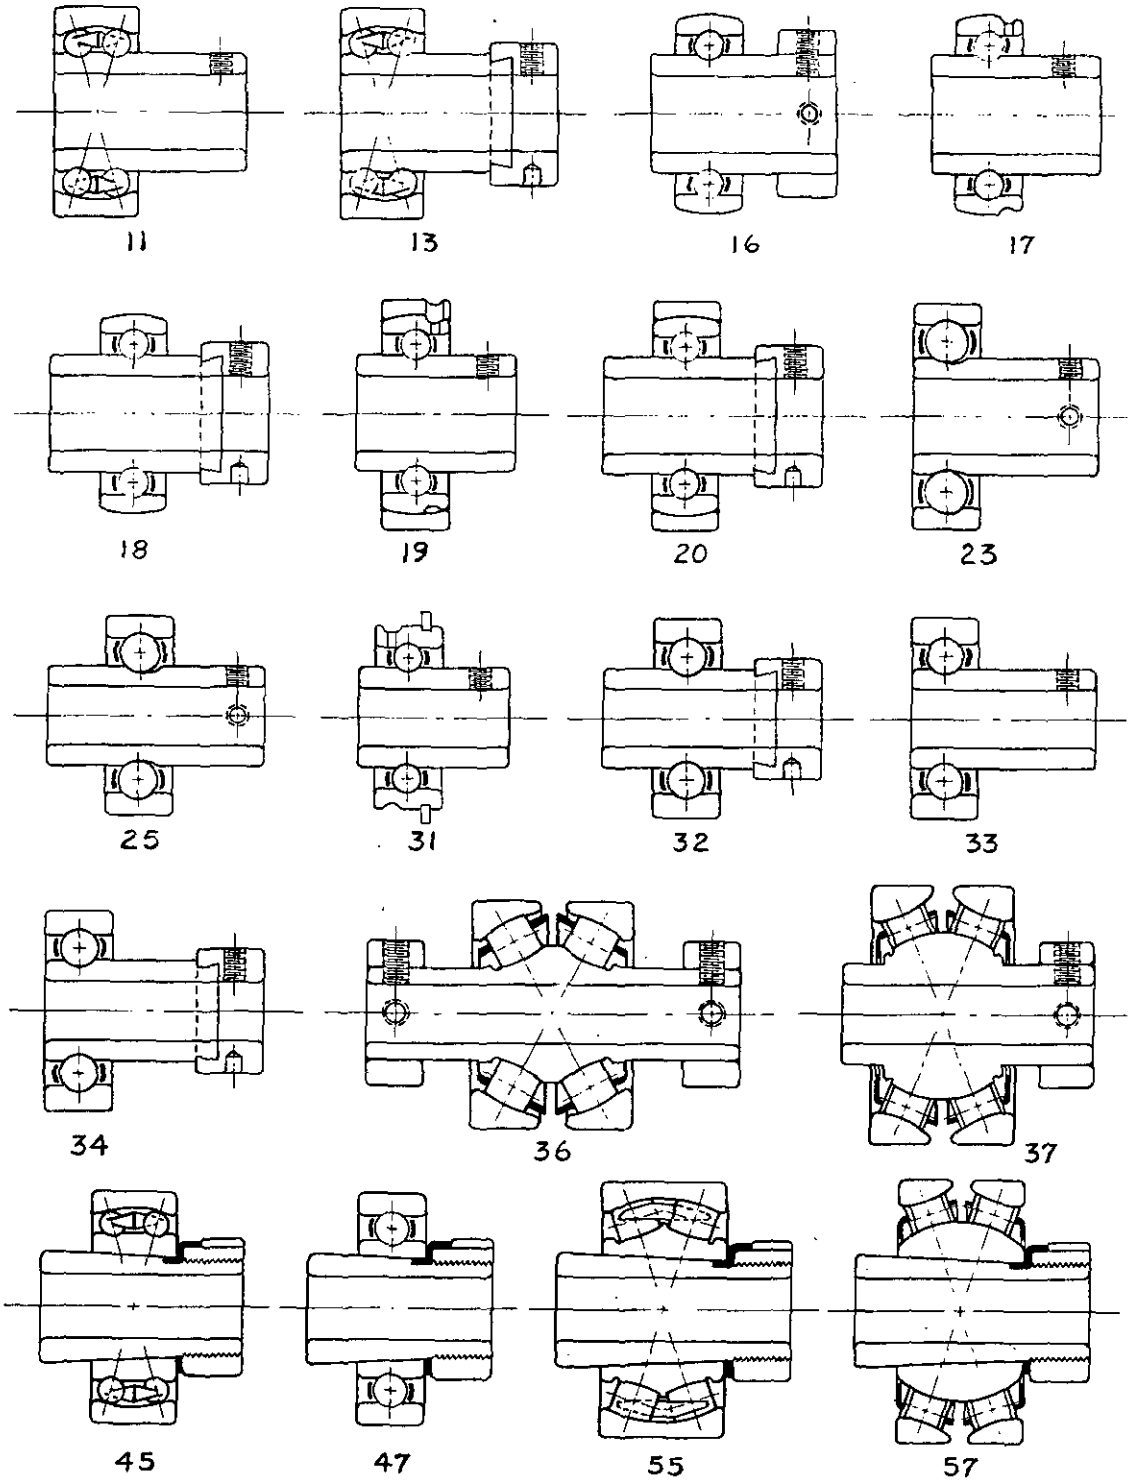


Figure 38 - Illustration of group 6 bearing types.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 This section covers tapered roller bearings - group 7 (see figure 43).

2. REFERENCED DOCUMENTS

2.1 This section is not applicable.

3. NUMBER STRUCTURE

3.1 Digit positions. Example of digit positions is shown on figure 39.

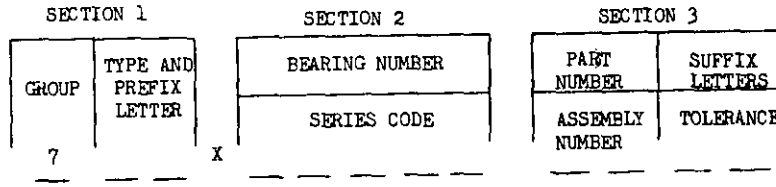


Figure 39 - Group 7, number structure.

3.1.1 Tolerances. Tolerances specified in table LX or table LXI are applicable to the tapered roller bearings in this group.

4. GROUP AND TYPE CODES

4.1 Digit positions. Example of digit positions is shown on figure 40.

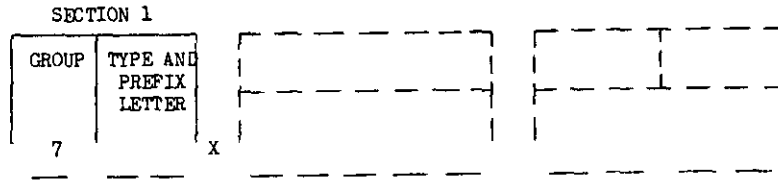


Figure 40 - Group 7, section 1

4.2 Group code. Group code for first position shall be as follows:

7 - Tapered roller bearings

4.3 Type codes 00 through 29 (2nd and 3rd positions). Type codes - 00 through 29 (2nd and 3rd positions) separate bearing parts (cones and cups) shall be as follows:

Type

11 No letter prefix (except NA and EE).
12 Letter prefix "A".
19 No letter prefix - "0" in position 4 is part of the cone or cup number.
20 Letter prefix "V".
21 100,000 series numbers.
22 200,000 series numbers.
23 300,000 series numbers.
24 400,000 series numbers.
25 500,000 series numbers.
26 600,000 series numbers.
27 700,000 series numbers.
28 800,000 series numbers.
29 900,000 series numbers.

4.4 Type codes - 51 through 89 (2nd and 3rd positions). Complete bearings.

4.4.1 Single row. Single row shall be as follows:

Type

51 Straight bore, normal angle (TS).
52 Tapered bore, normal angle (TST).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Type

53 Straight bore, steep angle (TSS).
54 Straight bore, keyway cone (TSK).
55 Straight bore, flanged cup (TSF).
56 Steering gear bearings - no inner race (TSG).
59 Straight bore, flanged cup, steep angle (TSSF).

4.4.2 Double row. Double row shall be as follows:

Type

57 Straight bore, double cone, single cups (TDI).
58 Tapered bore, double cone, single cups (TDIT).
60 Straight bore, keywayed double cone, single cups (TDIK).
61 Straight bore, double cup, single cones (TDO).
62 Straight bore, aligning double cup, single cones (TDODS).
63 Straight bore, double cup, single cones, steep angle (TDOS).
64 Straight bore, non-adjustable, double cup, single cones (TNA).
65 Straight bore, non-adjustable, double cup, slotted cones (TNASW).
66 Straight bore, non-adjustable, aligning double cup, single cones (TNADS).
67 Straight bore, non-adjustable, double cup, single cones, steep angle (TNAS).
68 Straight bore unit assembly, nonadjustable, two single cones, two single cups with or without cone and/or cup spacers (SS ASSY).
69 Straight bore, four row, two double cones, one double cup and two single cups, two cup spacers and one cone spacer, assembly is cup adjusted (TQO).
70 Straight bore, double cone, single cups, steep angle (TDIS).
71 Double row, non-adjustable, self contained (8300 series).

4.5 Complete bearings. The series of numbers (type codes) from 72 through 89 have been reserved for complete bearings with new series number designations.

5. SEPARATE BEARING PARTS AND COMPLETE BEARINGS

5.1 Digit positions. Example of digit positions is shown on figure 41.

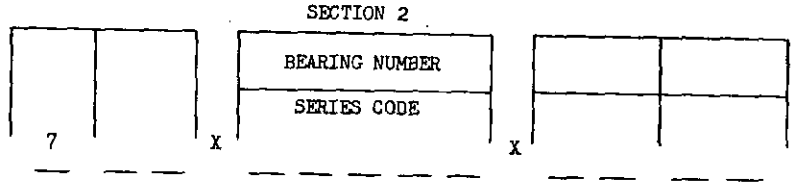


Figure 41 - Group 7, section 2.

5.2 Types 00 through 29 (cones and cups). Cone/cup (part) number (4, 5, 6, 7 and 8th positions). The actual part number is inserted in section 2. The difference in the number of digits in the space allowed (5) and the actual part number is taken up by inserting zeros ahead of the (1 to 4 digit) part number. In the case of six digit part numbers, the first digit of the number is the last digit of section 1.

5.2.1 Application. Application shall be as follows:

711 X 00001 - one digit number (1)
711 X 00024 - Two digit number (24)
711 X 00332 - Three digit number (332)
711 X 04559 - Four digit number (4559)
711 X 55437 - five digit number (55437)
719 X 05185 - five digit number (05185)
721 X 16372 - six digit number (116372)

5.3 Types 51 through 89 (complete bearings) series code - (4,5,6,7 and 8th positions). Complete bearings, shown commercially by a compound number, made up of a cone and cup number are of a definite series. The exact bearing is indicated by a series code in the 4th through 8th positions (section 2) and by an arbitrary number assigned to each possible cone and cup assembly within a series. These arbitrary numbers appear in the 1st and 2nd positions of section 3. Table LXII indicates what limiting cone or cup numbers are found in each series.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

5.3.1 Application of series coding shall be as follows:

751 X 00935 Complete bearing of the #935 series
751 X 03900 Complete bearing of the #3900 series
751 X 13000 Complete bearing of the #13000 series

For positive identification of a bearing, it is necessary to go into the 3rd section of the number which follows.

6. VARIATIONS OF THE GROUP 7 BASE BEARING NUMBER

6.1 Digit positions. Example of digit positions is shown on figure 42.

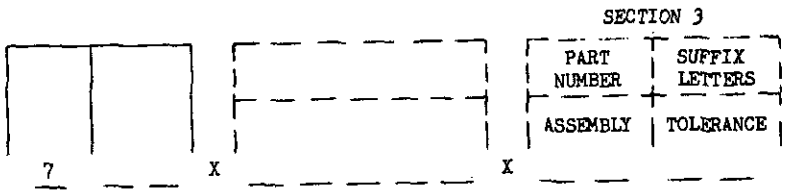


Figure 42 - Group 7, section 3.

6.2 Additional variations. Section 3 in the case of group 7 codes additional data necessary for positive identification and in all cases is an addition to the base number.

6.2.1 Significant codes. Section 3 is always required; however, the significant codes vary in meaning as specified in 6.2.1.1 and 6.2.1.2.

6.2.1.1 Type codes 00 through 29 - separate bearing parts. The first and second positions of section 3 indicate part number, and the third and fourth positions "Letter Suffix" of the commercial number.

6.2.1.2 Type codes 51 through 89 (complete bearings). The first and second positions of section 3 show the "Assembly Identification", i.e., the number assigned to a specific cone and cup assembly within a given series, and the third and fourth positions indicate the "Tolerance Code". Table LXIII illustrates this coding.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table LX - Tolerance limits for tapered roller bearing and self-aligning roller bearings - inch dimensions

(Tolerance limits in 0.0001 inch)

Maximum dimension		Class									
		4 All sizes		2 24.0000 max. cone bore		3 All sizes		0 12.0000 max. cup O.D.		00 10.50000 max. cup O.D.	
Basic bore diameter d inches		Bore tolerance limits									
Over	Incl.	d_{min} −	d_{max} +	d_{min} −	d_{max} +	d_{min} −	d_{max} +	d_{min} −	d_{max} +	d_{min} −	d_{max} +
0	2.5000	0	5	0	5	0	5	0	5	0	3
2.5000	12.0000	0	10	0	10	0	5	0	5	0	3
12.0000	24.0000	0	20	0	20	0	10	-	-	-	-
24.0000	36.0000	0	30	-	-	0	15	-	-	-	-
36.0000	48.0000	0	40	-	-	0	20	-	-	-	-
48.0000	---	0	50	-	-	0	30	-	-	-	-
Bore outside diameter D inches		O.D. tolerance limits									
Over	Incl.	D max +	D min −	D max +	D min −	D max +	D min −	D max +	D min −	D max +	D min −
0	12.0000	10	0	10	0	5	0	5	0	3	0
12.0000	24.0000	20	0	20	0	10	0	-	-	-	-
24.0000	36.0000	30	0	30	0	15	0	-	-	-	-
36.0000	48.0000	40	0	-	-	20	0	-	-	-	-
48.0000	---	50	0	-	-	30	0	-	-	-	-

Basic overall bearing width		Overall bearing width tolerance limits[1]									
Type	Inches	High +	Low −	High +	Low −	High +	Low −	High +	Low −	High +	Low −
TS TST TSF TSS TSSF TNA TNAS TDI TDIS TDO TDOS	Up to 4.0000 bore incl.	80	0	80	0	80	- 80	80	80	80	80
	Over 4.0000 bore to 12.0000 bore, incl.	140	100	80	0	80	- 80	80	80	80	80
	Over 12.0000 bore, up to 20.0000 cup outside diameter, incl.	150	150	150	150	80	- 80	-	-	-	-
	Over 12.0000 bore, over 20.0000 cup outside diameter	150	150	150	150	150	-150	-	-	-	-
TNA TNAS	Up to 5.0000 bore incl.	100	0	100	0	100	0	-	-	-	-
	Over 5.0000 bore	300	0	300	0	300	0	-	-	-	-
TDI TDIS TDO TDOS	Up to 4.0000 bore, incl.	160	0	160	0	160	160	160	160	160	160
	Over 4.0000 bore to 12.0000 bore, incl.	280	200	160	80	160	160	160	160	160	160
	Over 12.0000 bore up to 20.0000 cup outside diameter	300	300	300	300	160	160	-	-	-	-
	Over 12.0000 bore, over 20.0000 cup outside diameter	300	300	300	300	300	300				

Basic O.D. D inches		Assembled bearing radial runout of cup (outer ring) and cone (inner ring)				
Over	Incl.	D_{max}	D_{max}	D_{max}	D_{max}	D_{max}
0	12.0000	20	15	3	1.5	.75
12.0000	24.0000	20	15	7	-	-
24.0000	36.0000	30	20	20	-	-
36.0000	---	30	-	30	-	-

[1] For types TSF and TSSF bearings, the tolerance applies to the dimensions from the back face of the cup flange to the back face of the cone.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table LXI - Tolerance limits for Timken J-line, tapered roller bearings

Cone bore tolerances

Over		Incl.		Class 1		Over		Incl.		Class J3		Class J-0 [1]		Class J-00 [2]	
Inch	MM	Inch	MM	Inch −	MM −	Inch	MM	Inch	MM	Inch −	MM −	Inch −	MM −	Inch −	MM −
-	-	1.9685	50	0.0005	0.012	-	-	1.9685	50						
1.9685	50	3.1496	80	.0006	.015					0.0005	0.012	0.0005	0.012	0.0003	0.008
3.1496	80	4.7244	120	.0008	.020	1.9685	50	12.0079	305						
4.7244	120	7.0866	180	.0010	.025										
7.0866	180	9.8425	250	.0012	.030	12.0079	305	14.9606	380	.0010	.025	-	-	-	-
9.8425	250	12.4016	315	.0014	.035										
12.4016	315	14.9606	380	.0016	.040										

Cup O.D. tolerance

3.1496	80	4.7244	120	0.0006	0.015										
4.7244	120	5.9055	150	.0007	.018										
5.9055	150	7.0866	180	.0010	.025	3.1496	80	12.0079	305	0.0005	0.012	0.0005	0.012	0.0003	0.008
7.0866	180	9.8425	250	.0012	.030										
9.8425	250	12.4016	315	.0014	.035										
12.4016	315	15.7480	400	.0016	.040	12.0079	305	21.2598	540	.0010	.025	-	-	-	-
15.7480	400	19.6850	500	.0018	.045										
19.6850	500	21.2598	540	.0020	.050										

Cone length tolerances

All	Sizes	0.002	0.05	All	Sizes	0.006	0.15	0.006	0.15	0.006	0.15

Cup length tolerances

All	Sizes	0.004	0.10	All	Sizes	0.004	0.10	0.004	0.10	0.004	0.10

Overall bearing width tolerances

Cone		Bore		Inch +	MM +										
-	-	1.9685	50	0.004	.10										
1.9685	50	4.7244	120	.004	.10	3.1496	80	20.0787	510	±0.008	±0.20	±0.008	±0.20	±0.008	±0.20
4.7244	120	9.8425	250	.006	.15										
9.8425	250	14.9606	380	.008	.20	20.0787	510	21.2598	540	± .015	± .38	-	-	-	-

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table LXI - Tolerance limits for Timken J-line, tapered roller bearings (cont'd.)

Cup O.D.				Inch +	MM +
3.1496	80	21.2598	540	0.0015	0.038

Assembled bearing maximum runouts

3.1496 12.0079	80 305	12.0079 21.2598	305 540	0.0003 .0007	0.008 .018	0.00015 -	0.0038 -	0.000075 -	0.0019 -

[1] Class J-0 12.0079 (305mm) maximum cup O.D.
[2] Class J-00 10.4331 (265mm) maximum cup O.D.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table LXII - Tapered roller bearings, section 2 series code for group 7

Cone nos. from - to	Series code	Cone nos. from - to	Series code	Cone nos. from - to	Series code
A2031-A2136	00020	1729-1780	01700	17098-17245	17000
A4044-A4138	00040	1931-1997	01900	17520-17582	17500
A5069-A5144	00055	2420-2479	02400	18200-18352	18000
A6062-A6165	00060	2523-2586	02500	18520-18590	18500
		2620-2691	02600	18620-18690	18600
00050-00153	00000				
02420-02476	00024	2720-2799	02700	18720-18790	18700
02820-02884	00028	2820-2882	02800	19136-19283	19000
03056-03163	00030	2924-2984	02900	21075-21226	21000
		3120-3199	03100	21511-21549	21500
05062-05185	00050	3320-3387	03300	22168-22334	22000
07079-07204	00070				
08118-08231	00080	3420-3490	03400	22720-22780	22700
09062-09196	00090	3520-3586	03500	23092-23256	23000
		3620-3660	03600	23420-23491	23400
4-7	00005	3720-3784	03700	23620-23691	23600
11-14	00011	3820-3884	03800	24112-24262	24000
15-18	00015				
21-24	00021	3920-3994	03900	24720-24781	24700
31-34	00031	4320-4395	04300	25519-25584	25500
		4520-4595	04500	25820-25880	25800
35-38	00035	5320-5395	05300	26093-26300	26000
45-47	00045	5520-5595	05500	26820-26886	26800
312-316	00315				
332-349	00335	5720-5795	05700	27620-27690	27600
350-360	00355	6220-6280	06200	27820-27881	27800
		6320-6391	06300	28118-28318	28000
362-370	00365	6420-6484	06400	28521-28584	28500
372-378	00375	6521-6580	06500	28622-28682	28600
382-389	00385				
390-399	00395	8304-8330	08300	28820-28880	28800
414-422	00415	8520-8578	08500	28920-28995	28900
		8820-8880	08800	29520-29590	29500
432-449	00435	9120-9185	09100	29620-29688	29600
452-469	00455	9220-9285	09200	29710-29749	29700
472-488	00475				
492-499	00495	9320-9385	09300	29820-29880	29800
522-529	00525	9920-9977	09900	31520-31597	31500
		10520-10585	10500	33225-33472	33000
532-549	00535	11156-11315	11000	33820-33895	33800
552-560	00555	11520-11590	11500	34274-34500	34000
562-570	00565				
572-582	00575	11710-11749	11700	35175-35326	35000
590-598	00595	11910-11949	11900	36137-36300	36000
		12168-12303	12000	36620-36690	36600
612-624	00615	12520-12581	12500	36920-36990	36900
632-645	00635	12610-12649	12600	37425-37637	37000
652-665	00655				
672-691	00675	13169-13318	13000	38510-38549	38500
740-750	00745	13620-13687	13600	38820-38885	38800
		13830-13890	13800	39236-39433	39000
752-767	00755	14116-14283	14000	39520-39590	39500
772-787	00775	14525-14585	14500	41100-41294	41000
792-799	00795				
832-850	00835	15100-15251	15000	42346-42587	42000
854-869	00855	15520-15590	15500	42620-42690	42600
		16131-16284	16000	43096-43319	43000
892-898	00895	16522-16582	16500	44131-44363	44000
930-946	00935	16929-16986	16900	44610-44649	44600
1220-1280	01200				
1328-1380	01300				
1620-1680	01600				

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table LXII - Tapered roller bearings, section 2 series code for group 7 (cont'd.)

Cone nos. from - to	Series code	Cone nos. from - to	Series code	Cone nos. from - to	Series code
45220-45291	45000	82550-82587	82000	144614-144642	99144
46143-46369	46000	82720-82789	82700	147112-147198	99147
46720-46792	46700	82931-82951	82900	153044-153103	99153
47420-47490	47400	83265-83269	83000	157337-157430	99157
47620-47689	47600	84115-84155	84000	158350-158442	99158
47820-47896	47800	84210-84249	84200	161300-161925	99161
48120-48190	48100	84510-84548	84500	163110-163149	99163
48220-48291	48200	86100-86109	86000	168399-168500	99168
48320-48393	48300	86610-86669	86600	170950-171451	99170
48506-48508	48000	87111-87762	87000	175300-175350	99175
48510-48549	48500	88010-88128	88000	181453-182351	99181
48620-48686	48600	88510-88547	88500	192148-192201	99192
48750-48752	48700	88610-88649	88600	201250-201800	99201
49150-49368	49000	88900-88925	88900	203130-203190	99203
49520-49585	49500	89108-89150	89000	204140-204190	99204
52375-52401	52000	89410-89449	89400	205410-205449	99205
52510-52549	52500	90381-90744	90000	210700-211301	99210
52618-52638	52600	91112-91702	91000	212010-212049	99212
53150-53398	53000	92556-92988	92000	213362-213843	99213
53611-53648	53600	93125-93987	93000	215040-215098	99215
55175-55444	55000	94133-94719	94000	217056-217849	99217
56418-56662	56000	95426-95975	95000	219065-219122	99219
59162-59429	59000	96140-96944	96000	220975-221039	99220
64433-64700	64000	97450-97901	97000	221018-221576	99221
65199-65299	65000	98316-98789	98000	222070-222128	99222
65320-65395	65300	99100-99619	99000	224115-224749	99224
65500-65599	65500	101103-101601	99101	225710-225849	99225
66187-66462	66000	102810-102849	99102	228310-228349	99228
66520-66589	66500	103010-103049	99103	231110-232026	99231
67010-67048	67000	107057-107105	99107	234010-234223	99234
67320-67391	67300	108065-108142	99108	235113-235149	99235
67425-67675	67500	109120-109161	99109	236810-236849	99236
67720-67791	67700	111175-111725	99111	237510-237549	99237
67820-67887	67800	113089-113171	99113	238110-238849	99238
67920-67986	67900	114080-114161	99114	239171-239649	99239
68450-68726	68000	116048-116149	99116	241110-241549	99241
69354-69630	69000	117063-117148	99117	242377-242649	99242
71412-71751	71000	121140-121265	99121	243190-243251	99243
72187-72500	72000	122080-122125	99122	244180-244249	99244
73512-73876	73000	123167-123290	99123	246910-246949	99246
74500-74856	74000	125094-125145	99125	247510-247549	99247
77350-77675	77000	126096-126151	99126	249710-249949	99249
78214-78571	78000	127094-127140	99127	251000-251575	99251
80170-80222	80000	128102-128161	99128	252310-252349	99252
80325-80385	80300	129118-129172	99129	255410-255449	99255
80425-80480	80400	130787-131402	99130	256810-256849	99256
80720-80780	80700	132078-132127	99132	259010-259049	99259
81550-81606	81000	133136-133180	99133	261010-261049	99261
81610-81649	81600	134100-134145	99134	262710-262749	99262
81962-81963	81900	138131-138172	99138	264610-264648	99264

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table LXII - Tapered roller bearings, section 2 series code for group 7 (cont'd.)

Cone nos. from - to	Series code	Cone nos. from - to	Series code	Cone nos. from - to	Series code
266410-266449	99266	435010-435165	99435	586018-586049	99586
268710-268749	99268	437510-437549	99437	590638-591350	99590
269110-269143	99269	446310-446349	99446	603011-603049	99603
270710-270749	99270	450531-450549	99450	607070-607140	99607
272210-272749	99272	451250-451349	99451	610510-610549	99610
274110-274149	99274	455048-455118	99455	613410-613449	99613
275095-275161	99275	467510-467549	99467	617010-617049	99617
277455-277565	99277	470073-470133	99470	618065-618136	99618
280625-280702	99280	476510-476549	99476	619140-619320	99619
281110-281201	99281	480181-480749	99480	620100-620220	99620
285160-285228	99285	481411-481448	99481	623110-623265	99623
291175-291751	99291	501310-501349	99501	624510-624749	99624
295102-295950	99295	502010-502049	99502	629256-629405	99629
299615-299711	99299	506310-506348	99506	631311-631480	99631
305610-305649	99305	507910-507949	99507	639210-639249	99639
319210-319349	99319	510710-510749	99510	640191-640262	99640
321145-321246	99321	514045-514110	99514	641110-641149	99641
323166-323290	99323	515097-515238	99515	647220-647285	99647
324103-324160	99324	516050-516449	99516	649237-649313	99649
327010-327357	99327	517036-517117	99517	654610-654649	99654
328167-328448	99328	518061-518135	99518	655270-655346	99655
329115-329173	99329	521810-521849	99521	662303-663551	99662
330116-330166	99330	522102-522549	99522	665910-665949	99665
333137-333203	99333	523087-523088	99523	667910-667947	99667
341048-341098	99341	526129-526191	99526	671798-672875	99671
342043-342091	99342	527236-527380	99527	680235-680270	99680
348410-348449	99348	528301-528480	99528	687910-687949	99687
349510-349549	99349	529091-529749	99529	690296-690465	99690
350701-350687	99350	531201-531911	99531	700090-700168	99700
352110-352149	99352	532297-532445	99532	710806-711600	99710
357010-357049	99357	535310-535349	99535	713010-713049	99713
361161-361649	99361	536136-536225	99536	714610-714649	99714
365310-365348	99365	537075-537649	99537	715212-715380	99715
377410-377449	99377	538260-538370	99538	720125-720236	99720
379010-379049	99379	540010-541162	99540	722110-722186	99722
380080-380876	99380	542215-542291	99542	724119-724196	99724
382110-382149	99382	543085-543116	99543	726182-726287	99726
390090-390200	99390	544090-544118	99544	729221-729365	99729
408010-408049	99408	545112-545849	99545	735410-735449	99735
414210-414249	99414	550987-551701	99550	736160-736239	99736
420410-420801	99420	555210-555249	99555	737173-737261	99737
421210-421451	99421	560592-561275	99560	738101-738172	99738
423179-423300	99423	562710-562749	99562	739710-739749	99739
425176-425299	99425	565910-565949	99565	742710-742749	99742
426198-426331	99426	566810-566848	99566	743239-743345	99743
428262-428420	99428	567910-567949	99567	746610-746646	99746
429301-429470	99429	570610-570649	99570	749260-749336	99749
430829-431576	99430	571602-572655	99571	750502-751204	99750
432301-432470	99432	580010-581200	99580	752295-752381	99752
433301-433749	99433	582910-582949	99582	755280-755361	99755

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table LXII - Tapered roller bearings, section 2 series code for group 7 (cont'd.)

Cone nos. from - to	Series code	Cone nos. from - to	Series code	Cone nos. from - to	Series code
757010-757049	99757	814510-814849	99814	914412-914449	99914
758715-758744	99758	820085-820161	99820	921124-921876	99921
762320-762401	99762	821096-821165	99821	923095-923649	99923
763325-763410	99763	822100-822176	99822	924010-924045	99924
770910-770949	99770	823103-823175	99823	926710-926749	99926
772710-772749	99772	840210-840249	99840	929225-929341	99929
776420-776520	99776	843220-843292	99843	931170-931250	99931
778110-778149	99778	844010-844049	99844	932110-932147	99932
780210-781400	99780	852810-852849	99852	936310-936349	99936
783610-783649	99783	853010-853049	99853	941002-941953	99941
788310-788349	99788	859010-859049	99859	949510-949549	99949
789710-789749	99789	860010-860049	99860	953710-953749	99953
790114-790223	99790	865512-865548	99865	957010-957049	99957
801310-801349	99801	869410-869449	99869	959410-959447	99959
802011-802048	99802	879910-879947	99879	961511-961649	99961
803110-803149	99803	889010-889049	99889	971298-972151	99971
804010-804849	99804	903210-903345	99903	981992-982901	99981
806610-806649	99806	905810-905843	99905	991201-992550	99991
807010-807049	99807	911210-912401	99911		
813810-813849	99813	913810-913849	99913		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table LXIII - Section 3-significant digit codes for group 7

1st and 2nd position code XX—	Types 00 through 29 separate bearing parts-cones and cups
	Part identification number
10—	Cup - (no prefix)
30—	Cone - (separator type)
60—	Cone - full complement of rollers
41—	Cone - EE series
40—	Cone - NA series
22—	Cup - A series
42—	Cone - A series
17—	Cup - H series
37—	Cone - H series
13—	Cup - L series
33—	Cone - L series
15—	Cup - M series
35—	Cone - M series
18—	Cup - HH series
38—	Cone - HH series
16—	Cup - HM series
36—	Cone - HM series
19—	Cup - JH series
39—	Cone - JH series
23—	Cup - JHM series
43—	Cone - JHM series
24—	Cup - JLM series
44—	Cone - JLM series
25—	Cup - JM series
45—	Cone - JM series
12—	Cup - LL series
32—	Cone - LL series
14—	Cup - LM series
34—	Cone - LM series

Code XX—	Types 51 through 89 complete bearings
01-50	Assembly identification complete bearings non-separator type
51-96	complete bearings separator type

Types 000 through 29 separate bearing parts - cones and cups suffix letters		
3rd and 4th position code --XX	3rd and 4th position code --XX	3rd and 4th position code --XX
A = --11	DC = --40	SP = --64
AB = --12	DD = --39	SR = --65
AC = --13	DE = --41	ST = --89
ACP = --87	DS = --42	SW = --66
AD = --14	DT = --44	SX = --67
AS = --15	DW = --43	T = --68
AW = --17	DX = --45	TA = --69
AX = --16	E = --47	TD = --71
B = --19	EA = --48	TR = --72
BA = --21	EB = --49	U = --73
BC = --22	EC = --51	W = --74
BR = --23	ED = --52	WA = --75
BS = --24	EDC = --50	WB = --76
BW = --25	L = --53	WC = --70
C = --27	N = --54	WD = --77
CA = --28	NA = --57	WS = --86
CB = --29	NC = --55	X = --78
CC = --31	NW = --56	XA = --79
CE = --32	R = --58	XB = --81
CP = --33	RB = --59	XC = --82
CR = --34	S = --60	XD = --83
CS = --35	SA = --61	XE = --84
D = --36	SB = --62	XS = --80
DA = --37	SCP = --88	XW = --85
DB = --38	SD = --63	

Code --XX	Types 51 through 89 complete bearings bearing tolerance
--01	Class 4
--00	Class 2
--03	Class 3
--05	Class 0
--07	Class 00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

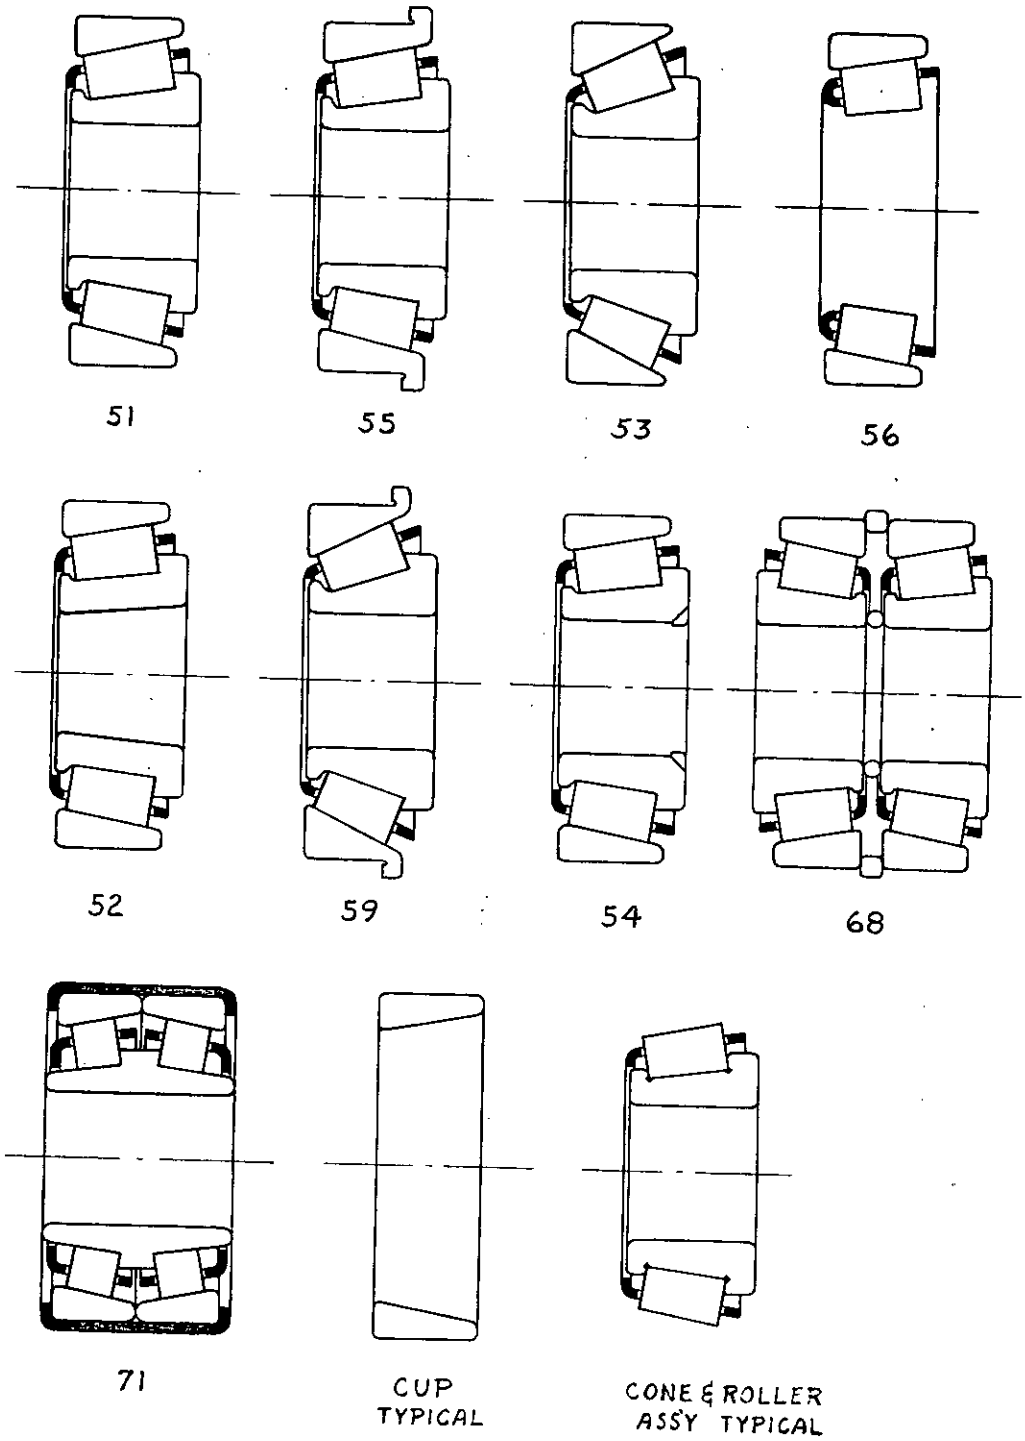


Figure 43 - Illustrations of group 7 bearing types.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

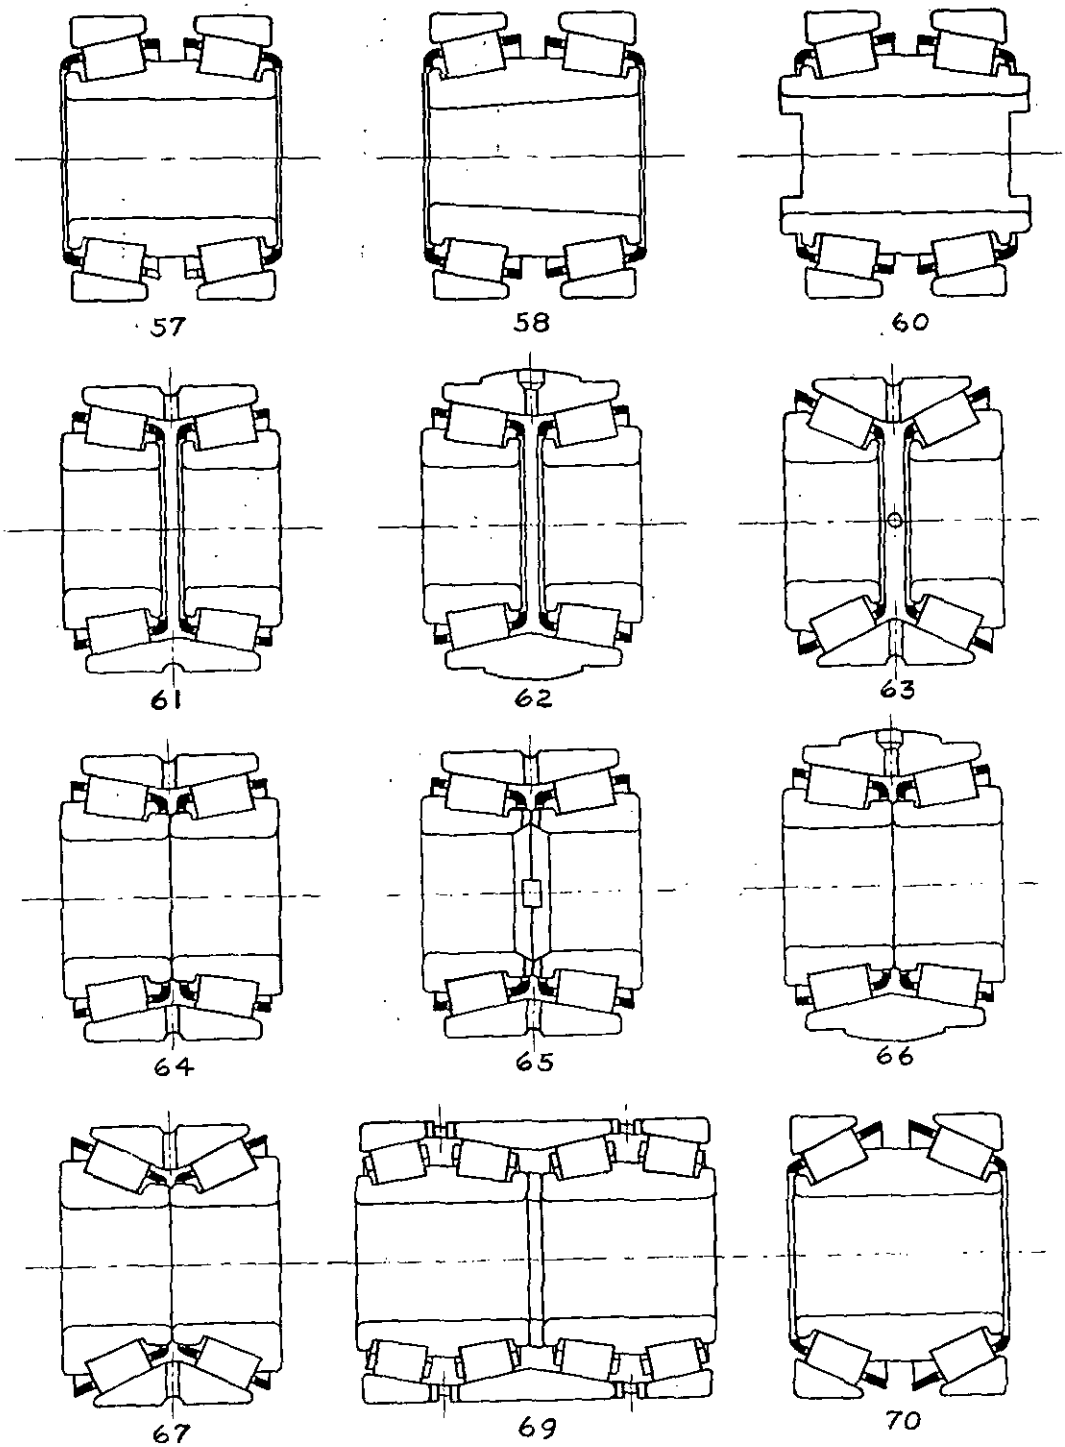


Figure 43 - Illustrations of group 7 bearing types (cont'd.)

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 This section covers general purpose ungrounded and grounded non-precision bearings - group 8.

2. REFERENCED DOCUMENTS

2.1 This section is not applicable.

3. NUMBER STRUCTURE

3.1 Digit positions. Example of digit positions is shown on figure 44.

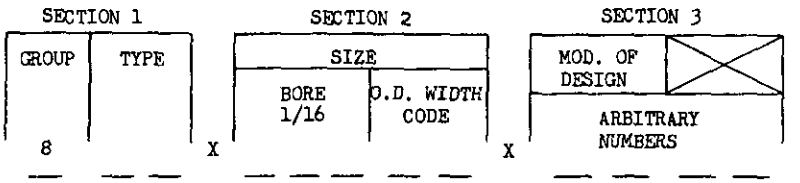


Figure 44 - Group 8, number structure.

4. CLASSIFICATION

4.1 Standard features. The following features are to be considered "standard":

(a) Retainerless construction

(b) Case hardened race surfaces

5. GROUP AND TYPE CODES

5.1 Digit positions. Example of digit positions is shown on figure 45.

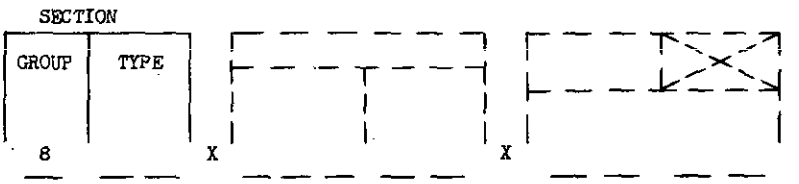


Figure 45 - Group 8, section 1.

5.2 Group code. Group code for first position shall be as follows:

8 - General purpose unground and ground non-precision bearings

5.3 Type codes (2nd and 3rd positions). Type codes for 2nd and 3rd positions shall be as specified in 5.3.1 through 5.3.5.

5.3.1 Low carbon steel, single row radial bearings (either inner or outer ring) composed of two or more pieces all inch dimensions shall be as follows:

Type		Dimension table
11	Unground - single row radial both rings same width.	IL (table LXV)
13	Unground - single row - radial inner ring extended on one side only.	IM (table LXVI)
14	Unground - single row - radial inner ring extended equal distance both sides.	IM (table LXVI)
15	Unground - single row - radial inner ring extended unequal distance on each side	IM (table LXVI)
18	Unground - single row - radial flanged outer ring - inner ring extended on flange side only.	IM (table LXVI)

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

5.3.2 Low carbon steel - single row radial bearings - one piece inner and outer rings - all inch dimensions shall be as follows:

Type		Dimension table
21	Ground (all surfaces) single row - radial.	IL (table LXV)
22	Ground (all surfaces) single row - radial - inner ring extended on one side only.	IM (table LXVI)

5.3.3 Low carbon steel - double row ball bearings (either inner or outer ring composed of one or more pieces - all inch dimensions shall be as follows:

Type		Dimension table
31	Unground - double row - both rings flush.	IL (table LXV)
32	Unground - double row - inner ring extended both sides.	IM (table LXVI)
33	Unground - double row - inner ring extended one side only.	IM (table LXVI)

5.3.4 Low carbon steel - single row - radial thrust ball bearings (either inner or outer ring composed of one or more pieces) all inch dimensions shall be as follows:

Type		Dimension table
41	Unground - single row radial thrust with formed inner ring.	IL (table LXV)
42	Unground - single row radial thrust with machined inner ring.	IL (table LXV)
43	Unground - single row radial thrust with formed inner ring and flanged outer ring.	IL (table LXV)
44	Unground - single row radial thrust with machined inner ring and flanged outer ring.	IL (table LXV)
45	Unground - single row radial thrust with inner ring extended on one side and flanged outer ring.	IM (table LXVI)

5.3.5 Low carbon steel thrust bearings - washer type - all inch dimensions shall be as follows:

Type		Dimension table
51	Unground - grooved raceways - rigid or flat seat type - single direction.	IH (table LXIV)
52	Unground - rigid or flat seat type - single direction - tapered roller thrust bearing.	IH (table LXIV)

6. BORE SIZE - O.D. AND WIDTH CODE

6.1 Digit positions. Example of digit positions is shown on figure 46.

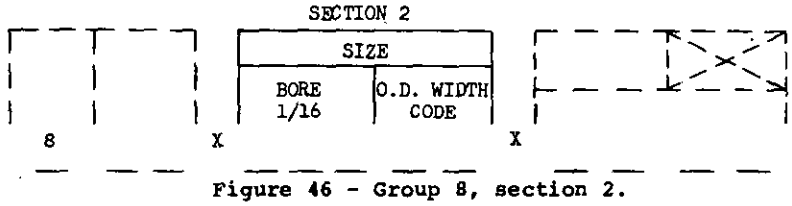


Figure 46 - Group 8, section 2.

6.2 Bore size (4, 5 and 6th positions). The bore size of general purpose unground and ground non-precision bearings is given as inch and is expressed as the number of 1/16ths. The type descriptions and boundary dimension tables utilize this method of expression.

6.2.1 Application. Example:

3/16 inch = 003; 1/2 inch = 008
1 inch = 116; 1-1/4 inches = 020

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

6.3 O.D. and width code (7 and 8th positions). The O.D. and width (or height) dimensions of a bearing are expressed by a code as shown on the boundary dimension tables (see tables LXIV through LXVI).

6.3.1 Application. The type description carries a reference to the appropriate boundary dimension table. These tables are arranged by bore size, and within each bore size the O.D.'s and widths are arranged in numerical sequence. Opposite each set of dimensions is the appropriate "Code" for the O.D. and width.

6.3.2 Interpretation of O.D. and width code. A bearing number shall be as follows:

811 - 00311 is decoded as:
811 = General purpose, low carbon steel, unground,
single row radial bearing, all inch dimensions, boundary
dimension table IL (see table LXV).
00311 = (003)-3/16 inch bore; O.D. and width code 11

Reference to boundary dimension table IL (see table LXV), bore size 003 and code 11 indicates that the O.D. is 3/4 inch and the width is 1/4 inch.

7. VARIATIONS OF THE GROUP 8 BASE BEARING NUMBER

7.1 Digit positions. Example of digit positions is shown on figure 47.

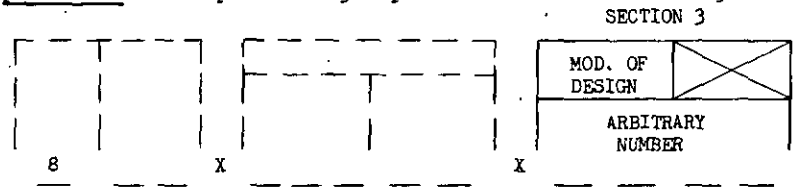


Figure 47 - Group 8, section 3.

7.2 Additional variations. Section 3 codes, any additional variations, modifications or special features of a bearing, as described by the base number, which are necessary for complete identification. Section 3 may be either a "Significant Code" covering those common features listed below or an arbitrarily assigned number known as a "Special Code" covering all other variations, modifications. etc.

7.2.1 Significant codes. Significant codes (1st and 2nd positions) will be of two digits and will begin with the numerals 0 through 7 as follows:

1st and 2nd position code (section 3)

Code	
01	One dust shield
02	Two dust shields
03	Two synthetic contact shields
05	Setscrew in inner race
06	Setscrew in inner race - one dust shield
07	Setscrew in inner race - two dust shields
11	Bore only ground - one dust shield
12	Bore only ground - two dust shields
15	O.D. only ground
16	O.D. only ground - one dust shield
17	O.D. only ground - two dust shields
20	Bore and O.D. ground
21	Bore and O.D. ground - one dust shield
22	Bore and O.D. ground - two dust shields
25	Setscrew in inner race - bore only ground
26	Setscrew in inner race - bore only ground - one dust shield
27	Setscrew in inner race - bore only ground - two dust shields
30	Baffle or felt seal on extended race side of bearing
31	Baffle or felt seal on extended race side of bearing - one dust shield
35	Banded O.D.
36	Banded O.D. - one dust shield
37	Banded O.D. - two dust shields
40	Ball retainer

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Code

41 Ball retainer - one dust shield
42 Ball retainer - two dust shields
45 Cadmium plated surfaces
46 Cadmium plated surfaces - one dust shield
47 Cadmium plated surfaces - two dust shields

7.2.2 Since group 8 bearings are usually not covered by a lubrication specification, these bearings should be coded 00 in the 3rd and 4th position (section 3) indicating manufacturers' standard slush.

7.3 Special codes. Special codes are arbitrarily assigned numbers of four digits only that begin with the numerals 8 and 9. These four digit numbers are assigned in numerical sequence as they are required to code additional features (not covered by the significant codes) of a particular base number. The more common features significantly coded in the "Table of Variation" may occur in conjunction with some additional features, in which case all of the additional features are coded by a special code.

7.3.1 Special codes. Special codes are assigned only by the central agency responsible for the numbering system.

8. BOUNDARY DIMENSION TABLES

8.1 Use. Use of the boundary dimension tables shall be as follows:

Dimension table	Bearing types
IH (table LXIV)	51, 52
IL (table LXV)	11, 21, 31, 41, 42, 43, 44
IM (table LXVI)	13, 14, 15, 18, 22, 32, 33, 45

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table LXIV - Boundary dimensions-IH

Bore		O.D.	Height	O.D. and height code	Bore		O.D.	Height	O.D. and height core
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
003	3/16	7/16	3/16	01	006	3/8	1-1/16	5/8	11
		17/32	3/16	02			1-3/32	1/2	12
		5/8	1/4	03			1-3/16	1/2	13
		3/4	1/4	04			1-1/4	23/32	14
		7/8	3/8	07			1-1/4	15/16	15
		15/16	3/8	05			1-5/16	1 1/4	16
		15/16	7/16	06			1-1/2	11/16	18
							1-1/2	1-3/32	19
004	1/4	9/16	7/32	01			1-11/16	1-9/16	20
		5/8	3/8	02			1-13/16	1-1/8	17
		5/8	7/16	03			2	1-3/8	21
		21/32	1/4	04			2	1-15/16	22
		23/32	5/16	05			2-1/4	2	23
		3/4	1/4	06			2-7/16	2	24
		3/4	21/32	19			2-1/2	2	25
		49/64	3/8	07			3	2	26
		13/16	3/8	08					
		13/16	7/16	09	007	7/16	43/64	5/16	01
		27/32	21/64	18			3/4	9/32	02
		27/32	3/8	10			13/16	5/16	03
		7/8	17/32	11			7/8	1/4	04
		1	5/8	12			15/16	5/16	05
		1-1/16	11/16	13			1	5/16	06
		1-1/4	15/16	14			1-3/64	23/64	16
		1-9/32	1-1/8	15			1-1/16	3/8	07
		1-9/16	1-9/16	16			1-3/32	1/2	08
		1-3/4	1-3/4	17			1-1/8	5/8	09
							1-1/4	23/32	10
005	5/16	5/8	1/4	01			1-9/32	5/8	11
		11/16	9/32	02			1-13/32	1 1/8	12
		11/16	5/16	03			1-1/2	27/32	13
		3/4	1/4	04			1-9/16	1-5/16	14
		27/32	3/8	05			1-3/4	1-1/4	15
		15/16	3/8	06					
		1	3/8	07	008	1/2	3/4	7/16	01
		1	17/32	08			7/8	1/4	02
		1-1/16	5/8	09			7/8	3/8	03
		1-3/32	1/2	10			7/8	9/16	04
		1-1/4	23/32	11			31/32	1/4	05
		1-9/32	1-1/8	12			1	9/32	07
		1-5/16	1-1/4	13			1	11/32	34
		1-1/2	1-3/32	14			1	3/8	06
							1-1/16	5/16	08
006	3/8	9/16	1/4	01			1-3/32	3/8	09
		5/8	1/4	02			1-1/8	5/8	10
		11/16	9/32	03			1-3/16	3/8	11
		47/64	19/64	28			1-3/16	7/16	12
		3/4	9/32	04			1-3/16	31/64	13
		3/4	5/16	05			1-3/16	5/8	14
		13/16	1/4	06			1-7/32	15/32	15
		7/8	5/16	07			1-7/32	9/16	16
		1	5/16	08			1-7/32	5/8	17
		1	17/32	09			1-1/4	17/32	18
		1-1/32	1/2	10			1-1/4	23/32	19
		1-3/64	23/64	27			1-17/64	7/16	33

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table LXIV - Boundary dimensions-IH (cont'd.)

Bore		O.D.	Height	O.D. and height code
No. of 1/16	Inches	Inches	Inches	
008	1/2	1-9/32	5/8	20
		1-3/8	9/16	21
		1-3/8	5/8	22
		1-7/16	5/8	23
		1-7/16	11/16	24
		1-1/2	27/32	25
		1-17/32	1-1/8	26
		1-9/16	1-1/8	27
		1-9/16	1-5/16	28
		1-3/4	1-1/4	29
		1-13/16	1-9/16	30
		1-7/8	1-3/4	31
		2-1/4	2-5/16	32
009	9/16	1	17/32	01
		1-1/32	5/16	02
		1-1/8	3/8	03
		1-7/32	9/16	04
		1-7/32	5/8	05
		1-11/32	7/16	12
		1-3/8	17/32	06
		1-13/32	5/8	07
		1-7/16	5/8	08
		1-1/2	3/4	09
		1-3/4	29/32	10
		2	1-5/16	11
010	5/8	1	9/32	01
		1	1/2	02
		1-1/8	5/16	03
		1-1/8	11/32	04
		1-1/8	7/16	05
		1-1/8	9/16	06
		1-3/32	9/32	07
		1-1/4	3/8	08
		1-1/4	9/16	09
		1-5/16	9/16	10
		1-5/16	5/8	11
		1-11/32	7/16	12
		1-11/32	9/16	13
		1-11/32	5/8	14
		1-3/8	15/32	15
		1-3/8	33/64	16
		1-3/8	5/8	17
		1-13/32	5/8	18
		1-27/64	29/64	38
		1-7/16	9/16	19
		1-7/16	11/16	20
		1-1/2	1/2	21
		1-1/2	11/16	22
		1-1/2	3/4	23
		1-9/16	19/32	24
		1-9/16	5/8	25
		1-9/16	43/64	26
		1-9/16	1-1/4	27

Bore		O.D.	Height	O.D. and height code
No. of 1/16	Inches	Inches	Inches	
010	5/8	1-5/8	23/32	28
		1-21/32	1-1/8	29
		1-11/16	1-1/8	30
		1-3/4	13/16	31
		1-3/4	29/32	32
		1-13/16	1-17/32	33
		1-15/16	1-9/16	34
		2	1-5/16	35
		2-1/8	1-15/16	36
		2-1/2	2-1/2	37
011	11/16	1-11/32	9/16	01
		1-11/32	5/8	02
		1-9/16	5/8	03
		1-11/16	9/16	04
		1-13/16	1-5/16	05
		1-15/16	13/16	06
		1-15/16	7/8	07
		2-1/16	1 3/4	08
012	3/4	1-3/32	9/32	01
		1-1/4	7/16	02
		1-1/4	9/16	03
		1-9/32	5/16	04
		1-5/16	9/32	05
		1-11/32	5/8	06
		1-7/16	27/64	09
		1-15/32	9/16	07
		1-15/32	5/8	08
		1-1/2	11/16	11
		1-17/32	5/8	12
		1-9/16	1/2	13
		1-9/16	35/64	14
		1-9/16	5/8	15
		1-5/8	19/32	16
		1-21/32	35/64	42
		1-11/16	5/8	17
		1-3/4	5/8	21
		1-3/4	21/32	18
		1-3/4	11/16	19
		1-3/4	23/32	20
		1-3/4	7/8	22
		1-25/32	1-1/8	23
		1-13/16	25/32	24
		1-13/16	1-1/8	25
		1-7/8	3/4	26
		1-7/8	1 1/4	27
		2	3/4	28
		2	1-1/16	29
		2	1-5/16	30
		2-1/16	1-11/16	31
		2-1/4	1-17/32	32
		2-1/4	1-15/16	33
		2-5/16	7/8	34
		2-7/16	2	35

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table LXIV - Boundary dimensions-IH (cont'd.)

Bore		O.D.	Height	O.D. and height code	Bore		O.D.	Height	O.D. and height code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
012	3/4	2-7/8	2-3/4	36	014	7/8	2-9/16	15/16	38
		3-1/4	7/8	37			2-11/16	2-5/16	39
		3-1/2	1-3/4	38			3-1/8	3-3/16	40
		3-1/2	2	39			4-3/4	2	41
		4-7/16	2	40					
		6	2-1/8	41	015	15/16	1-1/2	1/2	01
							1-5/8	9/16	03
013	13/16	1-1/4	1/2	01			1-5/8	5/8	02
		1-9/32	1/2	02			1-27/32	5/8	04
		1-3/8	17/32	03			1-27/32	3/4	05
		1-13/32	9/16	04			1-15/16	3/4	06
		1-15/32	9/16	05			1-15/16	13/16	07
		1-15/32	5/8	06			2	11/16	08
		1-1/2	7/16	07			2	23/32	09
		1-11/16	5/8	08			2	13/16	10
		1-15/16	13/16	09			2-1/8	3/4	11
							2-7/16	1	12
014	7/8	1-3/8	9/16	01					
		1-1/2	9/32	02	016	1	1-1/2	5/8	01
		1-1/2	3/8	03			1-5/8	3/8	02
		1-1/2	1/2	04			1-5/8	9/16	03
		1-1/2	17/32	05			1-11/16	1/2	04
		1-1/2	11/16	06			1-3/4	9/16	05
		1-9/16	9/16	07			1-3/4	5/8	06
		1-5/8	1/2	08			1-25/32	5/8	07
		1-5/8	9/16	09			1-27/32	3/4	08
		1-5/8	5/8	10			1-7/8	3/8	09
		1-21/32	5/8	11			1-7/8	9/16	10
		1-11/16	1/2	12			1-7/8	5/8	11
		1-11/16	19/32	13			1-7/8	11/16	12
		1-3/4	9/16	14			1-7/8	3/4	13
		1-3/4	5/8	15			1-15/16	1/2	14
		1-3/4	21/32	16			1-15/16	9/16	15
		1-3/4	11/16	17			1-15/16	5/8	16
		1-3/4	3/4	18			1-15/16	11/16	17
		1-13/16	11/16	19			1-15/16	3/4	18
		1-27/32	5/8	20			1-15/16	13/16	19
		1-27/32	3/4	21			1-31/32	19/32	20
		1-7/8	23/32	22			1-31/32	5/8	21
		1-57/64	19/32	42			1-31/32	3/4	22
		1-29/32	1 1/8	23			2	5/8	23
		1-15/16	11/16	24			2	11/16	24
		1-15/16	3/4	25			2	13/16	25
		1-15/16	49/64	26			2-1/64	41/64	57
		1-15/16	1-1/8	27			2-1/16	3/4	26
		1-31/32	1/2	28			2-1/16	1-1/8	27
		2	1	29			2-3/32	1-1/4	28
		2-1/16	27/32	30			2-1/8	23/32	29
		2-1/8	5/16	32			2-1/8	13/16	30
		2-1/8	11/16	31			2-1/4	21/32	31
		2-3/16	1-11/16	33			2-1/4	3/4	32
		2-1/4	1-3/16	34			2-1/4	13/16	33
		2-1/4	1-9/16	35			2-1/4	7/8	34
		2-1/2	1-3/4	36			2-1/4	29/32	35
		2-1/2	2-3/16	37			2-1/4	1	36

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table LXIV - Boundary dimensions-IH (cont'd.)

Bore		O.D.	Height	O.D. and height code
No. of 1/16	Inches	Inches	Inches	
016	1	2-1/4	1-1/16	37
		2-1/4	1-5/16	38
		2-5/16	1-1/8	39
		2-7/16	1-13/16	40
		2-1/2	1-3/8	41
		2-1/2	1-3/4	42
		2-3/4	2-1/2	43
		2-7/8	1-1/8	44
		2-7/8	1-3/16	45
		2-7/8	1-13/32	46
		2-7/8	2	47
		3	1	48
		3	2-5/8	49
		3-1/8	2-1/16	50
		3-1/4	7/8	51
		3-3/8	0.822	52
		3-1/2	3-5/8	53
		4	2	54
		6-1/2	2-1/4	55
		7-1/2	2-1/2	56
017	1 1/16	1-11/16	5/8	01
		1-3/4	5/8	02
		1-7/8	9/16	03
		1-7/8	11/16	04
		1-29/32	11/16	05
		1-15/16	3/4	06
		1-31/32	5/8	07
		1-31/32	3/4	08
		2	5/8	19
		2	11/16	09
		2-1/16	3/4	10
		2-1/8	5/8	11
		2-1/8	3/4	12
		2-1/8	13/16	13
		2-3/16	7/16	14
		2-3/16	5/8	15
		2-3/16	13/16	16
		2-1/4	1-1/16	17
		2-7/16	1	18
018	1 1/8	1-3/4	3/8	01
		1-27/32	3/4	02
		1-7/8	9/16	03
		1-7/8	5/8	04
		1-29/32	5/8	05
		1-31/32	5/8	06
		2	23/32	07
		2-1/16	19/32	08
		2-1/16	21/32	09
		2-3/32	5/8	10
		2-3/32	3/4	11
		2-1/8	5/8	12
		2-1/8	23/32	13
		2-1/8	13/16	14
018	1-1/8	2-1/8	7/8	15
		2-3/16	9/16	16
		2-3/16	11/16	17
		2-3/16	3/4	18
		2-3/16	15/16	19
		2-3/16	1-1/8	20
		2-7/32	1-1/4	21
		2-1/4	13/16	22
		2-5/16	25/32	23
		2-5/16	55/64	24
		2-11/32	15/16	25
		2-3/8	1-1/16	26
		2-25/64	11/16	42
		2-7/16	15/16	27
		2-1/2	1-9/16	28
		2-9/16	7/8	29
		2-9/16	15/16	30
		2-9/16	1-1/16	31
		2-9/16	1-5/16	32
		2-5/8	1-13/16	33
		2-13/16	1-1/2	34
		3	5/8	35
		3-1/8	2-5/16	36
		3-3/16	1-1/4	37
		3-3/16	1-5/16	38
		3-3/16	1-9/16	39
		3-3/8	2-7/16	40
		3-1/2	0.822	41
019	1 3/16	1-15/16	17/32	01
		1-15/16	5/8	02
		2-1/16	5/8	03
		2-3/32	5/8	04
		2-3/32	3/4	05
		2-1/8	0.779	06
		2-3/16	11/16	07
		2-3/16	3/4	08
		2-1/4	13/16	09
		2-11/32	15/16	10
		2-3/8	1-1/16	11
		2-13/32	15/16	12
		2-11/16	1-1/8	13
020	1 1/4	2	13/16	01
		2-1/16	1/2	02
		2-3/32	23/32	03
		2-1/8	11/16	04
		2-3/16	11/16	05
		2-1/4	5/8	06
		2-1/4	11/16	07
		2-1/4	29/32	08
		2-5/16	3/4	09
		2-11/32	5/8	10
		2-11/32	3/4	11
		2-11/32	15/16	12

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table LXIV - Boundary dimensions-IH (cont'd.)

Bore		O.D.	Height	O.D. and height code	Bore		O.D.	Height	O.D. and height code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
020	1-1/4	2-11/32	1-1/4	13	022	1-3/8	2-1/4	7/32	04
		2-3/8	13/16	14			2-1/4	5/8	05
		2-3/8	1	15			2-11/32	3/4	06
		2-13/32	15/16	16			2-3/8	21/32	07
		2-7/16	5/8	17			2-3/8	47/64	08
		2-7/16	3/4	18			2-13/32	11/16	09
		2-7/16	13/16	19			2-7/16	3/4	10
		2-7/16	1-1/4	20			2-15/32	5/8	37
		2-1/2	13/16	21			2-15/32	3/4	11
		2-1/2	15/16	22			2-15/32	13/16	12
		2-1/2	1-1/16	23			2-15/32	1-1/4	13
		2-33/64	45/64	46			2-1/2	13/16	14
		2-5/8	1	24			2-1/2	15/16	15
		2-3/4	5/8	25			2-1/2	1	16
		2-3/4	1-3/4	26			2-5/8	13/16	17
		2-3/4	1-13/16	27			2-5/8	1-1/4	18
		2-7/8	1	28			2-11/16	27/32	19
		2-7/8	1-1/16	29			2-11/16	61/64	20
		2-7/8	1-1/4	30			2-3/4	13/16	21
		2-7/8	1-1/2	31			2-13/16	7/8	22
		2-7/8	2	32			2-13/16	1-1/16	23
		3	1-7/16	33			2-7/8	13/16	24
		3-1/8	1-11/16	34			2-7/8	1-13/16	25
		3-1/4	2-3/4	35			2-15/16	1-3/16	26
		3-3/8	1-1/4	36			3	1-1/16	27
		3-3/8	2-7/16	37			3	1-1/2	28
		3-1/2	1-3/8	38			3-1/4	1-1/4	29
		3-1/2	1-7/16	39			3-1/4	1-11/16	30
		3-1/2	1-23/32	40			3-5/16	2-1/4	31
		3-1/2	2-5/8	41			3-1/2	1-1/2	32
		3-1/2	3-1/16	42			3-5/8	2-7/16	33
		3-11/16	1.010	43			3-5/8	2-5/8	34
		4	1	44			3-11/16	1-1/4	35
		4	4-3/16	45			4	3-1/2	36
021	1-5/16	2-1/32	9/16	01	023	1 7/16	2-7/32	5/8	16
		2-7/32	23/32	03			2-13/32	11/16	01
		2-5/16	3/4	02			2-7/16	5/16	03
		2-11/32	3/8	04			2-7/16	3/4	02
		2-11/32	5/8	16			2-15/32	5/8	04
		2-11/32	3/4	05			2-15/32	3/4	05
		2-3/8	3/4	06			2-1/2	15/16	06
		2-3/8	13/16	07			2-19/32	15/16	07
		2-7/16	15/16	08			2-5/8	13/16	08
		2-1/2	13/16	09			2-11/16	7/8	09
		2-1/2	1-1/16	10			2-7/8	13/16	10
		2-11/16	1-1/8	11			2-15/16	1-1/8	11
		2-3/4	1-1/4	12			3	1-1/16	12
		2-13/16	11/16	13			3	1-1/4	13
		2-13/16	15/16	14			3-1/4	1-1/4	14
		3-1/2	13/16	15			3-1/4	1-5/16	15
022	1 3/8	2	1	01	024	1 1/2	2-1/8	1/2	01
		2-3/16	1/2	02			2-1/4	3/4	02
		2-7/32	23/32	03			2-1/4	1-1/4	03

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table LXIV - Boundary dimensions-IH (cont'd.)

Bore		O.D.	Height	O.D. and height code	Bore		O.D.	Height	O.D. and height code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
024	1-1/2	2-5/16	1/2	04	025	1-9/16	2-9/16	3/4	01
		2-11/32	23/32	05			2-19/32	5/8	02
		2-1/2	5/8	06			2-19/32	3/4	03
		2-17/32	15/16	07			2-3/4	1	04
		2-9/16	11/16	08			2-25/32	7/8	05
		2-9/16	3/4	09			2-7/8	27/32	06
		2-9/16	49/64	10			3	13/16	07
		2-19/32	5/8	11			3	1	08
		2-19/32	11/16	12			3-1/32	1-1/2	09
		2-19/32	3/4	13			3-1/8	1-1/16	10
		2-19/32	15/16	14			3-1/4	1-1/16	11
		2-5/8	5/8	15			6-5/16	2-1/4	12
		2-5/8	27/32	16					
		2-11/16	11/16	17	026	1-5/8	2-7/16	1/2	01
		2-11/16	13/16	18			2-15/32	5/8	02
		2-11/16	7/8	19			2-15/32	23/32	03
		2-11/16	1-5/16	20			2-1/2	1	04
		2-3/4	1-1/8	21			2-19/32	11/16	05
		2-7/8	29/32	22			2-21/32	13/16	06
		2-7/8	1	23			2-3/4	15/64	08
		2-15/16	1-3/16	24			2-3/4	23/32	07
		3	13/16	25			2-13/16	7/8	09
		3	27/32	57			2-13/16	29/32	10
		3	1-3/32	26			2-13/16	1-5/8	11
		3-1/16	1-7/8	27			2-7/8	1-1/8	12
		3-1/8	1-1/16	28			2-7/8	1-1/4	13
		3-1/8	1-1/4	29			2-31/32	13/16	14
		3-1/4	1-1/8	30			2-31/32	7/8	15
		3-1/4	1-3/16	31			2-31/32	1-15/16	16
		3-1/4	1-3/8	32			3	27/32	36
		3-1/4	1-13/32	33			3	1-3/16	17
		3-1/4	2	34			3-1/16	15/16	18
		3-3/8	1-3/4	35			3-1/16	1-3/64	19
		3-1/2	1-1/4	36			3-3/32	13/32	20
		3-3/4	2	37			3-3/16	1-5/32	21
		3-3/4	2-7/16	38			3-1/4	1	22
		3-3/4	3-1/4	39			3-5/16	2	23
		4	1	40			3-3/8	1-5/16	24
		4	1.010	41			3-1/2	1-1/4	25
		4	3-1/16	42			3-1/2	1-3/4	26
		4-1/32	1-5/8	43			3-11/16	1-1/4	27
		4-1/4	1-5/8	44			3-11/16	2-1/2	28
		4-1/4	1-11/16	45			3-7/8	2	29
		4-1/4	2-1/32	46			3-7/8	2-7/16	30
		4-1/2	4-5/8	47			4-1/8	3-1/16	31
		4-5/8	1-11/16	48			4-1/8	3-1/2	32
		5	1-3/4	49			4-5/8	4	33
		5	2	51			5	1-5/8	34
		5	2-3/8	50			5-1/4	5-1/4	35
		6-3/4	1.385	52					
		8	1.385	53	027	1-11/16	2-1/2	3/4	01
		8	2-1/2	54			2-19/32	11/16	02
		9	1.385	55			2-11/16	13/16	03
		10	3	56			2-11/16	7/8	04

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table LXIV - Boundary dimensions-IH (cont'd.)

Bore		O.D.	Height	O.D. and height code	Bore		O.D.	Height	O.D. and height code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
027	1-11/16	2-3/4	13/16	05	028	1-3/4	4-21/32	1	43
		2-13/16	7/8	06			4-13/16	1-7/8	46
		2-31/32	13/16	07			4-13/16	1-15/16	47
		2-31/32	7/8	08			4-13/16	2-11/32	48
		3-1/8	13/16	09			4-7/8	1-1/8	49
		3-1/8	1-1/8	10			4-7/8	4	50
		3-3/16	1-1/8	11			5-7/8	5-11/16	51
		3-3/16	1-5/16	14					
		3-1/4	1	12	029	1-13/16	2-3/4	11/16	01
		3-3/8	1-3/16	13			2-13/16	3/4	02
							2-15/16	7/8	03
028	1-3/4	2-5/8	5/8	01			2-15/16	15/16	04
		2-11/16	3/4	02			3-1/16	3/4	05
		2-25/32	3/4	03			3-3/32	7/16	06
		2-7/8	11/16	04			3-3/32	13/16	07
		2-15/16	3/4	05			3-3/32	7/8	08
		2-15/16	53/64	06			3-1/8	1-1/8	09
		2-15/16	7/8	07			3-3/16	1-1/8	10
		2-31/32	1-1/8	08			3-3/8	1	11
		3	15/16	09			3-1/2	1-5/16	12
		3-1/16	3/4	10					
		3-3/32	13/16	12	030	1-7/8	2-3/8	1/2	01
		3-3/32	7/8	13			2-3/4	5/8	02
		3-3/16	13/16	14			2-3/4	13/16	03
		3-3/16	15/16	15			2-13/16	3/4	04
		3-3/16	1	16			3-1/16	25/32	05
		3-3/16	1-1/8	17			3-1/16	7/8	06
		3-3/16	1-1/4	18			3-1/8	13/16	07
		3-7/32	1	19			3-3/16	31/32	08
		3-7/32	1-9/16	20			3-3/16	1-5/16	09
		3-1/4	15/16	21			3-7/32	3/4	10
		3-1/4	31/32	22			3-7/32	13/16	11
		3-1/4	1-3/32	23			3-7/32	7/8	12
		3-3/8	1	24			3-5/16	1-1/4	13
		3-3/8	1-7/32	25			3-11/32	1-9/16	14
		3-1/2	1	26			3-7/16	15/16	15
		3-1/2	1-1/4	27			3-7/16	1-1/32	16
		3-1/2	1-5/16	28			3-7/16	1-9/64	17
		3-5/8	1-1/4	29			3-1/2	1	18
		3-5/8	1-5/16	30			3-9/16	1-1/4	19
		3-5/8	1-9/16	31			3-5/8	1-5/16	20
		3-5/8	2-1/4	32			3-3/4	1-1/4	21
		3-11/16	1-5/16	11			3-3/4	2-1/4	22
		3-3/4	7/8	33			4	1-1/4	23
		3-3/4	1-1/4	34			4	2	24
		3-3/4	1-5/8	35			4-1/4	1-3/8	25
		3-3/4	2-1/4	36			4-1/4	2-7/16	26
		3-3/4	4	37			4-1/4	3	27
		3-7/8	2	38			4-1/2	2-5/16	28
		4	1-1/2	39			4-5/8	3-1/2	29
		4	2-7/16	40			5-1/4	4-7/16	30
		4-5/16	1.010	41					
		4-3/8	2-5/16	42	031	1 15/16	2-15/16	1	01
		4-1/2	3-1/2	44			3	13/16	02
		4-5/8	1-1/8	45			3	7/8	03

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the currentversion before use.

Table LXIV - Boundary dimensions-IH (cont'd.)

Bore		O.D.	Height	O.D. and height code
No. of 1/16	Inches	Inches	Inches	
031	1-15/16	3	1-3/16	04
		3-1/16	7/8	05
		3-3/16	1-3/16	06
		3-7/32	13/16	07
		3-7/32	7/8	08
		3-1/4	1-3/16	09
		3-1/4	1-1/4	10
		3-7/16	1-1/4	11
		3-1/2	1	12
		3-19/32	1-1/8	13
		3-5/8	1-5/16	14
		3-3/4	1-1/4	15
		4	1-1/2	16
		4	1-5/8	17
		6	1-3/4	18
032	2	2-7/8	5/8	01
		2-15/16	3/4	02
		2-31/32	3/4	03
		3	13/16	04
		3-1/16	11/16	05
		3-1/16	3/4	06
		3-3/32	3/4	07
		3-3/16	7/8	08
		3-3/16	1	09
		3-3/16	1-3/16	10
		3-1/4	3/4	11
		3-1/4	13/16	12
		3-1/4	29/32	13
		3-1/4	15/16	14
		3-1/4	1-3/16	15
		3-5/16	1-5/16	16
		3-11/32	13/16	17
		3-11/32	7/8	18
		3-11/32	1-1/4	19
		3-3/8	13/16	20
		3-3/8	1	21
		3-1/2	13/16	22
		3-1/2	1-5/8	23
		3-19/32	1-3/4	24
		3-5/8	1	25
		3-5/8	1-1/16	26
		3-5/8	1-3/16	27
		3-11/16	1-3/8	28
		3-3/4	7/8	29
		3-3/4	1	30
		3-3/4	1-3/32	31
		3-3/4	1-5/16	32
		3-15/16	1	33
		4	1-3/8	34
		4	1-7/16	35
		4	1-23/32	36
		4	2-7/16	37
		4-1/8	13/16	38
		4-1/8	1-11/16	39
032	2	4-1/8	2-1/2	40
		4-7/16	1-3/8	41
		4-1/2	1-3/8	42
		4-1/2	2-1/4	43
		4-17/32	2-7/16	44
		4-9/16	1.010	45
		4-3/4	1-5/8	46
		4-3/4	3-1/2	47
		4-7/8	1-1/8	48
		5	1-3/8	49
		5	2-5/8	50
		5-1/4	4	51
		5-3/8	4-3/4	52
		5-1/2	7/8	53
		5-1/2	1-5/8	54
		5-3/4	2-1/4	55
		5-3/4	2-3/8	56
		5-3/4	2-13/16	57
		5-3/4	4-7/8	58
		6	1-3/8	59
		6-5/16	1-13/16	60
		6-5/16	3-5/8	61
		6-3/8	6-1/4	62
		7	1-3/8	63
		7-5/16	1-13/16	64
		7-5/16	3-7/8	65
		8	1-3/8	66
		8-5/16	1-13/16	67
033	2 1/16	3-3/16	7/8	01
		3-3/16	1-1/8	02
		3-1/4	3/4	03
		3-1/4	1	04
		3-21/64	13/16	10
		3-11/32	13/16	05
		3-11/32	7/8	06
		3-3/8	3/4	07
		3-3/8	13/16	08
		4	1-1/4	09
034	2 1/8	3	9/16	01
		3	11/16	29
		3-1/8	3/4	02
		3-3/16	11/16	03
		3-3/16	7/8	04
		3-7/32	15/16	05
		3-1/4	13/16	06
		3-5/16	7/8	07
		3-3/8	3/4	08
		3-7/16	27/32	09
		3-7/16	15/16	10
		3-1/2	1-1/32	11
		3-19/32	13/16	12
		3-19/32	7/8	13
		3-5/8	1-9/16	14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table LXIV - Boundary dimensions-IH (cont'd.)

Bore		O.D.	Height	O.D. and height code	Bore		O.D.	Height	O.D. and height code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
034	2-1/8	3-23/32	1-3/4	15	036	2 1/4	4	1-5/32	27
		3-3/4	1	16			4	1-1/4	28
		3-3/4	1-3/32	17			4	1-9/32	29
		3-13/16	1-15/64	18			4	1-5/16	30
		3-7/8	1-5/16	19			4-7/64	5/16	31
		3-15/16	1-3/8	20			4-1/8	1-5/8	32
		4-1/8	2-7/16	21			4-1/8	1-11/16	33
		4-3/8	1-7/32	22			4-3/16	1-13/32	34
		4-21/32	2-7/16	23			4-1/4	1	35
		4-15/16	1.010	24			4-1/4	1-1/4	36
		5	1-1/2	25			4-1/4	2-7/16	37
		5-1/8	1-3/8	26			4-1/2	1-9/16	38
		5-3/4	1-1/4	27			4-11/16	1-5/8	39
		7-1/2	1-7/8	28			4-11/16	1-11/16	40
							4-11/16	2-1/32	41
035	2-3/16	3-1/4	1	02			4-7/8	3	42
		3-5/16	7/8	03			4-31/32	2-7/16	43
		3-1/2	1-1/8	04			5	1-1/4	44
		3-19/32	13/16	05			5	3-1/2	45
		3-19/32	7/8	06			5-1/16	1.010	46
		3-3/4	1-1/4	07			5-1/8	2-1/2	47
		3-13/16	13/16	01			5-1/4	1	48
		3-27/32	13/16	08			5-1/4	1-3/8	49
		3-7/8	1-1/4	09			5-5/8	3	50
		4	1-1/2	10			5-5/8	4	51
		5	2-1/4	11			5-3/4	1-1/4	52
		6	2	12			5-7/8	4-7/16	53
		7	1-3/8	13			6	4-7/8	54
							6-3/8	2-1/2	55
036	2 1/4	3-1/8	5/8	01			6-3/8	2-5/8	56
		3-1/4	13/16	02			6-3/8	3-1/8	57
		3-5/16	11/16	03					
		3-5/16	3/4	04	037	2 5/16	3-1/4	13/16	01
		3-5/16	7/8	05			3-7/16	7/8	02
		3-11/32	7/8	06			3-23/32	13/16	03
		3-7/16	3/4	07			3-23/32	7/8	04
		3-7/16	7/8	08			3-15/16	1-1/4	05
		3-17/32	13/16	09			4-11/32	1	06
		3-5/8	3/4	10					
		3-5/8	7/8	11	038	2 3/8	3-7/16	11/16	01
		3-5/8	63/64	12			3-9/16	7/8	02
		3-5/8	1-1/4	13			3-9/16	1	03
		3-11/16	1-1/16	14			3-3/4	29/32	04
		3-23/32	13/16	15			3-3/4	1-1/64	05
		3-23/32	7/8	16			3-27/32	13/16	06
		3-23/32	1-1/4	17			3-27/32	7/8	07
		3-3/4	7/8	18			3-7/8	1-1/8	08
		3-3/4	15/16	19			4	1	09
		3-3/4	1-3/32	20			4	1-3/4	10
		3-3/4	1-1/4	21			4-1/32	1-3/4	11
		3-3/4	1-9/16	22			4-1/8	1-5/16	12
		3-27/32	1-3/4	23			4-3/16	1-1/16	13
		3-7/8	1	24			4-3/16	1-21/64	14
		3-7/8	1-1/4	25			4-5/16	1-15/32	15
		4	1	26			4-1/2	2-7/16	16

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table LXIV - Boundary dimensions-IH (cont'd.)

Bore		O.D.	Height	O.D. and height code	Bore		O.D.	Height	O.D. and height code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
038	2-3/8	5	5/8	17	040	2-1/2	5-7/16	2	36
							5-1/2	1	37
039	2-7/16	2-15/32	11/16	02			5-1/2	1-5/8	38
		3-7/16	3/4	01			5-5/8	2-3/4	39
		3-1/2	1-1/8	03			5-5/8	4	40
		3-9/16	13/16	04			5-3/4	1-1/4	41
		3-9/16	7/8	05			6	1-3/8	42
		3-3/4	7/8	06			6	1-7/8	43
		3-27/32	13/16	07			6-1/4	2	44
		3-27/32	7/8	08			6-1/4	3-1/4	45
		3-15/16	1-1/4	09			6-1/4	5-1/4	46
		3-15/16	1-1/2	10			6-3/8	4-7/8	47
		4	1-1/2	11			6-1/2	2-1/2	48
		4-1/2	7/8	12			6-3/4	1.385	49
		4-1/2	1-5/8	13			6-7/8	2-3/4	50
		4-5/8	1-5/8	14			6-7/8	2-7/8	51
		5	1-3/8	15			6-7/8	3-7/16	52
		5	2	16			6-7/8	5-7/8	53
		6-1/2	2-1/2	17			7	1-7/8	54
							7-1/2	7-1/2	55
040	2-1/2	3-1/2	13/16	01			7-3/4	12-1/2	56
		3-9/16	11/16	02			8	1-3/8	57
		3-11/16	15/16	03			9	1.385	59
		3-11/16	1	04			9	2-1/2	58
		3-23/32	1	05			10	1.385	60
		3-15/16	15/16	06					
		3-15/16	1-3/64	07	041	2-9/16	3-13/16	13/16	01
		3-31/32	13/16	08			3-31/32	13/16	02
		3-31/32	7/8	09			3-31/32	7/8	03
		3-31/32	1-3/8	10			4	3/4	04
		4	1-1/8	11			4	1-1/8	05
		4	1-1/4	12			4-5/32	1	06
		4-1/32	1	13			10-5/8	11/16	07
		4-1/16	1-5/32	14					
		4-1/8	1	15	042	2-5/8	3-15/32	1/2	01
		4-1/8	1-3/4	16			3-15/32	1	02
		4-5/32	1-3/4	17			3-1/2	1	03
		4-1/4	1	18			3-19/32	3/4	04
		4-1/4	1-1/8	19			3-3/4	3/4	05
		4-1/4	1-1/4	20			3-13/16	1	06
		4-1/4	1-5/16	21			3-31/32	13/16	07
		4-3/8	1-3/8	22			4-1/8	31/32	08
		4-1/2	1	23			4-1/8	1-5/64	09
		4-9/16	1-17/32	24			4-1/8	1-1/8	10
		4-5/8	2	25			4-1/4	1-3/16	11
		4-5/8	2-7/16	26			4-1/4	1-3/4	12
		4-3/4	1-3/16	27			4-11/32	1	13
		5	1-3/8	28			4-11/32	1-1/8	14
		5	1-1/2	29			4-3/8	2	15
		5-7/32	2-7/16	30			4-17/32	1-5/16	16
		5-5/16	1.010	31			4-9/16	1-9/32	17
		5-3/8	1-7/8	32			4-9/16	1-27/64	18
		5-3/8	2	33			4-3/4	1-9/16	19
		5-3/8	2-11/32	34			4-13/16	2-3/4	20
		5-3/8	3-1/2	35			5	2-1/4	21

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table LXIV - Boundary dimensions-IH (cont'd.)

Bore		O.D.	Height	O.D. and height code	Bore		O.D.	Height	O.D. and height code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
042	2-5/8	5-3/8	1-3/4	22	046	2-7/8	4	3/4	02
							4-1/8	1	03
043	2-11/16	4-1/8	1-1/8	01			4-7/16	1-1/32	04
		4-11/32	1	02			4-7/16	1-1/8	05
		4-11/32	1-1/8	03			4-7/16	1-5/32	06
		4-1/2	1-1/2	04			4-15/32	1	07
		4-3/4	1-3/4	05			4-19/32	7/8	08
		6	1-3/4	06			4-19/32	1	09
							4-9/16	1-9/32	10
044	2-3/4	3-7/8	3/4	01			4-5/8	1-3/4	11
		4	1	02			4-3/4	1-1/8	12
		4-1/32	1	03			4-15/16	1-11/32	13
		4-7/32	1-1/4	04			4-15/16	1-33/64	14
		4-1/4	1-1/8	05			4-15/16	2-1/4	15
		4-5/16	1	06			5-1/8	1-11/16	16
		4-5/16	1-1/8	07			5-1/2	1-3/8	17
		4-7/16	1-1/4	08			6-1/16	1-3/4	18
		4-15/32	1	09			8-3/4	2-1/2	19
		4-15/32	1-1/8	10					
		4-1/2	1-3/4	11	047	2-15/16	4-7/16	1-1/8	01
		4-5/8	1-1/2	12			4-1/2	1-1/2	02
		4-21/32	1-5/16	13			4-19/32	1	03
		4-3/4	1-1/8	14			4-19/32	1-1/8	04
		4-3/4	1-1/4	15			4-5/8	1-1/2	05
		4-3/4	1-5/16	16			4-3/4	1-5/8	06
		4-3/4	1-13/32	17			5-1/8	1-3/4	07
		4-3/4	1-15/32	18					
		4-13/16	2-3/4	21	048	3	3-3/4	9/16	01
		4-7/8	1-1/4	19			4	1/2	02
		4-7/8	2	20			4-1/8	3/4	03
		4-15/16	1-5/8	22			4-5/16	1-1/8	04
		5	1	23			4-3/8	1-1/8	05
		5	1-1/2	24			4-15/32	1-3/8	06
		5-1/4	3-1/8	25			4-1/2	9/16	07
		5-15/32	2-7/16	26			4-1/2	1-1/8	08
		5-9/16	1.010	27			4-17/32	1-1/8	09
		5-5/8	3-1/2	28			4-19/32	1	10
		5-7/8	2-3/4	29			4-5/8	1	11
		6	1-3/8	30			4-5/8	1-1/16	12
		6	1-5/8	31			4-5/8	1-3/16	13
		6-7/16	4-1/2	32			4-5/8	1-1/2	14
		6-1/2	3-1/4	33			4-23/32	1	15
		6-5/8	4-7/8	34			4-23/32	1-1/8	16
		6-3/4	1-3/8	35			4-3/4	1-1/8	17
		6-3/4	1-3/4	36			4-3/4	1-3/16	18
		7-7/8	7	37			4-3/4	1-5/16	19
							4-3/4	1-13/32	20
045	2-13/16	4-3/32	5/8	01			4-3/4	1-3/4	21
		4-1/4	1-1/8	02			4-13/16	2	22
		4-15/32	1	03			4-31/32	1-5/16	23
		4-15/32	1-1/8	04			5	1-1/4	24
		4-1/2	1-1/2	05			5-1/16	2-1/4	25
		4-3/4	1-3/8	06			5-1/8	1-13/32	26
							5-1/8	1-37/64	27
046	2 7/8	3-27/32	3/4	01			5-5/16	1-3/4	28

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table LXIV - Boundary dimensions-IH (cont'd.)

Bore		O.D.	Height	O.D. and height code	Bore		O.D.	Height	O.D. and height code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
048	3	5-1/2	1-1/2	29	052	3-1/4	4-31/32	1-1/8	11
		5-1/2	2-1/4	30			5	1-1/8	12
		5-1/2	3-1/8	31			5	1-17/64	13
		5-15/16	1.010	32			5-1/8	1-13/32	14
		6	1-3/8	33			5-7/32	1-5/16	15
		6	1-3/4	34			5-1/4	1-1/4	16
		6	2	35			5-1/4	1-3/8	17
		6-1/4	3	36			5-1/4	1-9/16	18
		6-1/4	4	37			5-1/4	2-1/4	19
		6-5/16	1-13/16	38			5-5/16	2-1/4	20
		6-3/8	1-5/16	39			5-1/2	1-15/32	21
		6-3/8	2-1/4	40			5-1/2	1-21/32	22
		6-3/8	2-3/8	41			5-11/16	1-27/32	23
		6-3/8	2-13/16	42			5-3/4	3-1/8	24
		6-3/4	1-3/8	43			6-1/16	2-1/8	25
		6-3/4	3-3/8	44			6-1/8	1-1/2	26
		6-7/8	3-3/8	64			6-3/16	1-3/4	27
		7	1-3/8	45			7	3-3/8	28
		7	1-3/4	46			7-1/4	5	29
		7-1/4	5-3/4	47			7-3/4	1-1/2	30
		7-5/16	1-13/16	48			7-3/4	4	31
		7-7/16	1-3/8	49			7-3/4	5-7/8	32
		7-1/2	4	50			8	1.760	33
		7-1/2	5-7/8	51			9	1.760	34
		8	1-3/8	52			9-1/8	7-7/8	35
		8-1/8	3-1/4	53			10	1.760	36
		8-1/8	3-3/8	54			11	1.760	37
		8-1/8	4-1/16	55					
		8-5/16	1-13/16	56	053	3-5/16	4-31/32	1-3/16	01
		8-3/8	4-5/8	57			5-1/8	1-13/32	02
		8-3/4	8-3/4	58					
		9	1-3/8	59	054	3-3/8	4-1/2	3/4	01
		9	2-5/8	60			4-5/8	3/4	02
		9-5/16	1-13/16	61			4-7/8	1-1/8	03
		9-3/8	4-3/4	62			4-7/8	1-1/4	04
		10-1/2	5-1/4	63			5	3/4	05
							5-1/4	1-3/8	06
049	3 1/16	4-23/32	1	01			5-11/16	2-1/2	07
							6	1-3/8	08
051	3 3/16	4-23/32	1	01			7	1-3/8	09
		4-25/32	1-3/16	02					
		4-27/32	1	03	055	3-7/16	5	1	01
		5-3/8	1-1/2	04			5-7/32	1	02
		5-1/2	1-3/4	05			5-3/8	1-1/2	03
							5-1/2	1-1/2	04
052	3 1/4	4-1/8	11/16	01			5-1/2	1-3/4	05
		4-3/16	1/4	02			5-3/4	1-7/8	06
		4-15/64	13/16	03			6-1/4	2	07
		4-1/4	27/32	04			8	1-3/4	08
		4-3/8	3/4	05					
		4-1/2	1-1/8	06	056	3-1/2	4-7/16	5/8	02
		4-5/8	3/4	07			4-5/8	3/4	01
		4-3/4	1-1/8	08			5	1-1/8	03
		4-3/4	1-1/4	09			5	1-1/4	04
		4-31/32	1	10			5-1/16	1-1/4	05

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table LXIV - Boundary dimensions-IH (cont'd.)

Bore		O.D.	Height	O.D. and height code
No. of 1/16	Inches	Inches	Inches	
056	3-1/2	5-1/8	1	06
		5-7/32	1	07
		5-7/32	1-1/8	08
		5-5/16	1-3/16	09
		5-5/16	1-21/64	10
		5-5/16	1-13/32	11
		5-7/16	1-15/32	12
		5-15/32	1-5/16	13
		5-1/2	2-1/4	14
		5-3/4	1-3/8	15
		5-3/4	1-1/2	16
		5-3/4	1-23/32	17
		5-13/16	2-1/2	18
		5-7/8	1-9/16	19
		5-7/8	1-49/64	20
		6-1/64	1-5/8	21
		6-1/16	1-15/16	22
		6-1/4	3-3/8	23
		6-5/16	2-1/2	24
		6-3/4	1-5/8	25
		7-1/8	2-1/2	26
		7-1/8	2-5/8	27
		7-1/8	3-1/8	28
		7-1/4	4-1/2	29
		7-3/4	1-1/2	30
		7-3/4	4	31
		8	1-3/4	32
		8	2	33
		8-1/8	6-1/2	34
		8-1/2	2-1/2	35
		8-3/4	4-5/8	36
		8-3/4	7	37
		9-3/8	3-3/4	38
		9-3/8	3-15/16	39
		9-3/8	4-11/16	40
		10	1-3/4	41
		10	9-7/8	42
057	3-9/16	5-7/32	1	01
058	3-5/8	4-3/4	3/4	01
		4-27/32	7/8	02
		5-1/8	1-1/4	03
		5-7/32	1-1/4	04
		5-5/8	1-3/8	05
059	3-11/16	5-1/2	1	01
		6-1/8	1-7/8	02
060	3-3/4	4-5/8	5/8	01
		4-7/8	3/4	02
		5-1/16	1-9/32	03
		5-1/4	1-1/8	04
		5-1/4	1-1/4	05
		5-1/2	13/16	06

Bore		O.D.	Height	O.D. and height code
No. of 1/16	Inches	Inches	Inches	
060	3-3/4	5-11/16	1-1/4	07
		5-11/16	1-13/16	08
		5-3/4	1-3/8	09
		5-3/4	2-1/4	10
		5-13/16	1-9/16	11
		6-1/8	1-3/4	12
		6-1/4	1-21/32	13
		6-1/4	1-55/64	14
		6-5/16	3-1/16	15
		6-7/16	2-1/16	16
		6-7/8	2-13/16	17
		7-1/8	1-7/8	18
		8	4	19
		8-3/8	6	20
		8-3/4	1-5/8	21
		9	1-3/8	22
		9	4-5/8	23
		9	7	24
		10-5/16	8-3/4	25
061	3-13/16	4-19/32	11/16	01
		5-7/16	13/16	02
		5-7/16	1-1/4	03
		5-7/8	13/16	04
		6	1-1/2	05
062	3-7/8	5	3/4	01
		5-1/4	1-1/8	02
		5-5/8	1-3/8	03
		5-7/8	1-3/8	04
		6	1	05
		6-1/16	1-3/4	06
063	3-15/16	5-7/16	13/16	01
		5-7/8	1-1/2	02
		6-1/16	1-3/4	03
		6-1/2	2	04
		9	1-3/4	05
064	4	5-1/4	7/8	01
		5-3/4	3/4	02
		5-3/4	7/8	03
		5-3/4	1	04
		5-3/4	1-3/8	05
		5-13/16	1-3/8	06
		6	1-5/16	07
		6	1-3/8	08
		6	1-15/32	09
		6-3/16	1-5/8	10
		6-1/4	1-1/2	11
		6-1/4	1-5/8	12
		6-1/4	1-7/8	13
		6-1/4	2-1/2	14
		6-1/2	1	15
		6-1/2	2	16

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table LXIV - Boundary dimensions-IH (cont'd.).

Bore		O.D.	Height	O.D. and height code	Bore		O.D.	Height	O.D. and height code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
064	4	6-9/16	3-1/16	17	068	4-1/4	12	1.760	11
		6-5/8	1-23/32	18			12-1/4	4-3/4	12
		6-5/8	1-61/64	19			13	1.760	13
		6-13/16	2-5/32	20					
		6-7/8	2	21	070	4-3/8	6-3/8	1-3/8	01
		7	1-3/4	22					
		7	4	23	071	4-7/16	6-1/4	1-1/2	01
		7-1/8	2-13/16	24					
		7-3/8	2-5/16	25	072	4-1/2	5-3/4	7/8	01
		7-3/4	2-3/4	26			5-3/4	1	02
		7-3/4	2-7/8	27			5-13/16	1-1/2	03
		7-3/4	3-7/16	28			6-1/4	1-3/8	04
		8	1-3/4	29			6-1/2	1-3/4	05
		8	2	30			6-3/4	1-5/8	06
		8-1/8	5	31			7	3-1/16	07
		8-3/8	2-5/16	32			7-1/4	1-3/4	08
		8-1/2	1-13/16	33			7-1/4	1-15/16	09
		8-1/2	4-3/8	34			7-1/4	2-3/16	10
		8-3/4	1-5/8	35			7-5/16	3-9/16	11
		9	1-3/4	36			7-15/32	1-3/4	12
		9	4-1/2	37			7-3/4	4-5/8	13
		9-1/4	7-1/2	38			8-1/8	2	14
		9-3/8	2-5/16	39			8-1/4	3-3/8	15
		9-1/2	4-5/8	40			9-1/4	3-1/4	16
		9-1/2	7	41			9-1/4	3-7/16	17
		10	1-3/4	42			9-1/4	4-1/16	18
		10	5-1/4	43			9-1/4	6	19
		10	7-7/8	44			9-1/2	1-3/4	20
		10-1/2	2-5/16	45			9-1/2	2	21
		10-5/8	4-7/16	47			9-7/8	2-1/8	22
		10-5/8	4-1/2	46			10-3/16	5	23
		10-5/8	5-5/16	48			10-3/8	7-1/2	24
		10-3/4	2-1/2	49			10-3/8	8-3/4	25
		11-7/16	9-3/4	50			11-1/4	5-7/8	26
		11-1/2	5-1/4	51			11-1/4	8-3/4	27
		12-1/2	5-1/2	52			11-15/16	9-3/4	28
		16	5	53			12	4-3/4	29
		16	5-1/2	54			12	5	30
							12	5-15/16	31
066	4-1/8	5-7/8	1-1/2	01					
		6	1	02	074	4-5/8	6-7/8	1-5/8	01
		6-1/8	1-3/8	03					
					075	4-11/16	7-1/4	2-3/8	01
067	4-3/16	6-7/8	2-1/4	01			7-1/2	2-3/8	02
068	4-1/4	5-1/2	7/8	01	076	4-3/4	6	1	01
		5-9/16	5/8	02			7	1-5/8	02
		6-1/16	1-5/16	03			7	2	03
		6-1/4	1-3/8	04			7-1/2	15/16	04
		6-1/4	1-3/4	05			7-3/4	2-1/2	05
		8-11/64	2	06			10-1/4	1-7/8	06
		9	1.760	07					
		9-1/2	1-3/4	08	077	4-13/16	6-7/8	1-1/4	01
		10	1.760	09					
		11	1.760	10	078	4-7/8	7-1/8	1-5/8	01

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table LXIV - Boundary dimensions-IH (cont'd.)

Bore		O.D.	Height	O.D. and height code
No. of 1/16	Inches	Inches	Inches	
078	4-7/8	9-3/8	1-3/4	02
079	4-15/16	7	1-1/2	01
		7-1/4	2	02
		7-1/2	2-3/8	03
		8-1/8	2-5/8	04
		11	2	05
		12	3	06
080	5	6-1/4	1	01
		6-1/2	1-1/8	02
		7	1-1/4	03
		7-1/4	1-5/8	04
		7-1/4	2	05
		7-1/4	3-9/16	06
		8	1-3/4	07
		8-1/16	3-7/8	08
		8-1/4	2	09
		8-1/4	2-1/4	10
		8-1/4	2-1/2	11
		8-1/2	2-5/16	12
		8-1/2	5	13
		9	1-3/4	14
		9-5/32	2-1/4	15
		9-3/8	4	16
		9-1/2	1-7/8	17
		9-1/2	2-5/16	18
		9-1/2	4-7/8	19
		10	2	20
		10-1/4	1-7/8	21
		10-3/8	7	22
		10-1/2	2-5/16	23
		10-1/2	2-5/8	24
		10-1/2	3-3/4	25
		10-1/2	4	26
		10-1/2	4-11/16	27
		10-1/2	5-1/8	28
		11	2	29
		11-1/8	8	30
		11-1/4	9-1/2	31
		11-5/16	5-5/8	32
		11-1/2	2-5/8	33
		12	2	34
		12-3/8	9-3/4	35
		12-1/2	2-5/8	36
		12-1/2	5-1/4	37
		12-1/2	6-1/2	38
		13-1/4	5-1/4	39
		13-1/4	5-1/2	40
		13-1/4	6-9/16	41
		13-3/4	11-3/4	42
		14	2-3/4	43
081	5-1/16	6-3/4	1-1/4	01

Bore		O.D.	Height	O.D. and height code
No. of 1/16	Inches	Inches	Inches	
082	5-1/8	7	1-1/2	01
		7-3/8	1-5/8	02
083	5-3/16	8-1/2	2-3/4	01
084	5-1/4	6-15/32	1	01
		6-3/4	1-1/8	02
		7-1/2	1-5/8	03
		8-9/16	2-1/4	04
		10	2.010	05
		11	2.010	06
		11-1/4	2-1/4	07
		12	2.010	08
		13	2.010	09
086	5-3/8	7-7/8	1-5/8	01
		15-3/16	3-3/4	02
087	5-7/16	7-1/2	1-3/4	01
		8-1/4	1-3/8	02
		8-7/8	3	03
088	5-1/2	7	1-1/8	01
		8	2-3/16	02
		8-1/16	1-3/8	03
		8-1/4	1-7/8	04
		8-1/2	1-1/2	05
		8-1/2	3-7/8	06
		8-11/16	4-1/8	07
		8-3/4	1-3/4	08
		9-1/4	5-1/4	09
		10	1-3/4	10
		10	2	11
		10-1/4	4-1/4	12
		10-1/2	2-1/2	13
		11-1/4	2-1/4	14
		11-1/4	7-1/2	15
		11-1/2	2	16
		11-13/16	5-5/8	17
		12	10	18
		12-1/4	2-1/2	19
		12-7/8	5-1/2	20
		13	6-1/2	21
090	5-5/8	8-3/8	1-7/8	01
091	5-11/16	9-1/4	3	01
092	5-3/4	7-1/4	1-1/8	01
		8	1-1/2	02
		8-1/2	1-7/8	03
		12-1/2	2-1/2	04
093	5-13/16	10-5/8	11/16	01

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table LXIV - Boundary dimensions-IH (cont'd.).

Bore		O.D.	Height	O.D. and height code	Bore		O.D.	Height	O.D. and height code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
094	5-7/8	8-5/8	1-7/8	01	100	6-1/4	13-3/4	2-3/4	06
							15	3.015	07
095	5-15/16	8	1-3/4	01					
		9-1/2	3	02	102	6-3/8	9-1/8	1-7/8	01
		9-3/4	3-1/4	03					
					103	6-7/16	10-5/8	3-3/4	01
096	6	7-1/4	1	01					
		7-5/8	1-1/4	02	104	6-1/2	8	1-1/16	01
		8-5/8	2-3/8	03			8-1/8	1-1/4	02
		8-3/4	1-7/8	04			8-1/4	1-1/4	03
		9	2	05			8-3/4	1-1/2	04
		9	2-1/4	06			9-1/2	2-1/4	05
		9-1/4	2-1/4	07			10-1/8	4-5/8	06
		9-1/4	2-7/16	08			10-1/2	2-7/8	07
		9-1/4	2-13/16	09			12-1/4	3-1/2	08
		9-1/4	4-1/8	10			13-3/4	2-3/4	09
		9-1/2	2-5/8	11			18	6-3/4	10
		10	2	12					
		10-1/2	2-5/8	13	106	6-5/8	9-5/8	2-1/4	01
		10-1/2	4-7/8	14			12	2-3/4	02
		11	2	15					
		11	4-1/2	16	108	6-3/4	9	1-1/8	01
		11-5/32	3	17			9-3/4	2-1/4	02
		11-1/2	2-5/8	18					
		11-1/2	5-1/8	19	109	6-13/16	12-3/4	7-1/2	01
		12	2	20					
		12	4-1/4	21	110	6-7/8	9-7/8	2-1/4	01
		12	4-1/2	22			14-1/8	3-1/4	02
		12	5-5/16	23					
		12	8	24	111	6-5/16	10-1/2	1	01
		12-1/2	2-1/2	25					
		12-1/2	2-5/8	26	112	7	8-3/4	1-3/8	01
		12-1/2	2-3/4	27			9-3/4	1-7/8	02
		12-3/4	7-1/4	28			10	2	03
		13-1/8	3	29			10	2-1/4	04
		13-5/8	6-3/4	30			10	2-5/8	05
		14	3	31			10-1/2	2-5/8	06
		14-3/4	7-1/2	32			10-3/4	4-5/8	07
		14-3/4	11-3/4	33			11	2	08
		15	6	34			11-1/2	2-5/8	09
		15	6-5/16	35			12	2	10
		15	7-1/2	36			12-1/2	2-5/8	11
		15	7-7/8	37			12-5/8	5	12
		16	3-1/4	38			12-3/4	7-1/8	13
							13	3.015	14
098	6-1/8	8	1 1/8	01			14	3	15
		8-7/8	1 7/8	02			14-1/2	3-1/4	16
							14-3/4	4	17
099	6 3/16	10-1/8	3 3/8	01			15	3.015	18
							17	3.015	19
100	6 1/4	8-5/8	1 1/8	01					
		9	1 7/8	02	114	7-1/8	10-1/8	2-1/4	01
		11	2.010	03			11-3/4	2	02
		12	2.010	04					
		13	2.010	05	116	7-1/4	10-1/4	2-1/4	01

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Table LXIV - Boundary dimensions-IH (cont'd.)

Bore		O.D.	Height	O.D. and height code	Bore		O.D.	Height	O.D. and height code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
118	7-3/8	10-3/8	2-1/4	01	160	10	18-7/8	5	07
							20	3-3/4	08
120	7-1/2	9-1/4	1-3/8	01			20-7/8	5	09
		11-1/2	2-1/2	02					
		11-5/8	5-1/4	03	168	10-1/2	15.748	3-15/16	01
126	7-7/8	22-7/8	4	01	176	11	13-3/4	2-3/8	01
							15-3/4	4-1/4	02
128	8	10	1-1/2	01			19-1/2	3.765	03
		11-1/2	3	02			12-1/2	4.515	04
		12	3	03			25-1/2	4.515	05
		12-1/4	5-1/4	04					
		12-3/4	4	05	184	11-1/2	14-1/4	2-3/8	01
		14	3	06					
		14-1/4	5-5/8	07	186	11-5/8	16-1/2	2-3/4	01
		14-3/4	4	08					
		15	4	09	192	12	15	2-1/2	01
		16	3	10			16	3-1/4	02
		16-1/2	3-5/8	11			17-1/4	4-1/2	03
		16-1/2	4-3/4	12			18	3-3/4	04
		16-7/8	4	13			18-7/8	5	05
		16-7/8	7-1/2	14			20	3-3/4	06
							20	4-1/2	07
132	8-1/4	10	1-3/4	01			20-7/8	6	08
							24	4-1/2	09
136	8-1/2	10-1/2	1-1/2	01			24-7/8	6	10
140	8-3/4	11	1-3/4	01	224	14	20	3-3/4	01
							20-7/8	4-7/8	02
144	9	11-1/4	1-7/8	01			22	3-3/4	03
		13	3-1/2	02			22-7/8	4-7/8	04
		14	3	03			24	3-3/4	05
		14-3/4	4	04			24-7/8	4-7/8	06
		16	3	05					
		16-1/2	6-3/4	06	244	15-1/4	20-1/4	2-1/2	01
		16-7/8	4	07					
		17	3.015	08	256	16	22	4-1/2	01
		17	3-3/4	09			22-7/8	6	02
		18	3	10			24	4-1/2	03
		18-7/8	4	11			25	6	04
		19	4-1/8	12			26	4-1/2	05
		19-1/2	3.765	13			27	6	06
		21-1/2	3.765	14					
					288	18	23.692	3	01
148	9-1/4	13.583	3.150	01			26	5	02
		13.976	3.543	02			27	6-3/4	03
							28	5	04
152	9-1/2	11-3/4	1-7/8	01			29	6-3/4	05
							30	5-1/2	06
160	10	12.008	1.0236	01			31	7-1/4	07
		12-1/2	2-1/8	02					
		14-1/2	4	03	320	20	25	3-3/4	01
		16	3	04			28	5-1/2	02
		16-7/8	4	05			29	7-1/2	03
		18	3-3/4	06			30	5-1/2	04

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table LXIV - Boundary dimensions-IH (cont'd.)

Bore		O.D.	Height	O.D. and height code	Bore		O.D.	Height	O.D. and height code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
320	20	31	7-1/2	05	416	26	36	6-1/4	01
		32	6	06			37	8-1/2	02
		33	8	07			38	6-1/4	03
							39	8-1/2	04
352	22	26-7/8	2-3/4	01			40	6-1/4	05
		30	5-1/2	02			41	9	06
		31	7-1/2	03					
		32	5-1/2	04	448	28	38	6-1/4	01
		33	7-1/2	05			39	8-1/2	02
		34	6	06			40	6-1/4	03
		35	8	07			41	8-1/2	04
							42	6-3/4	05
379	23-11/16	28-5/8	3-1/4	01			43	8-1/2	06
384	24	32	5-1/2	01	480	30	40	6-1/4	01
		33	7-1/2	02			41	8-1/2	02
		34	5-1/2	03			42	6-1/4	03
		35	7-1/2	04			43	8-1/2	04
		36	6	05			44	6-3/4	05
		37	8	06			45	9	06

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table LXV - Boundary dimensions-IL

Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches	
002	1/8	1/2	11/64	01
		1/2	3/16	03
		5/8	3/16	05
		11/16	9/32	07
003	3/16	9/16	3/16	01
		5/8	3/16	03
		11/16	1/4	05
		11/16	19/64	07
		11/16	11/16	09
		3/4	7/32	13
		3/4	1/4	11
		13/16	1/4	15
		7/8	1/4	17
		7/8	7/16	19
004	1/4	5/8	3/16	01
		11/16	1/4	03
		11/16	7/16	05
		3/4	7/32	07
		3/4	1/4	09
		3/4	19/64	11
		13/16	1/4	13
		7/8	1/4	15
		7/8	7/16	16
		29/32	5/16	19
		15/16	1/4	21
		15/16	5/16	23
		15/16	23/64	25
		1	5/16	27
		1-1/16	1/4	29
		1-1/16	5/16	31
		1-1/16	3/8	33
		1-1/16	7/16	35
		1-3/16	5/16	37
		1-9/32	5/16	39
005	5/16	11/16	7/32	01
		13/16	1/4	03
		7/8	1/4	05
		7/8	7/16	07
		29/32	5/16	09
		29/32	7/16	11
		15/16	5/16	13
		15/16	23/64	15
		15/16	1/2	17
		1	5/16	19
		1-3/64	7/16	21
		1-1/16	1/4	23
		1-1/16	5/16	25
		1-1/16	3/8	27
		1-1/16	7/16	29
		1-1/16	9/16	31
		1-3/16	5/16	33
		1-1/4	3/8	35
		1-9/32	5/16	37
005	5/16	1-9/32	17/32	39
		1-5/16	3/8	41
006	3/8	7/8	7/32	03
		7/8	1/4	01
		7/8	7/16	05
		29/32	5/16	07
		29/32	7/16	09
		15/16	5/16	11
		15/16	1/2	13
		1	5/16	15
		1-1/16	1/4	17
		1-1/16	5/16	19
		1-1/16	3/8	21
		1-1/16	13/32	23
		1-1/16	7/16	25
		1-1/16	9/16	27
		1-1/8	3/8	29
		1-1/8	9/16	31
		1-3/16	3/8	33
		1-1/4	3/8	35
		1-9/32	5/16	37
		1-9/32	3/8	39
		1-9/32	17/32	41
		1-5/16	3/8	43
		1-23/64	7/16	45
		1-23/64	17/32	47
007	7/16	13/16	7/32	01
		7/8	1/4	03
		7/8	7/16	05
		29/32	9/32	07
		29/32	5/16	09
		29/32	7/16	11
		59/64	19/64	13
		15/16	5/16	15
		15/16	1/2	17
		1-3/64	23/64	19
		1-1/16	1/4	21
		1-1/16	5/16	23
		1-1/16	3/8	25
		1-1/16	9/16	27
		1-1/8	1/4	29
		1-1/8	3/8	31
		1-1/8	9/16	33
		1-3/16	3/8	35
		1-1/4	3/8	37
		1-9/32	5/16	39
		1-9/32	3/8	41
		1-9/32	17/32	43
		1-5/16	3/8	45
		1-3/8	7/16	49
		1-3/8	1/2	55
		1-3/8	5/8	51
		1-7/16	5/16	53
		1-1/2	7/16	57

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table LXV - Boundary dimensions-IL (cont'd.)

Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches	
007	7/16	1-19/32	9/16	59
		1-5/8	3/8	61
008	1/2	59/64	9/32	01
		1-1/8	1/4	03
		1-1/8	11/32	05
		1-1/8	3/8	07
		1-1/8	25/64	09
		1-1/8	9/16	11
		1-3/16	3/8	13
		1-1/4	3/8	15
		1-1/4	13/32	17
		1-1/4	43/64	19
		1-9/32	5/16	21
		1-9/32	3/8	23
		1-9/32	17/32	25
		1-5/16	3/8	27
		1-23/64	7/16	29
		1-3/8	7/16	31
		1-3/8	31/64	33
		1-3/8	5/8	35
		1-7/16	1/2	37
		1-1/2	7/16	39
		1-1/2	3/4	41
		1-9/16	7/16	43
		1-19/32	9/16	45
		1-5/8	3/8	47
		1-5/8	1/2	49
		1-3/4	9/16	51
009	9/16	1-3/64	5/16	01
		1-1/8	3/8	03
		1-1/8	9/16	05
		1-3/8	7/16	07
		1-3/8	29/64	09
		1-3/8	5/8	11
		1-3/8	7/16	13
		1-7/16	1/2	15
		1-1/2	7/16	17
		1-1/2	3/4	19
		1-9/16	7/16	21
		1-19/32	9/16	23
		1-5/8	3/8	25
		1-5/8	1/2	27
		1-11/16	7/16	29
		1-3/4	9/16	31
		1-13/16	3/8	33
010	5/8	1	29/32	01
		1-23/64	27/64	03
		1-3/8	9/32	05
		1-3/8	7/16	07
		1-3/8	15/32	09
		1-3/8	5/8	11
		1-7/16	7/16	13
		1-7/16	1/2	15
		1-1/2	7/16	17
		1-1/2	3/4	19
010	5/8	1-9/16	7/16	21
		1-5/8	3/8	23
		1-5/8	1/2	25
		1-3/4	9/16	27
		1-13/16	1/2	29
		1-7/8	1/2	31
		1-59/64	11/16	33
		2	7/16	35
		2	1/2	37
		2	9/16	39
		2	5/8	41
		2-3/4	15/16	43
011	11/16	1-5/8	3/8	01
		1-5/8	5/8	03
		1-3/4	9/16	05
		1-7/8	1/2	07
		2	7/16	09
		2	5/8	11
		2-1/4	5/8	13
012	3/4	1-9/16	7/16	01
		1-19/32	1/2	03
		1-5/8	5/16	05
		1-5/8	3/8	07
		1-5/8	1/2	09
		1-5/8	5/8	11
		1-11/16	1/2	13
		1-11/16	9/16	15
		1-3/4	9/16	17
		1-3/4	15/16	19
		1-13/16	1/2	21
		1-7/8	1/2	23
		1-15/16	1/2	25
		1-15/16	5/8	27
		2	7/16	29
		2	1/2	31
		2	5/8	33
		2-3/64	41/64	35
		2-5/64	5/8	37
		2-1/8	5/8	39
		2-3/16	1/2	41
		2-3/16	5/8	43
		2-1/4	5/8	45
		2-5/16	5/8	47
013	13/16	1-3/4	9/16	01
		1-3/4	15/16	03
		1-7/8	1/2	05
		1-7/8	7/8	07
		1-15/16	1/2	09
		1-15/16	5/8	11
		2	7/16	13
		2	5/8	15
		2-1/4	5/8	17
014	7/8	1-31/64	23/64	01

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table LXV - Boundary dimensions-IL (cont'd.)

Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches	
014	7/8	1-11/16	15/32	03
		1-11/16	17/32	05
		1-7/8	3/8	07
		1-7/8	1/2	09
		1-7/8	7/8	11
		1-59/64	19/32	13
		1-15/16	5/8	15
		2	7/16	17
		2	1/2	19
		2	5/8	21
		2-1/16	1/2	23
		2-5/64	5/8	25
		2-1/8	1/2	27
		2-1/8	5/8	29
		2-3/16	5/8	31
		2-1/4	5/8	33
		2-5/16	5/8	35
		2-5/16	11/16	37
		2-1/2	5/8	39
		2-1/2	11/16	41
		2-17/32	5/8	43
		2-5/8	11/16	45
015	15/16	1-15/16	5/8	01
		2	7/16	03
		2	1/2	05
		2	5/8	07
		2	7/8	09
		2-3/64	19/32	11
		2-1/16	1/2	13
		2-1/4	5/8	15
		2-1/2	5/8	17
		2-5/8	11/16	19
016	1	2	3/8	01
		2	7/16	03
		2	1/2	05
		2	5/8	07
		2	7/8	09
		2-3/64	19/32	11
		2-5/64	5/8	13
		2-1/8	1/2	15
		2-1/8	5/8	17
		2-3/16	5/8	19
		2-1/4	5/8	21
		2-5/16	5/8	23
		2-5/16	11/16	25
		2-1/2	5/8	27
		2-1/2	11/16	29
		2-17/32	5/8	31
		2-5/8	11/16	33
		2-3/4	5/8	35
		2-3/4	15/16	37
017	1-1/16	2-3/16	1/2	01
		2-3/16	7/8	03
		2-5/8	11/16	05
		2-7/8	11/16	07
018	1-1/8	2	1/2	01
		2-3/16	1/2	03
		2-3/16	7/8	05
		2-1/4	5/8	07
		2-1/4	1-1/8	09
		2-5/16	5/8	11
		2-5/16	11/16	13
		2-1/2	5/8	15
		2-1/2	11/16	17
		2-17/32	5/8	19
		2-5/8	11/16	21
		2-3/4	5/8	23
		2-13/16	27/64	25
		2-7/8	11/16	27
019	1-3/16	2-5/16	5/8	01
		2-5/16	1-1/8	03
		2-5/8	11/16	05
		2-3/4	5/8	07
		2-7/8	11/16	09
020	1-1/4	2-5/16	19/32	01
		2-5/16	1-1/8	03
		2-1/2	5/8	07
		2-1/2	11/16	09
		2-17/32	5/8	11
		2-5/8	11/16	13
		2-5/8	1-1/4	15
		2-3/4	5/8	17
		2-7/8	11/16	19
		3-1/16	3/4	21
		3-3/32	11/16	23
		3-7/64	59/64	25
		3-5/32	11/16	27
021	1-5/16	2-5/8	11/16	01
		2-5/8	1-1/4	03
		2-5/16	39/64	05
022	1-3/8	2-1/2	11/16	01
		2-5/8	11/16	03
		2-5/8	1-1/4	05
		2-3/4	5/8	07
		2-7/8	11/16	09
		3-7/64	59/64	11
		3-5/32	11/16	13
		3-3/16	11/16	15
		3-3/8	5/8	17
023	1-7/16	2-3/4	3/4	01
		2-3/4	1-3/8	03
		3-5/32	11/16	05
024	1-1/2	2-3/4	5/8	01
		2-3/4	3/4	03
		2-3/4	1-3/8	05
		2-49/64	45/64	07
		2-7/8	11/16	09

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table LXV - Boundary dimensions-IL (cont'd.)

Bore		O.D.	Width	O.D. and width code	Bore		O.D.	Width	O.D. and width code
No. of 1/16	Inches	Inches	Inches		No. of 1/16	Inches	Inches	Inches	
024	1-1/2	3-1/16	3/4	11	030	1-7/8	3-3/8	3/4	01
		3-3/32	11/16	13			3-3/8	15/16	03
		3-7/64	13/16	15			3-3/8	1-3/4	05
		3-7/64	59/64	17			3-5/8	3/4	07
		3-5/32	11/16	19					
		3-3/16	11/16	21	031	1-15/16	3-3/8	49/64	01
		3-3/8	3/4	23			3-3/8	15/16	03
		3-5/8	3/4	25			3-3/8	1-3/4	05
		3-5/8	13/16	27			3-55/64	1-1/32	07
025	1-9/16	3-3/32	7/8	01	032	2	3-3/8	15/16	01
		3-3/32	1-9/16	03			3-3/8	1-3/4	03
							3-5/8	3/4	05
026	1-5/8	2-49/64	39/64	01			3-3/4	13/16	07
		3-1/16	3/4	03			3-15/16	13/16	09
		3-3/32	11/16	05			4-1/2	1-5/32	11
		3-3/32	7/8	07					
		3-3/32	1-9/16	09	033	2-1/8	3-55/64	59/64	01
		3-3/16	11/16	11					
		3-3/8	3/4	13	036	2-1/4	3-55/64	55/64	01
		3-55/64	1-1/32	15			3-15/16	13/16	03
							4-3/8	7/8	05
027	1-11/16	3-3/32	7/8	01					
		3-3/32	1-9/16	03	037	2-5/16	4-1/2	1-5/32	01
028	1-3/4	3-1/16	45/64	01	039	2-7/16	4-3/8	7/8	01
		3-3/32	7/8	03					
		3-3/32	1-9/16	05	040	2-1/2	4-1/2	15/16	01
		3-3/8	3/4	07			4-1/2	1-1/32	03
		3-5/8	3/4	09					
		3-3/4	13/16	11	044	2-3/4	4-3/8	7/8	01
		3-55/64	1-1/32	13			4-1/2	29/32	03
		3-15/16	13/16	15					
					048	3	4-3/8	3/4	01
029	1-13/16	3-3/8	15/16	01					
		3-3/8	1-3/4	03					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table LXVI - Boundary dimensions-IM

Bore		O.D.	Width		O.D. and width code
No. of 1/16	Inches	Inches	O.R. Inches	I.R. Inches	
002	1/8	5/8	3/16	13/64	02
		5/8	3/16	7/32	04
003	3/16	5/8	3/16	13/64	02
		5/8	3/16	7/32	04
		11/16	1/4	1/4	06
		11/16	1/4	5/16	08
		11/16	3/8	15/32	10
		11/16	13/32	7/16	12
		3/4	1/4	15/32	14
		3/4	13/32	7/16	16
		7/8	1/4	9/32	20
		7/8	1/4	5/16	22
		7/8	13/32	7/16	24
		1-3/16	1/4	5/16	18
004	1/4	11/16	1/4	1/4	02
		11/16	1/4	9/32	04
		11/16	1/4	5/16	06
		11/16	1/4	15/32	08
		11/16	1/4	5/8	10
		11/16	1/4	1/2	12
		11/16	3/8	15/32	14
		3/4	1/4	5/16	18
		3/4	1/4	5/8	20
		3/4	13/32	7/16	22
		13/16	1/4	5/16	24
		13/16	1/4	5/8	26
		13/16	13/32	7/16	28
		7/8	1/4	5/16	30
		7/8	1/4	1/2	32
		7/8	1/4	5/8	34
		7/8	13/32	7/16	36
		29/32	5/16	3/8	44
		29/32	5/16	11/16	46
		29/32	3/8	7/16	48
		15/16	5/16	11/32	38
		15/16	5/16	3/8	40
		15/16	5/16	11/16	42
		1	5/16	11/16	50
		1	13/32	7/16	52
		1-1/16	1/4	9/32	54
		1-1/16	1/4	5/16	56
		1-1/16	13/32	7/16	58
		1-9/32	5/16	11/32	60
		1-9/32	5/16	3/8	62
005	5/16	7/8	1/4	5/16	02
		7/8	13/32	7/16	04
		29/32	5/16	3/8	06
		29/32	5/16	11/16	08
		29/32	3/8	7/16	10
		29/32	13/32	7/16	12
		15/16	5/16	3/8	14
		15/16	5/16	11/16	16
		15/16	11/32	7/16	18
		15/16	15/32	1/2	20

Bore		O.D.	Width		O.D. and width code
No. of 1/16	Inches	Inches	O.R. Inches	I.R. Inches	
005	5/16	15/16	33/64	5/8	22
		1	5/16	3/8	24
		1	5/16	11/16	26
		1	13/32	7/16	28
		1-1/16	1/4	5/8	30
		1-1/16	5/16	11/16	32
		1-1/16	3/8	7/16	34
		1-1/16	3/8	3/4	36
		1-1/16	13/32	7/16	38
		1-1/8	3/8	7/16	40
		1-3/16	13/32	7/16	42
		1-1/4	1/2	17/32	44
		1-9/32	5/16	3/8	46
		1-9/32	1/2	17/32	48
006	3/8	7/8	1/4	11/32	02
		7/8	13/32	7/16	04
		29/32	5/16	3/8	06
		29/32	5/16	11/16	10
		29/32	11/32	7/16	08
		29/32	3/8	7/16	12
		29/32	3/8	11/16	14
		29/32	13/32	7/16	16
		15/16	5/16	3/8	18
		15/16	5/16	11/16	20
		15/16	15/32	1/2	22
		1	5/16	3/8	24
		1	5/16	11/16	26
		1	3/8	7/16	28
		1	13/32	7/16	30
		1-1/16	1/4	5/8	32
		1-1/16	5/16	11/16	34
		1-1/16	3/8	7/16	36
		1-1/16	3/8	3/4	38
		1-1/16	13/32	7/16	40
		1-1/16	33/64	5/8	42
		1-1/8	3/8	7/16	44
		1-1/8	3/8	1/2	46
		1-1/8	3/8	3/4	48
		1-1/8	17/32	9/16	50
		1-3/16	3/8	7/16	52
		1-3/16	3/8	3/4	54
		1-1/4	3/8	7/16	56
		1-1/4	3/8	3/4	58
		1-1/4	1/2	17/32	60
		1-9/32	5/16	3/8	62
		1-9/32	5/16	11/16	64
		1-9/32	3/8	7/16	66
		1-9/32	3/8	3/4	68
		1-5/16	3/8	3/4	70
		1-5/16	1/2	17/32	72
		1-3/8	7/16	15/32	76
		1-3/8	7/16	1/2	74
		1-7/8	1/2	3/4	78
007	7/16	7/8	1/4	9/32	02
		29/32	9/32	11/32	04

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the currentversion before use.

Table LXVI - Boundary dimensions-IM (cont'd.)

Bore		O.D.	Width		O.D. and width code	Bore		O.D.	Width		O.D. and width code
No. of 1/16	Inches	Inches	O.R. Inches	I.R. Inches		No. of 1/16	Inches	Inches	O.R. Inches	I.R. Inches	
007	7/16	29/32	5/16	3/8	06	008	1/2	1-9/32	5/6	11/16	42
		29/32	11/32	7/16	10			1-9/32	1/2	17/32	44
		29/32	3/8	7/16	08			1-5/16	3/8	7/16	46
		29/32	13/32	7/16	12			1-5/16	3/8	3/4	48
		15/16	5/16	3/8	16			1-5/16	1/2	17/32	50
		15/16	15/32	1/2	18			1-3/8	13/32	9/16	52
		1-1/16	1/4	5/8	20			1-3/8	7/16	15/32	54
		1-1/16	5/16	11/16	22			1-3/8	7/16	1/2	56
		1-1/16	3/8	7/16	24			1-3/8	7/16	9/16	58
		1-1/16	3/8	1/2	26			1-3/8	7/16	13/16	60
		1-1/16	3/8	3/4	28			1-3/8	7/16	15/16	62
		1-1/16	33/64	5/8	30			1-3/8	7/16	1-3/32	64
		1-1/8	3/8	7/16	32			1-3/8	19/32	5/8	70
		1-1/8	3/8	3/4	34			1-3/8	5/8	23/32	66
		1-1/8	17/32	9/16	36			1-3/8	5/8	3/4	68
		1-3/16	3/8	7/16	38			1-13/16	15/32	19/32	72
		1-3/16	3/8	3/4	40			1-7/16	1/2	9/16	74
		1-3/16	17/32	9/16	42			1-7/16	1/2	1	76
		1-1/4	3/8	7/16	44			1-1/2	7/16	15/32	82
		1-1/4	3/8	19/32	46			1-1/2	7/16	1/2	78
		1-1/4	3/8	3/4	48			1-1/2	7/16	17/32	86
		1-1/4	7/16	1/2	50			1-1/2	7/16	9/16	80
		1-1/4	1/2	17/32	52			1-1/2	7/16	21/32	90
		1-9/32	5/16	11/16	54			1-1/2	7/16	11/16	84
		1-9/32	3/8	7/16	56			1-1/2	7/16	3/4	98
		1-9/32	3/8	3/4	58			1-1/2	7/16	15/16	88
		1-5/16	3/8	7/16	60			1-1/2	7/16	1	92
		1-5/16	3/8	3/4	62			1-1/2	7/16	1-1/16	94
		1-5/16	7/16	1/2	64			1-1/2	7/16	1-5/64	96
		1-5/16	1/2	17/32	66			1-1/2	9/16	1	71
		1-3/8	7/16	15/32	68			1-1/2	23/32	3/4	73
		1-3/8	7/16	1/2	72			1-9/16	7/16	1/2	75
		1-3/8	7/16	9/16	70			1-9/16	7/16	9/16	77
		1-3/8	7/16	13/16	74			1-9/16	7/16	15/16	79
		1-3/8	19/32	5/8	76			1-9/16	17/32	21/32	81
		1-9/16	7/16	9/16	78			1-37/64	1/2	19/32	83
								1-5/8	3/8	7/8	85
008	1/2	1-1/8	1/4	1/4	02			1-5/8	1/2	9/16	87
		1-1/8	5/16	21/32	04			1-5/8	1/2	1	89
		1-1/8	3/8	13/32	12			1-3/4	9/16	5/8	91
		1-1/8	3/8	7/16	06			2-1/8	5/8	3/4	93
		1-1/8	3/8	1/2	08						
		1-1/8	3/8	5/8	10	009	9/16	1-1/8	17/32	9/16	02
		1-1/8	3/8	11/16	14			1-1/4	7/16	1/2	04
		1-1/8	3/8	3/4	16			1-5/16	1/2	17/32	06
		1-1/8	17/32	9/16	18			1-23/64	29/64	13/32	08
		1-1/8	35/64	5/8	20			1-3/8	7/16	1/2	10
		1-3/16	3/8	7/16	22			1-3/8	7/16	9/16	12
		1-3/16	3/8	1/2	24			1-3/8	7/16	13/16	14
		1-3/16	3/8	3/4	26			1-3/8	7/16	15/16	16
		1-3/16	17/32	9/16	28			1-3/8	19/32	5/8	18
		1-1/4	3/8	7/16	30			1-3/8	5/8	23/32	20
		1-1/4	3/8	3/4	32			1-7/16	7/16	9/16	22
		1-1/4	1/2	17/32	34			1-7/16	1/2	9/16	24
		1-9/32	3/8	13/32	36			1-7/16	1/2	1	26
		1-9/32	3/8	7/16	38			1-7/16	19/32	5/8	28
		1-9/32	3/8	3/4	40			1-1/2	7/16	1/2	30

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table LXVI - Boundary dimensions-IM (cont'd.)

Bore		O.D.	Width		O.D. and width code
No. of 1/16	Inches	Inches	O.R. Inches	I.R. Inches	
009	9/16	1-1/2	7/16	11/16	32
		1-1/2	7/16	7/8	34
		1-1/2	7/16	15/16	36
		1-1/2	23/32	3/4	38
		1-9/16	7/16	1/2	40
		1-9/16	7/16	15/16	42
		1-9/16	5/8	13/16	44
		1-9/16	23/32	3/4	46
		1-5/8	3/8	7/8	48
		1-5/8	1/2	9/16	50
		1-3/4	9/16	5/8	52
010	5/8	1-3/8	7/16	7/16	02
		1-3/8	7/16	15/32	06
		1-3/8	7/16	1/2	04
		1-3/8	7/16	9/16	08
		1-3/8	7/16	11/16	10
		1-3/8	7/16	13/16	12
		1-3/8	7/16	15/16	14
		1-3/8	19/32	5/8	16
		1-3/8	5/8	23/32	18
		1-7/16	1/2	9/16	20
		1-7/16	1/2	1	22
		1-7/16	19/32	5/8	24
		1-1/2	7/16	31/64	28
		1-1/2	7/16	1/2	26
		1-1/2	7/16	19/32	30
		1-1/2	7/16	15/16	32
		1-1/2	7/16	1	34
		1-1/2	5/8	23/32	36
		1-1/2	23/32	3/4	38
		1-9/16	7/16	1/2	40
		1-9/16	7/16	9/16	42
		1-9/16	7/16	15/16	44
		1-9/16	23/32	3/4	46
		1-5/8	3/8	5/8	48
		1-5/8	3/8	7/8	50
		1-5/8	1/2	9/16	52
		1-5/8	1/2	11/16	54
		1-5/8	1/2	1	56
		1-3/4	9/16	5/8	58
		1-3/4	9/16	1-1/16	60
		1-3/4	9/16	1-1/8	62
		1-3/4	5/8	11/16	64
		1-7/8	1/2	9/16	66
		1-7/8	1/2	1	68
		1-7/8	9/16	5/8	70
		1-15/16	5/8	1-1/8	72
011	11/16	1-1/2	7/16	1/2	02
		1-1/2	7/16	5/8	04
		1-5/8	19/32	5/8	06
		1-5/8	23/32	13/16	08
		1-3/4	9/16	1-1/16	10
		1-13/16	23/32	3/4	12
		1-7/8	1/2	1	14
012	3/4	1-9/16	7/16	15/32	02

Bore		O.D.	Width		O.D. and width code
No. of 1/16	Inches	Inches	O.R. Inches	I.R. Inches	
012	3/4	1-9/16	7/16	15/16	04
		1-5/8	3/8	3/8	06
		1-5/8	3/8	7/8	08
		1-5/8	1/2	9/16	10
		1-5/8	1/2	1	12
		1-5/8	19/32	5/8	14
		1-5/8	23/32	13/16	16
		1-11/16	1/2	9/16	18
		1-3/4	23/32	3/4	20
		1-3/4	9/16	9/16	22
		1-3/4	9/16	5/8	24
		1-3/4	9/16	11/16	26
		1-3/4	9/16	3/4	28
		1-3/4	9/16	1-1/16	30
		1-3/4	9/16	1-13/16	32
		1-3/4	19/32	1/2	34
		1-3/4	23/32	3/4	38
		1-3/4	3/4	1	36
		1-3/4	29/32	15/16	40
		1-7/8	1/2	9/16	42
		1-7/8	1/2	1	44
		1-7/8	11/16	15/16	46
		1-15/16	5/8	11/16	48
		1-15/16	5/8	1-1/8	50
		1-15/16	13/16	1-1/16	52
		1-15/16	13/16	1-1/8	54
		2	7/16	15/16	56
		2	1/2	9/16	60
		2	1/2	1	62
		2	5/8	1-1/8	58
		2	11/16	15/16	64
		2	27/32	7/8	66
		2-5/64	5/8	23/32	68
		2-5/64	5/8	1-1/8	70
		2-5/64	7/8	1-1/8	72
		2-1/8	5/8	23/32	74
		2-1/8	5/8	7/8	76
		2-1/8	5/8	1-1/8	78
		2-3/16	5/8	7/8	82
		2-3/16	5/8	1-1/8	80
		2-1/4	13/32	1-1/8	88
		2-1/4	5/8	7/8	84
		2-1/4	5/8	1-1/8	86
		2-5/16	5/8	7/8	90
		2-5/16	5/8	1-1/8	92
013	13/16	1-3/4	29/32	15/16	02
		1-13/16	9/16	5/8	04
		1-7/8	27/32	7/8	06
		1-7/8	27/32	31/32	08
		2	7/16	15/16	10
		2	1/2	1	12
		2	5/8	1-1/8	14
		2-1/4	5/8	1-1/8	16
014	7/8	1-7/8	1/2	9/16	02
		1-7/8	1/2	5/8	04
		1-7/8	1/2	1	06

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Table LXVI - Boundary dimensions-IM (cont'd.)

Bore		O.D.	Width		O.D. and width code
No. of 1/16	Inches	Inches	O.R. Inches	I.R. Inches	
014	7/8	1-7/8	11/16	15/16	08
		1-7/8	27/32	7/8	10
		1-7/8	27/32	31/32	12
		1-15/16	5/8	11/16	14
		1-15/16	5/8	1-1/8	16
		1-15/16	27/32	7/8	18
		2	7/16	15/16	20
		2	1/2	9/16	22
		2	1/2	31/32	24
		2	1/2	1	26
		2	9/16	5/8	28
		2	5/8	1-1/8	30
		2	11/16	15/16	32
		2-5/64	5/8	23/32	34
		2-5/64	5/8	1-1/8	36
		2-1/8	5/8	23/32	38
		2-1/8	5/8	7/8	40
		2-1/8	5/8	1-1/8	42
		2-3/16	5/8	23/32	44
		2-3/16	5/8	1-1/8	46
		2-1/4	5/8	7/8	48
		2-1/4	5/8	1-1/8	50
		2-1/4	3/4	13/16	52
		2-5/16	5/8	1-1/8	54
		2-1/2	5/8	7/8	56
		2-1/2	5/8	1-1/4	58
		2-5/8	11/16	1-3/16	60
015	15/16	1-15/16	9/16	5/8	02
		1-15/16	27/32	7/8	04
		2	7/16	15/16	06
		2	1/2	3/4	08
		2	1/2	1	10
		2	5/8	1-1/8	12
		2	27/32	7/8	14
		2	27/32	31/32	16
		2-1/16	27/32	7/8	18
		2-5/64	5/8	1-1/8	20
		2-1/8	5/8	1-1/8	22
		2-1/8	27/32	7/8	24
		2-3/16	5/8	1-1/8	26
		2-1/4	5/8	1-1/8	28
		2-1/4	13/16	1-1/16	30
		2-5/16	5/8	1-1/8	32
		2-1/2	5/8	7/8	34
		2-1/2	5/8	1-1/4	36
		2-1/2	11/16	15/16	38
		2-5/8	11/16	1-3/16	40
016	1	1-7/8	9/16	5/8	02
		2	7/16	15/16	04
		2	1/2	1/2	06
		2	1/2	9/16	08
		2	1/2	5/8	10
		2	1/2	15/16	12
		2	1/2	31/32	14
		2	1/2	1	16
		2	1/2	1-3/16	18

Bore		O.D.	Width		O.D. and width code
No. of 1/16	Inches	Inches	O.R. Inches	I.R. Inches	
016	1	2	9/16	5/8	20
		2	5/8	1-1/8	22
		2	27/32	7/8	24
		2	27/32	31/32	26
		2-1/16	9/16	5/8	28
		2-1/16	27/32	7/8	30
		2-5/64	5/8	1-1/8	34
		2-5/64	5/8	2-3/32	32
		2-1/8	5/8	23/32	38
		2-1/8	5/8	7/8	36
		2-1/8	5/8	1-1/8	40
		2-1/8	51/64	1-1/8	42
		2-1/8	27/32	7/8	44
		2-3/16	5/8	23/32	46
		2-3/16	5/8	1-1/8	48
		2-1/4	5/8	23/32	50
		2-1/4	5/8	7/8	52
		2-1/4	5/8	1-1/8	54
		2-1/4	13/16	1-1/16	56
		2-1/4	1-3/32	1-1/8	58
		2-5/16	5/8	23/32	60
		2-5/16	5/8	7/8	62
		2-5/16	5/8	1-1/8	64
		2-1/2	5/8	3/4	66
		2-1/2	5/8	7/8	68
		2-1/2	5/8	1-1/4	70
		2-1/2	11/16	15/16	72
		2-1/2	13/16	7/8	74
		2-17/32	5/8	3/4	76
		2-17/32	5/8	7/8	78
		2-17/32	5/8	1-1/4	80
		2-5/8	11/16	13/16	82
		2-5/8	11/16	15/16	84
		2-5/8	11/16	1-3/16	86
		2-3/4	5/8	1-1/4	88
		3-1/16	3/4	1-1/2	90
017	1-1/16	2-3/16	1/2	1	02
		2-3/16	29/32	1-1/32	04
018	1-1/8	2-1/8	9/16	5/8	02
		2-3/16	27/32	7/8	04
		2-3/16	29/32	1-1/32	06
		2-1/4	5/8	23/32	08
		2-1/4	5/8	1-1/8	10
		2-1/4	5/8	1-13/32	12
		2-1/4	1-3/32	1-1/8	14
		2-5/16	5/8	23/32	16
		2-1/2	5/8	3/4	18
		2-1/2	5/8	1-1/4	20
		2-1/2	11/16	15/16	22
		2-17/32	5/8	3/4	24
		2-17/32	5/8	1-1/4	26
		2-5/8	11/16	13/16	28
		2-5/8	11/16	15/16	30
		2-5/8	11/16	1-3/16	32
		2-3/4	5/8	1-1/4	34

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table LXVI - Boundary dimensions-IM (cont'd.).

Bore		O.D.	Width		O.D. and width code
No. of 1/16	Inches	Inches	O.R. Inches	I.R. Inches	
019	1-3/16	2-5/16	5/8	23/32	02
		2-5/16	5/8	1-1/8	04
		2-5/16	29/32	1-1/32	06
		2-1/2	5/8	1-1/4	08
		2-1/2	11/16	15/16	10
		2-17/32	5/8	1-1/4	12
		2-5/8	11/16	15/16	14
		2-5/8	11/16	1-3/16	16
		2-3/4	5/8	1-1/4	18
		3-1/16	3/4	1-1/2	20
020	1-1/4	2-1/8	9/16	5/8	02
		2-5/16	29/32	1-1/32	04
		2-1/2	5/8	3/4	06
		2-1/2	5/8	7/8	08
		2-1/2	11/16	15/16	10
		2-1/2	7/8	1-1/8	12
		2-17/32	5/8	3/4	14
		2-17/32	5/8	1-1/4	16
		2-5/8	11/16	13/16	18
		2-5/8	11/16	15/16	20
		2-5/8	11/16	1-3/16	22
		2-3/4	5/8	3/4	24
		2-3/4	5/8	1-1/4	26
		2-7/8	11/16	13/16	28
		2-7/8	11/16	15/16	30
		3-1/16	3/4	1	32
		3-1/16	3/4	1-1/2	34
		3-3/32	11/16	15/16	36
		3-5/32	11/16	1-5/16	38
021	1-5/16	2-5/8	11/16	13/16	02
		2-5/8	1-1/64	1-5/32	04
		3-1/16	3/4	1-1/2	06
022	1-3/8	2-5/8	1-1/64	1-5/32	02
		2-3/4	5/8	3/4	04
		2-3/4	5/8	1-1/4	06
		2-7/8	11/16	13/16	08
		2-7/8	11/16	15/16	10
		3-1/16	3/4	1-1/2	12
		3-3/32	11/16	1-7/16	14
		3-5/32	11/16	1-5/16	16
		3-3/16	11/16	1-7/16	18
023	1-7/16	2-3/4	5/8	1-1/4	02
		2-3/4	3/4	15/16	04
		2-3/4	1-7/64	1-1/4	06
		3-1/16	3/4	1-1/2	08
		3-3/32	11/16	1-7/16	10
		3-5/32	11/16	1-5/16	12
		3-3/16	11/16	1-7/16	14
		3-3/8	1	1-1/4	16
024	1-1/2	2-3/4	3/4	1-1/4	02
		2-3/4	1-7/64	1-1/4	04
		2-7/8	11/16	13/16	06
		3-1/16	3/4	1	08
024	1-1/2	3-1/16	3/4	1-1/2	10
		3-3/32	11/16	15/16	12
		3-3/32	11/16	1-7/16	14
		3-5/32	11/16	1-5/16	16
		3-3/16	11/16	15/16	18
		3-3/16	11/16	1-7/16	20
		3-3/8	3/4	1	22
		3-3/8	3/4	1-1/2	24
		3-5/8	3/4	1-1/2	26
		3-3/4	13/16	1-9/16	28
025	1-9/16	3-3/32	7/8	29/32	02
		3-3/32	1-11/16	1-5/16	04
026	1-5/8	3-1/16	3/4	1	02
		3-3/32	11/16	15/16	04
		3-3/32	11/16	1-7/16	06
		3-3/32	1-11/64	1-5/16	08
		3-3/16	11/16	15/16	10
		3-3/16	11/16	1-7/16	12
		3-3/8	3/4	1	14
		3-3/8	3/4	1-1/2	16
		3-5/8	3/4	1-1/2	18
		3-3/4	13/16	1-9/16	20
027	1-11/16	3-3/32	1-11/64	1-5/16	02
		3-3/8	3/4	1-1/4	04
		3-3/8	3/4	1-1/2	06
		3-5/8	3/4	1-1/2	08
		3-3/4	13/16	1-9/16	10
028	1-3/4	3-3/32	1-11/64	1-5/16	02
		3-3/8	3/4	1	04
		3-3/8	3/4	1-1/2	06
		3-5/8	3/4	1-1/2	08
		3-3/4	13/16	1-9/16	10
		3-15/16	13/16	1-9/16	12
029	1-13/16	3-3/8	1-15/64	1-3/8	02
030	1-7/8	3-3/8	1-15/64	1-3/8	02
		3-5/8	3/4	1-1/2	04
		3-3/4	13/16	1-9/16	06
		3-15/16	13/16	1-9/16	08
031	1-15/16	3-3/8	1-15/64	1-3/8	02
		3-3/4	13/16	1-9/16	04
		3-15/16	13/16	1-9/16	06
032	2	3-3/8	1-15/64	1-3/8	02
		3-3/4	13/16	1-9/16	04
		3-15/16	13/16	1-9/16	06
035	2-3/16	3-15/16	13/16	1-9/16	02
		4-3/8	7/8	1-5/8	04
036	2-1/4	3-15/16	13/16	1-9/16	02
		4-3/8	7/8	1-5/8	04
039	2-7/16	4-3/8	7/8	1-5/8	02
043	2-11/16	4-3/8	7/8	1-5/8	02

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 This section covers special items - group 9.

1.2 Definition. Anti-friction bearings and component parts of bearings that do not fit into any of the preceding nine groups.

2. REFERENCED DOCUMENTS

2.1 This section is not applicable.

3. NUMBER STRUCTURE

3.1 Digit positions. Example of digit positions is shown on figure 48.

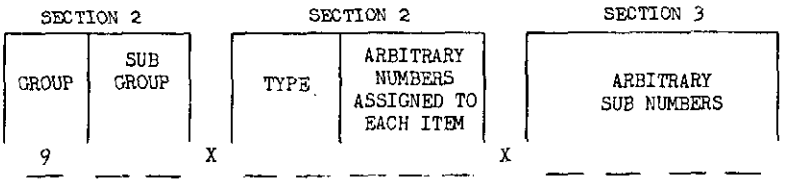


Figure 48 - Group 9, number structure.

4. GROUP AND SUB-GROUP CODES

4.1 Digit positions. Example of digit positions is shown on figure 49.

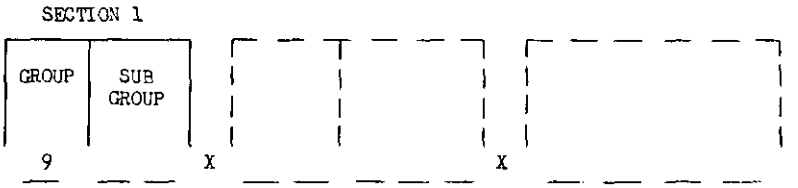


Figure 49 - Group 9, section 1.

4.2 Group code (1st position). Group code for first position shall be as follows:

9-Special items

4.3 Sub-group codes (2nd and 3rd positions). Sub-group codes (2nd and 3rd positions) shall be as follows:

Code	
90	Special items similar in construction to group 0-miniature and instrument ball bearing types.
91	Special items similar in construction to group 1-annular ball bearing types.
92	Special items similar in construction to group 2-cylindrical and self-aligning roller bearing types.
93	Special items similar in construction to group 3-journal and needle roller bearing types.
94	Special items similar in construction to group 4-pure thrust bearing types
95	Special items similar in construction to group 5-aircraft control and pulley bearing types.
96	Special items similar in construction to group 6-industrial power transmission ball and roller bearing types.
97	Special items similar in construction to group 7-tapered roller bearing types.
98	Special items similar in construction to group 8-general purpose unground and ground non-precision bearing types.
99	Special items not conforming to basic types as set up for group 0 through 8 and component parts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

5. TYPE CODES AND ARBITRARY ITEM NUMBERS

5.1 Digit positions. Example of digit positions is shown on figure 50.

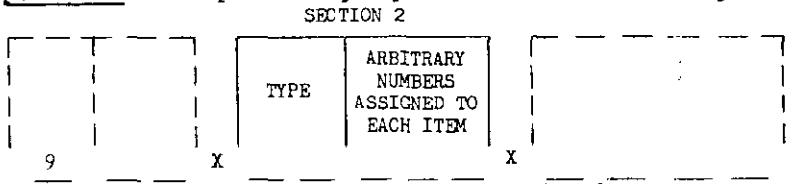


Figure 50 - Group 9, section 2.

5.2 Type codes (4th and 5th positions) for sub-groups 90 through 98. The type codes used in these positions for sub-groups 90 through 98 correspond to the basic types as set up in each of the major groups (0 through 8).

5.2.1 Application of type code. A Federal L1OON, Marlin Rockwell 1205 or Fafnir 120K is an annular ball bearing, single row radial, non-loading groove, all metric dimensions. It is a group 1, type 11 bearing except that it does not conform in basic dimensions as set up in boundary dimension table MA (see table XXIV). This bearing would be coded 991 X 11:

991 = Special item; similar in construction to group 1, annular ball bearing.
11 = Type 11, annular ball bearing, single row radial, non-loading groove, both rings same width, metric bore, O.D. and width.

5.3 Types codes (4th and 5th positions) for sub-group 99. Sub-group code 99 covers special items not conforming to basic types as set up in groups 0 through 8 (1st position code). These special items include complete bearings as well as component parts. These type codes are defined as specified in 5.3.1.

5.3.1 Code 999X.

Code

11 Fan and water pump bearings
12 Front wheel ball bearings (automotive)
13 Clutch throwout ball bearings (automotive)
14 All other ball and roller bearings for automotive application
15 Radial ball and cylindrical roller bearing, flush ground assembly
16 Cylindrical roller assembly only
18 Linear bearings (ball bushings)
19 Shim, bearing
20 Seals, bearing
21 Shields, bearing
33 Aircraft bearings not conforming in construction to group 3 or 5
35 Stack propeller bearings
36 Counterweight propeller bearings and component parts
37 Plate, retaining, bearing
39 Mounted unit, housing unit only
30 Retainer, ball, component or assembly (star type)
41 Retainer, ball, component or assembly (sleeve type)
50 Nut, lock (plain round, self locking)
51 Washer, lock (key)
52 Spring, loading and spring, washer
53 Adapter sleeves (without nut and washer)
54 Adapter sleeves, complete
55 Adapter sleeves, (push in type)
56 Ball, steel (high carbon chrome alloy)
57 Ball, bronze
58 Ball, carbon steel
59 Roller, steel
60 Combination radial and washer type thrust bearing (inner race of radial bearing is one race of thrust bearing)
61 Bearing, rocker arm, engine
63 Pillow block castings only
64 Spacer sleeves, collars, washers or seats
66 Split outer race only
67 Retainer assemblies, ball or roller (washer thrust bearing types, group 4)

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

Code	
68	Conveyor tube assemblies
69	Hanger frames and housings
70	Ball, monel
71	Ball, brass
72	Ball, aluminum
73	Ball, glass
74	Ball, bakelite, plastic or teflon
75	Ball, corrosion resisting (stainless)
76	Ball, beryllium copper
77	Roller, flanged
78	Turret rollers or wheels (bearing is integral part of assembly)
79	Ball, carboloy (tungsten carbide)
80	Ball, nylon
81	Ball, stellite
82	Ball, sapphire
83	Ball, cobalt chrome tungsten alloy
84	Ball, chrome molybdenum
85	Ball, cobenium
86	Ball, copper
87	Ball, K-monel
88	Ball, hastelloy
89	Ball, nickel chrome alloy
90	Ceramic

6. ARBITRARY SUB-NUMBERS

6.1 Digit positions. Example of digit positions is shown on figure 51.

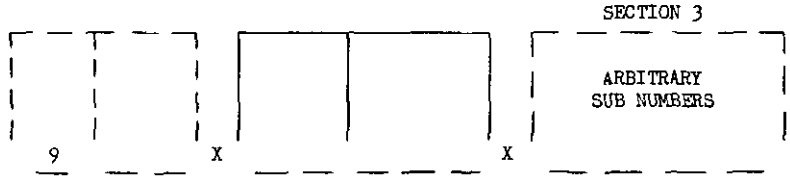


Figure 51 - Group 9, section 3.

6.2 Significant codes - (section 3) (1st, 2nd, 3rd and 4th positions). Significant codes applicable to "Ball," bearing identifies the grade of ball. Reference to table LXVII) provides standard tolerance values for "ball," bearing and shows the relationship of grade and tolerance.

Section 3 code

Code	Grade
0003	3
0005	5
0010	10
0015	15
0025	25
0050	50
0100	100
0200	200
0300	300
0500	500
1000	1000
2000	2000
3000	3000

6.2.1 Other arbitrary sub-numbers will be assigned by the central agency responsible for the number system as required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table LXVII - Master table of ball grades and tolerance values

Grade	Diameter tolerance per ball	"V" block out-of-round in 120 degree angle	Diameter tolerance per unit container	Basic diameter tolerance	Marking increments	Maximum surface roughness micro-inch "AA"[1]
	Inch	Inch	Inch	Inch ±	Inch	
3	0.000003	0.000003	0.000005	0.00003	0.000003	[2]0.5
5	.000005	.000005	.00001	.00005	.000005	[2] .7
10	.000010	.000010	.00002	.0001	.000010	[2]1.0
15	.000015	.000015	.00003	.0001	.000015	[2]1.2
25	.000025	.000025	.00005	.0001	.000025	[2]1.5
50	.00005	.00005	.0001	.0002	.00005	3.0
100	.0001	.0001	.0002	.0005	.0001	5.0
200	.0002	.0002	.0004	.0010	.0002	8.0
300	.0003	.0003	.0006	.0015	.0003	
500	.0005	.0005	.001	.002	.0005	Not applicable
1000	.001	.001	.002	.005	Not applicable	
2000	.002	.002	.004	.005		
3000	.003	.003	.006	.005		

[1] "AA" arithmetical average.
[2] These grades may carry waviness requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.