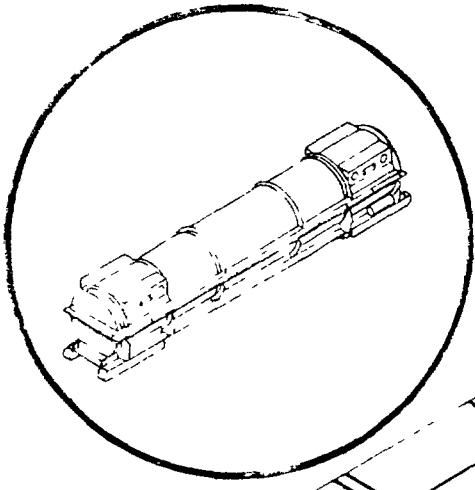
MILITARY STANDARD


MIL STD-1320-194
(NAVY)
15 JUNE 1979

TRUCKLOADING
TORPEDO, MAIN ASSEMBLY MK 37 MOD 2
IN CONTAINER MK 318 MOD 0

CONTAINER DATA

DIMENSIONS	155 1/2 L X 28 W X 31 3/8 H
STACKING HEIGHT	29 3/4
GROSS WT (APPROX)	1639 LBS
CUBE	75 0 CU FT
DOT HAZARD CLASSIFICATION	NONE
CONTAINER DRAWING NO	LD 162244



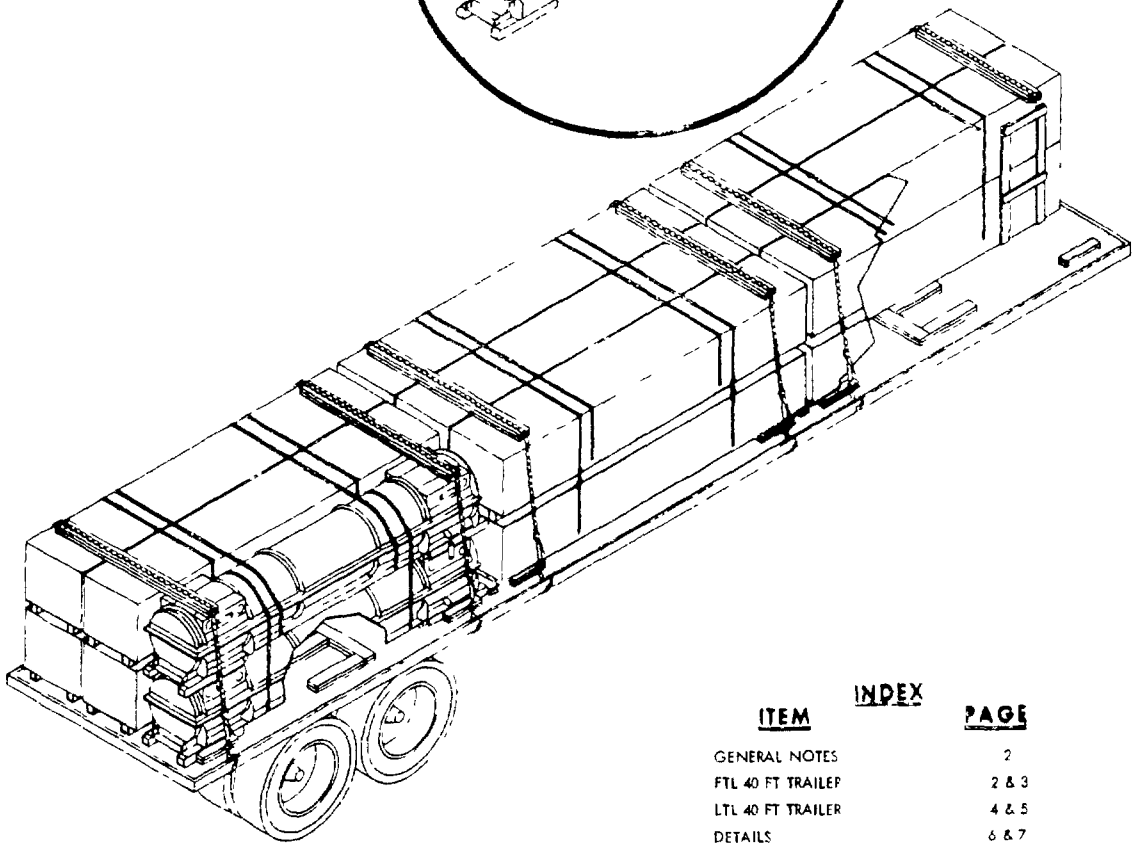

INDEX

ITEM	PAGE
GENERAL NOTES	2
FTL 40 FT TRAILER	2 & 3
LTL 40 FT TRAILER	4 & 5
DETAILS	6 & 7

NOTES

1 UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES

2 FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY)

FSC 8140

AUTHORIZED AND RELEASED FOR HIGHWAY SHIPMENT ONLY

[illegible] TECHNICAL DIRECTION AGENT (DATA) DATE

SIGNATURE SEASYSCOM BY DIRECTION DATE

ORIGINATOR R K Cannon 5-16-79 DATE

NAVAL WEAPONS HANDLING CENTER
WINSTA EAGLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:47Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

1 THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR TRUCKLOADING THE TORPEDO, MAIN ASSEMBLY MK 37 MOD 2 IN CONTAINER MK 318 MOD 0

2 THE PROCEDURES AND PRACTICES DESCRIBED HEREIN ARE INTENDED FOR 40 FT FLATBED TRAILERS THE TRAILER AXLES SHALL BE LOCATED IN THE "WESTERN" POSITION (AT THE EXTREME REAR OF THE TRAILER)

3 WHEN REQUIRED TO SHIP CONTAINERS TWO HIGH, THEY SHALL BE STACKED AND STRAPPED TOGETHER AS SPECIFIED IN THE CONTAINER UNITIZING DETAIL ON PAGE 7

4 CHAINS AND STEEL STRAPS MAY BE USED INTERCHANGEABLY FOR TIEDOWNS ON A 1 TO 1 BASIS

5 STEEL STRAPS USED FOR TIEDOWNS SHALL BE 2 X .050 AND SHALL BE APPLIED AS SPECIFIED AS SHOWN IN THIS DOCUMENT AND THE GENERAL TRUCKLOADING DOCUMENT MIL-STD-1320 (NAVY)

6 CHAINS, FITTINGS AND LOAD BINDERS SHALL MEET THE REQUIREMENTS OF AND BE APPLIED AS SPECIFIED BY THE GENERAL TRUCKLOADING DOCUMENT MIL-STD-1320 (NAVY) AND THE REQUIREMENTS OF THIS DOCUMENT

7 PRIOR TO LOADING THE TRAILER AND DURING THE PRELOADING INSPECTION REQUIRED BY OP 2165 AND REPORTED ON DD FORM 626 THE CHAINS, FITTINGS AND LOADBINDERS SHALL BE INSPECTED FOR STRETCH GOUGING, BENT LINKS WEAR AND ANY OTHER NOTICEABLE DEFECTS THE INSPECTOR SHALL CONFIRM THAT THE CHAINS AND LOADBINDERS HAVE BEEN INSPECTED AND SHALL SO NOTE IN ITEM NO 22 OF DD FORM 626 ANY DEFICIENCY SHALL BE CAUSE FOR REJECTION OF A CHAIN OR LOADBINDER

8 THE MAXIMUM GROSS WEIGHT OF THE TRACTOR-TRAILER AND THE ALLOWABLE AXLE WEIGHTS ARE THE RESPONSIBILITY OF THE CARRIER THE CARRIER WILL ADVISE THE SHIPPER OF THESE LIMITATIONS AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THE TRACTOR-TRAILER WILL NOT EXCEED THESE LIMITATIONS

9 AFTER BLOCKING AND BRACING HAS BEEN INSPECTED, ATTACH SHIPPING DOCUMENTS TO INSIDE OF TRAILER IN AN ACCESSIBLE AREA AND CLOSE AND SEAL TRAILER DOORS

10 APPLICABLE MATERIAL SPECIFICATIONS DUNNAGE LUMBER, MM-L-751 NAILS, FF-N-105, TYPE II STYLE 10, COMMON BRIGHT, STRAPPING, QQ-S-781, TYPE I, HEAVY DUTY FINISH A, B OR C

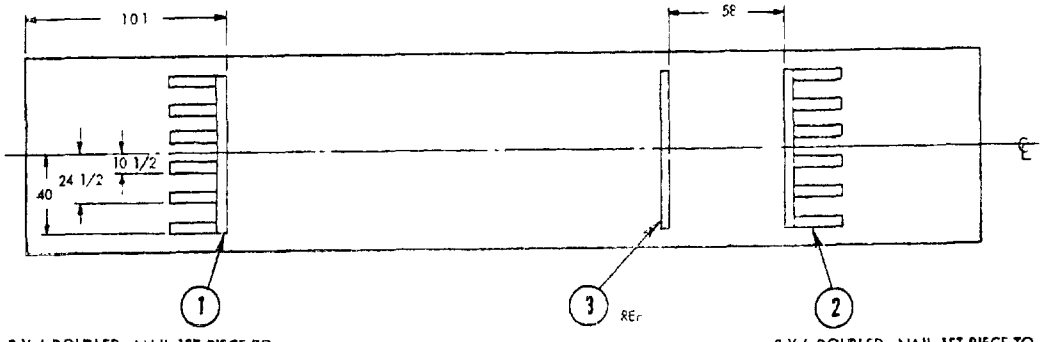
11 FOR GENERAL TRUCKLOADING PROCEDURES REFER TO THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY)

FTL 40 FT TRAILER (FLATBED)

1 A FULL TRUCKLOAD CONSISTS OF 18 CONTAINERS SHIPMENT OF CONTAINERS OF MINES IS LIMITED TO TWO HIGH DUE TO THE STACKING CHARACTERISTICS OF THE MK 318 CONTAINER

2 PREPOSITION BLOCKING AS SHOWN IN DETAIL A THE SUGGESTED LOADING SEQUENCE IS

- a INSTALL REAR PREPOSITIONED BLOCKING
- b LOAD REAR STACK OF CONTAINERS
- c LOAD MIDDLE STACK OF CONTAINERS
- d INSTALL FORWARD PREPOSITIONED BLOCKING
- e LOAD FORWARD STACK OF CONTAINERS
- f COMPLETE REMAINING BLOCKING AND TIEDOWN




2 X 6 DOUBLED NAIL 1ST PIECE TO TRAILER FLOOR W/1-16d NAIL EVERY 8 INCHES NAIL 2ND PIECE TO 1ST IN LIKE MANNER.

DETAIL A

2 X 6 DOUBLED NAIL 1ST PIECE TO TRAILER FLOOR W/4-16d NAILS NAIL 2ND PIECE TO 1ST IN LIKE MANNER

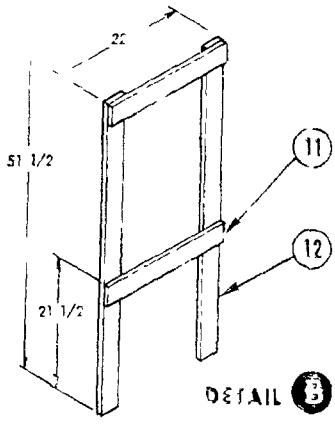Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:47Z
Check the source to verify that this is the current version before use.




DETAIL B

ANTI CHAFING ASSEMBLY
(2 REQUIRED)

NOTE

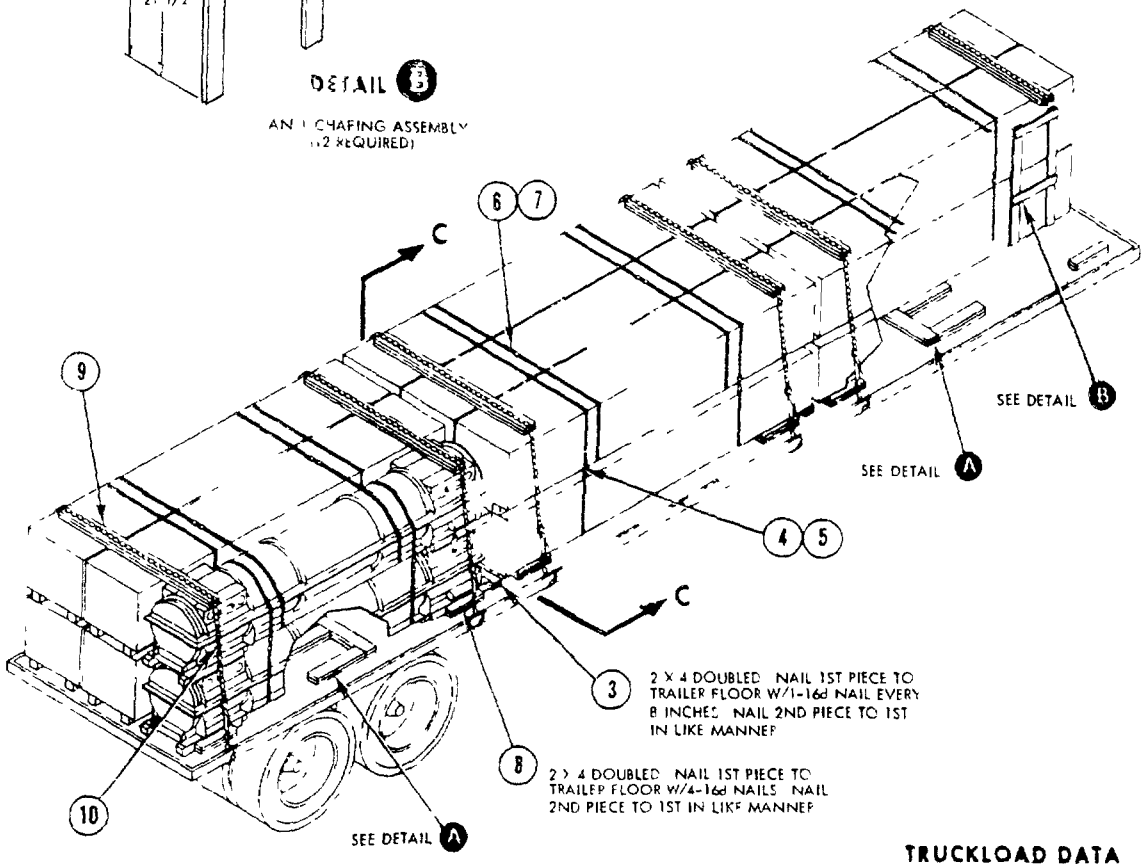
THIS FTL ILLUSTRATES THE USE OF CHAINS AS TIEDOWNS. 2 X .050 STEEL STRAPS ARE AN AUTHORIZED ALTERNATE



TRUCKLOAD DATA

NO. OF CONTAINERS 18

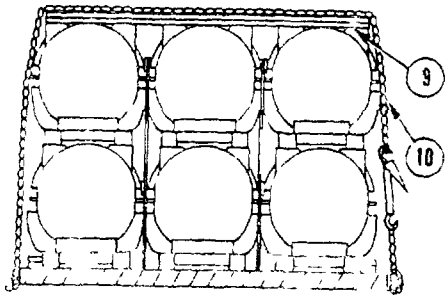WEIGHT (APPROX.) . . . . . 29 502 LBS



SECTION C-C

PIECE NO.	DESCRIPTION	SIZE	NO. OF PIECES REQ'D	NAIL TO	NAILS NUMBER	NAILS SIZE
12	UPRIGHT	1 X 3 X 51 1/2	24	SEE 11	-	-
11	TIE PIECE	1 X 4 X 22	24	12	3	6d CLINCHED
10	CHAIN & BINDER	5/16 OR 3/8	6		-	-
9	PROTECTOR BOARD	2 X 6 X 79	12	DOUBLE LAMINATE	8	10d
8	SLEEPER	2 X 4 X 18	24	SEE FIELD NOTE		
7	SEAL	FOR 1 1/4 STRAP	12	-	-	-
6	CROSS STRAP	1 1/4 X .035 X 21 FT.	6	-	-	-
5	SEAL	FOR 1 1/4 STRAP	36	-	-	-
4	UNITIZING STRAP	1 1/4 X .035 X 16 FT	18	-	-	-
3	SEPARATOR	2 X 4 X 80	4	SEE FIELD NOTE		
2	BACKUP CLEAT	2 X 6 X 24	24	SEE DETAIL A		
1	CROSSMEMBER	2 X 6 X 80	4	SEE DETAIL A		

LIST OF MATERIALS & MARKING DATA

FTL 40 FT TRAILER (FLATBED)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:47Z
Check the source to verify that this is the current version before use.

LTL 40 FT TRAILER (FLATBED)

1 WHEN REQUIRED TO SHIP LESS THAN A FULL TRUCKLOAD, SELECT THE CORRECT LOAD PATTERN FROM TABLE I POSITION THE CONTAINERS ON THE TRAILER USING THIS PATTERN

2 THE LTL PATTERNS SHOWN FOR 11, 13 14, 15, 16 AND 17 CONTAINERS REQUIRE PREPOSITIONED BLOCKING AS SHOWN IN DETAIL A, PAGE 2 WHEN CONTAINERS ARE TWO ACROSS, MODIFY BLOCKING ACCORDINGLY BLOCK AND TIEDOWN CONTAINERS USING THE PRINCIPLES SHOWN ON PAGE 3 AND FTL NOTES ON PAGE 2

3 WHEN REQUIRED TO SHIP 17 CONTAINERS, THE FILLER ASSEMBLY, DETAIL F PAGE 6, SHALL BE USED TO FILL THE VOID IN THE CENTER OF THE MIDDLE STACKS WHERE THE STACK IS ONE CONTAINER HIGH THE ASSEMBLY SHALL BE POSITIONED ON THE ONE HIGH CONTAINER AND STRAPPED TO THE CONTAINER IN SIMILAR MANNER AS SHOWN PER CONTAINER UNITIZING ON PAGE 7














4 THE LTL PATTERN SHOWN FOR 12, 10, 9, 8 & 7 CONTAINERS REQUIRES THE FORWARD STACK TO BE POSITIONED 48 INCHES FROM THE FRONT OF THE TRAILER BLOCK AND TIEDOWN CONTAINERS USING THE PRINCIPLES SHOWN ON PAGES 3 AND 5

5 THE LTL PATTERN SHOWN FOR 6 OR LESS CONTAINERS REQUIRES THE FORWARD STACK TO BE POSITIONED 48 INCHES FROM THE FRONT OF THE TRAILER BLOCK AND TIEDOWN CONTAINERS USING THE PRINCIPLES SHOWN ON PAGE 5

6 THE LTL ON PAGE 5 IS FOR 5 CONTAINERS LTL SHIPMENTS ARE NOT LIMITED TO THIS QUANTITY ACTUAL SHIPPING REQUIREMENTS WILL DETERMINE THE NUMBER OF CONTAINERS TO BE SHIPPED ON A TRAILER AND THEY SHOULD BE BLOCKED AND TIED DOWN IN ACCORDANCE WITH APPROPRIATE PARTS OF THIS STANDARD


TABLE I

LOAD PATTERN *

NO OF CONTAINERS → FWD	NO OF CONTAINERS → FWD	NO OF CONTAINERS → FWD
17 	11 	5 
16 	10 	4 
15 	9 	3 
14 	8 	2 
13 	7 	1 
12 	6 	

*LOAD PATTERN IS THE FLOOR PLAN FOR THE LOAD THE NUMBER IN THE BLOCKS IS THE NUMBER OF CONTAINERS IN THE LAYER OF THE STACK


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:47Z
Check the source to verify that this is the current version before use.



DETAIL D
ANTI-CHAFING ASSEMBLY
(6 REQUIRED)


NOTE

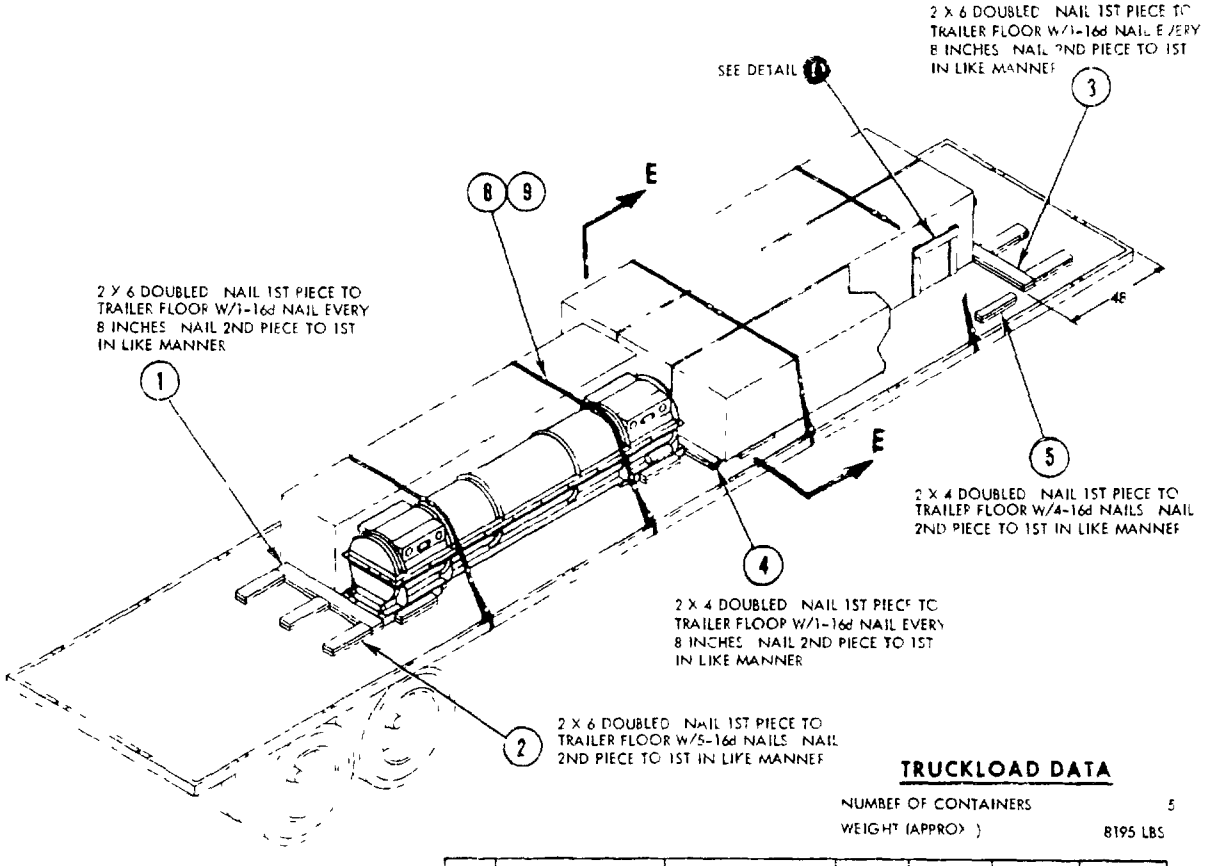THIS LOAD ILLUSTRATES THE USE OF 2 X .050 STEEL STRAPS AS TIEDOWNS. CHAIN AND LOADBINDERS ARE AN AUTHORIZED ALTERNATE



TRUCKLOAD DATA

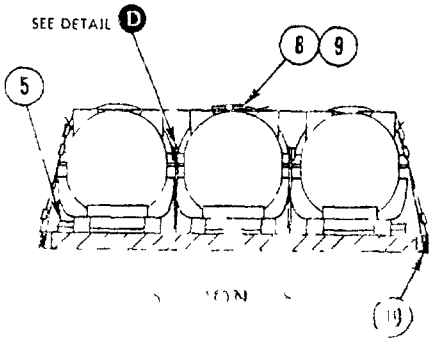NUMBER OF CONTAINERS 5
WEIGHT (APPROX.) 8195 LBS




PIECE NO	DESCRIPTION	SIZE	NO OF PIECES REQ'D	NAIL TO	NUMBER NAILS	SIZE NAILS
10	PAD (STRAP)	2 X .050 X 18	8	-	-	-
9	SEAL	FOR 2 INCH STRAP	32	-	-	-
8	STRAP	2 X .050 X 18 FT 6	4	-	-	-
7	TIE PIECE	1 X 4 X 22	6	6	3	6d CLINCHED
6	UPRIGHT	1 X 4 X 21 1/2	12	SEE 7		-
5	SLEEPER	2 X 4 X 18	16	SEE FIELD NOTE		
4	SEPARATOR	2 X 4 X 80	2	SEE FIELD NOTE		
3	CROSSMEMBER	2 X 6 X 80	2	SEE FIELD NOTE		
2	BACKUP CLEAT	2 X 6 X 20	14	SEE FIELD NOTE		
1	CROSSMEMBER	2 X 6 X 50	2	SEE FIELD NOTE		

LIST OF MATERIALS & NAILING DATA

TYPICAL LOAD (SINGLE LAYER) 40 FT TRAILER (FLATBED)

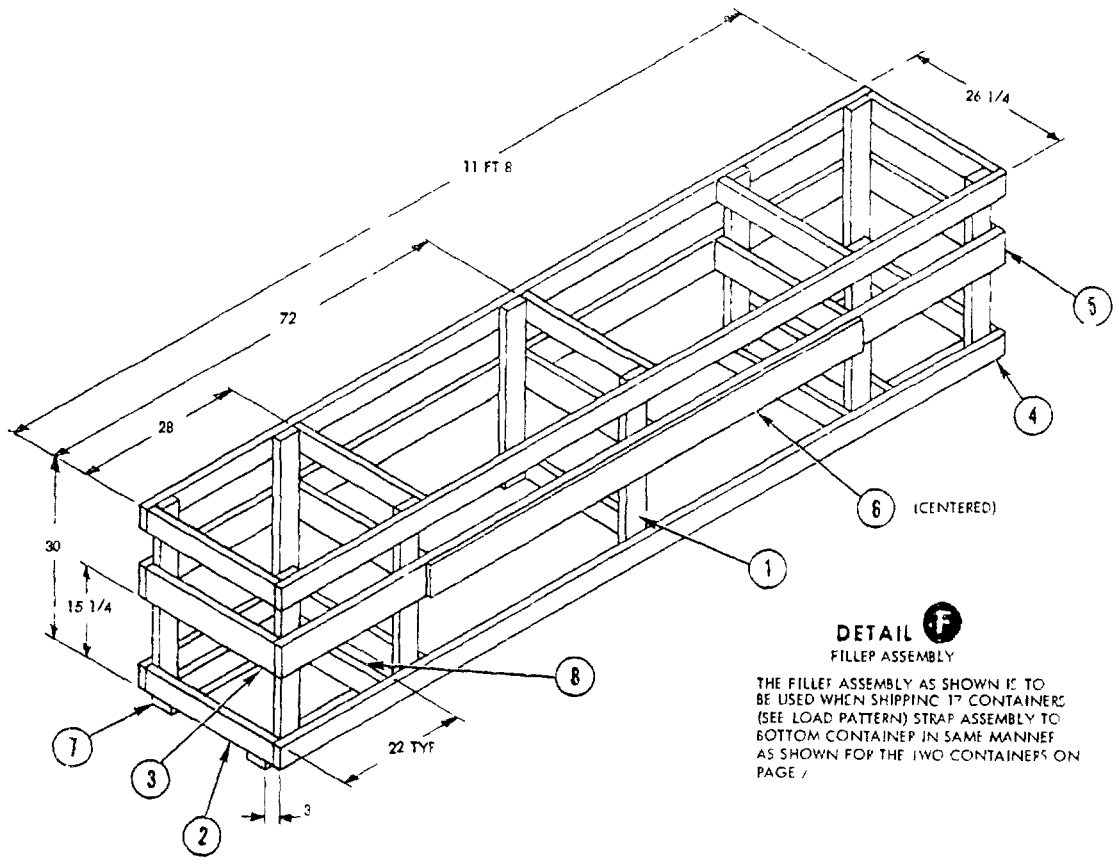Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:47Z
Check the source to verify that this is the current version before use.



DETAIL F
FILLER ASSEMBLY


THE FILLER ASSEMBLY AS SHOWN IS TO BE USED WHEN SHIPPING 17 CONTAINERS (SEE LOAD PATTERN) STRAP ASSEMBLY TO BOTTOM CONTAINER IN SAME MANNER AS SHOWN FOR THE TWO CONTAINERS ON PAGE 7

PIECE NO	DESCRIPTION	SIZE	NO PCS REQD	NAIL TO	NUMBER NAILS	SIZE
8	SUPPORT BRACE	2 X 4 X 23 1/4	2	SEE 4	-	-
7	SUPPORT	2 X 4 X 22	4	2 8	2/JOINT	16d
6	BUFFER PIECE	1 X 6 X 7 FT	2	5	1/FT	10d
5	LONGITUDINAL	2 X 6 X 11 FT 8	2	3	1/JOINT	16d
4	LONGITUDINAL	2 X 4 X 11 FT 8	4	5	2/JOINT	16d
				2	1/JOINT	16d
3	CROSS BRACE	2 X 6 X 23 1/4	5	1	3/JOINT	16d
2	HORIZONTAL	2 X 4 X 23 1/4	10	1	2/JOINT	16d
1	VERTICAL	2 X 4 X 30	10	4 5	2/JOINT	10d

LIST OF MATERIALS AND NAILING DATA

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:47Z
Check the source to verify that this is the current version before use.

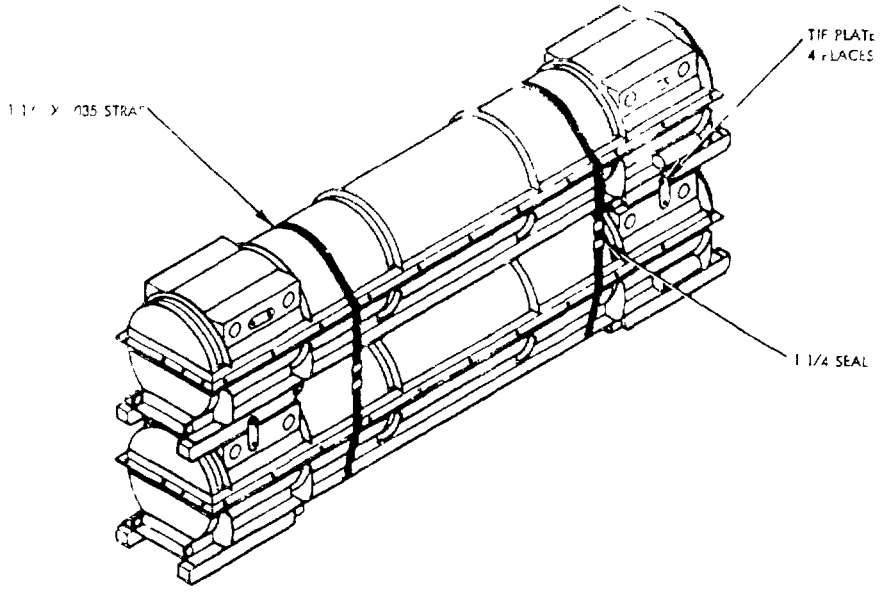UNITIZING PROCEDURE



CONTAINER UNITIZING PROCEDURE

1. STACK TWO CONTAINERS USING A FORK LIFT TRUCK
2. BE CERTAIN THAT THE NESTING FEATURES AND BEARING SURFACES ARE PROPERLY POSITIONED TO PREVENT SHIFTING IN LATERAL AND LONGITUDINAL DIRECTIONS
3. FASTEN TIE PLATES IN POSITION ON CONTAINERS
4. SECURE BOTTOM CONTAINER TO TOP CONTAINER WITH TWO 1 1/4 X .035 STEEL STRAPS POSITIONED AS INDICATED ABOVE
5. AFTER TENSIONING STRAPS, SEAL WITH TWO 1 1/4 SEALS, DOUBLE CRIMP SEAL OR ONE DOUBLE NOTCHED SEAL

WARNING

WHEN LOADING/UNLOADING TRAILERS WITH UNITIZED CONTAINERS EXTRA CAUTION SHOULD BE TAKEN TO PREVENT TOPPLING. SPECIAL ATTENTION SHOULD BE GIVEN TO APPROPRIATE BACKUP OF OUTBOARD CONTAINERS AND CONTAINERS IN THE OUTER ROWS. CONTAINERS SHALL BE DEUNITIZED AFTER UNLOADING THE VEHICLE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:47Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No 22-R255

INSTRUCTIONS The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay or will otherwise enhance use of the document DoD contractors government activities, or manufacturers vendors who are prospective suppliers of the product are invited to submit comments to the government Fold on lines on reverse side staple in corner and send to preparing activity Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity

DOCUMENT IDENTIFIER AND TITLE

MIL-STD-1320-194 (NAVY)

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3 IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO

DATE

DD FORM 1426
1 JAN 72

REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

S/N 0102-014-1802

☆ GOVERNMENT PRINTING OFFICE 1972 O-759 022/4783

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:47Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID

U.S. MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commanding Officer
Naval Weapons Station Earle (NWHC-R. Harris)
Colts Neck, NJ 07722

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:47Z
Check the source to verify that this is the current version before use.