MILITARY STANDARD

MIL-STD-[illegible]
([illegible])
14 APRIL 19[illegible]

TRUCK LOADING

TORPEDO MK 50 (ALWT)


FOR OPEVAL AND TECHEVAL

IN SHIPPING AND STORAGE CONTAINER [illegible]

CONTAINER DATA


TORPEDOES PER CONTAINER	1
DIMENSIONS	135 L x 20 W x 22 H
GROSS WT (W/FLIGHTGEAR)	1172 LBS Δ
GROSS WT (W/O FLIGHT GEAR)	1125 LBS Δ
TARE WT	372 LBS
CUBE	34.4 CU FT

Δ DO NOT USE FOR SHIPPING WEIGHT

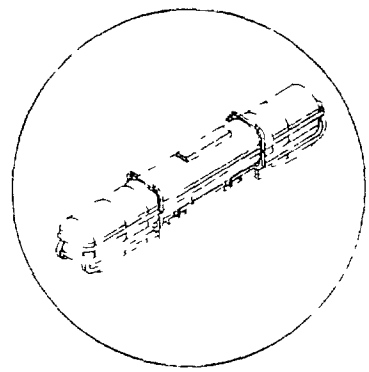

DOT HAZARD CLASSIFICATION

WARSHOT TORPEDO - EXPLOSIVES A
EXERCISE TORPEDO - INERT
EMPTY CONTAINER - INERT

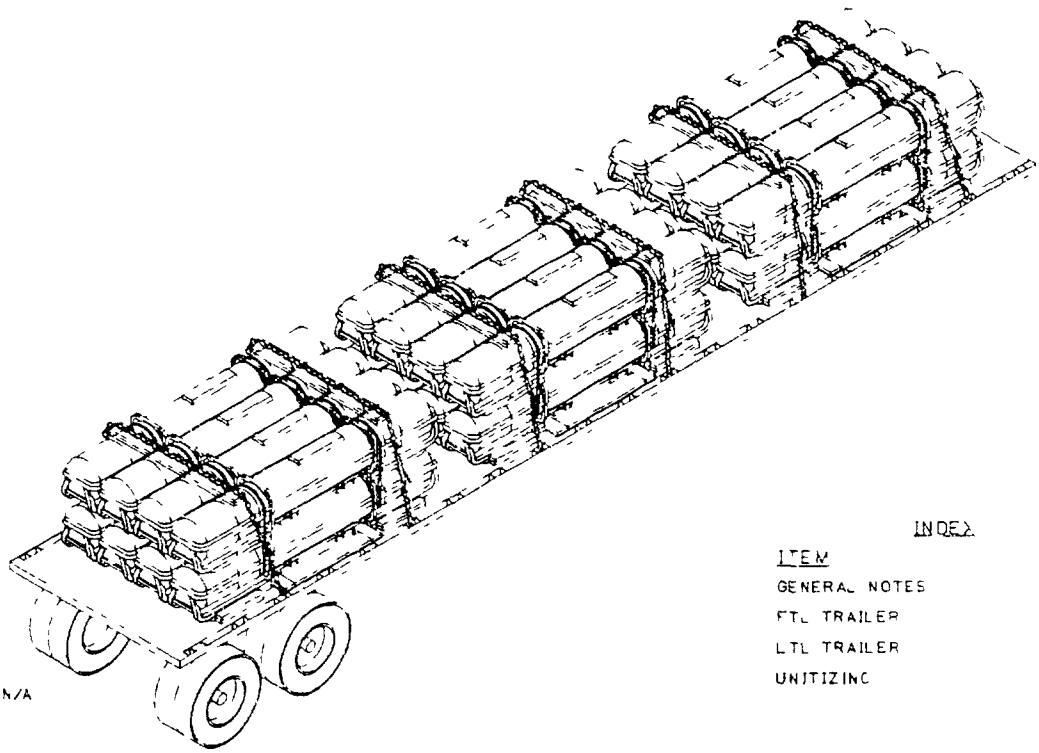

AMSC NO - N/A

INDEX

ITEM	PAGE
GENERAL NOTES	2
FTL TRAILER	2 & 3
LTL TRAILER	4 & 5
UNITIZING	6

NOTES

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING CONTAINERLOADING AND CARLOADING MILITARY STANDARDS REFER TO INDEX TO STANDARDS MIL-HDBK-236 (NAVY)

DISTRIBUTION STATEMENT A

Approved for public release distribution is unlimited

FSC 8140

AUTHORIZED AND RELEASED FOR HIGHWAY SHIPMENT ONLY

W S Gray NWHC 7/14/86
SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE

E Kelly 7/14/86
SIGNATURE SEASYSCOM BY DIRECTION DATE

ORIGINATOR [illegible] 7/14/86
DATE


NAVAL WEAPONS HANDLING CENTER
WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

1. THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR TRUCKLOADING TORPEDO MK 50 (ALWT) FOR OPEVAL AND TECHEVAL IN SHIPPING AND STORAGE CONTAINER EX 695 FOR GENERAL TRUCKLOADING PROCEDURES REFER TO THE GENERAL TRUCKLOADING DOCUMENT MIL-STD 1320 (NAVY)
2. THE PROCEDURES DESCRIBED HEREIN ARE INTENDED FOR 40 FT AND LONGER FLATBED TRAILERS WITH THE TRAILERS TANDEM AXLES LOCATED IN THE "WESTERN POSITION" (AT THE EXTREME REAR OF THE TRAILER) DO NOT USE TRAILERS WITH METAL FLOORS
3. CHAINS AND STEEL STRAPPING MAY BE USED INTERCHANGEABLY ON A ONE TO ONE BASIS FOR TIE DOWNS
4. STEEL STRAPPING USED AS TIE DOWNS SHALL BE 2 X .050 AND SHALL CONFORM TO AND BE APPLIED AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT MIL-STD-1320 (NAVY)
5. CHAINS FITTINGS AND LOAD BINDERS SHALL CONFORM TO AND BE APPLIED AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT MIL-STD-1320 (NAVY) EXCEPT THAT THE CHAIN/GRAB HOOKS SHALL BE ATTACHED TO THE STAKE POCKETS (NOT AROUND THE RUB RAIL)
6. PROTECTOR BOARDS (DOUBLED 2 X 6 S) SHALL BE USED UNDER THE TIE DOWNS WHEN USING STEEL STRAPPING THE STRAPS SHALL BE STAPLED TO THE PROTECTOR BOARD USING 2 INCH STRAPPING STAPLES WHEN USING CHAIN THE CHAINS SHALL BE SECURED TO THE PROTECTOR BOARD BY DRIVING A 10d NAIL THROUGH THE CHAIN LINK AND CLINCHING THE NAIL OVER THE CHAIN FIVE STAPLES/NAILS SHALL BE USED FOR EACH TIE DOWN
7. PRIOR TO LOADING THE TRAILER AND DURING PRELOADING INSPECTION REQUIRED BY NAVSEA OP 2165 AND REPORTED ON DD FORM 626 THE CHAINS FITTINGS AND LOAD BINDERS SHALL BE INSPECTED FOR STRETCH GOUGING BENT LINKS WEAR AND ANY OTHER NOTICABLE DEFECTS THE INSPECTOR SHALL CONFIRM THAT THE CHAINS, FITTINGS AND LOAD BINDERS HAVE BEEN INSPECTED AND SHALL SO NOTE IN ITEM NO 22 OF DD FORM 626 ANY DEFICIENCY SHALL BE CAUSE FOR REJECTION OF A CHAIN OR LOAD BINDER
8. UNLESS OTHERWISE SPECIFIED DUNNAGE LUMBER STEEL STRAPPING STRAP SEALS AND NAILS SHALL BE AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT MIL-STD-1320 (NAVY)
9. THE MAXIMUM GROSS WEIGHT OF THE TRACTOR-TRAILER AND THE ALLOWABLE AXLE WEIGHTS ARE THE RESPONSIBILITY OF THE CARRIER THE CARRIER WILL ADVISE THE SHIPPER OF THESE LIMITATIONS AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THE TRACTOR-TRAILER WILL NOT EXCEED THESE LIMITATIONS
10. AFTER THE BLOCKING, BRACING AND TIE DOWNS HAVE BEEN INSPECTED THE CONTAINERS SHALL BE COMPLETELY COVERED WITH FIRE RESISTANT WATERPROOF TARPAULINS
11. AFTER THE TARPAULINS ARE IN PLACE ATTACH "EXPLOSIVES A" PLACARDS TO BOTH SIDES FRONT AND BACK OF THE TRAILER (WHEN APPLICABLE) AND ATTACH THE SHIPPING DOCUMENTS TO AN ACCESSABLE AREA ON THE BACK DECK OF THE TRAILER

FTL 40 FT AND LONGER TRAILER (FLATBED)

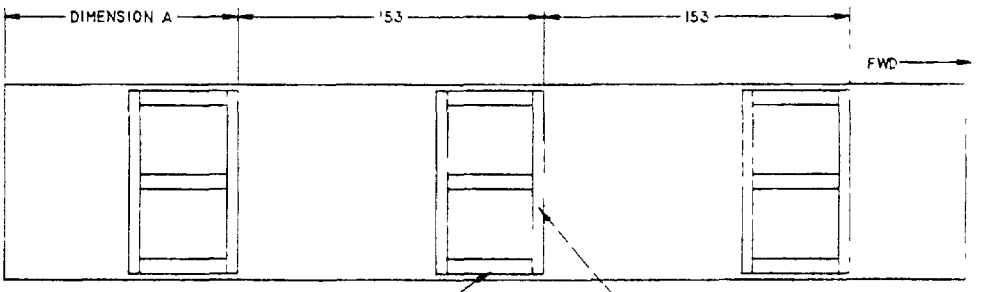

TRAILER LENGTH	DIMENSION A
40 FT	116 INCHES
42 FT	128 INCHES
44 FT	140 INCHES
45 FT	146 INCHES

(3)(4) NAIL ITEM 3 TO TRAILER FLOOR W/1-10d NAIL EVERY 6 INCHES
NAIL ITEM 4 TO ITEM 3 W/1-16d NAIL EVERY 6 INCHES

(1)(2) NAIL ITEM 1 TO TRAILER FLOOR W/1-10d NAIL EVERY 8 INCHES
NAIL ITEM 2 TO ITEM 1 W/1-16d NAIL EVERY 8 INCHES

DETAIL (A)

PREPOSITIONED FLOOR BLOCKING FOR 40 FT OR LONGER TRAILER


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.

NOTE

A) TAULIN OVER
D) TAINERS OMITTED
C) CLARITY

NOTE

DIRECTION OF ARROW INDICATES FORWARD END OF CONTAINER

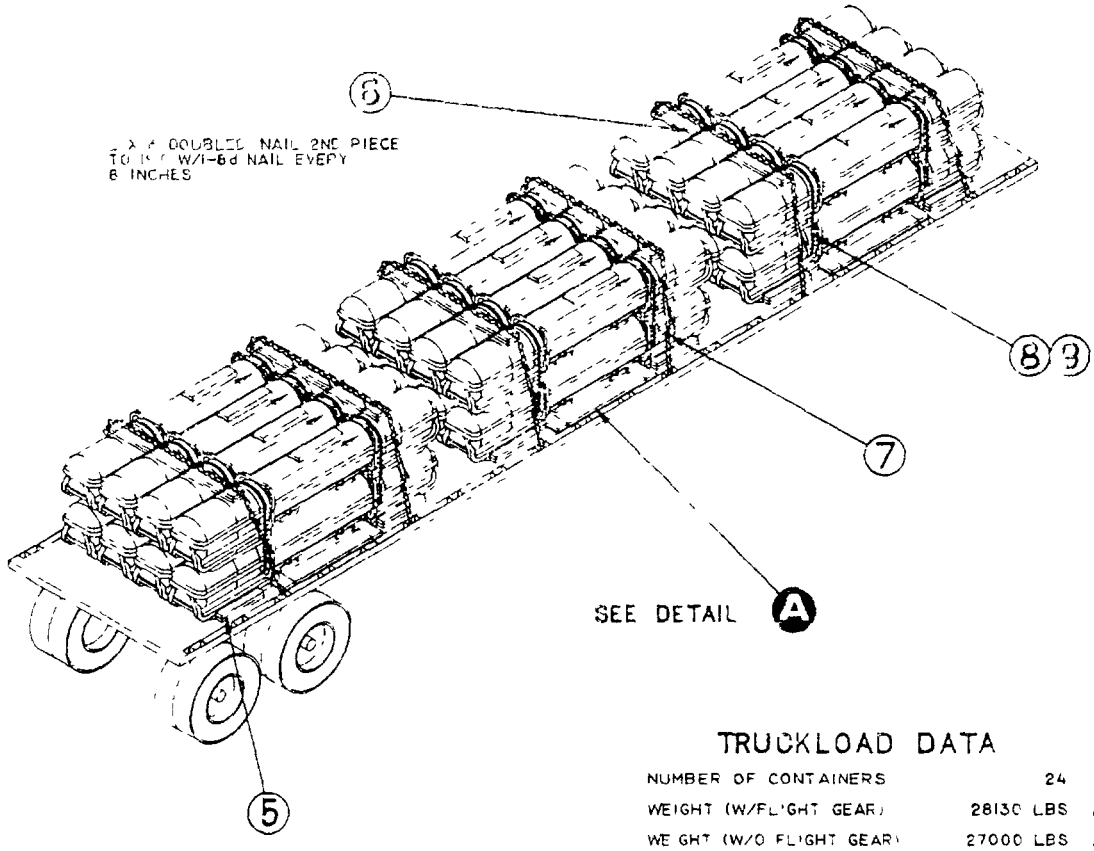

TRUCKLOAD DATA

NUMBER OF CONTAINERS	24	
WEIGHT (W/FLIGHT GEAR)	28130 LBS	Δ
WEIGHT (W/O FLIGHT GEAR)	27000 LBS	Δ

Δ DO NOT USE FOR SHIPPING WEIGHT

LIST OF MATERIALS

REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
24	9	SEAL NOTCHING TYPE	SEE NOTE 8 PAGE 2	FOR 1 1/4 IN STRAP
24	8	UNITIZING STRAP	SEE NOTE 8 PAGE 2	1 1/4 .035 X LENGTH TO SUIT
6	7	CHAIN AND LOAD BINDER	SEE NOTE 5 PAGE 2	5/16 OR 3/8
12	6	PROTECTOR BOARD	SEE NOTE 6 PAGE 2	2 X 6 X 70
24	5	SLEEPER	SEE NOTE 8 PAGE 2	2 X 4 X 24
9	4	PREPOSITIONED BACKUP CLEAT UPPER	SEE NOTE 8 PAGE 2	2 X 6 X 43
9	3	PREPOSITIONED BACKUP CLEAT, LOWER	SEE NOTE 8 PAGE 2	1 X 6 X 43
6	2	PREPOSITIONED CROSSMEMBER UPPER	SEE NOTE 8 PAGE 2	2 X 6 X 90
6	1	PREPOSITIONED CROSSMEMBER, LOWER	SEE NOTE 8 PAGE 2	1 X 6 X 90


Source: https://assist.dla.mil - Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.

40 FT AND LONGER TRAILERS (FLATBED)

1. WHEN REQUIRED TO SHIP LESS-THAN-TRUCKLOAD SELECT THE CORRECT LOAD PATTERN FOR THE NUMBER OF CONTAINERS TO BE SHIPPED FROM TABLE I
2. POSITION CONTAINERS ON THE TRAILER AS SHOWN IN TABLE I, BLOCK AND TIE DOWN USING THE PRINCIPLES SHOWN ON PAGES 3 AND 5 AND THE GENERAL DOCUMENT MIL-STD-1320 (NAVY)
3. THE LTL PLAN SHOWN ON PAGE 5 IS THE LESS-THAN-TRUCKLOAD FOR THE QUANTITY OF CONTAINERS SHOWN. THIS DOES NOT LIMIT SHIPMENTS TO THIS QUANTITY SINCE LTL SHIPMENTS MAY CONSIST OF A LESSER OR GREATER NUMBER OF CONTAINERS
4. WHEN USING LOAD PATTERNS WITH 1, 2, OR 3 CONTAINERS WIDE, CENTER THE PREPOSITIONED BLOCKING AND CONTAINERS ON THE CENTER LINE OF THE TRAILER

TABLE I

LOAD PATTERN *

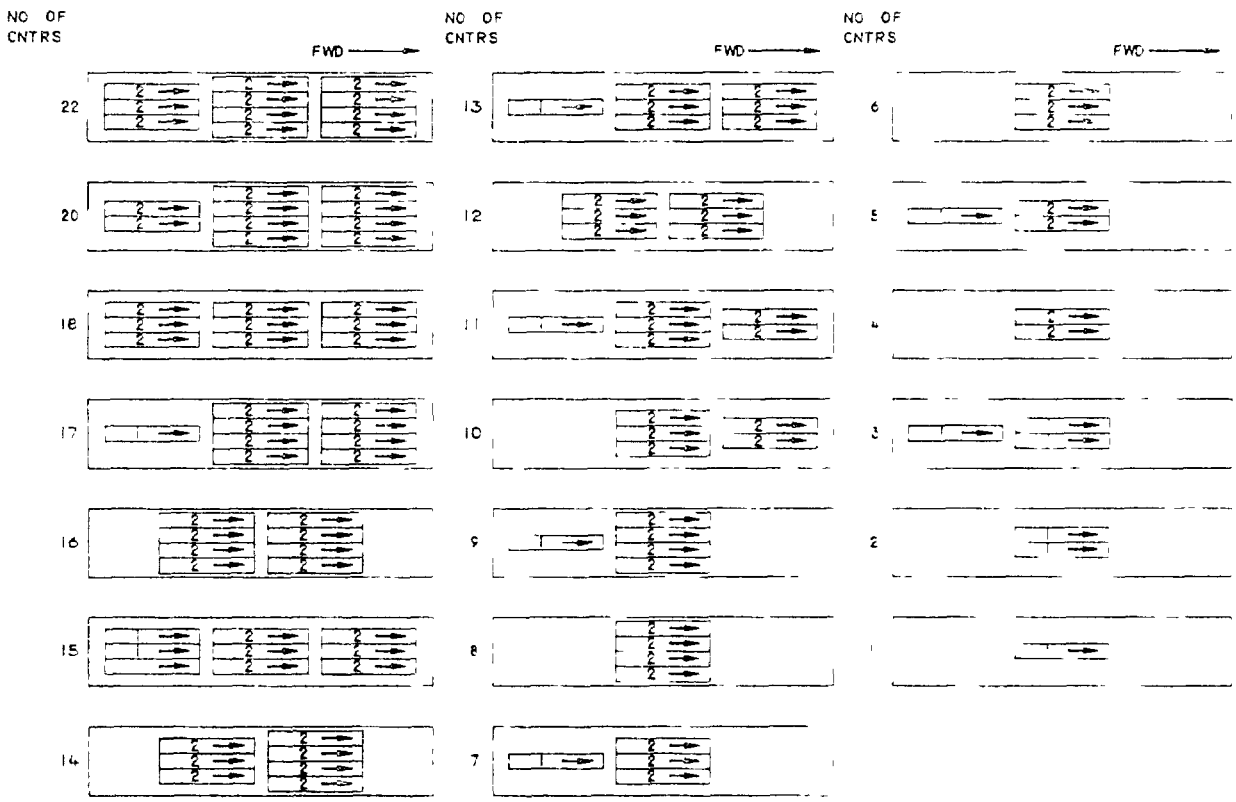

* LOAD PLAN SHOWS FLOOR PLAN FOR TRAILER

NUMBER IN BLOCKS INDICATES THE NUMBER OF CONTAINERS IN A ROW OF A STACK

ARROWS INDICATE FORWARD END OF CONTAINER


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.

NOTE

TARPAULIN OVER CONTAINER OMITTED FOR CLARITY

NOTE

DIRECTION OF ARROW INDICATES FORWARD END OF CONTAINER

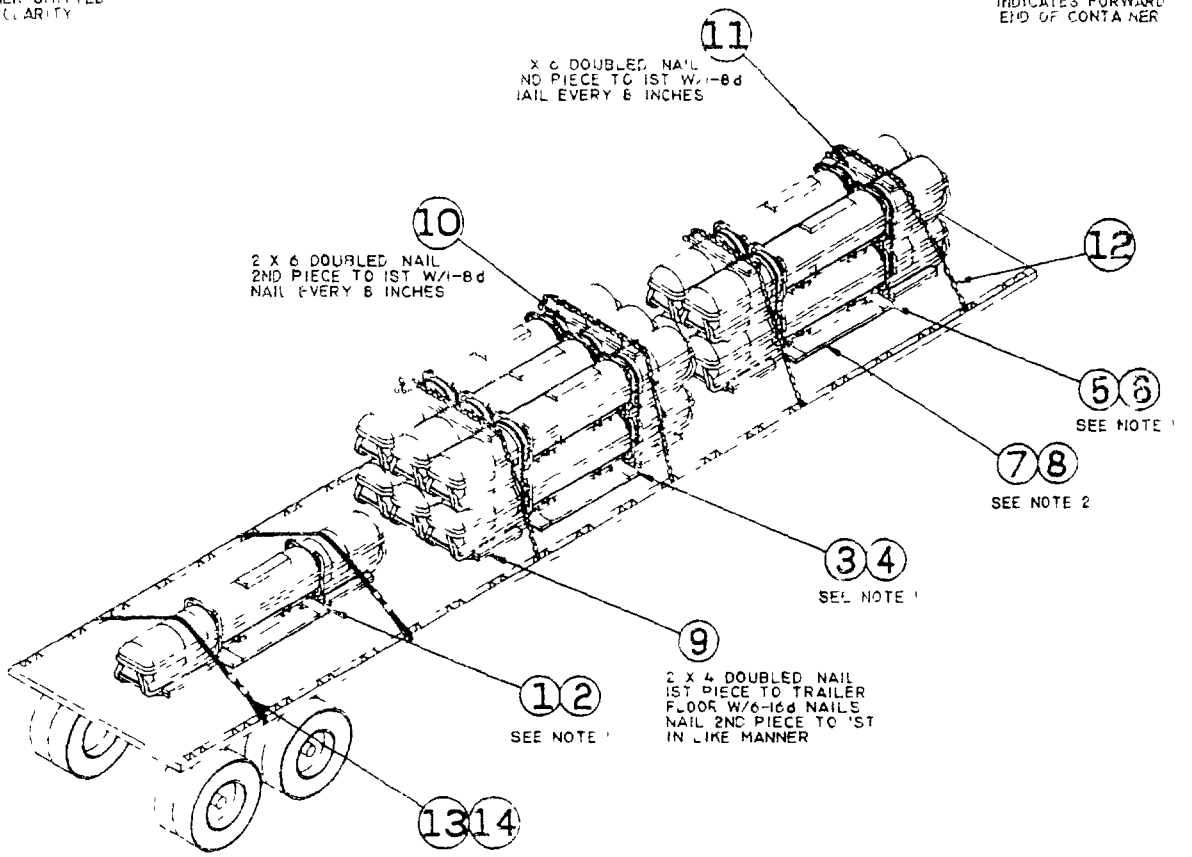

NOTES

1. CENTER PREPOSITIONED BLOCKING ON THE CENTER LINE OF THE TRAILER
2. WHEN LOADING LESS THAN FOUR CONTAINERS ACCROSS THE TRAILER THE CENTER BACKUP CLEATS ARE NOT USED


REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
10	16	SEAL	SEE NOTE 8 PAGE 2	FOR 1 1/4 IN STRAP
10	15	UNITIZING STRAP	SEE NOTE 8 PAGE 2	1 1/4 X .035 X LENGTH TO SUIT
4	14	SEAL	SEE NOTE 8 PAGE 2	FOR 2 IN STRAP
2	13	TIE DOWN STRAP	SEE NOTE 4 PAGE 2	2 X .050 X LENGTH TO SUIT
4	12	CHAIN AND LOAD BINDER	SEE NOTE 5 PAGE 2	5/16 OR 3/8
4	11	PROTECTOR BOARD	SEE NOTE 6 PAGE 2	2 X 6 X 30
4	10	PROTECTOR BOARD	SEE NOTE 6 PAGE 2	2 X 6 X 50
24	9	SLEEPER	SEE NOTE 8 PAGE 2	2 X 4 X 24
6	8	PREPOSITIONED BACKUP CLEAT UPPER	SEE NOTE 8 PAGE 2	2 X 8 X 43
6	7	PREPOSITIONED BACKUP CLEAT LOWER	SEE NOTE 8 PAGE 2	1 X 8 X 43
2	6	PREPOSITIONED CROSSMEMBER UPPER	SEE NOTE 8 PAGE 2	2 X 6 X 50
2	5	PREPOSITIONED CROSSMEMBER LOWER	SEE NOTE 8 PAGE 2	1 X 6 X 50
2	4	PREPOSITIONED CROSSMEMBER UPPER	SEE NOTE 8 PAGE 2	2 X 6 X 70
2	3	PREPOSITIONED CROSSMEMBER LOWER	SEE NOTE 8 PAGE 2	1 X 6 X 70
2	2	PREPOSITIONED CROSSMEMBER UPPER	SEE NOTE 8 PAGE 2	2 X 6 X 30
2	1	PREPOSITIONED CROSSMEMBER LOWER	SEE NOTE 8 PAGE 2	1 X 6 X 30

LIST OF MATERIALS

LTL 40 FT AND LONGER TRAILER (FLATBED)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.

UNITIZING PROCEDURE

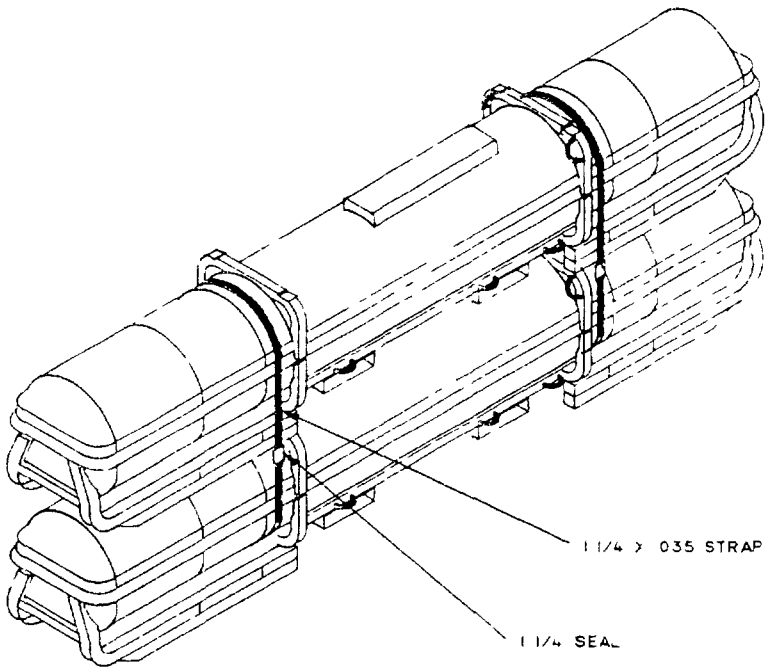

DETAIL B

1 USING A FORK TRUCK STACK TWO (2) CONTAINERS TOGETHER AS SHOWN IN DETAIL B NOTE BE SURE TO ALIGN THE STACKING FEATURES

2 STRAP THE TOP CONTAINER TO THE BOTTOM CONTAINER WITH TWO (2) 1 1/4 X .035 STEEL STRAPS, TENSIONED AND SEALED WITH ONE (1) DOUBLE NOTCHED SEAL PER STRAP POSITION THE STRAPS OVER THE BODY OF THE UPPER CONTAINER AND UNDER THE BODY OF THE LOWER CONTAINER AND AS CLOSE TO THE OUTBOARD SIDE OF THE ROLL FRAMES AS FEASIBLE

WARNING

THE STRAPPING TOGETHER OF CONTAINERS TO FORM A UNIT LOAD OF CONTAINERS TWO (2) HIGH IS AUTHORIZED FOR LOADING AND UNLOADING OF TRAILERS ONLY ANY MOVEMENT OF THESE LOADS IS LIMITED TO THAT NECESSARY TO LOAD OR UNLOAD THE TRAILER

REVIEW ACTIVITY
NAVY OS

PREPARING ACTIVITY
NAVY-OS
(PROJECT NO 8140-N/051

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS. In a continuing effort to make our standardization documents better, the DoD provides this form for use in [illegible] comments and suggestions for improvements. All users of military standardization documents are invited to provide [illegible]. This form may be detached, folded along the lines indicated, and [illegible] along the loose edge (DO NOT STAPLE), and mailed. In block 5, be as specific as possible about particular problems with the document (e.g., [illegible] which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible), and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE. This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commanding Officer
Naval Weapons Station Earle
Naval Weapons Handling Center (803)
Colts Neck, NJ 07722

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions - Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-STD-1399 (NAVY)	TRUCKLOAD MK [illegible] MWT TORPEDO IN FX699 Container

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*

5. PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* — Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* — Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* — Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 1426 PREVIOUS EDITIONS ARE OBSOLETE

Source: https://assist.dla.mil - Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.