MILITARY STANDARD

MIL-STD-1320-2378 (NAVY)

23 FEBRUARY 1993

SUPERSEDING MIL-STD-1320-237A 22 JULY 1992

TRUCKLOADING


MK 50 TORPEDO (WARSHOT AND EXERCISE)
IN SHIPPING AND STORAGE CONTAINER
MK 714 MODS 0 AND 1
FLEET ISSUE UNIT LOADS

CONTAINER DATA


CONTAINER DATA LIST	DL3167617 OR DL6213163
DIMENSIONS	157 L X 23 W X 24 3/8 H
GROSS WEIGHT	1200 LBS Δ
TARE WEIGHT	620 LBS Δ
CUBE	55.5 CU FT

Δ DO NOT USE FOR SHIPPING WEIGHT

FOR HAZARD CLASSIFICATION SEE NAVSEA S7020-AC-SAF-010/020/030

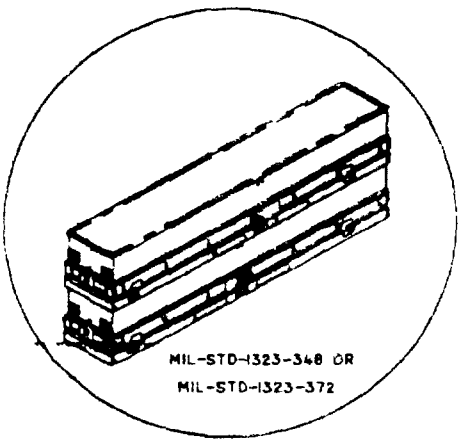

MIL-STD-1323-348 OR
MIL-STD-1323-372

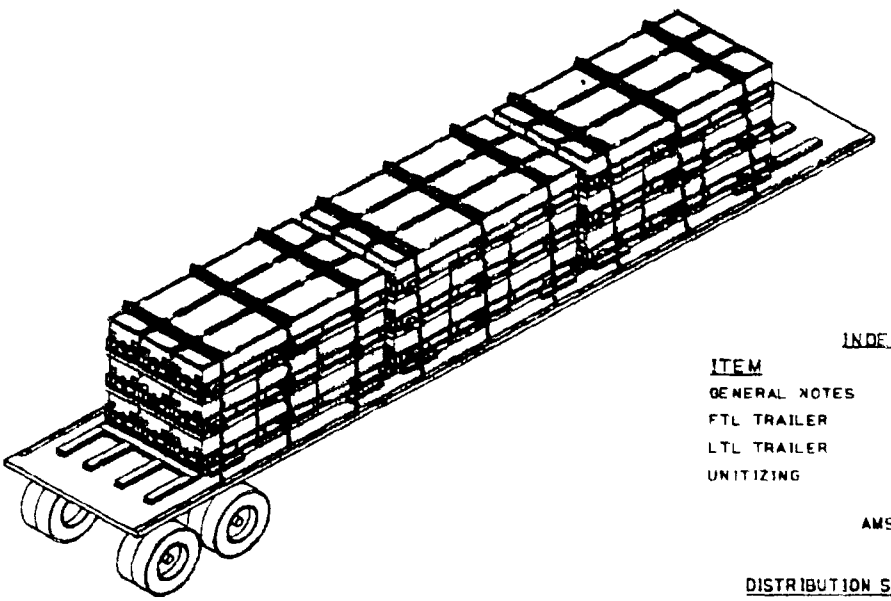

INDEX

ITEM	PAGE
GENERAL NOTES	2
FTL TRAILER	2 & 3
LTL TRAILER	4 & 5
UNITIZING	6 & 7

AMSC NO - N/A

DISTRIBUTION STATEMENT A
APPROVED FOR PUBLIC RELEASE
DISTRIBUTION IS UNLIMITED

REV LTR	REVISION DESCRIPTION	DATE	TDA	SYSCOM
B	ADDED UNIT LOADS PAGE 6	2/23/93	[illegible]	[illegible]
A	ADDED CONTAINER MK 714 MOD 1	3/18	E R	L R C
			APPROVAL	

NOTES

1 UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES
2 FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS MIL-HDBK 236 (NAVY)

FSC 8140

AUTHORIZED AND RELEASED
FOR HIGHWAY SHIPMENT ONLY.

S/E RINALDI 15 JULY 89
SIGNATURE TDA, WPNSTA EARLE DATE

S/L R CARINGI 15 JULY 89
SIGNATURE SEC'Y BY BY DIRECTION DATE

ORIGINATOR S/DAVID N HOEGLER 5 JULY 89
DATE

WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

1 THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR TRUCKLOADING UNIT LOADS OF TORPEDO MK 50 IN SHIPPING STORAGE CONTAINER MK 714 MODS 0 & 1

2 THE PROCEDURES DESCRIBED HEREIN ARE INTENDED FOR 44 FT THROUGH 48 FT FLATBED TRAILERS

3 CHAINS AND STEEL STRAPPING MAY BE USED INTERCHANGEABLY ON A ONE TO ONE BASIS FOR TIE DOWNS

4 STEEL STRAPPING USED AS TIE DOWNS SHALL BE 2 X .050 AND SHALL CONFORM TO AND BE APPLIED AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT MIL-STD-1320 (NAVY)

5 CHAINS FITTINGS AND LOAD BINDERS SHALL CONFORM TO AND BE APPLIED AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT MIL-STD-1320 (NAVY) EXCEPT THAT THE CHAIN/GRAB HOOKS SHALL BE ATTACHED TO THE STAKE POCKETS (NOT AROUND THE RUB RAIL)

6 PROTECTOR BOARDS (DOUBLED 2 X 6 S) SHALL BE USED UNDER THE TIE DOWNS WHEN USING STEEL STRAPPING THE STRAPS SHALL BE STAPLED TO THE PROTECTOR BOARD USING 2 INCH STRAPPING STAPLES WHEN USING CHAIN THE CHAINS SHALL BE SECURED TO THE PROTECTOR BOARD BY DRIVING A 10 d NAIL THROUGH THE CHAIN LINK AND CLINCHING THE NAIL OVER THE CHAIN FIVE STAPLES/NAILS SHALL BE USED FOR EACH TIE DOWN

7 PRIOR TO LOADING THE TRAILER AND DURING PRELOADING INSPECTION REQUIRED BY NAVSEA SW020-AC-SAF-010/020/030 AND REPORTED ON DD FORM 626 THE CHAINS FITTINGS AND LOAD BINDERS SHALL BE INSPECTED FOR STRETCH GOUGING BENT LINKS WEAR AND ANY OTHER NOTICEABLE DEFECTS THE INSPECTOR SHALL CONFIRM THAT THE CHAINS FITTINGS AND LOAD BINDERS HAVE BEEN INSPECTED AND SHALL SO NOTE IN ITEM NO 22 OF DD FORM 626 ANY DEFICIENCY SHALL BE CAUSE FOR REJECTION OF A CHAIN OR LOAD BINDER

8 UNLESS OTHERWISE SPECIFIED DUNNAGE LUMBER STEEL STRAPPING STRAP SEALS AND NAILS SHALL BE AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT MIL-STD-1320 (NAVY)


9 THE MAXIMUM GROSS WEIGHT OF THE TRACTOR-TRAILER AND THE ALLOWABLE AXLE WEIGHTS ARE THE RESPONSIBILITY OF THE CARRIER THE CARRIER WILL ADVISE THE SHIPPER OF THESE LIMITATIONS AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THE TRACTOR-TRAILER WILL NOT EXCEED THESE LIMITATIONS

10 AFTER THE BLOCKING BRACING AND TIE DOWNS HAVE BEEN INSPECTED THE CONTAINERS SHALL BE COMPLETELY COVERED WITH FIRE RESISTANT WATERPROOF TARPAULINS THE TARPAULINS MAY BE UNDER THE TIE DOWNS

11 AFTER THE TARPAULINS ARE IN PLACE ATTACH APPROPRIATE PLACARDS TO BOTH SIDES FRONT AND BACK OF THE TRAILER AND ATTACH THE SHIPPING DOCUMENTS TO AN ACCESSIBLE AREA ON THE BACK DECK OF THE TRAILER

12 FOR GENERAL TRUCKLOADING PROCEDURES REFER TO THE GENERAL TRUCKLOADING DOCUMENT MIL-STD-1320 (NAVY)

FTL 44 FT THROUGH 48 FT TRAILER (FLATBED)

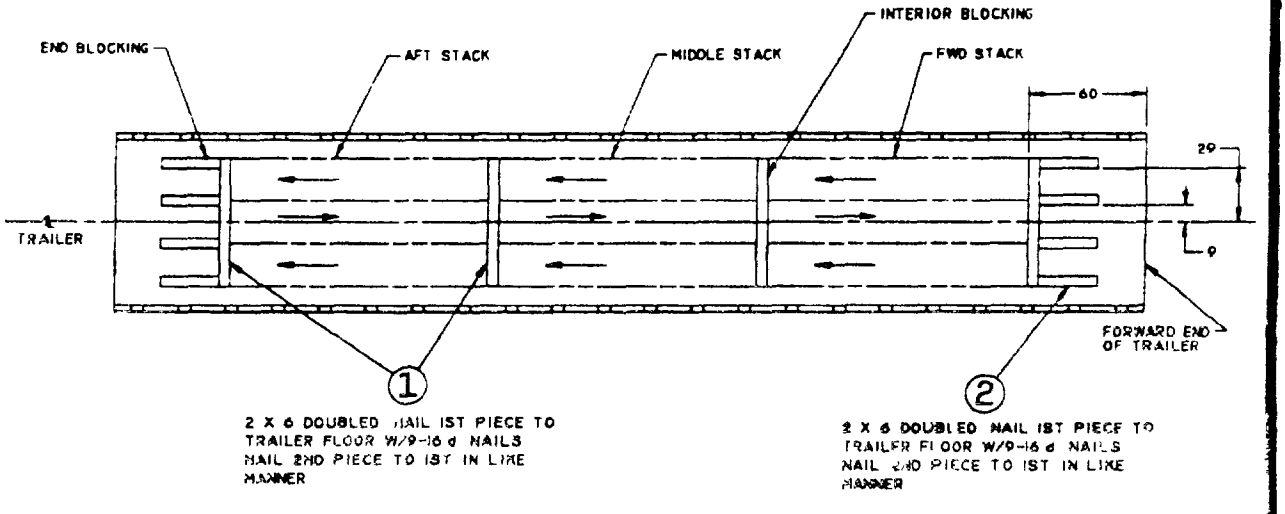

DETAIL

Source: https://assist.dla.mil Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.


FLOOR BLOCKING FOR 44 FT THROUGH 48 FT TRAILERS (45 FT TRAILER SHOWN)

NOTE

TARPAULINS OVER CONTAINERS OMITTED FOR CLARITY

NOTE

DIRECTION OF ARROW INDICATES FORWARD END OF TOP CONTAINER

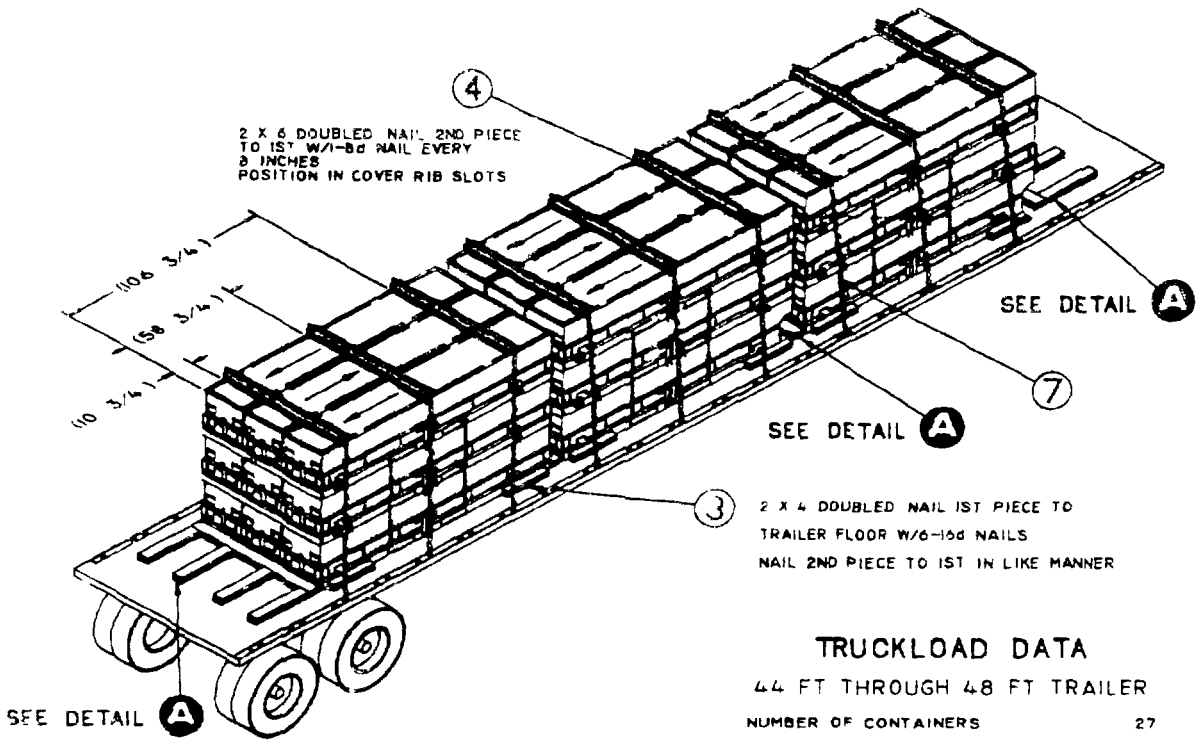


TRUCKLOAD DATA

44 FT THROUGH 48 FT TRAILER

NUMBER OF CONTAINERS 27

WEIGHT 32400 LBS Δ

Δ DO NOT USE FOR SHIPPING WEIGHT

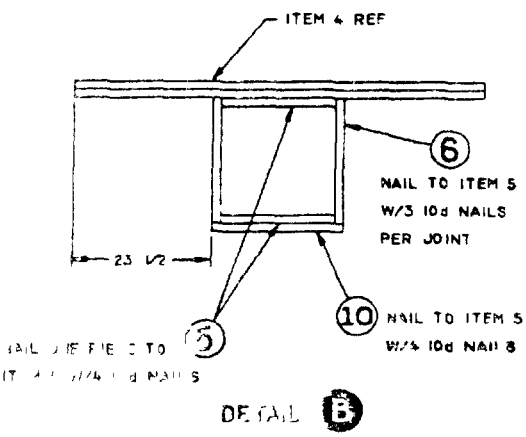

DETAIL B

SPACER BLOCK (2 REQUIRED WHEN NESTED)

REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
2	10	HORIZONTAL BOTTOM	WOOD	2 X 6 X 22 1/2
AR	9	SEAL	STEEL	1 1/4
AR	8	UNITIZING STRAP	STEEL	1 1/4 X .035 X 9 FT
9	7	CHAIN AND LOAD BINDER	SEE NOTE 5 ON PAGE 2	5/16 OR 3/8
4	6	VERTICAL	WOOD	2 X 6 X 22 1/2
4	5	HORIZONTAL, TOP	WOOD	2 X 6 X 19 1/2
18	4	PROTECTOR BOARD	SEE NOTE 6 & 8 ON PAGE 2	2 X 6 X 69 1/2
24	3	SIDE CLEAT	WOOD	2 X 4 X 24
16	2	BACKUP CLEAT	WOOD	2 X 6 X 30
8	1	CROSSMEMBER	WOOD	2 X 6 X 70

LIST OF MATERIALS

FIG 44 FT THROUGH 48 FT TRAILER (FLATBED) (44 FT TRAILER SHOWN)


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.

LTL 44 FT THROUGH 48 FT TRAILERS (FLATBED)

1. WHEN REQUIRED TO SHIP LESS-THAN-TRUCKLOAD SELECT THE CORRECT LOAD PATTERN FOR THE NUMBER OF CONTAINERS TO BE SHIPPED FROM TABLE I
2. POSITION CONTAINERS ON THE TRAILER AS SHOWN IN TABLE I BLOCK AND TIE DOWN USING THE PRINCIPLES SHOWN ON PAGES 3 AND 5 AND THE GENERAL DOCUMENT MIL-STD-1320 (NAVY)
3. THE LTL PLAN ON PAGE 5 SHOWS THE LESS-THAN-TRUCKLOAD METHODS FOR STACKS OF ONE TWO AND THREE CONTAINERS HIGH AND THE APPLICATION OF DETAIL B SPACER/HOLD DOWN
4. THE NUMBERS IN EACH ROW OF A STACK IS THE NUMBER OF CONTAINERS STACKED IN THE ROW A "B" FOLLOWING THE NUMBER REQUIRES THE USE OF DETAIL B SPACERS ON THE FWD AND AFT PROTECTOR BOARD ASSEMBLIES
5. WARNING LOCATE CONTAINERS WITH OPPOSITE ENDS ADJACENT AS DEPICTED IN TABLE I FAILURE TO LOCATE CONTAINERS AS INDICATED WILL RESULT IN AN UNSAFE SHIPPING CONFIGURATION

TABLE I

LOAD PATTERN *

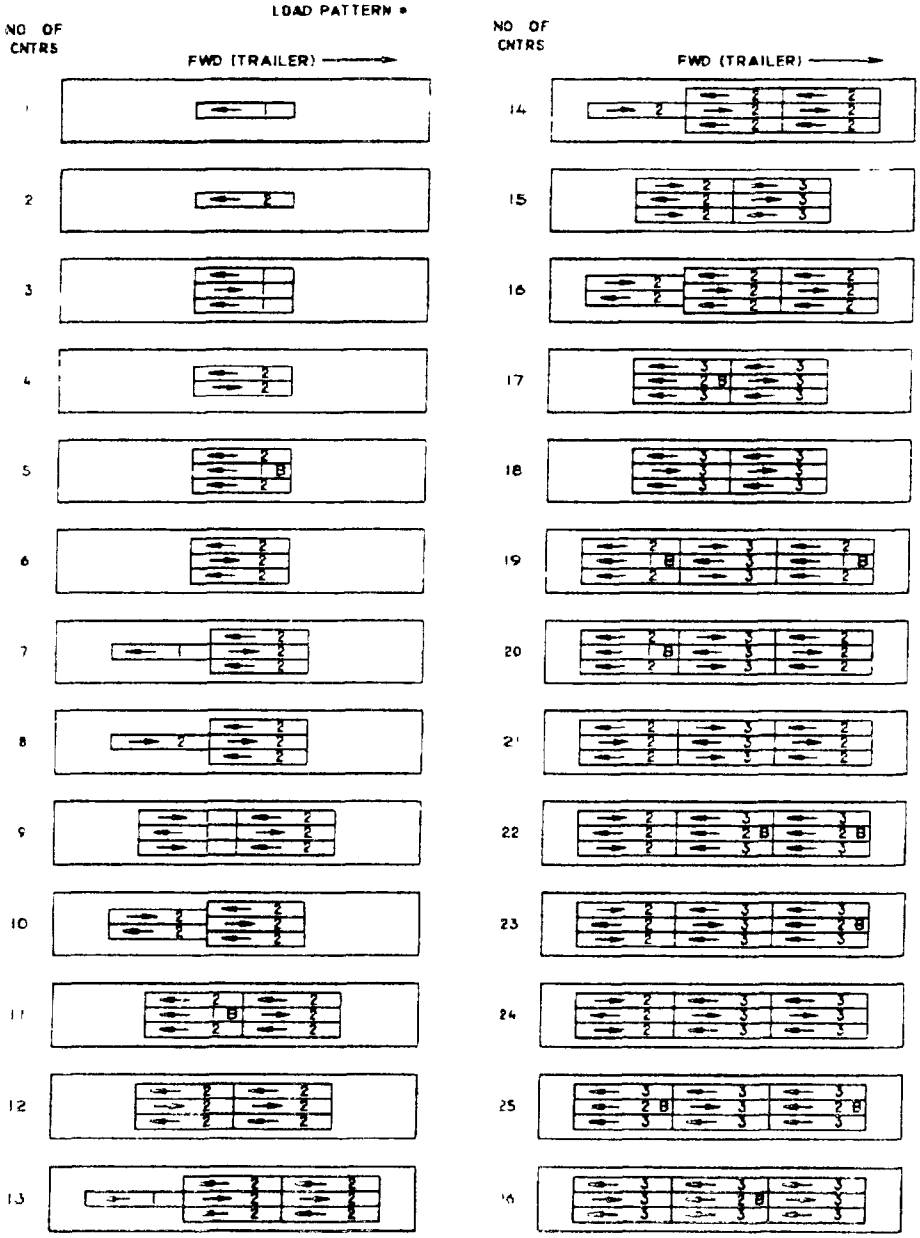

* LOAD PLAN SHOWS FLOOR PLAN FOR TRAILER
ARROWS INDICATE FORWARD END OF TOP CONTAINER

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.


TYPICAL CONSTRUCTION FOR STACKS OF ONE, TWO AND THREE LAYERS

NOTE

TARPAULINS OVER CONTAINER OMITTED FOR CLARITY


NOTE

DIRECTION OF ARROW INDICATES FORWARD END OF CONTAINER

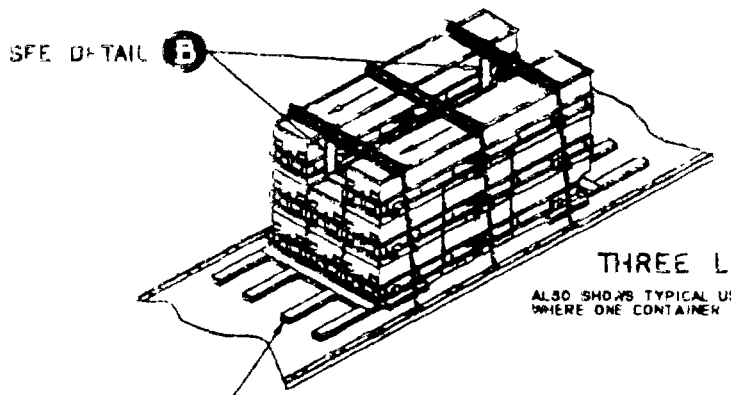


THREE LAYERS

ALSO SHOWS TYPICAL USE OF DETAIL B SPACER/HOLD DOWNS WHERE ONE CONTAINER IS OMITTED FROM THE STACK

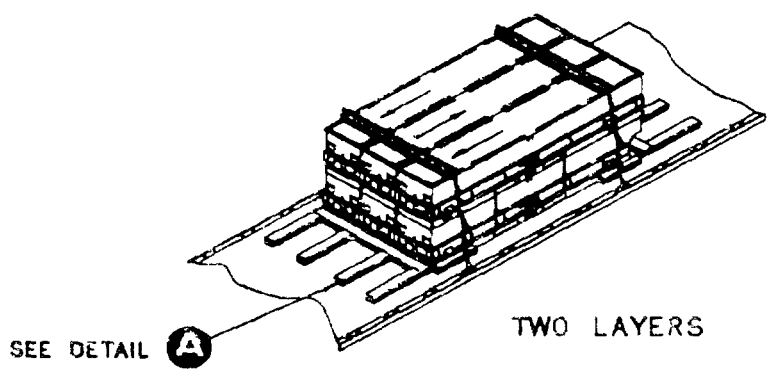

TWO LAYERS

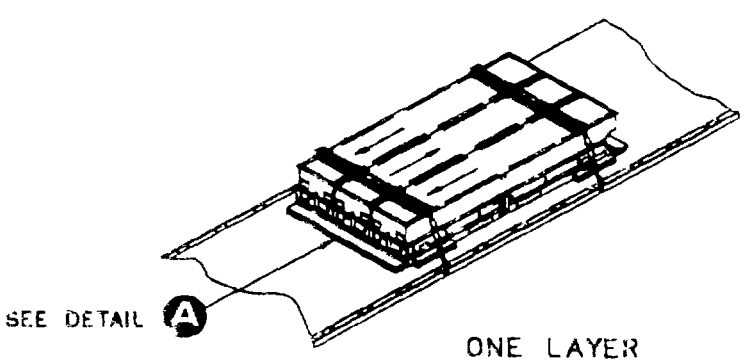

ONE LAYER

INTERIOR BLOCKING MAY BE USED FOR A SINGLE LAYER STACK

NOTE: DO NOT USE PLYWOOD TIE PADS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.

UNITIZING PROCEDURE, MK 714 MOD 1 CONTAINER


1 PREPARE UNIT LOAD OF MK 714 MOD 1 CONTAINERS PER MIL - STD-1323-372

2 WHEN A THREE HIGH STACK IS REQUIRED POSITION A THIRD CONTAINER ON THE UNIT LOAD WITH THE FORWARD END FACING THE OPPOSITE DIRECTION AS THE MIDDLE CONTAINER

3 POSITION TWO 1 1/4 X .035 STEEL STRAPS THROUGH THE FORK POCKETS OF THE TOP TWO CONTAINERS AS SHOWN TENSION AND SEAL WITH ONE DOUBLE NOTCHED SEAL (SEE NOTE 8 ON PAGE 2)

WARNING

WHEN LOADING/UNLOADING TRAILERS WITH UNITIZED CONTAINERS EXTRA CAUTION SHOULD BE TAKEN TO PREVENT TOPPLING SPECIAL ATTENTION SHOULD BE GIVEN TO APPROPRIATE BACKUP OF OUTBOARD CONTAINERS

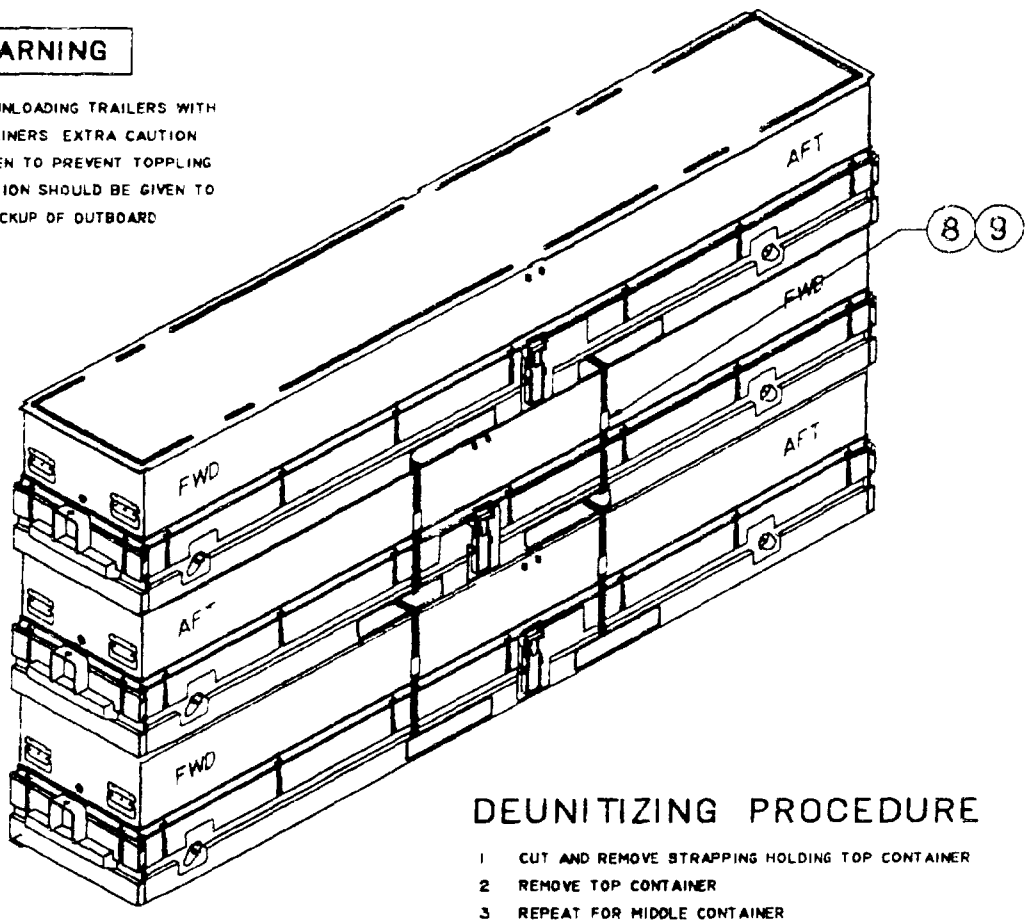

DEUNITIZING PROCEDURE

1 CUT AND REMOVE STRAPPING HOLDING TOP CONTAINER

2 REMOVE TOP CONTAINER

3 REPEAT FOR MIDDLE CONTAINER

NOTE IF UNITIZING IN ACCORDANCE WITH MIL-STD-1323-372 IS REQUIRED DO NOT CUT THE STRAPS JOINING THE LOWER TWO CONTAINERS UNITIZE THE REMAINING CONTAINERS TWO HIGH IN ACCORDANCE WITH THE UNITIZING PROCEDURES OF MIL-STD-1323-372

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.

UNITIZING PROCEDURE, MK 714 MOD 0 CONTAINER


1 PREPARE UNIT LOAD OF MK 714 MOD 0 CONTAINERS PER MIL-STD-1323-348

2 WHEN A THREE HIGH STACK IS REQUIRED POSITION A THIRD CONTAINER ON THE UNIT LOAD WITH THE FWD ENDS FACING THE SAME DIRECTIONS

3 POSITION TWO 1 1/4 X .035 STEEL STRAPS THROUGH THE FORK POCKETS OF THE TOP CONTAINERS AT THE ENDS OF THE POCKETS AS SHOWN TENSION AND SEAL WITH ONE DOUBLE NOTCHED SEAL (SEE NOTE 8 ON PAGE 2)

WARNING

WHEN LOADING/UNLOADING TRAILERS WITH UNITIZED CONTAINERS EXTRA CAUTION SHOULD BE TAKEN TO PREVENT TOPPLING SPECIAL ATTENTION SHOULD BE GIVEN TO APPROPRIATE BACKUP OF OUTBOARD CONTAINERS

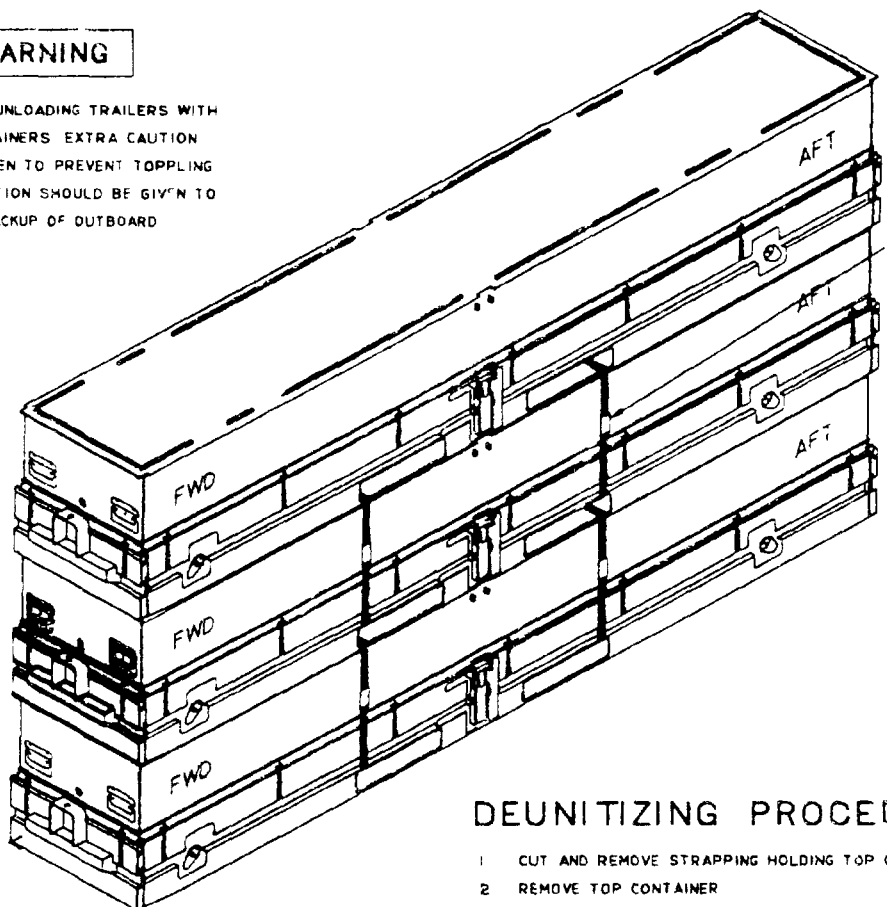

8 9

DEUNITIZING PROCEDURE

1 CUT AND REMOVE STRAPPING HOLDING TOP CONTAINER

2 REMOVE TOP CONTAINER

3 REPEAT FOR MIDDLE CONTAINER

NOTE IF UNITIZING IN ACCORDANCE WITH MIL-STD-1323-348 IS REQUIRED DO NOT CUT THE STRAPS JOINING THE LOWER TWO CONTAINERS UNITIZE THE REMAINING CONTAINERS TWO HIGH IN ACCORDANCE WITH THE UNITIZING PROCEDURES OF MIL-STD-1323-348

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No 27-R215

INSTRUCTIONS The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-STD-1320-2378, MK 50 TORPEDO IN MK 714 MODS 0 & 1 CONTAINERS

NAME OF ORGANIZATION AND ADDRESS	CONTRACT NUMBER
	MATERIAL PROCURED UNDER A ☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3 IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*	TELEPHONE NO
	DATE

DD FORM 1426 REPLACES EDITION OF 1 JAN 72 WHICH IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:48Z
Check the source to verify that this is the current version before use.