
MILITARY STANDARD

MIL STD 1320-2.2
(NAVY)

4 SEPTEMBER 1991

TRUCKLOADING

DUAL THRUST ROCKET MOTOR (DTRM)
MK 104 MODS 1, 2 & 3
IN SHIPPING AND STORAGE CONTAINER
MK 750 MOD 0

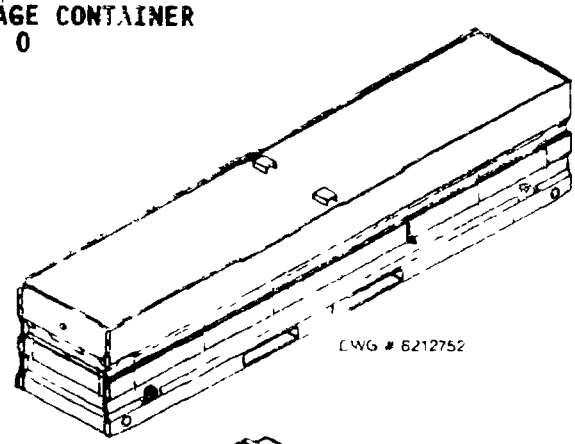

DWG # 8212752


CONTAINER DATA

DIMENSIONS	126.45 L X 26.32 W X 27.63 H
GROSS WEIGHT	1,647 LBS △
TARE WEIGHT	575 LBS △
CUBE	53.21 CU FT

△ DO NOT USE FOR SHIPPING WEIGHT

DO NOT STACK MORE THAN 6 CONTAINERS HIGH IN STORAGE

FOR HAZARD CLASSIFICATION SEE NAVSEA OP2165

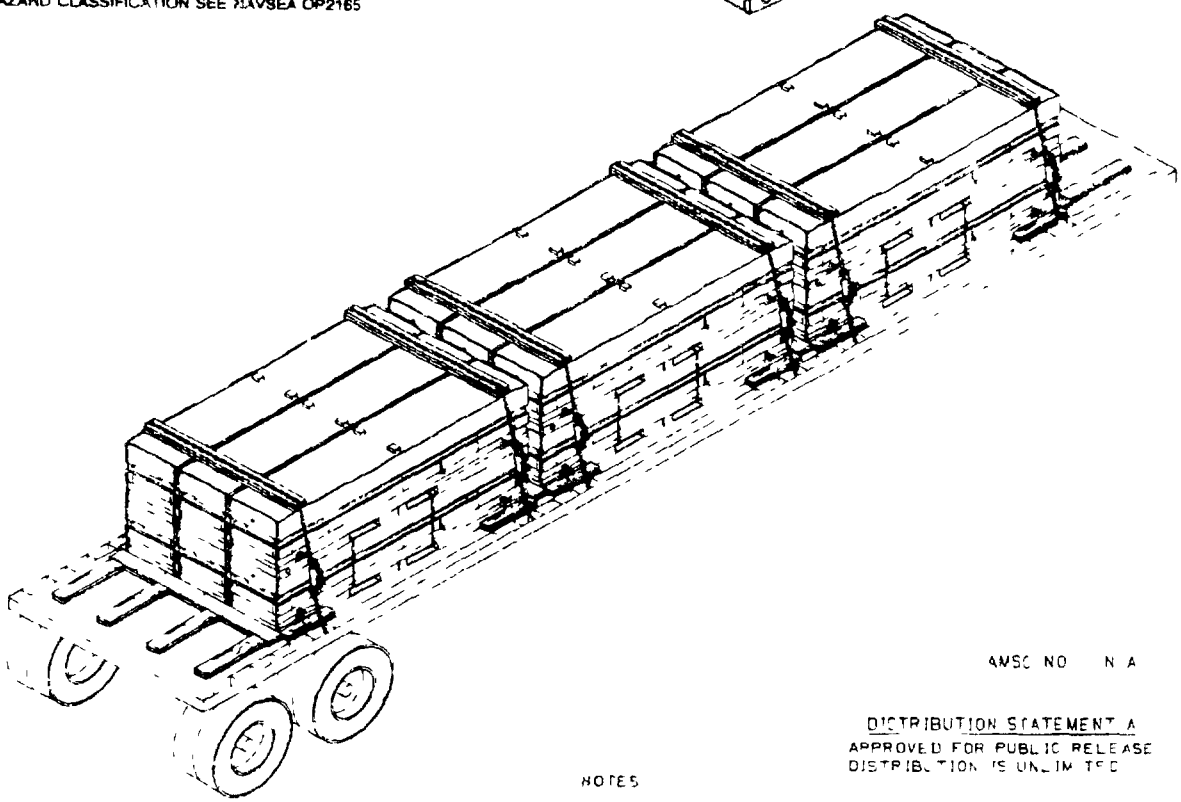

AMSC NO N/A

DISTRIBUTION STATEMENT A
APPROVED FOR PUBLIC RELEASE
DISTRIBUTION IS UNLIMITED

NOTES

1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING CONTAINERLOADING AND CARLOADING MILITARY STANDARDS REFER TO INDEX TO STANDARDS MIL-HDBK 236 (NAVY)

FSC 8140

REV LTR	REVISION DESCRIPTION	DATE	TDA	SYSCOM
			APPROVAL	

AUTHORIZED AND RELEASED
FOR HIGHWAY SHIPMENT ONLY

SIGNATURE TDA — MONETA EARLE — DATE 9/4/91

SIGNATURE NAVSEASYSCOM BY DIRECTION — DATE 9/4/91

ORIGINATOR

MONETA EARLE NSWC DR 91 PAGE 1 OF 1

Source: https://assist.dla.mil - Downloaded: 2020-10-28T23:19Z
Check the source to verify that this is the current version before use.


GENERAL NOTES

1. THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR TRUCKLOADING THE DUAL THRUST ROCKET MOTOR (DTRM) MK 104 MODS 1 2 & 3 IN SHIPPING AND STORAGE CONTAINER MK 750 MOD 0
2. THE PROCEDURES DESCRIBED HEREIN ARE INTENDED FOR 40 THRU 48 FT FLATBED TRAILERS DO NOT USE TRAILERS WITH METAL FLOORS
3. CHAINS AND STEEL STRAPPING MAY BE USED INTERCHANGEABLY ON A ONE TO-ONE BASIS FOR TIEDOWNS
4. STEEL STRAPPING USED AS TIEDOWNS SHALL BE 2 X .050 AND SHALL CONFORM TO AND BE APPLIED AS SPECIFIED IN THE GENERAL DOCUMENT MIL STD 1320 (NAVY)
5. CHAINS FITTINGS AND LOAD BINDER SHALL CONFORM TO AND BE APPLIED AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT MIL STD 1320 (NAVY) EXCEPT THAT THE CHAIN/GRAB HOOKS SHALL BE ATTACHED TO THE STAKE POCKETS (NOT AROUND THE RUB RAIL)
6. PROTECTOR BOARDS DOUBLED 2 X 6s SHALL BE USED UNDER THE TIE DOWNS WHEN USING STEEL STRAPPING THE STRAPS SHALL BE STAPLED TO THE PROTECTOR BOARDS USING 2 STRAPPING STAPLES WHEN USING CHAIN THE CHAINS SHALL BE SECURED TO THE PROTECTOR BOARD BY DRIVING A 10d NAIL THROUGH THE CHAIN LINK AND CLINCHING THE NAIL OVER THE CHAIN FIVE STAPLES/NAILS SHALL BE USED FOR EACH TIEDOWN
7. PRIOR TO LOADING THE TRAILER AND DURING PRELOADING INSPECTION REQUIRED BY NAVSEA OP 2165 AND REPORTED ON DD FORM 626 THE CHAINS FITTINGS AND LOADBINDERS SHALL BE INSPECTED FOR STRETCH GOUGING BENT LINKS WEAR AND AND ANY OTHER NOTICEABLE DEFECTS THE INSPECTORS SHALL CONFIRM THAT THE CHAINS FITTINGS AND LOADBINDERS HAVE BEEN INSPECTED AND SHALL SO NOTE IN ITEM 22 OF DD FORM 626 ANY DEFICIENCY SHALL BE CAUSE FOR REJECTION OF A LOADBINDER
8. UNLESS OTHERWISE SPECIFIED DUNNAGE LUMBER STEEL STRAPPING STRAP SEALS AND NAILS SHALL BE AS SPECIFIED IN THE GENERAL DOCUMENT MIL-STD 1320 (NAVY)
9. THE MAX GROSS WEIGHT OF THE TRACTOR TRAILER AND THE ALLOWABLE AXLE WEIGHTS ARE THE RESPONSIBILITY OF THE CARRIER THE CARRIER WILL ADVISE THE SHIPPER OF THESE LIMITATIONS AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THE TRACTOR TRAILER WILL NOT EXCEED THESE LIMITATIONS
10. AFTER THE BLOCKING BRACING AND TIEDOWNS HAVE BEEN INSPECTED THE CONTAINERS SHALL BE COMPLETELY COVERED WITH FIRE RESISTANT WATERPROOF TARPAULINS
11. AFTER THE TARPAULINS ARE IN PLACE ATTACH THE PROPER EXPLOSIVE PLACARDS TO BOTH SIDES FRONT AND BACK OF THE TRAILER AND ATTACH THE SHIPPING DOCUMENTS TO AN ACCESSIBLE AREA ON THE BACK DECK OF THE TRAILER

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.


FIL 40 FT THRU 48 FT TRAILERS (FLATBED)

NOTE
TARPAULINS OVER CONTAINERS REMOVED FOR CLARITY

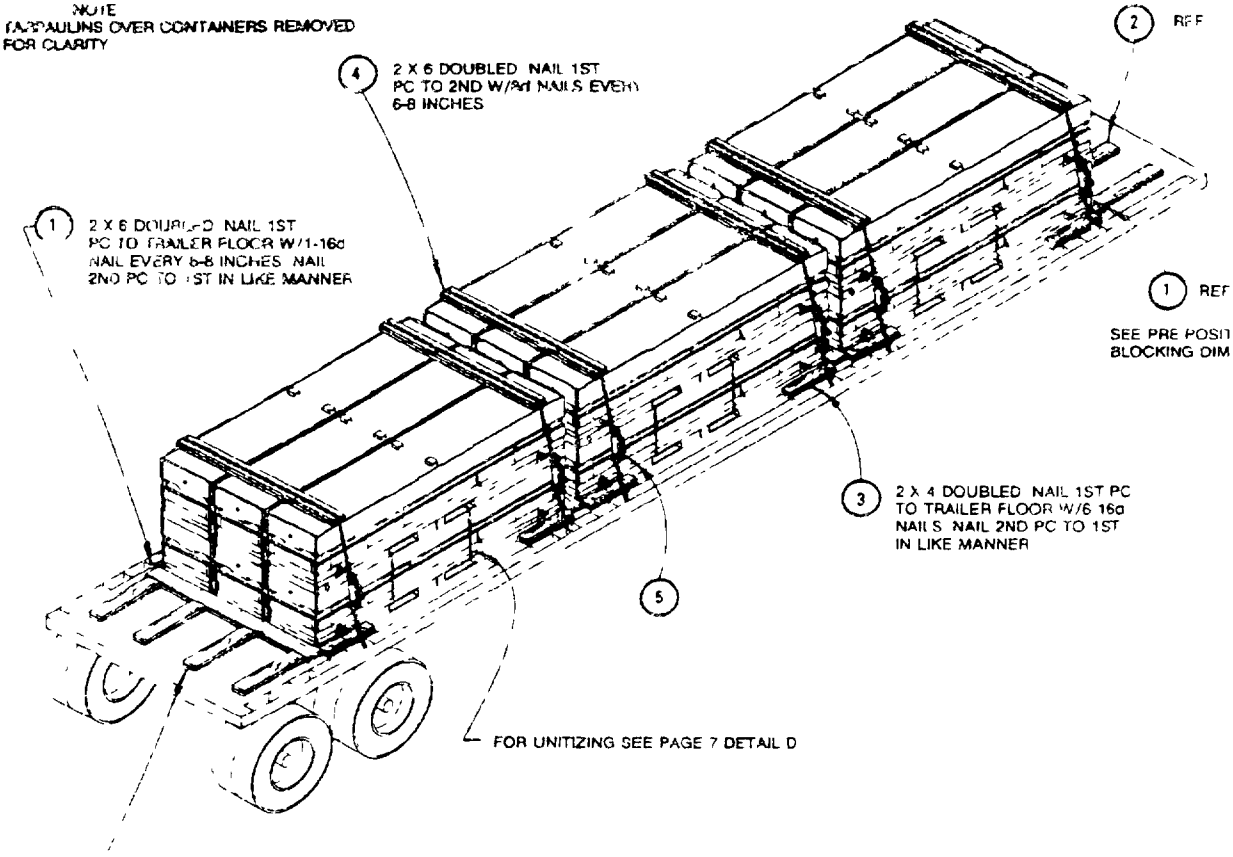

2 2 X 6 DOUBLED NAIL 1ST PC TO TRAILER FLOOR W/9-16d NAILS NAIL 2ND PC TO 1ST IN LIKE MANNER

1 REF



TRAILER LENGTH	DIMENSION X
40 FT	45
42 FT	57
44 FT	69
46 FT	75
48 FT	93

PRE POSITION BLOCKING

REQD	ITEM	DESCRIPTION	MATERIAL	DIMENSIONS
2	10	SEAL	STEEL	1 1/4
2	9	STRAPPING	STEEL	1 1/4 X .035 X 12 FT
4	8	PROTECTOR BOARD	DETAIL C	2 X 6 X 80
2	7	BASE	DETAIL C	2 X 6 X 23 3/8
2	6	SUPPORT SIDE	DETAIL C	2 X 6 X 27 5/8
6	5	CHAIN & LOADBINDER	STEEL	5/16 OR 3/8
12	4	PROTECTOR BOARD	WOOD	2 X X 40
24	3	SLEEPER	WOOD	2 X X 14
16	2	BACKUP CLEAT	WOOD	2 X 6 X 10
8	1	CROSSMEMBER	WOOD	X X 10

LIST OF MATERIALS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.

LTL 40FT THRU 48FT TRAILERS (FLATBED)


NOTES

1. WHEN REQUIRED TO SHIP LESS THAN FULL LOAD, SELECT THE CORRECT LOAD PATTERN FOR THE NUMBER OF CONTAINERS TO BE SHIPPED FROM TABLE 1
2. POSITION UNITIZED CONTAINERS ON TRAILER AS SHOWN IN TABLE 1 BLOCK AND TIE DOWN USING THE PRINCIPLES SHOWN ON THIS PAGE AND PAGES 3 & 5
3. THE NUMBERS ON EACH ROW OF A STACK IS THE NUMBER OF CONTAINERS STACKED IN A ROW
4. SEE DETAIL A FOR BLOCKING AND BRACING VARIATIONS FOR LTL SHIPMENTS
5. SEE DETAILS B & C FOR LTL USAGE OF SEPARATOR
6. FOR UNITIZING SEE DETAIL D PAGE 7


TABLE 1

FWD TRAILERS

NO OF CONTRS

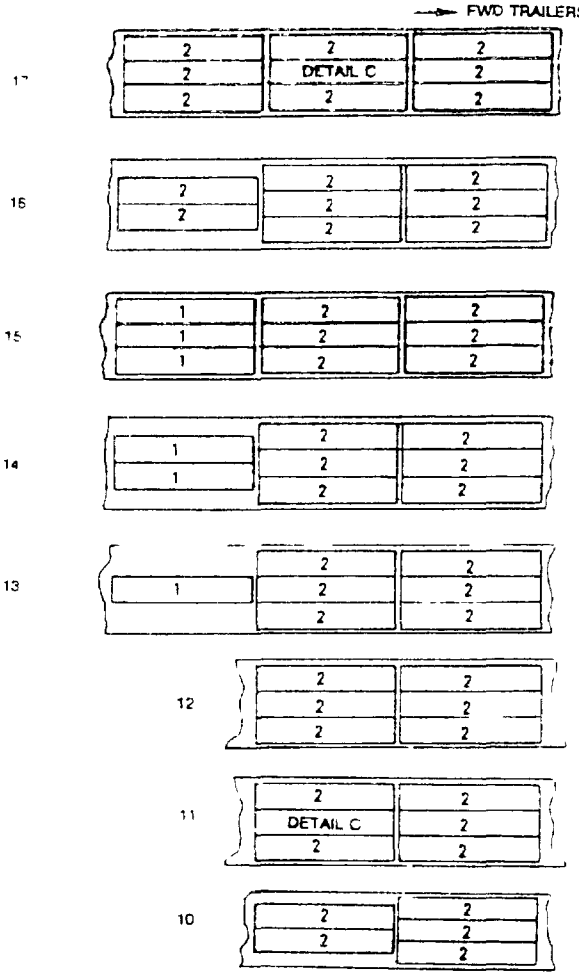


NO OF CONTRS

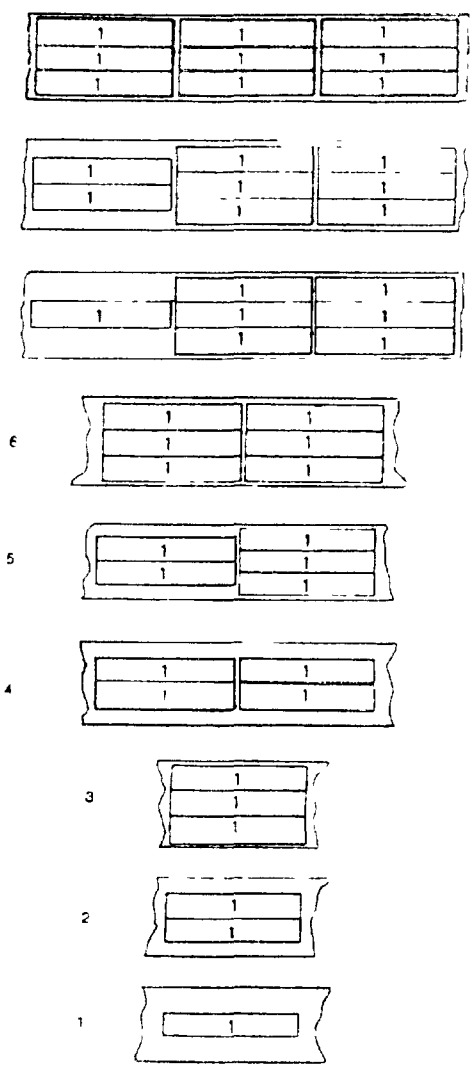


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.

DETAIL A


SUGGESTED BLOCKING FOR V[illegible]
LTL SHIPMENTS

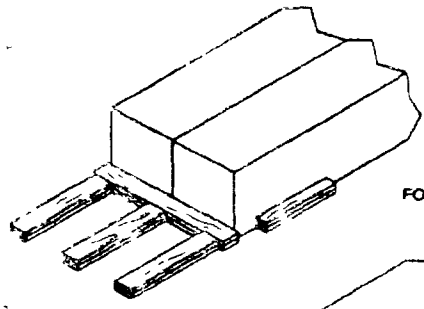


FOR 2 CONTAINERS

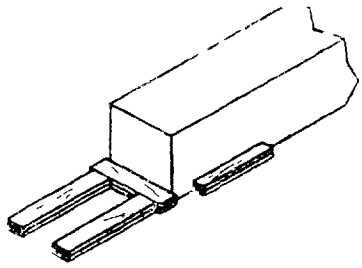


FOR 1 CONTAINER

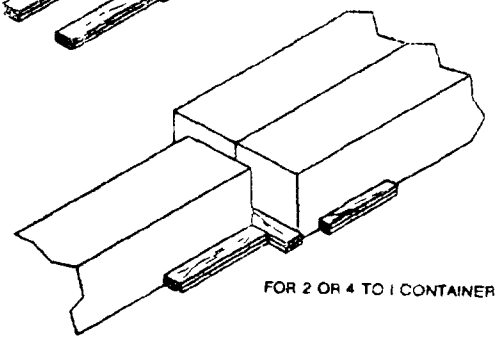

FOR 2 OR 4 TO 1 CONTAINER

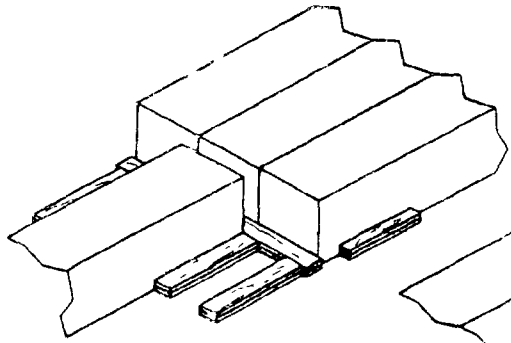

FOR 3 OR 6 TO 1 CONTAINER

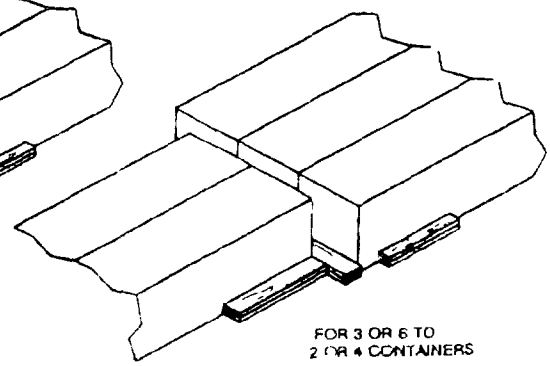


FOR 3 OR 6 TO
2 OR 4 CONTAINERS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.


LTL 40FT THRU 48FT TRAILER (FLATBED)

NOTE: USE DETAIL C WHEN REQUIRED TO FILL VOID IN CONTAINER STACK AS SHOWN IN DETAIL B

SEE DETAIL C

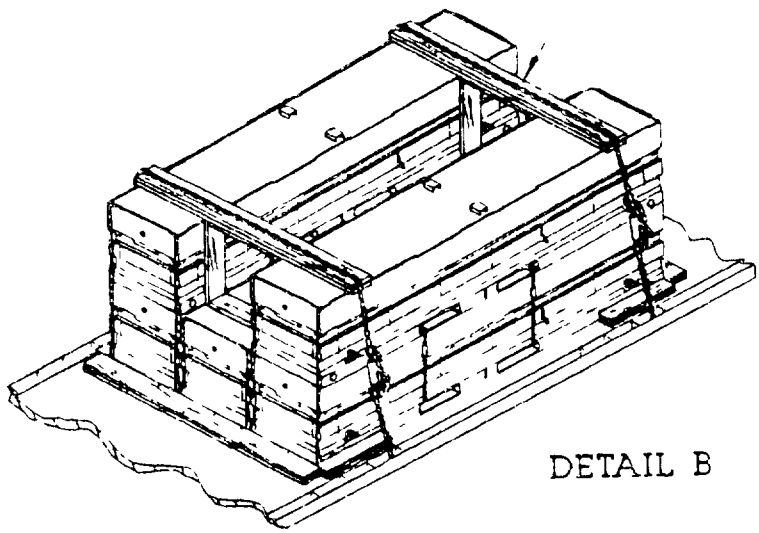

DETAIL B

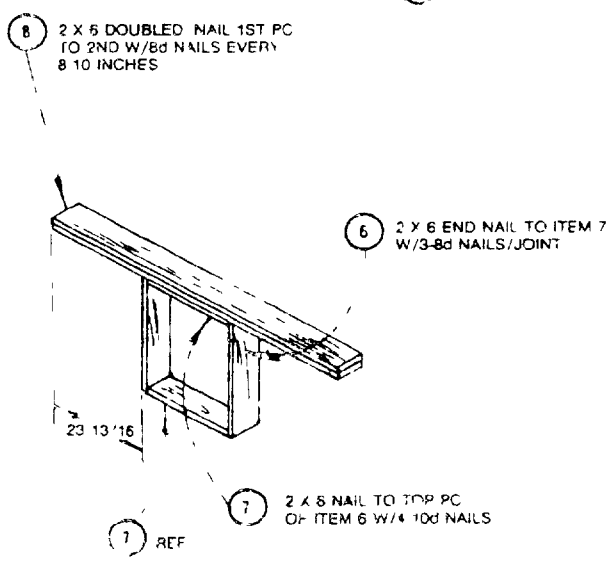

DETAIL C

SEPARATOR

(2) REQUIRED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.

UNITIZING PROCEDURE


1 USING A FORK LIFT TRUCK, STACK ONE CONTAINER ON TOP OF THE FIRST CONTAINER. BE SURE TO ALIGN THE STACKING FEATURES.

2 POSITION THE TWO STEEL STRAPS THROUGH THE FORK POCKETS OF THE CONTAINERS AS SHOWN. TENSION AND DOUBLE NOTCH THE SEALS.

WARNING

WHEN LOADING/UNLOADING TRAILERS WITH UNITIZED CONTAINERS, EXTRA CAUTION SHOULD BE TAKEN TO PREVENT TOPPLING. SPECIAL ATTENTION SHOULD ALSO BE GIVEN TO APPROPRIATE BACK UP OF OUTBOARD CONTAINERS.

THE STRAPPING TOGETHER OF CONTAINERS TO FORM A UNIT LOAD OF CONTAINERS TWO (2) HIGH IS AUTHORIZED FOR LOADING AND UNLOADING OF TRAILERS ONLY. ANY MOVEMENT OF THESE LOADS IS LIMITED TO THAT NECESSARY TO LOAD OR UNLOAD THE TRAILER.

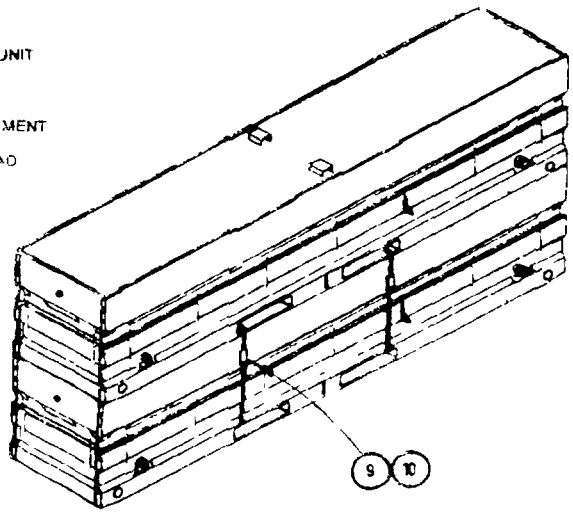

DETAIL D

DEUNITIZING PROCEDURE

1 CUT AND REMOVE STRAPPING HOLDING TOP CONTAINER.

2 REMOVE TOP CONTAINER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commanding Officer
Naval Weapons Station Earle
Attn: Code 502
Colts Neck, New Jersey 07722-5000

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R035

INSTRUCTIONS. The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers, vendors, who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
MIL-STD-1320-262 - Truckloading DTRM MK 104 MODS in MK 750 Container

NAME OF ORGANIZATION AND ADDRESS	CONTRACT NUMBER
	MATERIAL PROCURED UNDER A ☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID.

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO (If "Yes", in what way?)

4. REMARKS

SUBMITTED BY (Printed or typed name and address - Optional)	TELEPHONE NO. DATE

DD FORM 1426 REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED. S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.