A-A-548D
January 8, 1988
SUPERSEDING
A-A-548C
April 1, 1983

COMMERCIAL ITEM DESCRIPTION

CLAMP, CANTILEVER JAW

The General Services Administration has authorized the use of this commercial item description in lieu of Type V, Federal Specification GGG-C-406.

This description establishes requirements for cantilever jaw clamp used for clamping and holding work in a fixed position.

Salient characteristics:

Body. Two steel side plates separated by shoulder rivets and shall have a square pressure pad retained on one end in such a manner as to oppose the similar pressure pad on the movable jaw.


Movable jaw. Two steel side plates separated by shoulder rivets and shall have a square pressure pad retained by a rivet at one end. A free rotating thrust trunnion shall be mounted in the jaw so as to receive the end of the screw.

Handle. T-type.

Screws. Steel, smoothly cut or formed to fit threaded trunnions, design for load intended. Screws shall have national coarse threads.

Pressure pads. Square, unhardened, mild steel with at least one smooth surface and one V-groove face. Pads rotate freely on their retaining rivets.

Illustration. The cantilever jaw clamps shall be similar to the illustration shown below.

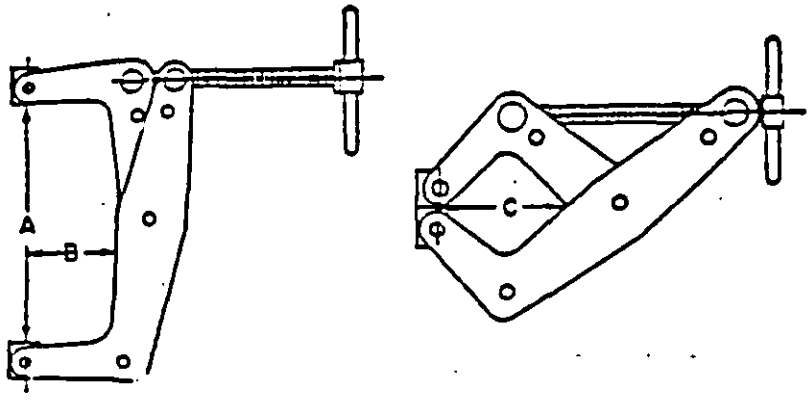

National Stock Number	Nominal size of clamp	A Full opening (min.)	B Open (min.)	Working depth of throat C Closed (min.)	Diameter of screw, (min.)	Weight of clamp complete (min.)	test load, (min.)
		Inches	Inches	Inches	Inch	Pounds	Pounds
5120-00-588-6089	2	2	1-1/8	2	1/4	1/2	950
5120-00-588-6090	3	3	1-1/4	2-3/4	3/8	1-1/4	1700
5120-00-588-6091	6	6	2	3-1/4	1/2	3	2700

DISTRIBUTION STATEMENT A. Approved for Public Release; Distribution is Unlimited.

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:08Z
Check the source to verify that this is the current version before use.

Identification marking. Each clamp shall be etched or stamped in a permanent and legible manner with the manufacturer's name or identifying symbol, part number and country of origin.

Workmanship. The clamps shall be free of any defects that can adversely affect their operation, serviceability, or life expectancy.

QUALITY ASSURANCE PROVISIONS

Examination of the end item for defects in dimensions, finish, markings, and workmanship. Sampling shall be in accordance with MIL-STD-105 at inspection level II with an acceptable quality level (AQL) of 2.5.

Sampling for tests. Sampling for tests shall be in accordance with MIL-STD-105 at inspection level S-3 with an Acceptable Quality Level (AQL) of 4.0.

Tests:

Proof load test. Shall be conducted on a tension machine or similar device of known accuracy. Clamp shall be subjected to the applicable specified test load. The test shall be conducted with the clamp in the full open or minimum capacity opening as applicable. The test load shall be applied gradually, to simulate actual usage, until the specified minimum load is obtained. This load should be maintained for a period of not less than 5 minutes. Upon completion of this test, the clamp shall be examined and any evidence of deformed or damaged components shall be sufficient cause for classifying that clamp as a reject. The test load shall be applied to the center line of the screw.

Regulatory requirement. In accordance with the section 23.403 of the Federal Acquisition Regulations, the Government's policy is to acquire items composed of the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition without adversely affecting performance requirements or exposing suppliers' employees to undue hazards from the recovered materials.

Preservation, packaging, packing, labeling, and marking. The preservation, packaging, packing, labeling, and marking shall be as specified in the contract or order.

Notes:

The issue of referenced documents in effect on the date of invitation for bid or request for proposals shall be used to determine compliance with the stated requirements. Sources for obtaining referenced documents may be determined by contacting the Contracting Officer.

Military Standards are available from the Naval Publications and Forms Center, 5801 Tabor Avenue, Philadelphia, PA 19120.

MILITARY INTERESTS:

Military Coordinating Activity

Army - GL

Custodians:

Army - GL
Air Force - 99

Review Activities:

Air Force - 84

PREPARING ACTIVITY

GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:08Z
Check the source to verify that this is the current version before use.