MS9955

FED. SUP CLASS
5330

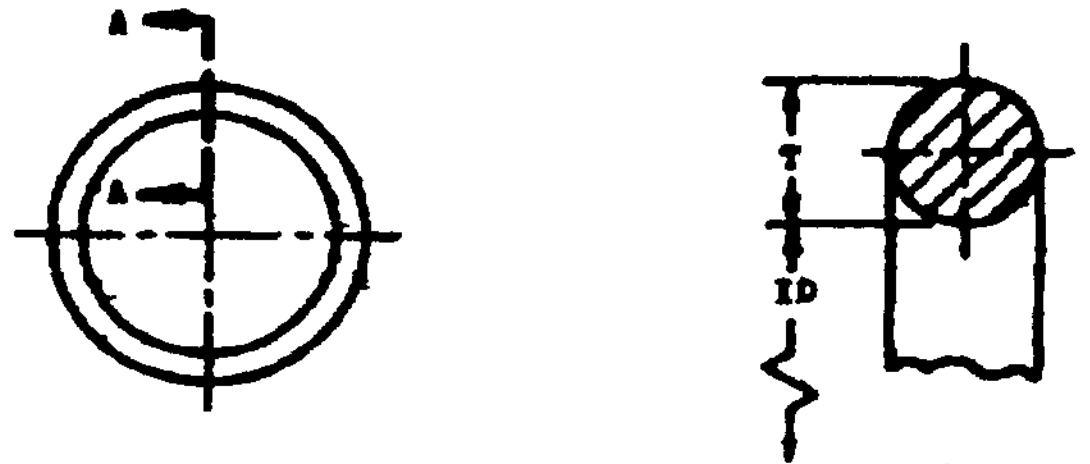

SECTION A-A

PART NUMBER	ID IN.		ID (mm)		T IN.		T (mm)		APPROX MASS	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	LB/100	kg/100
MS9955-001	0.025	0.033	0.635	0.838	0.037	0.043	0.940	1.092	.002	.0009
MS9955-002	0.038	0.046	0.965	1.168	0.047	0.053	1.194	1.346	.005	.002
~~MS9955-003~~	~~0.052~~	~~0.060~~	~~1.321~~	~~1.524~~	~~0.057~~	~~0.063~~	~~1.448~~	~~1.600~~	~~.008~~	~~.004~~
~~MS9955-004~~	0.069	0.079	1.89	1.90	0.067	0.073	1.702	1.854	.013	.006
~~MS9955-005~~	~~0.096~~	~~0.106~~	~~2.44~~	~~2.69~~	~~0.067~~	~~0.073~~	~~1.702~~	~~1.854~~	~~.016~~	~~.007~~
MS9955-006	0.109	0.119	2.77	3.02	0.067	0.073	1.702	1.854	.017	.009
MS9955-007	0.140	0.150	3.56	3.81	0.067	0.073	1.702	1.854	.020	.009
MS9955-008	0.171	0.181	4.34	4.60	0.067	0.073	1.702	1.854	.023	.010
MS9955-009	0.203	0.213	5.16	5.41	0.067	0.073	1.702	1.854	.027	.012
MS9955-010	0.234	0.244	5.94	6.20	0.067	0.073	1.702	1.854	.029	.013
MS9955-011	0.296	0.306	7.52	7.77	0.067	0.073	1.702	1.854	.035	.016
MS9955-012	0.359	0.369	9.12	9.37	0.067	0.073	1.702	1.854	.041	.019
MS9955-013	0.421	0.431	10.69	10.95	0.067	0.073	1.702	1.854	.047	.021
MS9955-014	0.484	0.494	12.29	12.55	0.067	0.073	1.702	1.854	.053	.024
MS9955-015	0.546	0.556	13.87	14.12	0.067	0.073	1.702	1.854	.058	.026
MS9955-016	0.609	0.619	15.47	15.72	0.067	0.073	1.702	1.854	.065	.029
MS9955-017	0.671	0.681	17.04	17.30	0.067	0.073	1.702	1.854	.070	.032
MS9955-018	0.734	0.744	18.64	18.90	0.067	0.073	1.702	1.854	.076	.034
MS9955-019	0.795	0.807	20.19	20.50	0.067	0.073	1.702	1.854	.082	.037
MS9955-020	0.858	0.870	21.79	22.10	0.067	0.073	1.702	1.854	.088	.040
MS9955-021	0.920	0.932	23.37	23.67	0.067	0.073	1.702	1.854	.094	.043
MS9955-022	0.983	0.995	24.97	25.27	0.067	0.073	1.702	1.854	.100	.045
MS9955-023	1.045	1.057	26.54	26.85	0.067	0.073	1.702	1.854	.106	.048
MS9955-024	1.108	1.120	28.14	28.45	0.067	0.073	1.702	1.854	.112	.051
MS9955-025	1.170	1.182	29.72	30.02	0.067	0.073	1.702	1.854	.118	.054
MS9955-026	1.233	1.245	31.32	31.62	0.067	0.073	1.702	1.854	.123	.056
MS9955-027	1.295	1.307	32.89	33.20	0.067	0.073	1.702	1.854	.129	.059
MS9955-028	1.358	1.370	34.49	34.80	0.067	0.073	1.702	1.854	.135	.061
MS9955-029	1.479	1.499	37.57	38.07	0.067	0.073	1.702	1.854	.147	.067
MS9955-030	1.604	1.624	40.74	41.25	0.067	0.073	1.702	1.854	.159	.072
MS9955-031	1.729	1.749	43.92	44.42	0.067	0.073	1.702	1.854	.171	.078
MS9955-032	1.854	1.874	47.09	47.60	0.067	0.073	1.702	1.854	.183	.083
MS9955-033	1.979	1.999	50.27	50.77	0.067	0.073	1.702	1.854	.194	.088
MS9955-034	2.104	2.124	53.44	53.95	0.067	0.073	1.702	1.854	.206	.093
MS9955-035	2.229	2.249	56.62	57.12	0.067	0.073	1.702	1.854	.218	.099
MS9955-036	2.354	2.374	59.79	60.30	0.067	0.073	1.702	1.854	.229	.104
MS9955-037	2.479	2.499	62.97	63.47	0.067	0.073	1.702	1.854	.241	.109
MS9955-038	2.604	2.624	66.14	66.65	0.067	0.073	1.702	1.854	.253	.115
MS9955-039	2.724	2.754	69.19	69.95	0.067	0.073	1.702	1.854	.265	.120
MS9955-040	2.849	2.879	72.36	73.13	0.067	0.073	1.702	1.854	.277	.126
MS9955-041	2.974	3.004	75.54	76.30	0.067	0.073	1.702	1.854	.289	.131
MS9955-042	3.224	3.254	81.89	82.65	0.067	0.073	1.702	1.854	.312	.142
MS9955-043	3.474	3.504	88.24	89.00	0.067	0.073	1.702	1.854	.336	.152
MS9955-044	3.724	3.754	94.59	95.35	0.067	0.073	1.702	1.854	.359	.163
MS9955-045	3.974	4.004	100.94	101.70	0.067	0.073	1.702	1.854	.383	.174
MS9955-046	4.224	4.254	107.29	108.05	0.067	0.073	1.702	1.854	.406	.184
MS9955-047	4.474	4.504	113.64	114.40	0.067	0.073	1.702	1.854	.430	.195
MS9955-048	4.724	4.754	119.99	120.75	0.067	0.073	1.702	1.854	.454	.206
MS9955-049	4.966	5.012	126.14	127.30	0.067	0.073	1.702	1.854	.477	.216
MS9955-050	5.216	5.262	132.49	133.65	0.067	0.073	1.702	1.854	.500	.227
MS9955-102	0.044	0.054	1.12	1.37	0.100	0.106	2.540	2.692	.031	.014
MS9955-103	0.076	0.086	1.93	2.18	0.100	0.106	2.540	2.692	.037	.017
MS9955-104	0.107	0.117	2.72	2.97	0.100	0.106	2.540	2.692	.044	.020
MS9955-105	0.138	0.148	3.51	3.76	0.100	0.106	2.540	2.692	.050	.023

Review activities
Navy - AS, OS
Air Force - 82

...and has been approved by the Dept of the Air Force (11) and the Department of the Navy (AS) [illegible]

APPROVED 22 Dec 71 REVISED

P.A. Air Force - 11 Other Cust Navy - AS	INTERNATIONAL INTEREST ASCC 17/27	TITLE PACKING PREFORMED - AMS 7664, 'O' RING	MILITARY STANDARD MS9955
PROCUREMENT SPECIFICATION NONE	SUPERSEDES		SHEET 1 OF 7

DD FORM 1 SEP 66 672-1 (Limited coordination) EDITION OF 1 SEP 59 MAY BE USED

FED SUP CLASS
5330

MS9955

PART NUMBER	ID IN.		ID (mm)		T IN.		T (mm)		APPROX MASS	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	LB/100	kg/100
MS9955-106	0.169	0.179	4.29	4.55	0.100	0.106	2.540	2.692	.057	.026
MS9955-107	0.201	0.211	5.11	5.36	0.100	0.106	2.540	2.692	.063	.029
MS9955-108	0.232	0.242	5.89	6.15	0.100	0.106	2.540	2.692	.069	.031
MS9955-109	0.294	0.304	7.47	7.72	0.100	0.106	2.540	2.692	.082	.037
MS9955-110	0.357	0.367	9.07	9.32	0.100	0.106	2.540	2.692	.095	.043
MS9955-111	0.419	0.429	10.64	10.90	0.100	0.106	2.540	2.692	.108	.049
MS9955-112	0.482	0.492	12.24	12.50	0.100	0.106	2.540	2.692	.120	.054
MS9955-113	0.544	0.554	13.82	14.07	0.100	0.106	2.540	2.692	.133	.060
MS9955-114	0.607	0.617	15.42	15.67	0.100	0.106	2.540	2.692	.146	.066
MS9955-115	0.669	0.679	16.99	17.25	0.100	0.106	2.540	2.692	.158	.072
MS9955-116	0.732	0.742	18.59	18.85	0.100	0.106	2.540	2.692	.172	.078
MS9955-117	0.793	0.805	20.14	20.45	0.100	0.106	2.540	2.692	.184	.083
MS9955-118	0.856	0.868	21.74	22.05	0.100	0.106	2.540	2.692	.197	.089
MS9955-119	0.918	0.930	23.32	23.62	0.100	0.106	2.540	2.692	.210	.095
MS9955-120	0.981	0.993	24.92	25.22	0.100	0.106	2.540	2.692	.222	.101
MS9955-121	1.043	1.055	26.49	26.80	0.100	0.106	2.540	2.692	.236	.107
MS9955-122	1.106	1.118	28.09	28.40	0.100	0.106	2.540	2.692	.248	.112
MS9955-123	1.168	1.180	29.67	29.97	0.100	0.106	2.540	2.692	.261	.118
MS9955-124	1.231	1.243	31.27	31.57	0.100	0.106	2.540	2.692	.274	.124
MS9955-125	1.293	1.305	32.84	33.15	0.100	0.106	2.540	2.692	.286	.130
MS9955-126	1.356	1.368	34.44	34.75	0.100	0.106	2.540	2.692	.299	.136
MS9955-127	1.418	1.430	36.02	36.32	0.100	0.106	2.540	2.692	.312	.142
MS9955-128	1.481	1.493	37.62	37.92	0.100	0.106	2.540	2.692	.324	.147
MS9955-129	1.539	1.559	39.09	39.60	0.100	0.106	2.540	2.692	.337	.153
MS9955-130	1.602	1.622	40.69	41.20	0.100	0.106	2.540	2.692	.350	.159
MS9955-131	1.664	1.684	42.27	42.77	0.100	0.106	2.540	2.692	.363	.165
MS9955-132	1.727	1.747	43.87	44.37	0.100	0.106	2.540	2.692	.376	.171
MS9955-133	1.789	1.809	45.44	45.95	0.100	0.106	2.540	2.692	.388	.176
MS9955-134	1.852	1.872	47.04	47.55	0.100	0.106	2.540	2.692	.401	.182
MS9955-135	1.915	1.935	48.64	49.15	0.100	0.106	2.540	2.692	.414	.188
MS9955-136	1.977	1.997	50.22	50.72	0.100	0.106	2.540	2.692	.427	.194
MS9955-137	2.040	2.060	51.82	52.32	0.100	0.106	2.540	2.692	.440	.200
MS9955-138	2.102	2.122	53.39	53.90	0.100	0.106	2.540	2.692	.452	.205
MS9955-139	2.165	2.185	54.99	55.50	0.100	0.106	2.540	2.692	.465	.211
MS9955-140	2.227	2.247	56.57	57.07	0.100	0.106	2.540	2.692	.477	.216
MS9955-141	2.290	2.310	58.17	58.67	0.100	0.106	2.540	2.692	.491	.223
MS9955-142	2.352	2.372	59.74	60.25	0.100	0.106	2.540	2.692	.503	.228
MS9955-143	2.415	2.435	61.34	61.85	0.100	0.106	2.540	2.692	.516	.234
MS9955-144	2.477	2.497	62.92	63.42	0.100	0.106	2.540	2.692	.529	.240
MS9955-145	2.540	2.560	64.52	65.02	0.100	0.106	2.540	2.692	.541	.245
MS9955-146	2.602	2.622	66.09	66.60	0.100	0.106	2.540	2.692	.555	.252
MS9955-147	2.660	2.690	67.56	68.33	0.100	0.106	2.540	2.692	.567	.257
MS9955-148	2.722	2.752	69.14	69.90	0.100	0.106	2.540	2.692	.580	.263
MS9955-149	2.785	2.815	70.74	71.50	0.100	0.106	2.540	2.692	.593	.269
MS9955-150	2.847	2.877	72.31	73.08	0.100	0.106	2.540	2.692	.605	.274
MS9955-151	2.972	3.002	75.49	76.25	0.100	0.106	2.540	2.692	.631	.286
MS9955-152	3.222	3.252	81.84	82.60	0.100	0.106	2.540	2.692	.682	.309
MS9955-153	3.472	3.502	88.19	88.95	0.100	0.106	2.540	2.692	.733	.332
MS9955-154	3.722	3.752	94.54	95.30	0.100	0.106	2.540	2.692	.784	.356
MS9955-155	3.972	4.002	100.89	101.65	0.100	0.106	2.540	2.692	.835	.379
MS9955-156	4.222	4.252	107.24	108.00	0.100	0.106	2.540	2.692	.886	.402
MS9955-157	4.472	4.502	113.59	114.35	0.100	0.106	2.540	2.692	.938	.425
MS9955-158	4.722	4.752	119.94	120.70	0.100	0.106	2.540	2.692	.988	.448
MS9955-159	4.972	5.002	126.29	127.05	0.100	0.106	2.540	2.692	1.039	.471
MS9955-160	5.214	5.260	132.44	133.60	0.100	0.106	2.540	2.692	1.090	.494

APPROVED 22 Dec 71 REVISED

This standard has been approved by the Dept of the Air Force (11) and the Department of the Navy (AS) and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

Review activities:
Navy - AS, OS
Air Force 2, 82

Air Force-11 Other Cust Navy-AS	INTERNATIONAL INTEREST ASCC 17/27	TITLE PACKING PREFORMED - AMS 3669, 'O' RING	MILITARY STANDARD MS9955
PROCUREMENT SPECIFICATION NONE	SUPERSEDES		SHEET 2 OF 7

DD FORM 672-1 (Limited coordination)

EDITION OF 1 SEP 59 MAY BE USED

FED. SUP CLASS
5330

MS9955

PART NUMBER	ID IN.		ID (mm)		T IN.		T (mm)		APPROX MASS	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	LB/100	kg/100
MS9955-161	5.464	5.510	138.79	139.96	0.100	0.106	2.540	2.692	1.141	.518
MS9955-162	5.714	5.760	145.14	146.30	0.100	0.106	2.540	2.692	1.193	.541
MS9955-163	5.964	6.010	151.49	152.65	0.100	0.106	2.540	2.692	1.243	.564
MS9955-164	6.214	6.260	157.84	159.00	0.100	0.106	2.540	2.692	1.293	.586
~~MS9955-165~~	6.464	6.510	164.19	165.35	0.100	0.106	2.540	2.692	1.345	.610
~~MS9955-166~~	6.714	6.760	170.54	171.70	0.100	0.106	2.540	2.692	1.395	.633
MS9955-167	6.964	7.010	176.89	178.05	0.100	0.106	2.540	2.692	1.446	.656
MS9955-168	7.207	7.267	183.06	184.58	0.100	0.106	2.540	2.692	1.498	.679
MS9955-169	7.457	7.517	189.41	190.93	0.100	0.106	2.540	2.692	1.548	.702
MS9955-170	7.707	7.767	195.76	197.28	0.100	0.106	2.540	2.692	1.600	.726
MS9955-171	7.957	8.017	202.11	203.63	0.100	0.106	2.540	2.692	1.650	.748
MS9955-172	8.207	8.267	208.46	209.98	0.100	0.106	2.540	2.692	1.701	.772
MS9955-173	8.457	8.517	214.81	216.33	0.100	0.106	2.540	2.692	1.753	.795
MS9955-174	8.707	8.767	221.16	222.68	0.100	0.106	2.540	2.692	1.803	.818
MS9955-175	8.957	9.017	227.51	229.03	0.100	0.106	2.540	2.692	1.854	.841
MS9955-176	9.207	9.267	233.86	235.38	0.100	0.106	2.540	2.692	1.906	.865
MS9955-177	9.457	9.517	240.21	241.73	0.100	0.106	2.540	2.692	1.956	.887
MS9955-178	9.707	9.767	246.56	248.08	0.100	0.106	2.540	2.692	2.008	.911
MS9955-201	0.166	0.176	4.22	4.47	0.135	0.143	3.429	3.632	.115	.052
MS9955-202	0.229	0.239	5.82	6.07	0.135	0.143	3.429	3.632	.139	.063
MS9955-203	0.291	0.301	7.39	7.65	0.135	0.143	3.429	3.632	.161	.073
MS9955-204	0.354	0.364	8.99	9.25	0.135	0.143	3.429	3.632	.185	.084
MS9955-205	0.416	0.426	10.57	10.82	0.135	0.143	3.429	3.632	.208	.094
MS9955-206	0.479	0.489	12.17	12.42	0.135	0.143	3.429	3.632	.232	.105
MS9955-207	0.541	0.551	13.74	14.00	0.135	0.143	3.429	3.632	.255	.116
MS9955-208	0.604	0.614	15.34	15.60	0.135	0.143	3.429	3.632	.278	.126
MS9955-209	0.666	0.676	16.92	17.17	0.135	0.143	3.429	3.632	.301	.137
MS9955-210	0.728	0.740	18.49	18.80	0.135	0.143	3.429	3.632	.324	.147
MS9955-211	0.790	0.802	20.07	20.37	0.135	0.143	3.429	3.632	.348	.158
MS9955-212	0.853	0.865	21.67	21.97	0.135	0.143	3.429	3.632	.371	.168
MS9955-213	0.915	0.927	23.24	23.55	0.135	0.143	3.429	3.632	.394	.179
MS9955-214	0.978	0.990	24.84	25.15	0.135	0.143	3.429	3.632	.417	.189
MS9955-215	1.040	1.052	26.42	26.72	0.135	0.143	3.429	3.632	.441	.200
MS9955-216	1.103	1.115	28.02	28.32	0.135	0.143	3.429	3.632	.464	.210
MS9955-217	1.165	1.177	29.59	29.90	0.135	0.143	3.429	3.632	.487	.221
MS9955-218	1.228	1.240	31.19	31.50	0.135	0.143	3.429	3.632	.512	.232
MS9955-219	1.290	1.302	32.77	33.07	0.135	0.143	3.429	3.632	.534	.242
MS9955-220	1.353	1.365	34.37	34.67	0.135	0.143	3.429	3.632	.557	.253
MS9955-221	1.415	1.427	35.94	36.25	0.135	0.143	3.429	3.632	.580	.263
MS9955-222	1.478	1.490	37.54	37.85	0.135	0.143	3.429	3.632	.604	.274
MS9955-223	1.599	1.619	40.61	41.12	0.135	0.143	3.429	3.632	.650	.295
MS9955-224	1.724	1.744	43.79	44.30	0.135	0.143	3.429	3.632	.697	.316
MS9955-225	1.849	1.869	46.96	47.47	0.135	0.143	3.429	3.632	.743	.337
MS9955-226	1.974	1.994	50.14	50.65	0.135	0.143	3.429	3.632	.789	.358
MS9955-227	2.099	2.119	53.31	53.82	0.135	0.143	3.429	3.632	.836	.379
MS9955-228	2.224	2.244	56.49	57.00	0.135	0.143	3.429	3.632	.882	.400
MS9955-229	2.349	2.369	59.66	60.17	0.135	0.143	3.429	3.632	.929	.421
MS9955-230	2.474	2.494	62.84	63.35	0.135	0.143	3.429	3.632	.975	.442
MS9955-231	2.599	2.619	66.01	66.52	0.135	0.143	3.429	3.632	1.022	.464
MS9955-232	2.719	2.749	69.06	69.82	0.135	0.143	3.429	3.632	1.069	.485
MS9955-233	2.844	2.874	72.24	73.00	0.135	0.143	3.429	3.632	1.115	.506
MS9955-234	2.969	2.999	75.41	76.17	0.135	0.143	3.429	3.632	1.161	.527
MS9955-235	3.094	3.124	78.59	79.35	0.135	0.143	3.429	3.632	1.207	.547

Custodians
Navy - AS, OS
Air Force - 82

...ed has been approved by the Dept of the Air Force(s) and the ...of the Navy(AS) and is mandatory for use by ... activity. All other military activities are requested to employ this standard where possible.

REVISED

APPROVED 22 Dec 71

P.A. Air Force - 11 Other Cust Navy - AS	INTERNATIONAL INTEREST ABCC 17/87	TITLE PACKING PREFORMED - AMS 3668 'O' RING	MILITARY STANDARD MS9955
PROCUREMENT SPECIFICATION NONE	SUPERSEDES		SHEET 3 OF 7

DD FORM 1 SEP 58 672-1 (Limited coordination)

EDITION OF 1 SEP 58 MAY BE USED

MS9955

FED SUP CLASS
5330

PART NUMBER	ID IN.		ID (mm)		T IN.		T (mm)		APPROX MASS	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	LB/100	kg/100
MS9955-236	3.219	3.249	81.76	82.52	0.135	0.143	3.429	3.632	1 254	569
MS9955-237	3.344	3.374	84.94	85.70	0.135	0.143	3.429	3.632	1 301	.590
MS9955-238	3.469	3.499	88.11	88.87	0.135	0.143	3.429	3.632	1.347	.611
MS9955-239	3.594	3.624	91.29	92.05	0.135	0.143	3.429	3.632	1 394	632
MS9955-240	3.719	3.749	94.46	95.22	0.135	0.143	3.429	3.632	1 440	653
MS9955-241	3.844	3.874	97.64	98.40	0.135	0.143	3.429	3.632	1.487	.674
MS9955-242	3.969	3.999	100.81	101.57	0.135	0.143	3.429	3.632	1.533	.695
MS9955-243	4.094	4.124	103.99	104.75	0.135	0.143	3.429	3.632	1.580	717
MS9955-244	4.219	4.249	107.16	107.92	0.135	0.143	3.429	3.632	1.626	.738
MS9955-245	4.344	4.374	110.34	111.10	0.135	0.143	3.429	3.632	1.672	.758
MS9955-246	4.469	4.499	113.51	114.27	0.135	0.143	3.429	3.632	1 719	.780
MS9955-247	4.594	4.624	116.69	117.45	0.135	0.143	3.429	3.632	1 766	.801
MS9955-248	4.719	4.749	119.86	120.62	0.135	0.143	3.429	3.632	1 812	822
MS9955-249	4.844	4.874	123.04	123.80	0.135	0.143	3.429	3.632	1 859	843
MS9955-250	4.969	4.999	126.21	126.97	0.135	0.143	3.429	3.632	1 905	864
MS9955-251	5.086	5.132	129.18	130.35	0.135	0.143	3.429	3.632	1 952	885
MS9955-252	5.211	5.257	132.36	133.53	0.135	0.143	3.429	3.632	2 000	907
MS9955-253	5.336	5.382	135.53	136.70	0.135	0.143	3.429	3.632	2 044	.927
MS9955-254	5.461	5.507	138.71	139.88	0.135	0.143	3.429	3.632	2 091	.948
MS9955-255	5.586	5.632	141.88	143.05	0.135	0.143	3.429	3.632	2 137	969
MS9955-256	5.711	5.757	145.06	146.23	0.135	0.143	3.429	3.632	2 184	.991
MS9955-257	5.836	5.882	148.23	149.40	0.135	0.143	3.429	3.632	2 230	1.012
MS9955-258	5.961	6.007	151.41	152.58	0.135	0.143	3.429	3.632	2 277	1.033
MS9955-259	6.211	6.257	157.76	158.93	0.135	0.143	3.429	3.632	2.370	1.075
MS9955-260	6.461	6.507	164.11	165.28	0.135	0.143	3.429	3.632	2 462	1 117
MS9955-261	6.711	6.757	170.46	171.63	0.135	0.143	3.429	3.632	2 555	1 159
MS9955-262	6.961	7.007	176.81	177.98	0.135	0.143	3.429	3.632	2 649	1 202
MS9955-263	7.204	7.264	182.98	184.51	0.135	0.143	3.429	3.632	2.742	1 244
MS9955-264	7.454	7.514	189.33	190.86	0.135	0.143	3.429	3.632	2 835	1 286
MS9955-265	7.704	7.764	195.68	197.21	0.135	0.143	3.429	3.632	2 927	1 328
MS9955-266	7.954	8.014	202.03	203.56	0.135	0.143	3.429	3.632	3 020	1 370
MS9955-267	8.204	8.264	208.38	209.91	0.135	0.143	3.429	3.632	3 114	1.412
MS9955-268	8.454	8.514	214.73	216.26	0.135	0.143	3.429	3.632	3 207	1 455
MS9955-269	8.704	8.764	221.08	222.61	0.135	0.143	3.429	3.632	3 300	1 497
MS9955-270	8.954	9.014	227.43	228.96	0.135	0.143	3.429	3.632	3 392	1 539
MS9955-271	9.204	9.264	233.78	235.31	0.135	0.143	3.429	3.632	3 485	1.581
MS9955-272	9.454	9.514	240.13	241.66	0.135	0.143	3.429	3.632	3 579	1.623
MS9955-273	9.704	9.764	246.48	248.01	0.135	0.143	3.429	3.632	3 671	1 665
MS9955-274	9.954	10.014	252.83	254.36	0.135	0.143	3.429	3.632	3 764	1 707
MS9955-275	10.454	10.514	265.53	267.06	0.135	0.143	3.429	3.632	3 950	1 792
MS9955-276	10.954	11.014	278.23	279.76	0.135	0.143	3.429	3.632	4 136	1 876
MS9955-277	11.454	11.514	290.93	292.46	0.135	0.143	3.429	3.632	4 322	1 960
MS9955-278	11.954	12.014	303.63	305.16	0.135	0.143	3.429	3.632	4 508	2 045
MS9955-279	12.954	13.014	329.03	330.56	0.135	0.143	3.429	3.632	4 880	2.214
MS9955-280	13.954	14.014	354.43	355.96	0.135	0.143	3.429	3.632	5.252	2.382
MS9955-281	14.954	15.014	379.83	381.36	0.135	0.143	3.429	3.632	5.624	2.551
MS9955-282	15.910	16.000	404.11	406.40	0.135	0.143	3.429	3.632	5 987	2 716
MS9955-283	16.910	17.000	429.51	431.80	0.135	0.143	3.429	3.632	6 361	2 885
MS9955-284	17.910	18.000	454.91	457.20	0.135	0.143	3.429	3.632	6.729	3.052
MS9955-309	0.407	0.417	10.34	10.59	0.205	0.215	5.21	5.46	528	239
MS9955-310	0.470	0.480	11.94	12.19	0.205	0.215	5.21	5.46	581	264
MS9955-311	0.532	0.542	13.51	13.77	0.205	0.215	5.21	5.46	634	288
MS9955-312	0.595	0.605	15.11	15.37	0.205	0.215	5.21	5.46	.687	312
MS9955-313	0.657	0.667	16.69	16.94	0.205	0.215	5.21	5.46	740	336

Review activities:
Navy - AS, SH
Air Force - 82

This standard has been approved by the Dept of the Air Force (11) and the [illegible]

APPROVED 22 Dec 71 REVISED

P.A. Air Force - 11 Other Cust Navy - AS	INTERNATIONAL INTEREST ABCC 17/87	TITLE PACKING PREFORMED - AMS 3668 'O' RING	MILITARY STANDARD MS9955
PROCUREMENT SPECIFICATION NONE		SUPERSEDES:	SHEET 4 OF 7

DD FORM 672-1 (Limited coordination)

EDITION OF 1 SEP 67 MAY BE USED

FSC SUP CLASS
5330

MS9955

PART NUMBER	ID IN.		ID (mm)		T IN		T (mm)		APPROX MASS	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	LB/100	kg/100
MS9955-314	0.719	0.731	18.26	18.57	0.205	0.215	5.21	5.46	.793	.360
MS9955-315	0.781	0.793	19.84	20.14	0.205	0.215	5.21	5.46	.846	.384
MS9955-316	0.844	0.856	21.44	21.74	0.205	0.215	5.21	5.46	.893	.405
MS9955-317	0.906	0.918	23.01	23.32	0.205	0.215	5.21	5.46	.952	.432
MS9955-319	0.969	0.981	24.61	24.92	0.205	0.215	5.21	5.46	1.005	.456
~~MS9955-319~~	1.031	1.043	26.19	26.49	0.205	0.215	5.21	5.46	1.058	.480
MS9955-320	1.094	1.106	27.79	28.09	0.205	0.215	5.21	5.46	1 112	.504
MS9955-321	1.156	1.168	29.36	29.67	0.205	0.215	5.21	5.46	1.165	.528
MS9955-322	1.219	1.231	30.96	31.27	0.205	0.215	5.21	5.46	1 218	.552
MS9955-323	1.281	1.293	32.54	32.84	0.205	0.215	5.21	5.46	1.271	577
MS9955-324	1.344	1.356	34.14	34.44	0.205	0.215	5.21	5.46	1.324	.601
MS9955-325	1.469	1.485	37.31	37.72	0.205	0.215	5.21	5.46	1 430	.649
MS9955-326	1.590	1.610	40.39	40.89	0.205	0.215	5.21	5.46	1 537	697
MS9955-327	1.715	1.735	43.56	44.07	0.205	0.215	5.21	5.46	1 643	745
MS9955-328	1.840	1.860	46.74	47.24	0.205	0.215	5.21	5.46	1 749	.793
MS9955-329	1.965	1.985	49.91	50.42	0.205	0.215	5.21	5.46	1 855	.841
MS9955-330	2.090	2.110	53.09	53.59	0.205	0.215	5.21	5.46	1 961	889
MS9955-331	2.215	2.235	56.26	56.77	0.205	0.215	5.21	5.46	2.067	.938
MS9955-332	2.340	2.360	59.44	59.94	0.205	0.215	5.21	5.46	2 173	.986
MS9955-333	2.465	2.485	62.61	63.12	0.205	0.215	5.21	5.46	2.279	1 034
MS9955-334	2.590	2.610	65.79	66.29	0.205	0.215	5.21	5.46	2.385	1 082
MS9955-335	2.710	2.740	68.83	69.60	0.205	0.215	5.21	5.46	2.491	1.130
MS9955-336	2.835	2.865	72.01	72.77	0.205	0.215	5.21	5.46	2.597	1 178
MS9955-337	2.960	2.990	75.18	75.95	0.205	0.215	5.21	5.46	2 703	1 226
MS9955-338	3.085	3.115	78.36	79.12	0.205	0.215	5.21	5.46	2 810	1.275
MS9955-339	3.210	3.240	81.53	82.30	0.205	0.215	5.21	5.46	2.916	1 323
MS9955-340	3.335	3.365	84.71	85.47	0.205	0.215	5.21	5.46	3.022	1 371
MS9955-341	3.460	3.490	87.88	88.65	0.205	0.215	5.21	5.46	3 128	1.419
MS9955-342	3.585	3.615	91.06	91.82	0.205	0.215	5.21	5.46	3 234	1 467
MS9955-343	3.710	3.740	94.23	95.00	0.205	0.215	5.21	5.46	3 340	1 515
MS9955-344	3.835	3.865	97.41	98.17	0.205	0.215	5.21	5.46	3 446	1 563
MS9955-345	3.960	3.990	100.58	101.35	0.205	0.215	5.21	5.46	3 552	1 611
MS9955-346	4.085	4.115	103.76	104.52	0.205	0.215	5.21	5.46	3 658	1 659
MS9955-347	4.210	4.240	106.93	107.70	0.205	0.215	5.21	5.46	3 764	1 707
MS9955-348	4.335	4.365	110.11	110.87	0.205	0.215	5.21	5.46	3.870	1 755
MS9955-349	4.460	4.490	113.28	114.05	0.205	0.215	5.21	5.46	3 976	1.803
MS9955-350	4.585	4.615	116.46	117.22	0.205	0.215	5.21	5.46	4.090	1.855
MS9955-351	4.710	4.740	119.63	120.40	0.205	0.215	5.21	5.46	4.196	1.903
MS9955-352	4.835	4.865	122.81	123.57	0.205	0.215	5.21	5.46	4.302	1.951
MS9955-353	4.960	4.990	125.98	126.75	0.205	0.215	5.21	5.46	4.409	2.000
MS9955-354	5.077	5.123	128.96	130.12	0.205	0.215	5.21	5.46	4 515	2.048
MS9955-355	5.202	5.248	132.13	133.30	0.205	0.215	5.21	5.46	4 621	2 096
MS9955-356	5.327	5.373	135.31	136.47	0.205	0.215	5.21	5.46	4 727	2 144
MS9955-357	5.452	5.498	138.48	139.65	0.205	0.215	5.21	5.46	4.834	2.193
MS9955-358	5.577	5.623	141.66	142.82	0.205	0.215	5.21	5.46	4 940	2 241
MS9955-359	5.702	5.748	144.83	146.00	0.205	0.215	5.21	5.46	5 046	2.289
MS9955-360	5.827	5.873	148.01	149.17	0.205	0.215	5.21	5.46	5.152	2.337
MS9355-361	5.952	5.998	151.18	152.35	0.205	0.215	5.21	5.46	5.259	2 385
MS9955-362	6.202	6.248	157.53	158.70	0.205	0.215	5.21	5.46	5 471	2 482
MS9955-363	6.452	6.498	163.88	165.05	0.205	0.215	5.21	5.46	5.684	2.578
MS9955-364	6.702	6.748	170.23	171.40	0.205	0.215	5.21	5.46	5.896	2 674
MS9955-365	6.952	6.998	176.58	177.75	0.205	0.215	5.21	5.46	6 109	2 771
MS9955-366	7.195	7.255	182.75	184.28	0.205	0.215	5.21	5.46	6 321	2 867
MS9955-367	7.445	7.505	189.10	190.63	0.205	0.215	5.21	5.46	6 536	2 965
MS9955-368	7.695	7.755	195.45	196.98	0.205	0.215	5.21	5.46	6.746	3.060

APPROVED 22 Dec 71 REVISED

Rev - Navy - AS, OS
Air Force - 82

Air Force - 11 Other Cust Navy - AS	INTERNATIONAL INTEREST ABCC 17/27	TITLE PACKING, PREFORMED - AMS 3668 'O' RING
PROCUREMENT SPECIFICATION NONE		SUPERSEDES:

MILITARY STANDARD
MS9955
SHEET 5 OF 7

DD FORM 672-1 (Limited coordination)

FED. SUP CLASS
5330

MS9955

PART NUMBER	ID IN.		ID (mm)		T IN.		T (mm)		APPROX MASS	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	LB/100	kg/100
MS9955-369	7.965	8.005	201.80	203.33	0.205	0.215	5.21	5.46	6 959	3.157
MS9955-370	8.195	8.255	208.15	209.68	0.205	0.215	5.21	5.46	7.171	3.253
MS9955-371	8.445	8.505	214.50	216.03	0.205	0.215	5.21	5.46	7 384	3.349
MS9955-372	8.695	8.755	220.85	222.38	0.205	0.215	5.21	5.46	7 596	3.445
MS9955-373	8.945	9.005	227.20	228.73	0.205	0.215	5.21	5.46	7.809	3 542
MS9955-374	9.195	9.255	233.55	235.08	0.205	0.215	5.21	5.46	8.022	3.639
MS9955-375	9.445	9.505	239.90	241.43	0.205	0.215	5.21	5.46	8.234	3 735
MS9955-376	9.695	9.755	246.25	247.78	0.205	0.215	5.21	5.46	8 447	3.831
MS9955-377	9.945	10.005	252.60	254.13	0.205	0.215	5.21	5.46	8.660	3 928
MS9955-378	10.445	10.505	265.30	266.83	0.205	0.215	5.21	5.46	9.085	4.121
MS9955-379	10.945	11.005	278.00	279.53	0.205	0.215	5.21	5.46	9 510	4.314
MS9955-380	11.445	11.505	290.70	292.23	0.205	0.215	5.21	5.46	9 935	4 506
MS9955-381	11.945	12.005	303.40	304.93	0.205	0.215	5.21	5.46	10 360	4.693
MS9955-382	12.945	13.005	328.80	330.33	0.205	0.215	5.21	5.46	11 210	5 085
MS9955-383	13.945	14.005	354.20	355.73	0.205	0.215	5.21	5.46	12 060	5 470
MS9955-384	14.945	15.005	379.60	381.13	0.205	0.215	5.21	5.46	12 911	5 856
MS9955-385	15.910	16.000	404.11	406.40	0.205	0.215	5.21	5.46	13 744	6 234
MS9955-386	16.910	17.000	429.51	431.80	0.205	0.215	5.21	5.46	14 594	6 620
MS9955-387	17.910	18.000	454.91	457.20	0.205	0.215	5.21	5.46	15 444	7 005
MS9955-388	18.910	19.000	480.31	482.60	0.205	0.215	5.21	5.46	16 294	7 391
MS9955-389	19.910	20.000	505.71	508.00	0.205	0.215	5.21	5.46	17 144	7.776
MS9955-390	20.910	21.000	531.11	533.40	0.205	0.215	5.21	5.46	17 995	8 162
MS9955-391	21.910	22.000	556.51	558.80	0.205	0.215	5.21	5.46	18 845	8 548
MS9955-392	22.880	23.000	581.2	584.2	0.205	0.215	5.21	5.46	19 683	[illegible]
MS9955-393	23.880	24.000	606.6	609.6	0.205	0.215	5.21	5.46	[illegible]	[illegible]
MS9955-394	24.880	25.000	632.0	635.0	0.205	0.215	5.21	5.46	21 363	[illegible]
MS9955-395	25.880	26.000	657.4	660.4	0.205	0.215	5.21	5.46	22 233	10 085
MS9955-425	4.460	4.490	113.28	114.05	0.269	0.281	6.83	7.14	6 913	3 136
MS9955-426	4.585	4.615	116.46	117.22	0.269	0.281	6.83	7.14	7 096	3 219
MS9955-427	4.710	4.740	119.63	120.40	0.269	0.281	6.83	7.14	7 277	3 301
MS9955-428	4.835	4.865	122.81	123.57	0.269	0.281	6.83	7.14	7 459	3 383
MS9955-429	4.960	4.990	125.98	126.75	0.269	0.281	6.83	7.14	7 641	3 466
MS9955-430	5.077	5.123	128.96	130.12	0.269	0.281	6.83	7.14	7 823	3 548
MS9955-431	5.202	5.248	132.13	133.30	0.269	0.281	6.83	7.14	8 005	3 631
MS9955-432	5.327	5.373	135.31	136.47	0.269	0.281	6.83	7.14	8.187	3 714
MS9955-433	5.452	5.498	138.48	139.65	0.269	0.281	6.83	7.14	8 369	3 796
MS9955-434	5.577	5.623	141.66	142.82	0.269	0.281	6.83	7.14	8 550	3 878
MS9955-435	5.702	5.748	144.83	146.00	0.269	0.281	6.83	7.14	8 732	3 961
MS9955-436	5.827	5.873	148.01	149.17	0.269	0.281	6.83	7.14	8 915	4 044
MS9955-437	5.952	5.998	151.18	152.35	0.269	0.281	6.83	7.14	9 096	4 126
MS9955-438	6.202	6.248	157.53	158.70	0.269	0.281	6.83	7.14	9 461	4 291
MS9955-439	6.452	6.498	163.88	165.05	0.269	0.281	6.83	7.14	9 824	4 456
MS9955-440	6.702	6.748	170.23	171.40	0.269	0.281	6.83	7.14	10 188	4 621
MS9955-441	6.952	6.998	176.58	177.75	0.269	0.281	6.83	7.14	10 552	4 786
MS9955-442	7.195	7.255	182.75	184.28	0.269	0.281	6.83	7.14	10 916	4 951
MS9955-443	7.445	7.505	189.10	190.63	0.269	0.281	6.83	7.14	11 280	5 117
MS9955-444	7.695	7.755	195.45	196.98	0.269	0.281	6.83	7.14	11 644	5 282
MS9955-445	7.945	8.005	201.80	203.33	0.269	0.281	6.83	7.14	12.007	5 446
MS9955-446	8.445	8.505	214.50	216.03	0.269	0.281	6.83	7.14	12 735	5 776
MS9955-447	8.945	9.005	227.20	228.73	0.269	0.281	6.83	7.14	13 463	6 107
MS9955-448	9.445	9.505	239.90	241.43	0.269	0.281	6.83	7.14	14 191	6 437

APPROVED 22 Dec 71 REVISED

P.A. Air Force - 11 Other Cust Navy - AS	INTERNATIONAL INTEREST ASCC 17/87	TITLE PACKING, PREFORMED - AMS 3668 'O' RING	MILITARY STANDARD MS9955
PROCUREMENT SPECIFICATION NONE		SUPERSEDES:	SHEET 6 OF 7

DD FORM 672-1 (Limited coordination)

EDITION OF 1 SEP 59 MAY BE USED

FED SUP CLASS
5330

MS9955

PART NUMBER	ID IN		ID (mm)		T IN.		T (mm)		APPROX MASS	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	LB/100	Kg/100
MS9955-449	9.945	10.005	252.60	254.13	0.269	0.281	6.83	7.14	14.918	6.767
MS9955-450	10.445	10.505	265.30	266.83	0.269	0.281	6.83	7.14	15.646	7.097
MS9955-451	10.945	11.005	278.00	279.53	0.269	0.281	6.83	7.14	16.374	7.427
MS9955-452	11.445	11.505	290.70	292.23	0.269	0.281	6.83	7.14	17.102	7.757
MS9955-453	11.945	12.005	303.40	304.93	0.269	0.281	6.83	7.14	17.829	8.087
~~MS9955-454~~	~~12.445~~	~~12.505~~	~~316.10~~	~~317.63~~	~~0.269~~	~~0.281~~	~~6.83~~	7.14	~~18.557~~	8.417
MS9955-455	12.945	13.005	328.80	330.33	0.269	0.281	6.83	7.14	19.285	8.748
MS9955-456	13.445	13.505	341.50	343.03	0.269	0.281	6.83	7.14	20.012	9.077
MS9955-457	13.945	14.005	354.20	355.73	0.269	0.281	6.83	7.14	20.740	9.407
MS9955-458	14.445	14.505	366.90	368.43	0.269	0.281	6.83	7.14	21.468	9.738
MS9955-459	14.945	15.005	379.60	381.13	0.269	0.281	6.83	7.14	22.196	10.068
MS9955-460	15.445	15.505	392.30	393.83	0.269	0.281	6.83	7.14	22.923	10.398
MS9955-461	15.910	16.000	404.11	406.40	0.269	0.281	6.83	7.14	23.673	10.738
MS9955-462	16.410	16.500	416.81	419.10	0.269	0.281	6.83	7.14	24.402	11.069
MS9955-463	16.910	17.000	429.51	431.80	0.269	0.281	6.83	7.14	25.132	11.400
MS9955-464	17.410	17.500	442.21	444.50	0.269	0.281	6.83	7.14	25.861	11.730
MS9955-465	17.910	18.000	454.91	457.20	0.269	0.281	6.83	7.14	26.590	12.061
MS9955-466	18.410	18.500	467.61	469.90	0.269	0.281	6.83	7.14	27.320	12.392
MS9955-467	18.910	19.000	480.31	482.60	0.269	0.281	6.83	7.14	28.049	12.723
MS9955-468	19.410	19.500	493.01	495.30	0.269	0.281	6.83	7.14	28.778	13.053
MS9955-469	19.910	20.000	505.71	508.00	0.269	0.281	6.83	7.14	29.507	13.384
MS9955-470	20.910	21.000	531.11	533.40	0.269	0.281	6.83	7.14	30.966	14.046
MS9955-471	21.910	22.000	556.51	558.80	0.269	0.281	6.83	7.14	32.425	14.708
MS9955-472	22.880	23.000	581.2	584.2	0.269	0.281	6.83	7.14	33.861	15.359
MS9955-473	23.880	24.000	606.6	609.6	0.269	0.281	6.83	7.14	35.320	16.021
MS9955-474	24.880	25.000	632.0	635.0	0.269	0.281	6.83	7.14	36.779	16.683
MS9955-475	25.880	26.000	657.4	660.4	0.269	0.281	6.83	7.14	38.237	17.344

1. MATERIAL POLYTETRAFLUOROETHYLENE AMS 3668
2. DIMENSIONS IN INCHES. METRIC CONVERSIONS ARE IN PARENTHESES. INTERNATIONAL SYSTEM UNITS (SI) SHOWN ARE FOR REFERENCE ONLY
3. IDENTIFICATION AND PACKAGING PER AMS 2817. PACKING SHALL NOT BE COILED OR LOOPED
4. DIMENSIONAL INSPECTION PER AS871.
5. DO NOT USE UNASSIGNED PART NUMBERS.

Navy - AS, OS
Air Force - 82

APPROVED 22 Dec 71 REVISED

AS AND AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIVISION.

P.A. Air Force - 11 Other Cust Navy - AS	INTERNATIONAL INTEREST ASCC 17/27	TITLE PACKING, PREFORMED - AMS 3668, 'O' RING	MILITARY STANDARD MS9955
PROCUREMENT SPECIFICATION NONE		SUPERSEDES:	SHEET 7 OF 7

DD FORM 672-1 (Limited coordination)