MILITARY STANDARD

UNIT LOAD
FOR UNDERWAY REPLENISHMENT
SONOBUOYS, IN PALLET CRATE, CNU-313/E

MIL-STD-1323-98C (NAVY)
11 JANUARY 1988

SUPERSEDING
MIL-STD-1323-98B
4 NOVEMBER 1986

UNIT LOAD DATA

DODIC/ NALC NO.	SONOBUOY MODEL ANSSQ	CONTAINERS			UNIT LOAD GROSS WT. LBS*
		SIZE	CONTAINERS/ UNIT LOAD	CONTAINER WT. LBS	
8W01	36	SHORT	35	26	1201
8W02	36-LS/SLC	LONG	30	30	1191
8W03	36-SS/SLC	LONG	30	30	1191
8W04	41	SHORT	35	26	1201
8W05	41A	SHORT	35	26	1201
8W06	41A-LS/SLC	LONG	30	31	1221
8W07	41A-SS/SLC	LONG	30	31	1221
8W08	41B-LS/SLC	LONG	30	39	1461
8W09	47B	SHORT	35	35	1516
8W10	50	SHORT	35	45	1866
8W12	50A	SHORT	35	45	1866
8W13	53	SHORT	35	35	1516
8W14	53-LS/SLC	LONG	30	39	1461
8W15	53-SS/SLC	LONG	30	39	1461
8W16	53A	SHORT	35	35	1516
8W17	53A-LS/SLC	LONG	30	39	1461
8W18	57	SHORT	35	26	1201
8W19	57A	SHORT	35	26	1201
8W20	57(XN5)	SHORT	35	26	1201
8W21	41A-SS/SLC	LONG	30	30	1191
8W23	57A	SHORT	35	26	1201
8W24	83	SHORT	35	27	1236
8W25	41B	SHORT	35	35	1516
8W26	41B-LS/SLC	LONG	30	39	1461
8W29	36-LS/SLC	LONG	30	30	1191
8W30	57A-LS/SLC	LONG	30	30	1191
8W31	83-LS/SLC	LONG	30	31	1221
8W32	47B-LS/SLC	LONG	30	39	1461
8W34	71-LS/SLC	LONG	30	35	1341
8W35	62-LS/SLC	LONG	30	49	1761
8W36	41B-LS/SLC	LONG	30	39	1461
8W37	36	SHORT	35	26	1201
8W38	41B-LS/SLC	LONG	30	39	1461
8W40	53B-LS/SLC	LONG	30	39	1461
8W41	41B	SHORT	35	35	1516
8W42	57A-LS/SLC	LONG	30	30	1191
8W45	62A-LS/SLC	LONG	30	49	1761
8W49	53A	SHORT	35	39	1656
8W53	62A	SHORT	35	49	2006
8W54	62B	SHORT	35	49	2006
8W55	55	SHORT	35	320	1656

* DO NOT USE FOR SHIPPING WEIGHT

AMSC NO. - N/A

DISTRIBUTION STATEMENT A
APPROVED FOR PUBLIC RELEASE;
DISTRIBUTION IS UNLIMITED

REV LETTER	REV DESCRIPTION	DATE	TDA APPROVAL	SYSCOM APPROVAL
C	DELETED REVISIONS A AND B ADD ONS	1-4-88	EC	JEK
B	ADDED AN/SCQ-39 CHAFF BUOYS AND AN/SSQ-95 AER	11/4/86	mag	JEK
A	ADDED AIRBOCS	7/9/87	mag	JEK

FSC 8140

THIS UNIT LOAD IS AUTHORIZED AND RELEASED FOR SHIPPING, HANDLING, STORAGE AND TRANSFER-AT-SEA. IT MAY ALSO BE USED FOR DOMESTIC SHIPMENT IN COMPLIANCE WITH DOT REGULATIONS.

W S Gray NWHC 5/31/88
SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE

J E Kelly 5/24/88
SIGNATURE NAVSEACOM BY DIRECTION DATE

REQUIREMENTS FOR CONSTRUCTION OF THIS UNIT LOAD SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF MIL-STD-1323 (NAVY)

ORIGINATOR Charles McBride 5/24/88
DATE

NAVAL WEAPONS HANDLING CENTER
WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 20261O-23T23:56Z
Check the source to verify that this is the current version before use.

NO. OF SONOBUOYS PER CONTAINER..... 1
WEIGHT OF PALLET CRATE..... 290 LBS.
WEIGHT OF STEEL STRAPPING..... 1 LB.
UNIT LOAD CUBE..... 53.5 CU. FT.
DO NOT STACK MORE THAN 4 UNIT LOADS HIGH IN STORAGE


WARNING

ALL CONTAINERS SHOULD BEAR THE FOLLOWING MARKING, "SMALL QUANTITY OF HAZARDOUS MATERIAL CONTAINED HEREIN - HANDLE CARE-FULLY WHEN OPENING".


HAZARD CLASSIFICATION

SONOBUOYS

DOT: AMMUNITION, NON-EXPLOSIVE
CG: CLASS I

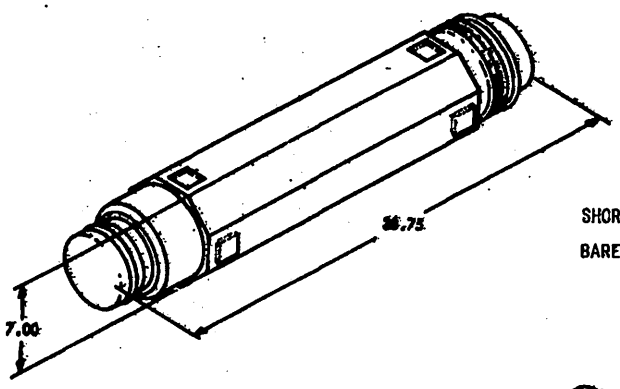

SHORT CONTAINER FOR BARE SONOBUOY

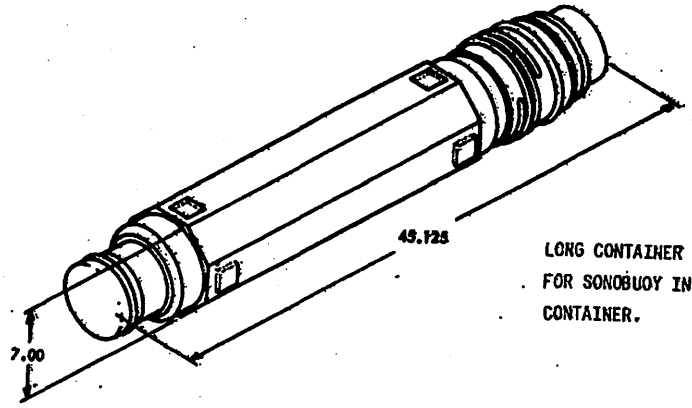

LONG CONTAINER CNU-289/E FOR SONOBUOY IN LAUNCH CONTAINER.

NOTES:

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED TRUCKLOADING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:56Z
Check the source to verify that this is the current version before use.

UNITIZING PROCEDURE FOR LONG CONTAINER

(A) SET UP THE SIDES AND ENDS OF THE PALLET CRATE, ITEM 1, LEAVING TOP HALF OF THE REMOVABLE END FOLDED DOWN. ASCERTAIN THAT ALL DECK INTERLOCKING LOOPS AT THE BOTTOM EDGE OF PANELS ARE ENGAGED IN THE DECK (SEE DETAIL B) AND ALL CORNER LOCKING DEVICES ARE SECURED.


(B) THREAD STRAPPING, ITEM 2, AROUND THE FIRST DOUBLE HORIZONTAL WIRES BELOW THE TOP OF THE CRATE SIDES. FORM SEALED LOOPS AS SHOWN IN DETAIL A AND DOUBLE NOTCH THE SEALS, ITEM 3. (TWO STRAPS ON EACH SIDE).

(C) POSITION 30 CONTAINERS LONGITUDINALLY IN THE CRATE WITH THEIR SCREW CAPS TOWARD THE OPEN END OF THE CRATE AND THEIR SMOOTH SIDES UP (DO NOT ENGAGE STACKING LUGS).


(D) RAISE THE TOP HALF OF THE REMOVABLE END TO THE CLOSED POSITION AND SECURE THE CORNER LOCKING DEVICES.


(E) THREAD STRAPPING, ITEM 2, THROUGH THE SECOND SQUARE BELOW THE TOP EDGE OF THE CRATE. TENSION OVER THE CONTAINERS AND DOUBLE NOTCH THE SEAL, ITEM 3.


MARKING: THE UNIT LOAD SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-1323 (NAVY).

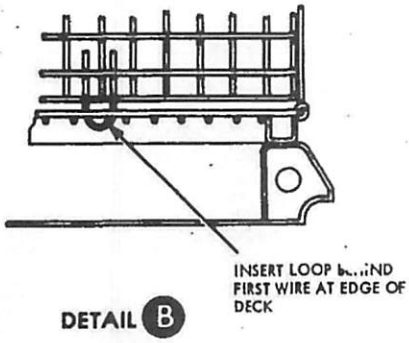

DETAIL B

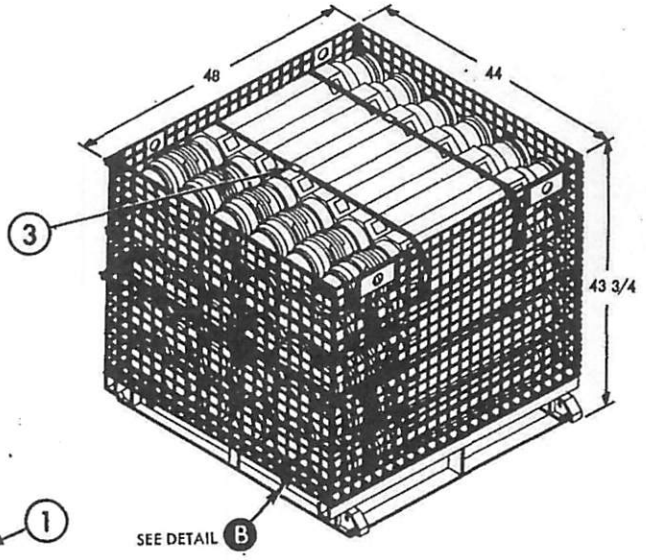

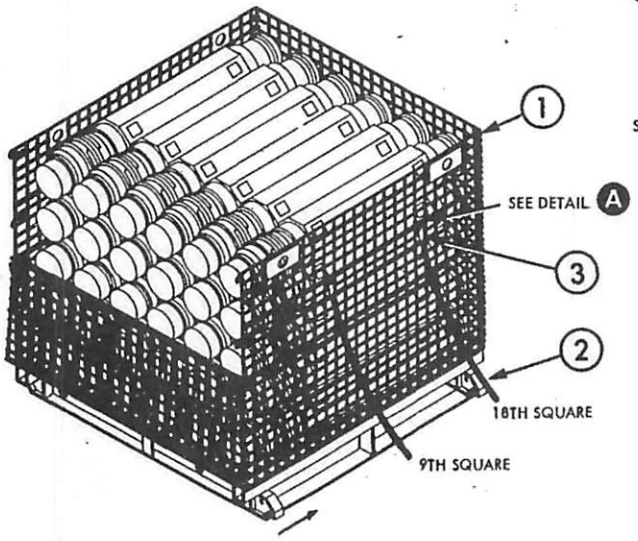



NOTES: 1. ALL MATERIAL SHALL BE SPECIFIED IN MIL-STD-1323.
2. DO NOT USE TYPE I STRAPPING WITH POWER MACHINES.

REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
6	3	SEAL	SEE NOTE 1	3/4
4	2	STRAPPING	SEE NOTES 1 & 2	3/4 X .035 X 3 FT 6
1	1	PALLET CRATE CNU-313/E	MIL-C-21215 SIZE 4	48 X 44 X 43 3/4

LIST OF MATERIALS

DEUNITIZING PROCEDURE

(a) CUT AND REMOVE STRAPPING.
(b) REMOVE CONTAINERS.

Source: https://assist.dla.mil -- Downloaded: 20261O-23T23:56Z
Check the source to verify that this is the current version before use.

UNITIZING PROCEDURE FOR SHORT CONTAINER

(A) SET UP THE SIDES AND ENDS OF THE PALLET CRATE, ITEM 1, LEAVING THE TOP HALF OF THE REMOVABLE END FOLDED DOWN. ASCERTAIN THAT ALL DECK INTERLOCKING LOOPS AT THE BOTTOM EDGE OF THE END PANELS ARE ENGAGED IN THE DECK (SEE DETAIL B) AND ALL CORNER LOCKING DEVICES ARE SECURED.

(B) THREAD STRAPPING, ITEM 2, AROUND THE FIRST DOUBLE HORIZONTAL WIRES BELOW THE TOP OF THE CRATE SIDES. FORM SEALED LOOPS AS SHOWN IN DETAIL A AND DOUBLE NOTCH THE SEALS, ITEM 3. (THREE STRAPS ON EACH SIDE).


(C) POSITION 30 CONTAINERS LONGITUDINALLY IN THE CRATE WITH THEIR SCREW CAPS TOWARD THE OPEN END OF THE CRATE AND THEIR SMOOTH SIDES UP. (DO NOT ENGAGE STACKING LUGS.)

(D) POSITION A STACK OF 5 CONTAINERS CROSSWISE IN THE END OF THE CRATE STARTING WITH STACKING RECESSES UP AND ALTERNATING LUGS UP AND RECESSES UP.


(E) RAISE THE TOP HALF OF THE REMOVABLE END TO THE CLOSED POSITION AND SECURE THE CORNER LOCKING DEVICES.


(F) THREAD STRAPPING, ITEM 2, THROUGH THE SECOND SQUARE BELOW THE TOP EDGE OF THE CRATE SIDES. TENSION OVER THE CONTAINERS AND DOUBLE NOTCH THE SEAL, ITEM 3.


MARKING: THE UNIT LOAD SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-1323 (NAVY).

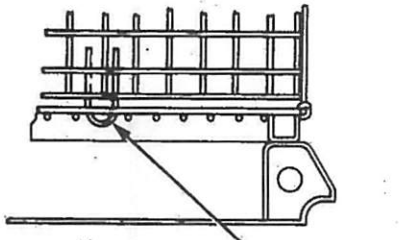

DETAIL B

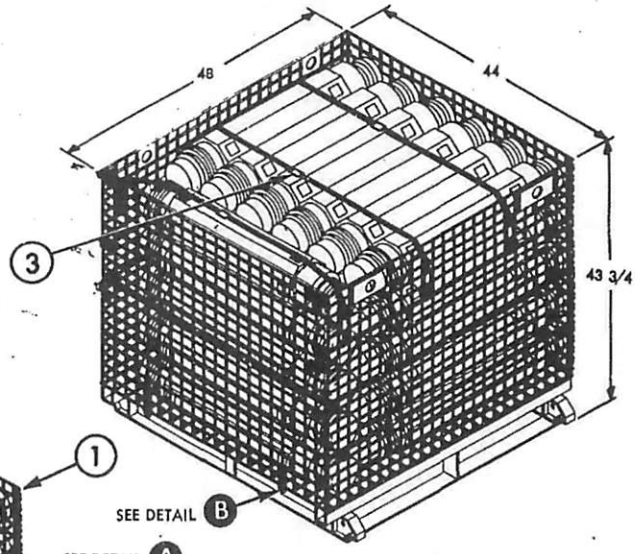

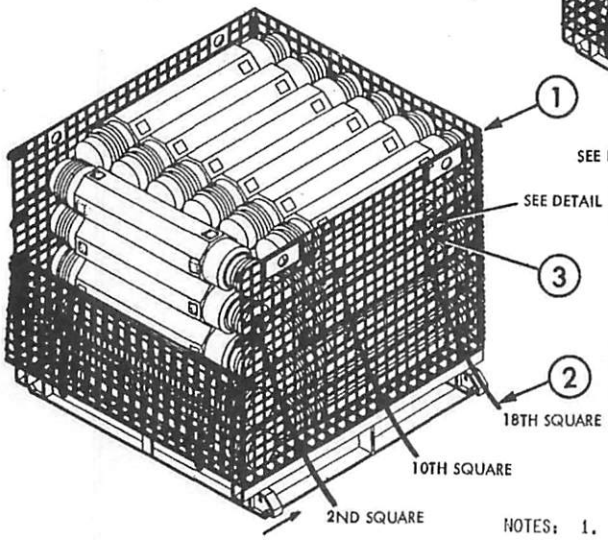



DETAIL A

NOTES: 1. ALL MATERIAL SHALL BE SPECIFIED IN MIL-STD-1323.
2. DO NOT USE TYPE I STRAPPING WITH POWER MACHINES.

DEUNITIZING PROCEDURE

(a) CUT AND REMOVE STRAPPING.
(b) REMOVE CONTAINERS.

LIST OF MATERIALS

REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
9	3	SEAL	SEE NOTE 1	3/4
6	2	STRAPPING	SEE NOTES 1 & 2	3/4 X .035 X 3 FT 6
1	1	PALLET CRATE CNU-313/E	MIL-C-21215 SIZE 4	48 X 44 X 43 3/4

REVIEW ACTIVITY:
NAVY-OS

PREPARING ACTIVITY:
NAVY-OS
(PROJECT NO. 8140-N773)
FSC 8140

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:56Z
Check the source to verify that this is the current version before use.