
FED. SUP CLASS
1660

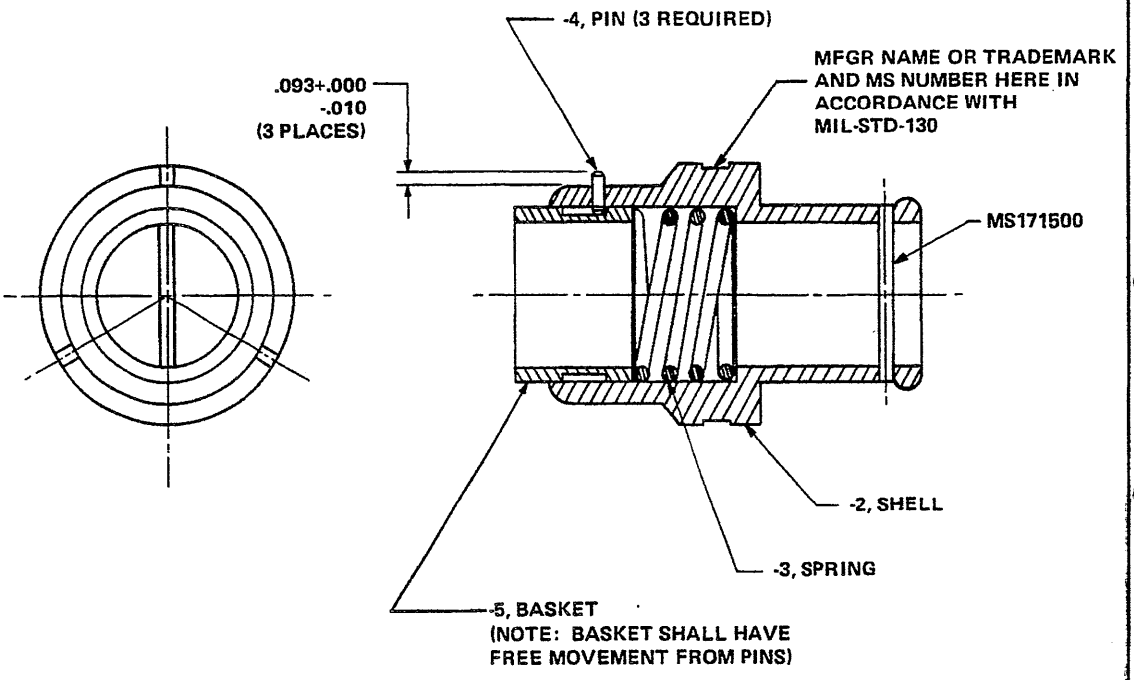

(D)

NOTES:

DIMENSIONS AND TOLERANCES SHALL BE IN ACCORDANCE WITH ANSI Y14.5 (1973) DIMENSIONS IN INCHES.
TOLERANCES ARE DECIMALS ± .015 UNLESS OTHERWISE SPECIFIED.
REMOVE ALL BURRS AND SHARP EDGES (.010 MAX).
FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
CAUTION: ALL PARTS OF THE OXYGEN SYSTEM SHALL BE FREE FROM OIL, GREASE, OR OTHER COMBUSTIBLE MATERIAL.

REVIEW ACTIVITY: AIR FORCE-11
ARMY – AV

APPROVED 9 SEPT 1968 REVISED (A) 2 JUN 1969 (11) 8 JUNE 1970 (C) 13 MARCH 1974 (D) 26 OCT 83

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.


P.A. AF – 82 Other Cust NAVY–AS AF – 99	TITLE CONNECTOR–BAYONET, THREE PIN, OXYGEN MASK	MILITARY STANDARD MS27796
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: AF DRAWINGS: 57B3661, 57B3663, 57A3664, 57A3665	SHEET 1 OF 2

DD FORM 1 SEP 63 672-1 (Coordinated) EDITION OF 1 SEP 57 MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 202610-23T16:52Z
Check the source to verify that this is the current version before use.

Project 1660-0427

FED. SUP CLASS
1660

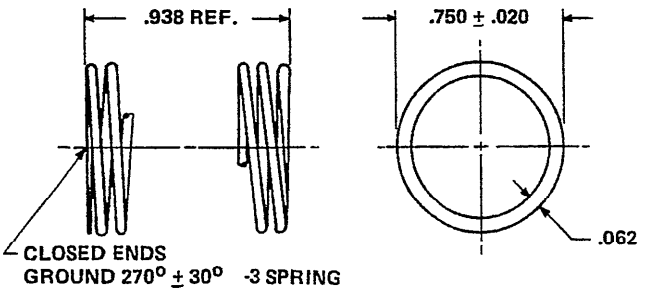


MATERIAL: STEEL QQ-W-423, FORM 1, COND. B, COMP. FS302

FINISH: PASSIVATE PER SPEC QQ-P-35 AFTER FORMING AND HEATING


HEAT SPRING TO 800° + 50°F FOR 30 MINUTES AFTER FORMING

TOTAL NO. OF COILS 5, ACTIVE COILS 3, LOAD 10 LBS ±1.0 LB. WHEN COMPRESSED TO .375 INCHES (TOTAL NUMBER OF COILS IS A REFERENCE VALUE)

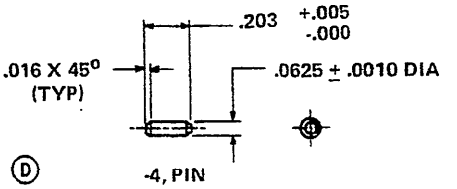


MATERIAL: STAINLESS STEEL PER ASTM A-555 OR ASTM A-581 CLASS 416, COND. A (HOT FINISH)

FINISH: ALL SURFACES 63 IN ACCORDANCE WITH ANSI B46.1 (1978)

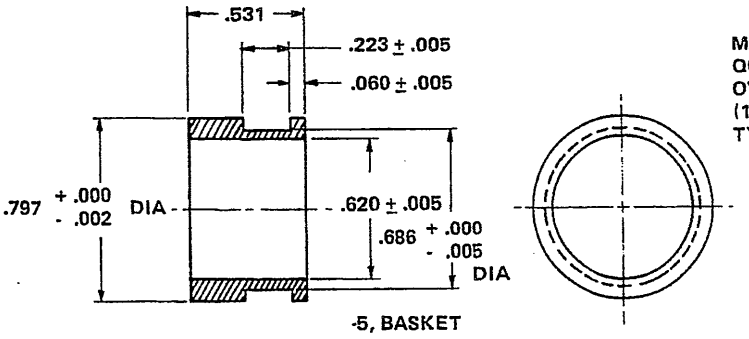

MATERIAL: ALUMINUM ALLOY SPEC QQ-A-225/6 TEMPER T4 FINISH ALL OVER 63/IN ACCORDANCE WITH ANSI B46.1 (1978) ANODIZE PER SPEC MIL-A-8625, TYPE II, CLASS 2, BLACK

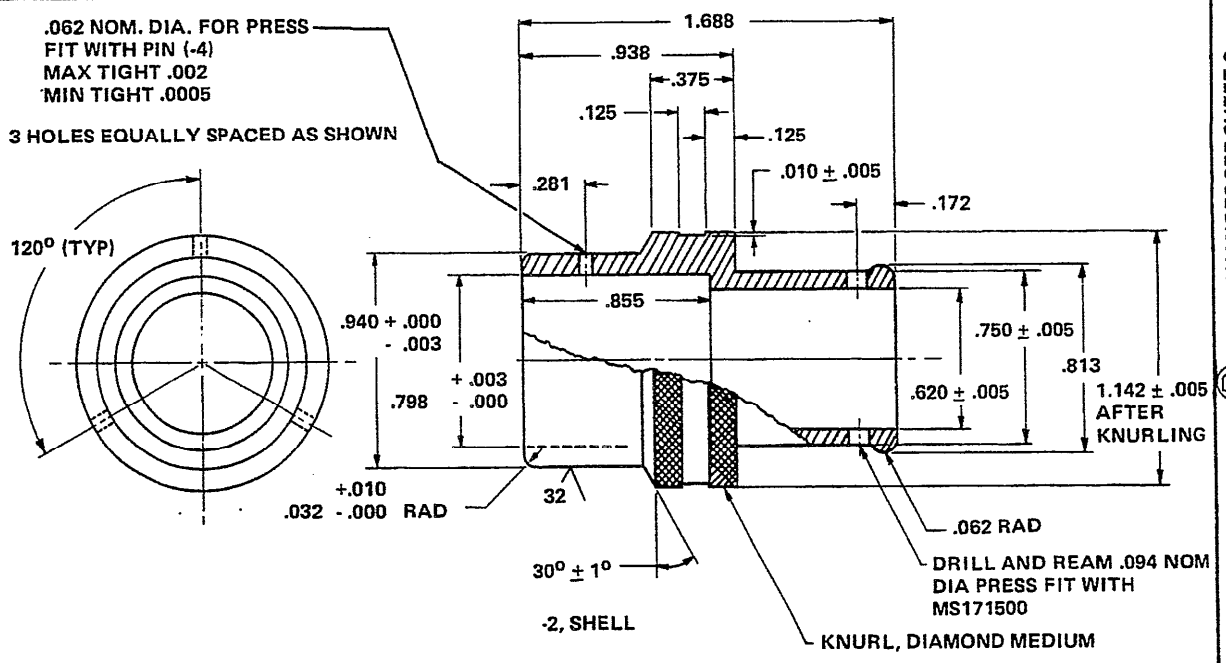

MATERIAL: ALUMINUM ALLOY, SPEC QQ-A-225/6 TEMPER T4
FINISH ALL OVER 63/IN ACCORDANCE WITH ANSI B46.1 (1978) (UNLESS OTHERWISE SPECIFIED)
ANODIZE PER SPEC MIL-A-8625, TYPE II CLASS 2, BLACK.

APPROVED 9 SEPT 1968 REVISED (B) FOR CHANGES SEE SHEET 2 (C) 13 MARCH 1974 (D)

REVIEW ACTIVITY: AIR FORCE-11
ARMY – AV

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. AF – 82 Other Cust NAVY–AS AF – 99	TITLE CONNECTOR–BAYONET, THREE PIN, OXYGEN MASK	MILITARY STANDARD MS27796
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: AF DRAWINGS: 56B3661, 57B3663, 57A3664, 56A3665	SHEET 2 OF 2

DD FORM 1 SEP 63 672-1 (Coordinated)

EDITION OF 1 SEP 57 MAY BE USED.

Project 1660-0427

Source: https://assist.dla.mil -- Downloaded: 202610-23T16:52Z
Check the source to verify that this is the current version before use.