BY ORDER OF THE COMMANDER
36TH WING

36TH WING INSTRUCTION 21-110

3 JUNE 2025

Maintenance

FOREIGN OBJECT DAMAGE/DEBRIS (FOD), DROPPED OBJECT PREVENTION (DOP), PROGRAM, AND TOOL ACCOUNTABILITY

COMPLIANCE WITH THIS PUBLICATION IS MANDATORY

ACCESSIBILITY: This publication is available for downloading or ordering on the e-Publishing website at www.e-Publishing.af.mil

RELEASABILITY: There are no releasability restrictions on this publication.

OPR: 36 MXG/MXGQ

Certified by: 36 MXG/CC
(Colonel Matthew S. Drossner)

Supersedes: 36WGI21-110, 12 April 2018

Pages: 14

This publication fulfills the requirements of Department of the Air Force Instruction (DAFI) 21-101, *Aircraft and Equipment Maintenance Management*, Chapter 11, Paragraph 11.9. *Dropped Object Prevention (DOP) Program* and Paragraph 11.8, *Foreign Object Damage (FOD) Prevention Program***.** This publication establishes the minimum responsibilities and procedures governing Chapter 8, Paragraph 8.5, *Tool Accountability and Serviceability.* It applies to all military, civilians and contractors working near aircraft, munitions, AGE, engines, or components. It applies to the 36th Wing including Geographically Separated Units, Air Force Reserve Command and Air National Guard units. When guidance in this publication conflicts with tenant unit command guidance, the more restrictive guidance will take precedence. The use of a name of any specific manufacturer, commercial product, commodity, or service in this publication does not imply endorsement by the Air Force. Ensure that all records created as a result of processes prescribed in this publication are maintained in accordance with (IAW) AFI 33-322, Records Management and Information Governance Program, and disposed of IAW Air Force Records Information Management System (AFRIMS) Records Disposition Schedule (RDS). Refer recommended changes and questions about this publication to the Office of Primary Responsibility (OPR) using the DAF Form 847, Recommendation for Change of Publication; route DAF Form 847 from the field through the appropriate functional chain of command. This publication may be supplemented at any level, but all direct supplements must be routed to the OPR of this publication for coordination prior to certification and approval.

SUMMARY OF CHANGES

This document has been substantially revised and must be completely reviewed. Major changes include the removal and addition of several paragraphs that will be marked with a margin bar, Attachments 1 & 2 have been updated.

1. Overview.

1.1. Foreign Object Damage/Debris (FOD) and Dropped Object Prevention (DOP) is the responsibility of **every** individual working in or around the airfield. Commanders and supervisors with missions on the airfield or supporting aircraft operations are responsible for implementing these procedures. Continual training, awareness and discipline are important elements of an effective FOD/DOP program. **The overall program objective is "ZERO FOD and DO" mishaps.**

1.1.1. **Foreign Object Damage/Debris (FOD).** FOD is any damage to an aircraft engine, aircraft system and tire caused by an external foreign object (FO) which may or may not degrade the required safety or operational characteristics of the engine, aircraft system or tire. Common causes of FOD are poor housekeeping, improper maintenance practices and aircraft taxiway or ramp deterioration.

1.1.2. **Dropped Object Prevention (DOP).** A dropped object (DO) is any aircraft part, component, surface or other item lost during aircrew operations from engine start to engine shutdown, unless intentionally jettisoned. Inadvertently released munitions or munitions released in excess of the quantity selected by the aircrew are not considered dropped objects and will be reported IAW DAFI 91-204, *Safety Investigations and Reports*.

1.1.3. Any area where a noticeable FOD hazard is identified shall be immediately reported through 36th Maintenance Group (36 MXG) Maintenance Operations Center (MOC) at DSN: 315-366-4321 and Airfield Management at DSN: 315-366-4188 to ensure the applicable ramp/runway area is swept or cleared before engine run or taxi operations begin.

2. Responsibilities: This section establishes additional 36 WG requirements for implementation of DAFI 21-101, Paragraph 11.8, FOD Prevention Program.

2.1. Wing FOD/DOP Manager Responsibilities:

2.1.1. Manage the FOD/DOP program in conjunction with DAFI 21-101, *Aircraft and Equipment Maintenance Management* and associated supplements.

2.1.2. Organize, report and present FOD/DOP program status at monthly and quarterly senior FOD/DOP program committee briefings.

2.1.3. Investigate and report all FOD/DOP incidents on Andersen AFB with the assistance of an aircraft or airframe specific specialist from the transient, deployed or tenant unit. All initial and final FOD/DOP reports will be routed up the chain using an Electronic Staff Summary Sheet (eSSS) to the 36 WG/CD or if unavailable, route to the 36 MXG/CC, for local approval prior to forwarding reports off base.

2.1.3.1. All deployed or transient aircraft FOD/DOP reports shall be forwarded to their owning wing FOD/DOP monitor to finalize the report at home station.

2.1.4 Maintain all digital copies of FOD/DOP reports IAW DAFI 21-101 for a minimum of two years.

2.1.5. Coordinate with 36 MXG Quality Assurance (QA) and accomplish inspections to determine compliance with FOD/DOP procedures.

2.1.5.1. Address areas of concern to the 36 WG/CD, 36 MXG/CC, unit commanders and unit superintendents.

2.1.5.2. Annotate inspection findings in 36 MXG QA database.

2.1.6. Develop and manage the FOD Prevention Incentive Program.

2.1.7. Analyze program areas that require additional management emphasis.

2.1.8. Generate and distribute FOD prevention material to unit FOD/DOP monitors.

2.1.9. - DELETED.

2.2. Unit Commander Responsibilities.

2.2.1. Each unit operating on the flightline will establish and maintain an effective unit FOD/DOP program. A FOD/DOP program will also be implemented at all deployed locations.

2.2.2. Each unit operating on the flightline will appoint primary and alternate unit FOD/DOP monitors in writing to the 36 WG FOD/DOP Manager. Forward appointment letters to UDG_36MXG_QA@us.af.mil**.** Unit FOD/DOP monitors are the unit point of contact for all FOD/DOP issues or concerns.

2.2.2.1. Deployed QA personnel may fill this position.

2.2.3. Ensure maximum participation in unit weekly and daily FOD walks.

2.2.4. All unit commanders shall actively support the FOD Prevention Incentive Program.

2.3. Unit FOD/DOP Monitor Responsibilities.

2.3.1. Ensures widest distribution of 36 WG FOD/DOP Manager information. Brief pertinent information contained in flashes and reports to all work center personnel and perform FOD Monitor duties.

2.3.2. May be assigned additional duties and/or responsibilities as required by unit CC, superintendent or supervisor.

2.3.3. Unit FOD/DOP Monitors will maintain a continuity book or digital folder containing the following as a minimum:

2.3.3.1. Tab A: Letters of Appointment: 36th Wing FOD/DOP Manager and Unit FOD Monitor.

2.3.3.2. Tab B: DAFI 21-101, para 11.8. & 11.9.

2.3.3.3. Tab C: 36 WGI 21-110, *Foreign Object Damage/Debris (FOD), Dropped Object Prevention (DOP) Program, and Tool Accountability*

2.3.3.4. Tab D: FOD walk procedures:

2.3.3.4.1. FOD walk checklist

2.3.3.4.2. Map of FOD Walk Area of Responsibilities (AOR)

2.3.3.4.3. Weekly FOD walk log; provided by 36 WG FOD/DOP Manager.

2.3.3.5. Tab E: Miscellaneous/Memos

2.3.4. FOD/DOP bulletin boards will be maintained and kept current by each section, work center, or facility that works in the flightline area or on any flightline related equipment. The FOD/DOP bulletin board should be located in a conspicuous location to increase individual awareness of FOD/DOP. Multiple shops in the same area can use a common FOD/DOP bulletin board. All required material can be obtained by contacting the 36 WG FOD/DOP Manager at DSN: 315-366-2286 or duty cell: 671-688-0352.

2.3.5. FOD/DOP bulletin board required contents are the following:

2.3.5.1. The 36 WG FOD Prevention Policy letter

2.3.5.2. The 36 WG FOD/DOP Manager poster.

2.3.6. The following are FOD Monitor duties during 36 WG FOD walks:

2.3.6.1. Attend the FOD Monitor pre-planning briefing prior to starting the FOD walk.

2.3.6.2. Ensure FOD walk line is straight and maintains a forward progress.

2.3.7. The units FOD/DOP Monitors are also members of the Junior FOD Prevention Committee.

2.3.7.1. Attend the quarterly and/or monthly FOD/DOP Program Committee meetings as required.

3. FOD Prevention Committees.

3.1. IAW DAFI 21-101, paragraph 11.8.7. the following personnel are also appointed to the 36th Wing Senior FOD Prevention committee and must attend:

3.1.1. The Commander and Superintendents of: 734th Air Mobility Squadron (734 AMS), 4th Reconnaissance Squadron (4 RS) and Helicopter Sea Combat Squadron 25 (HSC-25).

3.1.2. The 36 WG Senior FOD Prevention Committee reviews the progress of the FOD Prevention Program and provides policy recommendations to the 36 WG/CD to ensure a successful program.

4. The 36th Civil Engineer Squadron (CES) Responsibilities.

4.1. Provide powered sweepers for aircraft parking ramps, taxiways, runways, flightline access roads and other areas of the airfield as required per paragraph 6.1.3. of this instruction.

4.2. Ensure recently swept areas are FOD free upon completion of sweeping operations to ensure the actions have not created a FOD hazard such as broken bristles or broken taxiway lights.

4.3. Ensure vegetation growth is controlled and maintained for all aircraft parking ramps, taxiways, runways, flightline access roads and other areas of the airfield.

4.4. Provide monthly serviceability status of sweepers and hourly usage to the 36 WG FOD/DOP Manager, email to UDG_36MXG_QA@us.af.mil for inclusion in the monthly/quarterly Senior FOD Prevention Committee meeting.

4.5. Provide assistance and technical advice to the 36 WG FOD/DOP Manager and Senior FOD Prevention Committee for pavement repairs, airfield construction, and other functions that fall under 36 CES.

4.6. Ensure all contractors performing airfield repair work are properly trained on the USAF FOD prevention program and supplied with all required vehicle flightline driving items.

5. Unit Vehicle Control Non-Commissioned Officer (VCNCO) Responsibilities.

5.1. Shall ensure all vehicles driven on the flightline are equipped with a FOD kit (FOD pick tool, FOD container and flashlight). Each FOD container will be emptied after each shift.

5.2. For all permanently assigned vehicles, the 36 WG FOD/DOP manager, 36 MXG QA or support section where the vehicle is assigned will: ensure FOD pick tool, FOD container and flashlight are individually annotated on the back of the AF Form 1800, *Operator's Inspection Guide and Trouble Report* and are etched or stamped with the vehicle registration number.

5.3. Initiate a lost tool report, 36 WG AF145, *Lost Tool/Object Report*, for any lost or missing FOD kit item(s).

5.3.1. - 5.3.4. DELETED.

5.4. - DELETED.

6. Unit AOR for FOD walks, and street sweeper. *see attachment 2***.**

6.1. Aircraft spot and hangar FOD inspections will be performed on aircraft parking spot locations prior to all engine starts, after aircraft taxi and before taxiing aircraft are allowed to recover back to the parking spot. Additionally, perform FOD inspections of hangars and parking spots prior to performing any towing operations.

6.1.1. The 36th Maintenance Squadron (36 MXS) will FOD walk the outside of Hangars 2 through 4 once a week, to include throat area and between Bravo taxi lanes and the hangars.

6.1.2. The 36th Logistics Readiness Squadron (36 LRS) will FOD walk the gate 4 entrance and truck filling station located near gate 4 once a week.

6.1.3. The 36th Operations Support Squadron (36 OSS) will coordinate a sweeper truck schedule with 36 CES for all taxi lanes, taxiways, runways, ramps and unused aircraft parking areas Monday through Friday.

6.1.4. The 734 AMS will conduct a FOD walk once a week between spots S-79 to S-98.

6.1.5. HSC-25 will FOD walk the North Ramp 1 helicopter parking area and hangar once a week.

6.1.6. All deployed and TDY units will FOD walk their assigned parking areas daily, prior to and after every aircraft launch, recovery, and engine run operations.

6.1.6.1. All deployed and TDY units will FOD walk their assigned flightline work centers once a week.

6.1.7. The 36th Expeditionary Aircraft Maintenance Squadron (36 EAMXS) will FOD walk Hangar 5 once a week when not in use by TDY/Deployed units.

6.1.8. The 36th Munitions Squadron (36 MUNS) will conduct FOD inspections of all vehicles, trailers, pallets, and equipment prior to entering the flight line.

6.1.9. The 4 RS will FOD walk Hangar 1 once a week, to include the throat area between Alpha/Bravo taxi lane and the hangar. RQ-4 Global Hawk parking spots will be FOD walked prior to and after every aircraft launch, recovery and engine run operation.

7. Maintenance Operations Center (MOC) Responsibilities.

7.1. When a FOD/DOP incident occurs, immediately notify 36th Maintenance Group Quality Assurance (36 MXG/MXGQ), 36 WG/FOD Manager (36 MXG/MXGQ) at DSN: 315-366-2286, 36th Maintenance Group MOC (36 MXG/MXOC) at DSN: 315-366-4321 and 36th Wing Safety (36 WG/SE) at DSN: 315-366-3325 of the incident.

7.2. Coordinate with Airfield Management at DSN: 315-366-4188 for dispatch of street sweepers for FOD removal.

7.2.1. Notify the 36th Wing Flight Safety office at DSN: 315-366-3325 for all bird strikes. Maintenance personnel will collect all bird remains in a plastic bag and to Flight Safety personnel with a completed AF IMT 853, *Air Force Wildlife Strike Report*.

7.3. - DELETED.

8. Reporting/Investigation.

8.1. All tenant units will follow the published FOD/DOP incident reporting procedures for their respective command. Forward a copy of any reports to the 36 WG FOD/DOP Manager at UDG_36MXG_QA@us.af.mil for trend analysis.

8.2. All FOD/DOP incidents will be reported and investigated by the 36 WG FOD/DOP Manager. All units shall notify 36 MXG MOC at DSN: 315-366-4321. The 36 MXG MOC will initiate the FOD/DOP Critical Action Checklist.

8.3. For installed engine FOD, enter a “RED-X” in the AFTO Form 781A, *Maintenance Discrepancy and Work Document,* with the discrepancy, “Suspected/Actual FOD to Engine #.” Stop all maintenance on the affected engine, notify 36 MXG MOC at DSN: 315-366-4321, and do not continue until authorized by the 36 MXG/CC or designated representative with assistance from the 36 WG FOD/DOP Manager (36 MXG/MXGQ), 36th Wing Safety (36 WG/SE), or 36 MXG QA (36 MXG/MXGQ) as needed.

8.4. For confirmed engine FOD, the 36 WG FOD/DOP Manager will initiate a FOD report. The 36 WG/SE may appoint an investigation officer for reportable FOD events under the provisions of DAFI 91-204. The 36 WG/SE then controls all aspects of the investigation and reporting.

8.5. All units will notify 36 MXG MOC at DSN: 315-366-4321, 36 MXG QA, 36 WG FOD/DOP Manager at DSN: 315-366-2286 for any aircraft tires damaged by FOD prior to wheel and tire assembly removal.

9. General FOD Prevention.

9.1. All units will make every attempt to remove FOD from the flightline. If an object is too large, awkward or hazardous to be removed (i.e. damaged pavement or parking areas) contact Airfield Management at DSN: 315-366-4188 or by radio on the "RAMP" net with specific location and description of the object.

9.2. Personnel performing engine inlet and exhaust inspections will remove all loose articles of clothing, Restricted Area Badges and any items outlined in MDS specific guidance prior to performing the inspections.

9.3. Remove and secure Restricted Area Badges within 25 feet of operating engine(s).

EXCEPTION: Line badges can be secured inside of an armband pouch.

9.4. Wear of headgear is prohibited on the flightline, except:

9.4.1 The wear of required safety headgear items.

9.4.2. The wear of rain gear hoods is allowed but must be stowed within 25 feet of operating aircraft engines.

9.4.3. In order to effectively prevent thermal injury to flightline personnel, the boonie (campaign/floppy) hat may be worn as long as the chin strap is tightened down, and the hat is secured on the individual's head. Headgear will not be worn within 25 feet of running engines.

9.5. Glass bottles are not authorized on the flightline. Food or drinks are not authorized in industrial work areas exposed to toxic materials, chemicals, or industrial shop contaminants IAW DAFMAN 91-203, *Air Force Occupational Safety, Fire, and Health Standards,* paragraph 14.4.2.

9.6. All aircraft shall utilize owning wing cockpit FOD prevention guidance.

10. Vehicle Operator/Vehicle FOD Prevention Requirements.

10.1. Be familiar with 36WGI 13-213, *Andersen AFB Airfield Driving*, and adhere to all airfield signs and notifications. Perform vehicle tire FOD checks where specified or appropriate.

10.2. All vehicles that access the flightline will be free of litter, rocks or other debris to include tires, engine compartment, interior, and exterior of the vehicle. All vehicles accessing the flightline are subject to FOD checks.

10.2.1. Additional equipment for vehicles (i.e. chocks, extension cords) will be annotated on the vehicle inspection form.

10.2.2. Inspect bumper magnet (if installed) and remove debris daily.

10.3. Vehicle operators will perform a roll-over FOD check on all vehicle and equipment tires as follows (Note: vehicle operator shall properly wear the seat belt when vehicle is in motion):

10.3.1. Shut off ignition if the driver's seat is to be vacated.

10.3.2. Set the parking brake prior to getting out of the vehicle.

10.3.3. Ensure all doors are closed during the tire check.

10.3.4. Inspect the vehicles tire tread groove areas from sidewall to sidewall.

10.3.5. Re-enter vehicle, release parking brake, re-start ignition, and pull forward enough to expose bottom of tread groove, approximately 180 degrees, then re-perform items 10.3.1. through 10.3.4.

10.3.6. Failure to accomplish proper FOD checks may result in temporary suspension of flightline driver's license AF IMT 483, *Certificate of Competency,* IAW 36WGI 13-213.

10.4. Emergency vehicles responding to emergencies are exempt from vehicle FOD checks unless time permits (e.g., if emergency aircraft will not land for more than 15 minutes).

10.5. A flashlight will be utilized to accomplish FOD checks during hours of darkness.

10.6. Vehicle operators will inspect vehicles transporting equipment and other items to ensure items are secured.

10.7. For non-high pressure split wheel rims, metal valve stem caps will be removed (plastic caps required on GOV tires).

10.8. Vehicle operators will only use authorized Entry Control Points (ECPs).

10.9. Pintle hook pins will be secured to the vehicle with a lanyard and installed in the hook locking mechanism at all times. Pintle hooks shall be closed at all times when not in use.

10.10. Inspect all rolling equipment for FOD after any maintenance and prior to flightline entry.

10.11. Vehicle operators are responsible for monitoring and emptying the FOD container after each work shift.

11. FOD Prevention Incentive Program.

11.1. The 36 WG FOD Prevention Incentive Program requires active involvement at both the organizational and individual levels. The intent of the program is to reward FOD conscious personnel who take extra steps to identify and correct potential FOD hazards both on and off the flightline. The 36 WG FOD Manager oversees the program.

11.2. The FOD Fighter of the Month award promotes attention to detail by identifying and eliminating potential sources of FOD.

11.2.1. Submit FOD award nominations to 36 WG FOD/DOP Manager at UDG_36MXG_QA@us.af.mil with the name of the individual who found the

item(s), a contact number, date, time, and where the item(s) were found on the airfield. All submissions are due by the last duty day of each month.

11.3. The FOD Poster Contest promotes awareness and prevention. Poster submissions may be hand drawn or computer generated. A poster will be selected quarterly and may be enlarged and posted on unit FOD bulletin boards.

11.4. All FOD Prevention Incentive Program winners receive a Certificate of Recognition from the 36 WG/CD and a 1-day pass. Use of the 1-day pass should be coordinated with your supervisor.

12. Dropped Object Program.

12.1. Whenever a dropped object is discovered on assigned or transient aircraft:

12.2. The identifying squadron will notify 36 MXG MOC immediately.

12.2.1. Use ACC DO Investigation and AMU FOD/DO excel worksheets to document findings; these can be obtained from the 36 WG FOD/DOP Manager at DSN: 315-366-2286. Please refer to Paragraph 8 of this instruction for reporting procedures.

12.2.2. The unit Director of Operations/Maintenance Superintendent will ensure the DO investigation worksheets are completed and forwarded to the 36 WG FOD/DOP Manager at UDG_36MXG_QA@us.af.mil within 24 hours.

13. Composite Tool Kit (CTK)/Tool Control Procedures.

13.1. All tools in aircraft-related maintenance areas will be marked with permanent identifiers and tracked by the owning work center. All personnel in aircraft-related maintenance areas will perform a 100% accounting of their tools upon entry and before exiting these areas.

13.2. Emergency vehicles responding to real-world emergencies from a flightline location to an off flightline location will account for tools upon termination of the emergency incident.

14. Lost Tool/Object Procedures.

14.1. IAW DAFI 21-101_PACAFSUP, *Aircraft and Equipment Maintenance Management*, Table 8.9., the 36 WG AF145, *Lost Tool/Object Report*, will be initiated and routed if the item is not found after completing an initial search. The section supervisor or flight OIC/NCOIC will initiate a 36 WG AF145, which can be found on Attachment 3 and will contact the 36 MXG MOC to obtain a control number. MOC will run Lost Tool/Item Checklist procedures and notify all applicable members. The 36 MUNS will follow guidance outline in DAFMAN 21-200, *Munitions and Missile Maintenance Management*, Paragraph 9.6.

14.2. Complete 36 WG AF145 and applicable supplements.

14.3. Once initiated, the 36 WG AF145 must be completed even if the lost tool/item is found after the initial notification.

14.4. The individual and supervisor will conduct a search. If the lost tool or object was in a shop and aircraft components were involved, the appropriate components/location will be inspected.

14.5. The search will be terminated upon request of the section supervisor with concurrence of the Director of Operations/MX SUPT.

14.6. The 36 WG AF145 will be kept for 12 months in the tool room or work center CTK continuity binder.

14.7. The original completed copy 36 WG AF145 will be delivered to 36 MXG Quality Assurance office in building 17000 or emailed to 36 MXG QA organization box at UDG_36MXG_QA@us.af.mil within 5 duty days of initiation.

14.8. If a previously lost item is found, contact 36 MXG QA at DSN: 315-366-2286 to update the lost tool report.

THOMAS B. PALENSKE,
Brigadier General, USAF
Commander

Attachment 1

GLOSSARY OF REFERENCES AND SUPPORTING INFORMATION

References

DAFI 21-101, *Aircraft and Equipment Maintenance Management*, 20 Dec 2023

DAFMAN 91-203, *Air Force Occupational Safety, Fire and Health Standards*, 25 Mar 2022

DAFI 91-204, *Safety Investigations and Reports*, 10 Mar 2021

DAFI 21-101_PACAFSUP, *Aircraft and Equipment Maintenance Management*, 13 Dec 2024

36WGI 13-213, *Andersen AFB Airfield Driving*, 10 Jun 2014

Prescribed Forms

36 WG AF145, *Lost Tool/Object Report*, 15 Nov 2017

Adopted Forms

DAF Form 847, *Recommendation for Change of Publication*, 15 Apr 2022

AF FORM 483, *Certificate of Competency*, 13 May 2020

AF IMT 853, *Air Force Wildlife Strike Report*, 15 Oct 2005

AF FORM 1800, *Operator's Inspection Guide and Trouble Report*, 1 Apr 2010

AFTO FORM 781A, *Maintenance Discrepancy and Work Document*, 28 Jun 2017

Abbreviations and Acronyms

CC—Commander

CTK—Composite Tool Kit

DAFI—Department of the Air Force Instruction

DO—Dropped Object

DOP—Dropped Object Program

FO—Foreign Object

FOD—Foreign Object Damage/Debris

IAW—In Accordance With

IMT—Information Management Tool

MOC—Maintenance Operations Center

MXG—Maintenance Group

OG—Operations Group

OPR—Office of Primary Responsibility


OSS—Operations Support Squadron

POL—Petroleum Oil Lubricants

QA—Quality Assurance

Attachment 2

Figure A2.1. 36WG Units' FOD Walk Area of Responsibilities.

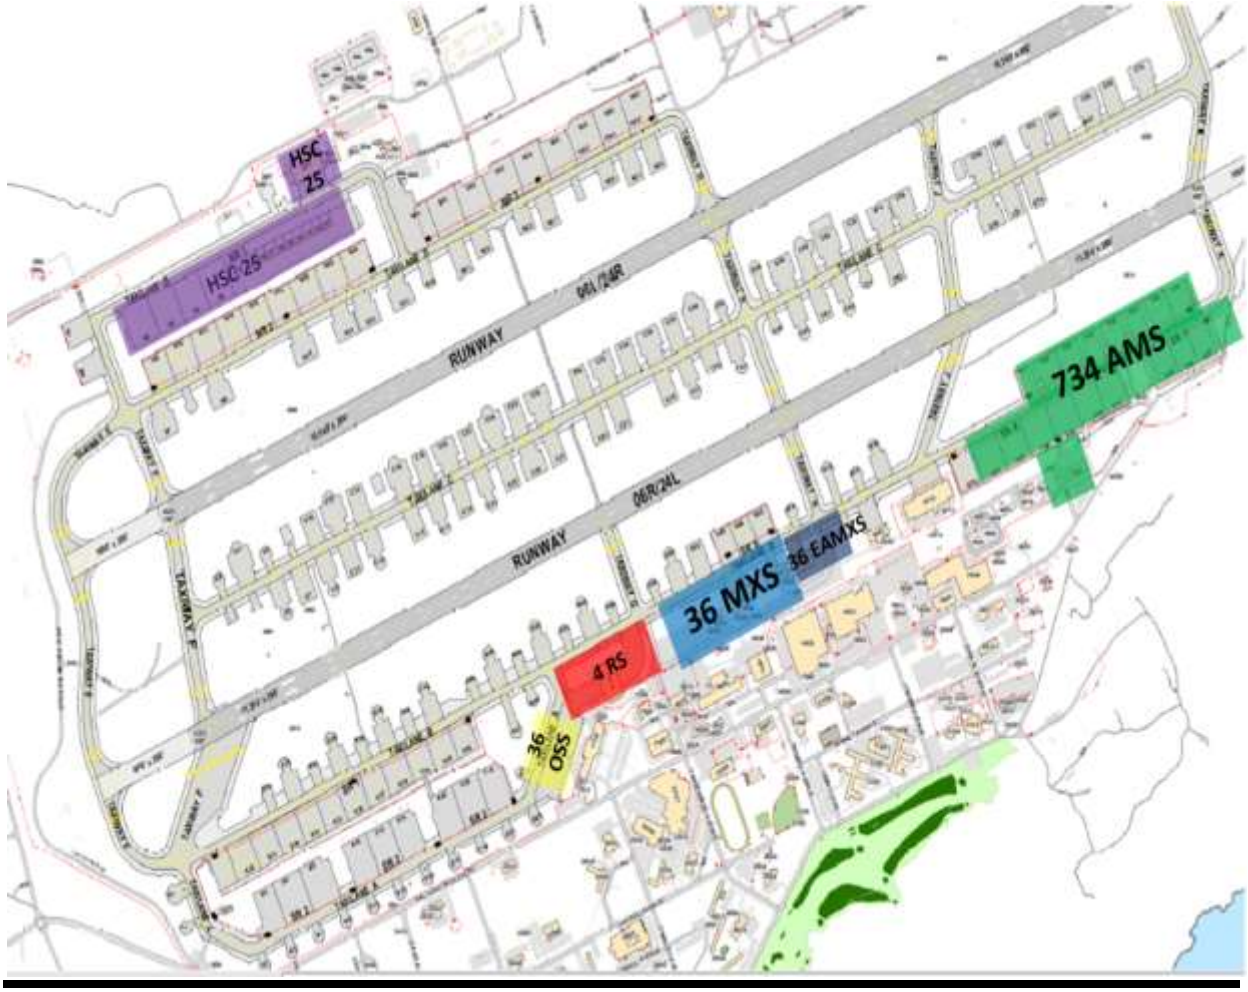

Attachment 3

Figure A3.1. The 36WG AF145, *Lost Tool/Object Report.*

LOST TOOL/OBJECT REPORT			PAGE OF PAGES	
BASE	AIRCRAFT SERIAL NUMBER	ORGANIZATION AND W/C	DATE(S)	TIME LOST
COMPOSITE TOOL KIT NUMBER	DESCRIPTION OF OBJECT	AFTO 781A PAGE BLOCK	AIRCRAFT IMPOUNDED: YES NO TIME DATE	
W/C SUPV NOTIFIED *(Last Name, Initial)* NAME T	MAINT SUPV NOTIFIED *(Last Name, Initial)* N A	MOC NOTIFIED *(Last Name, Initial)* NAME T	CTK CUSTODIAN NOTIFIED *(Last Name, Initial)* NAME T	QA NOTIFIED *(Last Name, Initial)* NAME T
AREA ITEM LOST				
ITEM NO.	MAINTENANCE SUPERVISOR/SUPERINTENDENT WILL		INDIVIDUAL	TIME/DATE
1	NAME OF INDIVIDUAL(S) THAT LOST OBJECT			
2	WORK BEING PERFORMED WHEN ITEM LOST			
3	AREAS CHECKED AND STEPS TAKEN TO FIND OBJECT			
4	SEARCH CONDUCTED BY *(List all Individuals)*			
5	ITEM WAS/WAS NOT FOUND *(If found, give location)*			
6	COPY OF FORM FILED BY CTK CUSTODIAN			
7	FORM FILED BY RECORDS CLERK (*If Applicable)*			
8	SIGNATURE OF MAINTENANCE SUPERVISOR/SUPERINTENDENT			
36 WG AF145 20171115				