BY ORDER OF THE COMMANDER
OKLAHOMA CITY AIR LOGISTICS COMPLEX

OKLAHOMA CITY AIR LOGISTICS COMPLEX INSTRUCTION 48-103

17 SEPTEMBER 2026

Aerospace Medicine

RESPIRATORY PROTECTION PROGRAM

COMPLIANCE WITH THIS PUBLICATION IS MANDATORY

ACCESSIBILITY: Publications and forms are available on the e-Publishing website at **www.e-Publishing.af.mil** for downloading or ordering

RELEASABILITY: There are no releasability restrictions on this publication

---

OPR: OC-ALC/SE

Certified by: OC-ALC/SE
(Mr. Matthew Mercer)

Supersedes: OC-ALCI48-103, 21 September 2020

Pages: 31

This publication implements and extends the requirements of Occupational Safety and Health Administration (OSHA) Standard 29 Code of Federal Regulations (CFR) 1910.134, *Respiratory Protection*, Department of the Air Force Instruction (DAFI) 48-137, *Respiratory Protection Program*, and Tinker Air Force Base Instruction (TINKERAFBI) 48-103, *Respiratory Protection Program*. It provides guidance and procedures for implementing the Oklahoma City Air Logistics Complex (OC-ALC) Respiratory Protection Program (RPP). This publication applies to all OC-ALC military and civilian members as well as contractors with a contractual obligation to OC-ALC. This publication may not be supplemented. Refer recommended changes and questions about this publication to the office of primary responsibility (OPR) using the Department of Air Force (DAF) Form 847, *Recommendation for Change of Product*; route DAF Forms 847 from the field through the appropriate functional chain of command. Requests for waivers must be submitted to the OPR listed above for consideration and approval. Ensure all records generated as a result of processes prescribed in this publication adhere to Air Force Instruction (AFI) 33-322, *Records Management and Information Governance Program*, and are disposed of in accordance with the Air Force Records Disposition Schedule, which is located in the Air Force Records Information Management System (AFRIMS). This publication requires the collection, maintenance, and use of Personally Identifiable Information (PII) subject to the Privacy Act of 1974. Systems of Records Notices (SORNs) F044 AF SG Q, *Occupational Health Records*, and F044 AF SG R, *Respiratory Protection Program Records*, apply. The use of the name or mark of any specific manufacturer, commercial product, commodity, or service in this publication does not imply endorsement by the Department of the Air Force.

SUMMARY OF CHANGES

This document has been extensively revised and must be completely reviewed. Changes include reorganizing paragraphs and terminology to align with the Department of the Air Force Manual (DAFMAN) 90-161 publication standards; expanding procedural guidance on the inspection, maintenance, and issuance of Powered Air-Purifying Respirators (PAPR) and Supplied Air Respirators (SAR) utilizing loose-fitting hoods; clarifying mandatory workplace binder contents (Tabs A through J); and updating form references and operational roles across group, squadron, and shop levels.

Chapter 1—PROGRAM OVERVIEW **5**

1.1. Overview of OC-ALC RPP. 5

1.2. Core Program Elements. 5

Chapter 2—ROLES AND RESPONSIBILITIES **6**

2.1. The 72d Operational Medical Readiness Squadron (72 OMRS/Bioenvironmental Engineering [BE]) must: 6

2.2. OC-ALC Safety Office (OC-ALC/SE) must: 6

2.3. Group level Commanders and Directors must: 6

2.4. 776th Maintenance Support Squadron (776 MXSS) must: 6

2.5. Squadron-Level Commanders and Directors must: 7

2.6. Supervisors Assigned as the RPP Administrators must: 7

2.7. Employees must: 8

Chapter 3—RESPIRATORY PROTECTION REQUIREMENTS **10**

3.1. Supplied Breathing Air Systems. 10

3.2. Compressed Supplied Breathing Air Systems. 10

3.3. Low Pressure Supplied Breathing Air Systems (Fresh Air Pumps). 10

3.4. Air Purifying Respirators. 10

3.5. Negative Pressure Air Purifying Respirators. 11

Chapter 4—PERSONAL RESPIRATORY PROTECTION EQUIPMENT MAINTENANCE AND ANNUAL INSPECTION REQUIREMENTS **12**

4.1. General Requirements for Respirator Maintenance. 12

4.2. General Requirements for Respirator Inspection. 12

Chapter 5—WORKPLACE/SHOP SPECIFIC RESPIRATORY PROTECTION PROGRAM ELEMENTS **14**

5.1. When using electronic means to convey the RPP, all employees must have immediate access to all required program elements. 14

5.2. All documentation required by this section must be made available in the work center/shop for inspection when requested. 14

Chapter 6—EVALUATION OF USER KNOWLEDGE AND THE EFFECTIVENESS OF RESPIRATORY PROTECTION PROGRAM TRAINING 16

6.1. The supervisor will at least every 12 months accomplish a meeting with shop personnel. 16

6.2. The demonstration of knowledge must. 16

6.3. Supervisors must use OC-ALC Form 106. 16

Chapter 7—ASSESSMENT OF EMPLOYEE VIEWS ON AND EVALUATION OF EFFECTIVENESS OF THE SHOP RESPIRATORY PROTECTION PROGRAM 17

7.1. The OSHA Respiratory Protection Standard 29 CFR 1910.134(l) 17

7.2. The results of the assessment of employee views. 17

7.3. The factors listed in items 7.4.1 through 7.4.4 of this section are required by 17

7.4. Factors to be assessed must include but are not limited to the following: 17

7.5. A medical evaluation is required if observations made during this program evaluation indicate a medical evaluation is needed. 17

7.6. Supervisors must record the assessment of employee views, identification of problems, and corrective actions. 17

Attachment 1—GLOSSARY OF REFERENCES AND SUPPORTING INFORMATION 18

Attachment 2—AFMC FORM 315, SUPERVISOR SAFETY INSPECTION RECORD (EXAMPLE) 21

Attachment 3—OC-ALC FORM 107, ANNUAL RESPIRATOR PROGRAM REVIEW AND APPROVAL (EXAMPLE) 22

Attachment 4—OC-ALC FORM 103, REQUEST FOR SAFETY EYEWEAR (EXAMPLE) 23

Attachment 5—EMPLOYEE QUICK REFERENCE SHEET 24

Attachment 6—FLOW CHART FOR SUPERVISOR TRAINING 26

Attachment 7—FLOW CHART OF EMPLOYEE MEDICAL QUALIFICATION, TRAINING AND FIT TESTING FOR TIGHT FITTING RESPIRATORY PROTECTION. 27

Attachment 8—FLOW CHART OF EMPLOYEE MEDICAL QUALIFICATION AND TRAINING FOR LOOSE FITTING RESPIRATORY PROTECTION 28

Attachment 9—FLOW CHART REGARDING AUTHORIZATION TO USE AND TRAINING FOR FILTERING FACEPIECE DEVICES (FFPDS) (I.E., DUST MASKS) 29

Attachment 10—OC-ALC FORM 106, ANNUAL EVALUATION OF USER KNOWLEDGE AND THE EFFECTIVENESS OF RESPIRATORY PROTECTION PROGRAM TRAINING 30

Attachment 11—OC-ALC FORM 104 ASSESSMENT OF EMPLOYEE VIEWS ON AND EVALUATION OF EFFECTIVENESS OF THE SHOP RESPIRATORY PROTECTION PROGRAM 31

Chapter 1

PROGRAM OVERVIEW

1.1. Overview of OC-ALC RPP. This instruction establishes the OC-ALC RPP elements that implement and incorporate extended guidance and criteria for all OC-ALC personnel. This instruction primarily applies to the use of respiratory protective devices during the execution of operations in industrial worksites. Except where more stringent requirements are specified in this instruction, the RPP must adhere strictly to the mandates of 29 CFR 1910.134, *OSHA Respiratory Protection Standard*.

1.2. Core Program Elements. The OC-ALC RPP consists of several mandatory, interrelated elements designed to ensure comprehensive worker protection. These include worksite hazard assessments (conducted by Bioenvironmental Engineering(BE)), medical evaluations, precise respirator selection, qualitative and quantitative fit testing, proper maintenance and storage procedures, and annual employee training. **Note:** Full compliance with each element is required prior to any employee being authorized or directed to wear a respirator.

Chapter 2

ROLES AND RESPONSIBILITIES

2.1. The 72d Operational Medical Readiness Squadron (72 OMRS/Bioenvironmental Engineering [BE]) must:

2.1.1. Identify tasks requiring respiratory protection (RP) in the Industrial Hygiene (IH) Assessment Letter.

2.1.2. Develop, review, and issue the Workplace Respirator Program Supplemental Information (WRPSI) to the Squadron Commanders and Directors having personnel covered by the RPP.

2.1.3. Notify supervisors who have employees covered by the RPP of required initial and annual medical qualifications and fit-test appointments.

2.1.4. Provide comprehensive RPP training for supervisors.

2.1.5. Review and approve all compressed breathing air supply sources prior to unit procurement.

2.2. OC-ALC Safety Office (OC-ALC/SE) must:

2.2.1. Provide authoritative safety guidance to supervisors and employees regarding compliance with this instruction.

2.2.2. Approve, in writing, the official maintenance and service tag affixed to the breathing air compressors operated by 776th Maintenance Support Squadron(776 MXSS) to document breathing air system maintenance. **Note:** The documentation may be an Air Force form/tag, Department of Defense (DoD) form/tag, or commercially available form/tag meeting the requirements of 29 CFR 1910.134 (i)(5)(iv).

2.3. Group level Commanders and Directors must:

2.3.1. Designate an OPR to ensure that all compressed breathing air systems, carbon monoxide (CO) monitor/sensors, oxygen (O_2) monitor/sensors, and breathing air distribution panels are assigned an official Oklahoma City Number (OC#). **Note:** The procedure specified in OC-ALCI 21-103, *Equipment Maintenance/Inspection and Documentation* must be followed to obtain an OC#. The 76th Maintenance Support Group (76 MXSG) Equipment Engineering Office is the primary point of contact (POC) for this procedure.

2.3.2. Enforce full execution and compliance with the RPP for their unit when required by the IH Assessment Letter.

2.4. 776th Maintenance Support Squadron (776 MXSS) must:

2.4.1. Ensure compressor systems used to supply breathing air have an approved inspection form/tag affixed at the compressor complying with 29 CFR 1910.134(i)(5)(iv), documenting the authorized technician's name and service completion date IAW manufacturer specifications. Maintenance must include, at a minimum, servicing and replacing filters, sorbent beds, and desiccant driers to guarantee breathing air quality meets Grade D standards outlined in 29 CFR 1910.134(i)(1)(ii).

2.4.2. Ensure the 776th Analytical Chemistry Laboratory conducts air quality testing for all compressed breathing air sources.

2.5. Squadron-Level Commanders and Directors must:

2.5.1. Ensure the OC-ALC Respiratory Protection Self-Assessment is accomplished semi-annually (every six months) as an integral component of the OC-ALC Self-Assessment Program and verify the results are entered into the Management Internal Control Toolset (MICT) Self-Assessment Program database.

2.5.2. Strictly prohibit the issue of or use of RP equipment or parts that are not National Institute for Occupational Safety and Health (NIOSH)-approved for the specific respirator assembly.

2.5.3. Ensure all compressed breathing air supply sources (e.g., compressors, filter and conditioning equipment, compressed breathing air cylinders etc.) are approved by BE prior to procurement.

2.5.4. Ensure individual shop supervisors establish and maintain the standardized RPP documentation binder (Tabs A through J) as prescribed in paragraphs **5.2.1 through 5.2.13**.

2.6. Supervisors Assigned as the RPP Administrators must:

2.6.1. Ensure that RP equipment used by their employees complies with the current BE shop-specific WRPSI and IH Assessment Letters issued by BE.

2.6.2. Comply with this instruction, TINKERAFBI 48-103, DAFI 48-137, *Respiratory Protection Program* and 29 CFR 1910.134 (OSHA). Direct all questions regarding this instruction to OC-ALC/SE.

2.6.3. Verify that initial and annual BE-provided training is formally tracked and documented in the Training Scheduling System (TSS).

2.6.4. Ensure personnel appointed to issue or maintain respirators (including PAPR power packs, hoses, batteries, and filter cartridges) receive initial workplace-specific training upon appointment, and at least every 12 months thereafter.

2.6.4.1. Retrain personnel whenever an employee exhibits lack of understanding, improper technique, or insufficient skill in RPP equipment usage.

2.6.4.2. Retrain personnel when workplace hazards change or when new RP equipment models are introduced, rendering previous training obsolete.

2.6.5. Maintain sufficient stock levels of RP equipment, ensuring that while one respirator is out for cleaning or repair that another respirator is available for use in the work area. If the shop has an appointed issuer for respirators, and/or maintainer for respirator repair and service, the supervisor must ensure enough parts are on hand for the person appointed to keep respirators serviceable. **Note:** See **Chapter 4** for maintenance and repair procedures.

2.6.6. Ensure employees conduct pre-use inspections on their assigned RP equipment prior to each use IAW inspection procedures that are outlined in **Attachment 5** of this instruction and the RPP training received from the shop supervisor.

2.6.7. Ensure the service start time and date are written on the filter of a PAPR except when the cartridge is to be disposed of at, or before, the end of one shift.

2.6.8. Refer to Attachments **7 and 8** of this instruction for assistance regarding the steps in each process for employee medical qualification, training and fit testing. Refer to **Attachment 9** for assistance regarding the process to request a shop evaluation for approval to use Filtering Facepiece Devises (FFPDs), and for training.

2.6.9. Ensure employee fit test dates are documented in the TSS electronic database.

2.6.10. Use the employee's current Fit Test Report to verify that the tight-fitting respirator issued exactly matches the manufacturer, model, and size of tight-fitting respirator for which they have been successfully fit-tested.

2.6.11. Ensure a new fit test is accomplished whenever an employee experiences any physical changes (e.g., weight gain or loss of 10% or more, injury, surgery or dental work which results in a change to the facial structure or shape, etc.) that could affect the respirator's fit. Contact BE directly at (405) 734-7844 if there are any questions. **Note:** Fit testing will not be conducted for personnel that are not clean shaven.

2.6.12. Ensure that respirator cleaning and disinfectant wipes are approved for use IAW 29 CFR 1910.134, Appendix B-2 and the respirator manufacturer recommendations.

2.6.13. Ensure that all RP equipment is cleaned and sanitized IAW the procedure specified in the shop specific WRPSI Letter received from BE and the manufacturer's instructions. The current WRPSI letter must be maintained behind Tab B of the shop's RPP binder or electronic equivalent.

2.6.14. Ensure annual respirator inspections are conducted IAW **paragraph 4.2** of this instruction.

2.6.15. Follow your unit's safety eyewear procurement procedure using **Attachment 4** of this instruction as an example when corrective lenses are needed while wearing a tight-fitting respirator. **Note:** If employee must wear corrective lenses, and they elect to wear contact lenses with any authorized respirator, the contact lenses will be purchased by the individual.

2.6.16. Ensure all program elements are met in accordance with **Chapter 5** of this instruction.

2.6.17. Hold a meeting with shop personnel at least every 12 months to evaluate the effectiveness of the shop specific training and document demonstration of respirator user knowledge of the RPP requirements IAW **Chapter 6** of this instruction.

2.6.18. Hold a meeting at least every 12 months with shop personnel to assess the employee's views on program effectiveness, the supervisor's identification of problems, and correction of the problems identified and document knowledge of these RPP requirements IAW **Chapter 7** of this instruction.

2.7. Employees must:

2.7.1. Follow the requirements of this instruction, and the Workplace Written Respiratory Protection Plan (WWRPP).

2.7.2. Refer to Attachments **7 and 8** of these instructions for assistance regarding the steps to take for employee medical qualification, training and fit testing. Refer to **Attachment 9** for assistance regarding the process for approval to use FFPDs.

2.7.3. Use prescription eyewear inserts with full face respirators when the employee requires the use of corrective lenses. The eyewear insert frames will be provided by the employees' work group. Lenses to fit the insert frames will be obtained using OC-ALC Form 103, *Request for Safety Eyewear* or electronic equivalent, provided by the workplace supervisor. A current optical prescription, no more than 12 months old, and a completed OC-ALC Form 103, or electronic equivalent, are required to order prescription eyewear.

2.7.3.1. Follow your unit's safety eyewear procurement procedure using **Attachment 4** of these instructions as an example when corrective lenses are needed while wearing a tight-fitting respirator. **Note:** If employee must wear corrective lenses, and they elect to wear contact lenses with any respirator, the contact lenses will be purchased by the individual.

2.7.4. Perform a seal check IAW 29 CFR 1910.134(g)(1)(iii) (i.e., the OSHA standard on RP) each time they don a tight-fitting air-purifying respirator. **Note:** See **Attachment 5**, Employee Quick Reference Sheet.

2.7.5. An employee covered by the RPP must inform their supervisor when the employee gains or loses more than 10% of their total body weight, has any facial or dental surgeries, or there is any other condition that might affect the shape of their face and respirator fit.

2.7.6. Inspect their assigned RP equipment before each use IAW the RPP training received from the shop supervisor. This inspection must include ensuring the size of respirator matches the size indicated on the current fit test report received from the BE Office. Additional recommended inspection procedures are outlined in **Attachment 5** of these instructions.

2.7.7. Follow the procedures outlined in the shop specific WRPSI letter received from BE and the manufacturer's instructions to clean, sanitize, maintain, and store respirators that are individually issued. Recommended procedures are outlined in **Attachment 5** of this instruction.

2.7.8. Ask their workplace supervisors for guidance; review RPP user instructions and training material; or contact BE or OC-ALC/SE directly if there are any questions or concerns.

2.7.9. Write the time and date when a new PAPR filter cartridge is placed in service on the face of the PAPR cartridge, except when a cartridge is disposed of at, or before, the end of one shift.

Chapter 3

RESPIRATORY PROTECTION REQUIREMENTS

3.1. Supplied Breathing Air Systems. Personal RP where tight-fitting masks or loose-fitting hoods have an air supply that delivers breathing air from a fresh air source and is conditioned to provide breathing quality air to the user IAW 29 CFR 1910.134(i).

3.1.1. General Requirements for Supplied Breathing Air Systems:

3.1.1.1. Industrial/Plant air compressors must not be used for supplied breathing air.

3.1.1.2. All compressed air and low pressure supplied air systems are required to be issued an OC# through 776 MXSS.

3.1.1.3. 776 MXSS will provide and maintain the approved breathing air maintenance and servicing tag for the compressed breathing air system at the compressor. **Note:** Tag will be approved by OC-ALC/SE, IAW 2.2.2 of this instruction.

3.1.1.4. Couplings and fittings used within the OC-ALC for breathing air supplied respirators must have conical shaped male plugs (Example: Schrader type). Breathing air equipment (e.g., hoses, air supply fittings to hoods, helmets, or compressor/ambient air pumps) must be procured with conical style couplings. **Note:** An exception may be made for NIOSH certified supplied air respirators used with low pressure ambient air pumps equipped with couplings from the manufacturer that are incompatible with outlets for non-respirable gases/supplied air systems in the shop. Retrofitting of existing couplings to the conical style may be accomplished if the NIOSH certification of the respirator is not compromised; retrofitting must be completed IAW the equipment manufacturer's instructions. All deviations from conical style couplings must be approved in writing by BE.

3.2. Compressed Supplied Breathing Air Systems.

3.2.1. Owning units operating compressed breathing air systems where the supervisors perform start-up and shutdown of the compressed breathing air system at the beginning and end of the work shift will document on the Air Force Technical Order (AFTO) Form 244, *Industrial/Support Equipment Record* annotating the system is functioning per manufacturer recommendations or in the absence of manufacturer instruction complies with 776 MXSS and BE requirements.

3.2.2. All compressed breathing air sources must have documentation that 776 MXSS Laboratory has performed the required breathing air quality tests.

3.3. Low Pressure Supplied Breathing Air Systems (Fresh Air Pumps).

3.3.1. Must be operated IAW the WRPSI and the manufacturer's operating instructions.

3.3.2. Must be inspected by the supervisor or designee to assure 776 MXSS maintenance is current per the manufacturer's requirements or the Air Force Sustainment Center (AFSC) Form 306, *Preventative Maintenance Instructions*.

3.4. Air Purifying Respirators. Personal RP where a filter is attached to the respirator to purify the air breathed by the user.

3.4.1. Powered Air Purifying Respirator Systems (PAPR).

3.4.1.1. The power unit, breathing air hose, helmet, hood, and headgear must be inspected and maintained by a trained individual per the manufacturer's recommendations that is appointed in writing by the supervisor IAW 4.1.3 of this instruction.

3.4.1.2. The power unit, breathing air hose, helmet, hood, and headgear must be stored per the manufacturer's recommendation.

3.4.1.3. Batteries for the power unit must be fully charged before issuing to a user.

3.4.1.4. Employees issued reusable individual hoods must be trained to inspect the hood and components per the manufacturer's recommendation and this instruction.

3.4.1.5. Employees issued disposable individual hood and headcovers must inspect the hood, headcover, assemblies, and breathing hose connection per the manufacturer's recommendations and/or the WRPSI.

3.4.1.6. Tight-Fitting Masks must be stored per the manufacturer's recommendations and/or the WRPSI.

3.4.1.7. Tight-Fitting Masks must be inspected and maintained per the manufacturer's recommendations and these instructions.

3.5. Negative Pressure Air Purifying Respirators.

3.5.1. Must be stored per the manufacturer's recommendations and/or the WRPSI.

3.5.2. Must be inspected and maintained per the manufacturer's recommendations.

Chapter 4

PERSONAL RESPIRATORY PROTECTION EQUIPMENT MAINTENANCE AND ANNUAL INSPECTION REQUIREMENTS

4.1. General Requirements for Respirator Maintenance.

4.1.1. Replacement of parts or repairs must: be done only by personnel trained in respirator maintenance and assembly. Personnel who are trained in respirator maintenance must have documentation of training by the supervisor.

4.1.2. Respirator maintenance may be accomplished by sending the RP equipment to the 569th Aircraft Maintenance Squadron Disassembly/Cleaning Section (569 AMXS/MXDPAA) respirator cleaning room in Building 2122 either by the individual user, or by an appointed respirator maintainer.

4.1.3. If respirators are cleaned and maintained "in-house" and not sent to the respirator cleaning room at Building 2122: the shop supervisor must appoint an employee or employees, in writing, as a maintainer who will be responsible for the maintenance (i.e., repair and replacement of parts) of respirators. A copy of the appointment letter must be placed behind Tab H of the shop's RPP binder. **Note:** 569 AMXS/MXDPAA, (Building 2122, 2nd floor, Post D-32, phone 405-734-8918), must provide cleaning and repair services on request. Work centers must provide a Job Order Number (JON) and replacement parts for required repairs as needed. The 569 AMXS/MXDPAA will not release respirators in need of parts or repair, until repairs are complete.

4.1.4. Maintenance must be performed IAW the manufacturer's instructions. In the absence of manufacturer's instructions, maintenance must be performed IAW sections **5.3. and 5.4. Attachment 5** to this instruction.

4.2. General Requirements for Respirator Inspection.

4.2.1. The shop supervisor must inspect all issued, in-use respirators annually regarding the condition and method of storage for each.

4.2.2. The inspection must be conducted at the time of issue to an employee and every 12 months thereafter. **Note:** Annual inspections are only required for those employees who have been issued respirators. In any given 12-month period some personnel may not perform duties requiring RP and therefore may not have been issued a respirator making the need for an annual inspection not required. Additionally, all respirators are not required to be inspected during the same inspection event. Supervisors responsible for many respirator users may inspect a portion of the total number each month but must ensure that all respirators are accounted for in a 12-month period.

4.2.3. The initial inspection and the annual inspection must be documented on Air Force Materiel Command (AFMC) Form 315, *Supervisor Safety Inspection Record* (refer **Attachment 2** of this instruction for an example). Information documented on the AFMC Form 315 for the inspection must include:

4.2.3.1. The employee's name.

4.2.3.2. The type of respirator inspected (e.g., tight fitting full face, PAPR, loose fitting air supplied air supplied helmet).

4.2.3.3. The required filter cartridges when applicable (e.g., cartridges used with a tight-fitting respirator or PAPR).

4.2.3.4. Discrepancies found at the time of the inspection. Examples include the following:

4.2.3.4.1. Incorrect size.

4.2.3.4.2. Incorrect cartridge.

4.2.3.4.3. Warped face seal area.

4.2.3.4.4. Torn, warped or missing exhalation and inhalation valves.

4.2.3.4.5. Incorrect hose for PAPR or incorrect air supply hose from ambient air pump or compressed breathing air connection.

4.2.3.4.6. Incorrect hood or shroud.

4.2.3.5. The corrective measures taken. If a discrepancy is corrected at the time of inspection the discrepancy and corrective action must be documented on the AFMC Form 315. If no discrepancies are found "No Findings" must be noted on the form. Additional suggested inspection items are outlined in **Attachment 5** of these instructions.

4.2.4. Tool crib supervisors with personnel who issue respirators from a tool crib must ensure respirators:

4.2.4.1. Have no defects.

4.2.4.2. Stored IAW guidance received from BE in the shop-specific WRPSI letter.

4.2.4.3. Maintained IAW the WRPSI and/or the manufacturer's instructions.

Chapter 5

WORKPLACE/SHOP SPECIFIC RESPIRATORY PROTECTION PROGRAM ELEMENTS

5.1. When using electronic means to convey the RPP, all employees must have immediate access to all required program elements. If using printed copies of standards and regulations to convey the RPP these printings must be current. Contact the BE or OC-ALC/SE for guidance.

5.2. All documentation required by this section must be made available in the work center/shop for inspection when requested. Note: The documents binder is outlined below:

5.2.1. Tab A – Annual Respirator Program Review and Approval OC-ALC Form 107. See **Attachment 3** of this instruction.

5.2.2. Tab B – Shop Specific Workplace Respirator Program Supplemental Information (WRPSI) letter received from BE. **Note:** This letter is updated by BE only as needed.

5.2.3. Tab C – OC-ALCI 48-103: Complete copy of this instruction.

5.2.4. Tab C1 – TINKERAFBI 48-103: Complete copy of this base instruction.

5.2.5. Tab D – DAFI 48-137 (or a memo stating how to access the instruction): If employees cannot freely access a copy of the DAFI on the internet through a work computer, the complete paper copy must be maintained in the binder.

5.2.6. Tab E – 29 CFR 1910.134 (or a memo stating how to access the OSHA Standard): If employees cannot freely access a copy of the OSHA Standard on the internet through a work computer, a complete paper copy must be maintained in the binder.

5.2.7. Tab F1 – Fit Test Reports: Copies of current Fit Test Reports, with the employee ID Number (i.e., social security number) blacked out, or a memo stating where the original reports are physically located. Copies of reports must be available for inspection in the shop when requested. **Note:** If the unit is using PAPRs with loose-fitting hoods a Memorandum for Record (MFR) stating the unit does not require fit tests.

5.2.8. Tab F2 – Training materials:

5.2.8.1. Copy of training materials used by the supervisor to conduct initial and annual training for personnel. Contact BE for guidance on what materials are to be used.

5.2.8.2. A copy of the Supervisor Training Lesson Plan used by BE to train supervisors, and a copy of the signed AF Form 3126, *General Purpose*, or equivalent for the supervisor.

5.2.8.3. A copy of the Filtering Facepiece Device Annual/Initial Training Outline from BE (if applicable).

5.2.9. Tab F3 – Industrial Hygiene Assessment Letter: Copies of the last two IH Assessment Letters, including addendum and amendment letters, and any air sampling letters received within the previous 24 months which directly apply to the RP requirement.

5.2.10. Tab G – AFMC Form 315: Current RPP AFMC Form 315 must be maintained until a subsequent AFMC Form 315 is completed.

5.2.11. Tab H – Respirator Maintainer/Issuer Documentation: Respirator Issuer/Maintainer Appointment Letter and Training Plan, or a memo stating it is not applicable and why it's not applicable.

5.2.12. Tab I – Breathing Air Quality Test Reports: Current Laboratory Test Report of breathing air quality received from 776th Maintenance Support Squadron Analytical Chemistry Section, (76 MXSS/MXDTA), for compressed breathing air sources, or a memo stating it is not applicable.

5.2.13. Tab J – Program Evaluation Forms: OC-ALC Forms 104, *Assessment of Employee Views on and Evaluation of Effectiveness of the Shop Respiratory Protection Program* and OC-ALC Form 106, *Annual Evaluation of User Knowledge and the Effectiveness of Respiratory Protection Program Training*. The forms must be maintained until a subsequent OC-ALC Forms 104 and 106 are completed.

Chapter 6

EVALUATION OF USER KNOWLEDGE AND THE EFFECTIVENESS OF RESPIRATORY PROTECTION PROGRAM TRAINING

6.1. The supervisor will at least every 12 months accomplish a meeting with shop personnel. To evaluate the effectiveness of the shop specific training, and document demonstration of respirator user knowledge of RPP requirements.

6.1.1. The OSHA Respiratory Protection Standard (29 CFR 1910.134(k)(1)) requires employees to demonstrate knowledge of at least the following items listed here in paragraphs **6.1.2** through **6.1.2.8.** **Note:** Contact the BE office for guidance.

6.1.2. Why the respirator is necessary.

6.1.3. How improper fit, usage, or maintenance would compromise the protective effect of the respirator.

6.1.4. The limitations and capabilities of the RP.

6.1.5. How the RP operates. Methods of operation include the following:

6.1.5.1. The respirator filters air from the area around the user, such as through a High Efficiency Particulate Air (HEPA) filter.

6.1.5.2. The respirator absorbs vapors or gas such as through organic vapor or acid gas cartridges.

6.1.5.3. Breathing air is provided from an uncontaminated source such as from an ambient air ("fresh air") pump, or an air compressor with proper filtration and sensors.

6.1.6. Limitations on the use of air-purifying respirators include prohibiting use in an oxygen deficient or immediately dangerous to life and health atmosphere.

6.1.7. How to use the respirator in situations where the respirator malfunctions.

6.1.8. How to inspect, put on (i.e., donning), remove (i.e., doffing), and use a respirator. This includes a hands-on demonstration by employees.

6.1.9. How to check the seal of a tight-fitting respirator. This includes a hands-on demonstration.

6.1.10. The procedures for maintenance and storage of the respirator.

6.1.11. How to recognize medical signs and symptoms that may limit or prevent the effective use of the RP device.

6.2. The demonstration of knowledge must. Include employees demonstrating the hands-on use of RP. This can be accomplished individually or in a group setting.

6.3. Supervisors must use OC-ALC Form 106. To record the results, including discrepancies, of the knowledge assessment and evaluation. If no discrepancies are found, "No Findings" must be noted in the notes section of the form. The OC-ALC Form 106 must be retained in Tab J of the shop's RPP binder or electronic equivalent until replaced by a subsequent OC-ALC Form 106 and must be made available for inspection when requested.

Chapter 7

ASSESSMENT OF EMPLOYEE VIEWS ON AND EVALUATION OF EFFECTIVENESS OF THE SHOP RESPIRATORY PROTECTION PROGRAM

7.1. The OSHA Respiratory Protection Standard 29 CFR 1910.134(l) . Requires assessment of employee's views regarding RPP effectiveness, the supervisor's identification of problems, and correction of the problems identified.

7.2. The results of the assessment of employee views. Including any program deficiencies identified, must be recorded on an OC-ALC Form 104 or electronic equivalent. Identification of deficiencies must include any corrective actions taken on the spot, at the time of the assessment.

7.3. The factors listed in items 7.4.1 through 7.4.4 of this section are required by . 29 CFR 1910.134(l)(2) through (l)(2)(iv).

7.3.1. The evaluation must assess employees' views on the effectiveness of the RPP and identify any problems.

7.4. Factors to be assessed must include but are not limited to the following:

7.4.1. Respirator fit. This includes the ability to use the respirator without interfering with effective job performance, hearing, vision, or communication.

7.4.2. The appropriate respirator selection for the hazards to which the employee is exposed. **Note:** BE selects appropriate RP. Contact the BE office for information regarding respirator selection.

7.4.3. Proper respirator use under the workplace conditions the employee encounters. This includes whether the respirator causes discomfort, and whether employees have confidence in the effectiveness of the RP.

7.4.4. Proper respirator maintenance.

7.5. A medical evaluation is required if observations made during this program evaluation indicate a medical evaluation is needed. Observing medical conditions such as difficulty in breathing, fatigue during respirator use, skin rash or irritation may indicate that a medical evaluation is necessary.

7.6. Supervisors must record the assessment of employee views, identification of problems, and corrective actions. If no discrepancies are found, "No Findings" must be noted in the notes section of the OC-ALC Form 104. The OC-ALC Form 104 must be retained in Tab J of the shop's RPP binder, or electronic equivalent, until replaced by a subsequent OC-ALC Form 104, or electronic equivalent, and must be made available for inspection when requested.

LINDSAY C. DROZ
Brigadier General, USAF
Commander

Attachment 1

GLOSSARY OF REFERENCES AND SUPPORTING INFORMATION

References

29 CFR 1910.134, *Respiratory Protection*

DAFI 48-137, *Respiratory Protection Program*, 12 September 2018

DAFMAN 90-161, *Publishing Processes and Procedures*, 18 October 2023

AFI 33-322, *Records Management and Information Governance Program*, 23 March 2020

OC-ALCI 21-103, *Equipment Maintenance/Inspection and Documentation*, 19 April 2022

TINKERAFBI 48-103, *Respiratory Protection Program*, 31 August 2013

Prescribed Forms

OC-ALC Form 103, *Request for Safety Eyewear*

OC-ALC Form 104, *Assessment of Employee Views on and Evaluation of Effectiveness of the Shop Respiratory Protection Program*

OC-ALC Form 106, *Annual Evaluation of User Knowledge and the Effectiveness of Respiratory Protection Program Training*

OC-ALC Form 107, *Annual Respirator Program Review (RPP) and Approval*

Adopted Forms

DAF Form 55, *Employee Safety and Health Record*

DAF Form 847, *Recommendation for Change of Product*

AFTO Form 244, *Industrial/Support Equipment Record*

AFMC Form 315, *Supervisor Safety Inspection Record*

AFSC Form 306, *Preventative Maintenance Instructions*

Abbreviations and Acronyms

569 AMXS/MXDPAA—569th Aircraft Maintenance Squadron, Disassembly/Cleaning Section

76 MXSG—76th Maintenance Support Group

76 MXSS/MXDTA—76th Maintenance Support Squadron, Analytical Chemistry Section

776 MXSS—776th Maintenance Support Squadron

AFI—Air Force Instruction

AFMC—Air Force Materiel Command

AFSC—Air Force Sustainment Center

AFTO—Air Force Technical Order

BE—Bioenvironmental Engineering

CFR—Code of Federal Regulations

DAF—Department of the Air Force

DAFMAN—Department of the Air Force Manual

FFPD—Filtering Facepiece Device

HEPA—High Efficiency Particulate Air

IAW—In Accordance With

IH—Industrial Hygiene

JON—Job Order Number

MFR—Memorandum for Record

MICT—Management Internal Control Toolset

NIOSH—National Institute for Occupational Safety and Health

O2—Oxygen

OC#—Oklahoma City Number

OC-ALC—Oklahoma City Air Logistics Complex

OC-ALCI—Oklahoma City Air Logistics Complex Instruction

OC-ALC/SE—Oklahoma City Air Logistics Complex Safety Office

OMRS—Operational Medical Readiness Squadron

OPR—Office of Primary Responsibility

OSHA—Occupational Safety and Health Administration

PAPR—Powered Air Purifying Respirator

PII—Personally Identifiable Information

POC—Point of Contact

RP—Respiratory Protection

RPP—Respiratory Protection Program

SAR—Supplied Air Respirator

SORN—System of Records Notice

TINKERAFBI—Tinker Air Force Base Instruction

TSS—Training Scheduling System

WIC—Workplace Identifier Code

WRPSI—Workplace Respirator Program Supplemental Information

WWRPP—Workplace Written Respiratory Protection Program

Terms

Air—Purifying Respirator–A respirator with an air-purifying filter, cartridge, or canister that removes specific air contaminants by passing ambient air through the air–purifying element.

Annual—No more than twelve (12) months from the last occurrence.

Expanded Standards—Specific substances outlined in separate sections following 29 CFR 1910.1000, Subpart Z. Exposure programs for these substances require strict adherence to the mandatory procedures contained in the expanded standards. When OSHA adopts additional expanded standards, Air Force operations will comply with the added requirements and BE will monitor compliance.

Filtering Facepiece Device (Dust Mask)—A negative pressure particulate respirator with a filter as an integral part of the facepiece or with the entire facepiece composed of the filtering medium.

Fresh Air Pump—An electrical or pneumatically driven positive displacement pump which takes ambient air and provides it to a respirator at pressures of less than 25 pounds per square inch gauge (psig). This is also known as a free-air pump or ambient air pump.

Job Order Number (JON)—A nine-position number used to control workload for the project order period during which funding is provided. The number consists of a five-position control number, a one-position job designator, and a three-position JON suffix.

Multiple User/Common Use Respirator—A respirator that is maintained in a tool crib or in bench stock and is available for check out and use only by authorized individuals. This respirator is used by numerous employees and is not assigned to any specific individual.

Program Letters—Workplace Respirator Program Supplemental Information (WRPSI) letter, Expanded Standard Written Compliance Program, etc.

Attachment 2

AFMC FORM 315, SUPERVISOR SAFETY INSPECTION RECORD (EXAMPLE)

Figure A2.1. AFMC Form 315, *Supervisor Safety Inspection Record* (Example).

SUPERVISOR SAFETY INSPECTION RECORD

1. ORGANIZATION INSPECTED	2. OFFICE SYMBOL	3. SUPERVISOR NAME
123 MXSS	MXDABC	Sam Supervisor

4. ORGANIZATION LOCATION (Building, Post/Room Number)	5. DATE OF INSPECTION
9001/C68	20260601

6. INSPECTION PARTICIPANTS (Name and Office Symbols)

(Insert the names of all personnel in the Respiratory Protection Program)

1. SAFETY DISCREPANCIES FOUND	2. CORRECTIVE ACTIONS
3M 6900, Full Face Tight Fitting:	
Visor scratched enough to affect worker's view	Mask removed from service and sent to respirator
- Respirator for John Doe	room in building 2122, 566 AMXS/MXDVAA.
3M 7800 Full Face Tight Fitting:	
Warped face seal area - Respirator for Jane Doe	Masked removed from ser[illegible] and discarded.
One PAPR unit battery not charging properly	Removed batter[illegible]om service a[illegible]eplaced with a new one.
PAPR did not meet minimum airflow requirement	Remo[illegible]d t[illegible] fro[illegible]rvice [illegible]r maintenance/repair.
Two packages of filters in stock past their expiration	emov[illegible]filters from [illegible]ock and discarded. Replaced with
	[illegible] filter[illegible]
All other respirators and filters in good se[illegible]iceable	
condition.	

EXAMPLE

AFMC FORM 315, 19920701 *(IMT-V1)*

Attachment 3

OC-ALC FORM 107, ANNUAL RESPIRATOR PROGRAM REVIEW AND APPROVAL (EXAMPLE)

Figure A3.1. OC-ALC Form 107, *Annual Respirator Program Review and Approval* (Example).

ANNUAL RESPIRATORY PROTECTION PROGRAM (RPP)
REVIEW AND APPROVAL

ANNUAL RESPIRATORY PROTECTION PROGRAM (RPP) REVIEW AND APPROVAL

This form documents the annual review and approval of the workplace/shop specific respiratory protection program (RPP) for 123 MXSS/MXDAB org/office symbol. WIC# 901Z

By signing below, the shop supervisor and Bioenvironmental Engineering (BE) representative acknowledge they have reviewed and verified the shop's RPP as current and correct as required by 29 CFR 1910.134, *Respiratory Protection*, DAFI 48-137, *Respiratory Protection Program*, TINKERAFBI 48-103, *Respiratory Protection Program*. This form shall be maintained behind Tab A of the Respiratory Protection Program binder IAW OC-ALCI 48-103.


Sarah Supervisor	Sarah Supervisor	June 1,2026
Shop Supervisor (Print)	Shop Supervisor (Sign)	Date
Brenda Bee	Brenda Bee	June 1, 2026
BE (Print)	BE (Sign)	Date
Shop Supervisor (Print)	Shop Supervisor (Sign)	Date
BE (Print)	BE (Sign)	Date
Shop Supervisor (Print)	Shop Supervisor (Sign)	Date
BE (Print)	BE (Sign)	Date
Shop Supervisor (Print)	Shop Supervisor (Sign)	Date
BE (Print)	BE (Sign)	Date

EXAMPLE

Attachment 4

OC-ALC FORM 103, REQUEST FOR SAFETY EYEWEAR (EXAMPLE)

Figure A4.1. OC-ALC Form 103, *Request for Safety Eyewear* (Example).

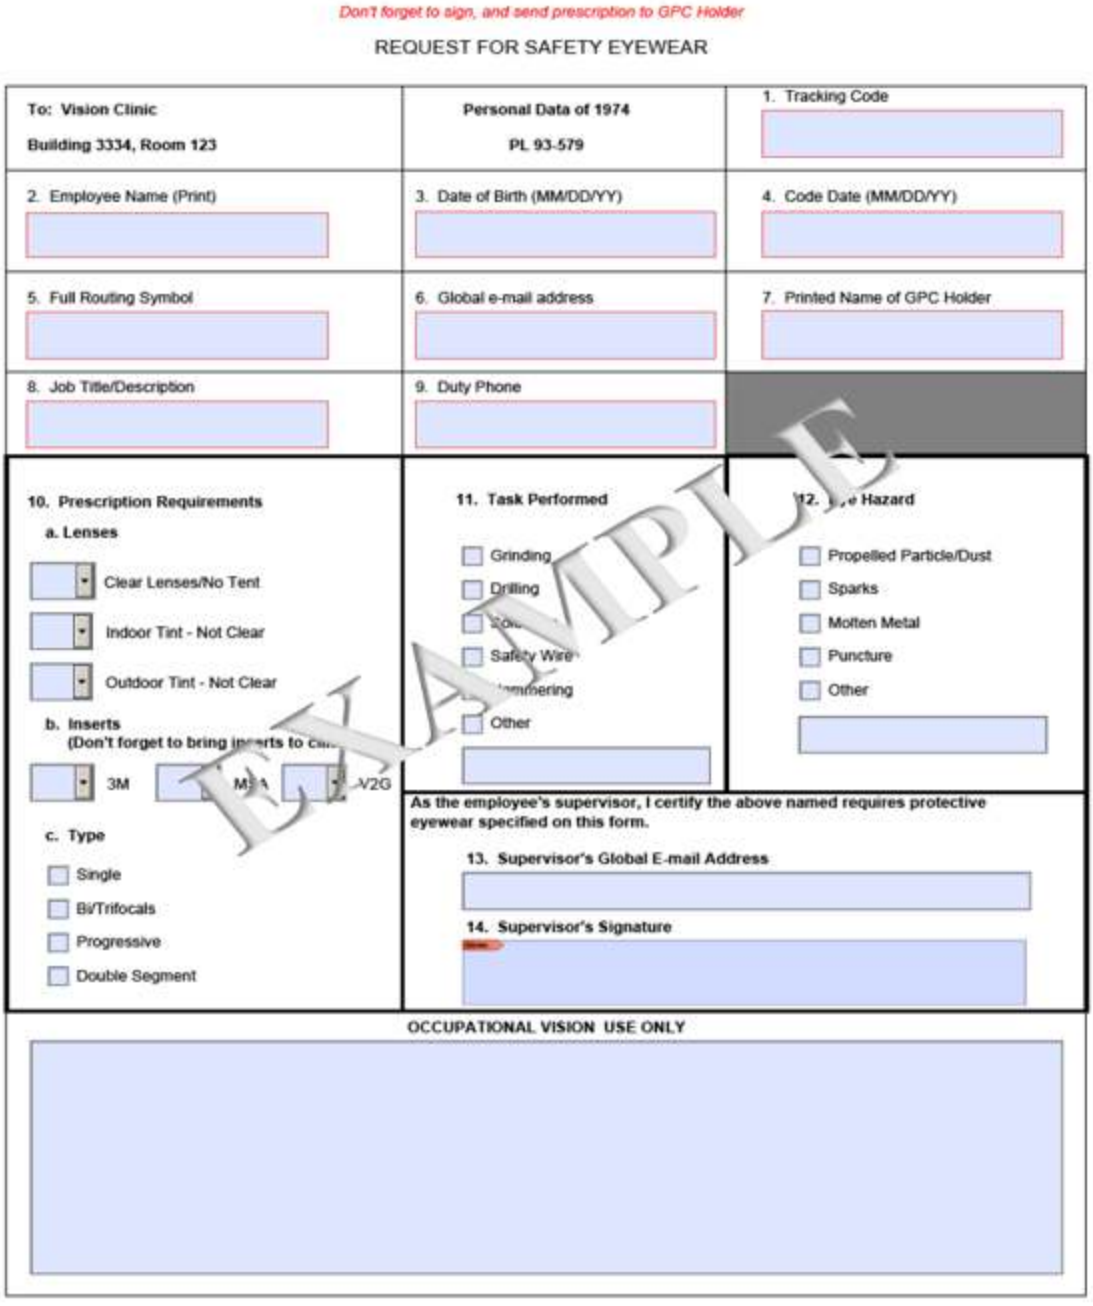

Don't forget to sign, and send prescription to GPC Holder

REQUEST FOR SAFETY EYEWEAR

To: Vision Clinic **Building 3334, Room 123**	**Personal Data of 1974** **PL 93-579**	1. Tracking Code
2. Employee Name (Print)	3. Date of Birth (MM/DD/YY)	4. Code Date (MM/DD/YY)
5. Full Routing Symbol	6. Global e-mail address	7. Printed Name of GPC Holder
8. Job Title/Description	9. Duty Phone	

10. Prescription Requirements

a. Lenses

- Clear Lenses/No Tent
- Indoor Tint - Not Clear
- Outdoor Tint - Not Clear

b. Inserts

(Don't forget to bring inserts to cl...

- 3M
- M...
- V2G

c. Type

- Single
- Bi/Trifocals
- Progressive
- Double Segment

11. Task Performed

- Grinding
- Drilling
- [illegible]
- Safety Wire
- [illegible]hammering
- Other

12. [illegible]e Hazard

- Propelled Particle/Dust
- Sparks
- Molten Metal
- Puncture
- Other

As the employee's supervisor, I certify the above named requires protective eyewear specified on this form.

13. Supervisor's Global E-mail Address

14. Supervisor's Signature

OCCUPATIONAL VISION USE ONLY

EXAMPLE

Attachment 5

EMPLOYEE QUICK REFERENCE SHEET

A5.1. Inspection. Taken from OSHA Small Entity Compliance Guide, and NIOSH Guide to Industrial Respiratory Protection) Use the following procedures to inspect respirators before use:

A5.1.1. Rubber facepiece:

A5.1.1.1. Check for dirt, cracks, tears, or holes.

A5.1.1.2. Check for distortion from improper storage.

A5.1.1.3. Check for cracked, scratched or loose-fitting lens.

A5.1.1.4. Check for broken or missing mounting clips.

A5.1.2. Headstraps:

A5.1.2.1. Check for check for breaks or tears.

A5.1.2.2. Check for loss of elasticity.

A5.1.2.3. Check for broken or malfunctioning buckles or attachments.

A5.1.2.4. Check for excessively worn serrations of the head straps which might allow the facepiece to slip.

A5.1.3. Valves:

A5.1.3.1. Check for detergent residue, dust or dirt on the valve seat.

A5.1.3.2. Inspect for cracks, tears, or distortion in the valve.

A5.1.3.3. Check for missing or defective valve cover.

A5.1.4. Filter Elements:

A5.1.4.1. Ensure proper type of filter for the job/task and contaminants present (refer to the shop specific IH Assessment Letter and WRPSI letter, both from BE).

A5.1.4.2. Inspect for missing or worn gaskets.

A5.1.4.3. Check for worn threads.

A5.1.4.4. Cracks or dents in housing.

A5.1.4.5. Check for spent, dirty, used.

A5.2. Seal check of tight-fitting air-purifying. (Taken from 29 CFR 1910.134, Appendix B-1)

A5.2.1. Positive pressure check.

A5.2.1.1. Put the respirator on.

A5.2.1.2. Close off the exhalation valve and exhale gently into the facepiece.

A5.2.1.3. The face fit is considered satisfactory if a slight positive pressure can be built up inside the facepiece without any evidence of outward leakage.

A5.2.2. Negative pressure check.

A5.2.2.1. Put the respirator on.

A5.2.2.2. Close off the inlet opening(s) of the canister(s) or cartridge(s) by covering with the palm of hands, nitrile gloves, or by replacing the filter seals. Then inhale so the facepiece collapses slightly and hold the breath for 10 seconds.

A5.2.2.3. If the facepiece remains in its slightly collapsed condition and no inward leakage of air is detected, the tightness of the respirator is considered satisfactory.

A5.3. Cleaning. (Taken from 29 CFR 1910.134, Appendix B-2) Use the manufacturer's recommendations, or the alternate following procedure to clean individual issue respirators:

A5.3.1. Remove any filters, cartridges, or canisters. Disassemble facepieces by removing speaking diaphragms, demand and pressure-demand valve assemblies, hoses, or any components recommended by the manufacturer. Discard or repair any defective parts.

A5.3.2. Wash the respirator in warm water (maximum 110° F) with mild detergent or with a cleaner-disinfectant solution recommended by the manufacturer. Use a soft bristle (not wire) brush or cloth to facilitate dirt removal.

A5.3.3. Follow manufacturer instructions for the cleaner-disinfectant or follow the respirator disinfecting procedure in the OSHA respiratory protection standard, 29 CFR 1910.134, Appendix B-2.

A5.3.4. Thoroughly rinse in clean, warm running water (maximum 110° F) to completely remove all cleaner and disinfectant, then allow water to drain from respirator.

A5.3.5. Hand dry with a clean lint free cloth, or air dry in a clean area.

A5.3.6. Clean other respirator parts as recommended by the manufacturer.

A5.3.7. Inspect and replace worn or broken parts.

A5.3.8. Reassemble facepiece.

A5.3.9. Ensure all components work properly then place in plastic bag or other closed container for storage.

A5.3.10. Use new filters, cartridges, or canisters, as specified by the manufacturer and BE.

A5.4. Maintenance. Personnel that maintain respirators must request replacement parts (replacement valves, cartridges, straps, etc.) from their workplace supervisor as needed. Personnel must not mix parts from different manufacturers, types or models of respirators.


A5.4.1. Personnel must replace the cartridge, filter, or canister of an air purifying respirator with the type specified in the IH Assessment Letter and WRPSI letter, both from BE.

A5.4.2. Personnel who change filter cartridges must ensure that the replacement cartridges have not passed their expiration or shelf-life date.

Attachment 6

FLOW CHART FOR SUPERVISOR TRAINING


Figure A6.1. Flow Chart for Supervisor Training.

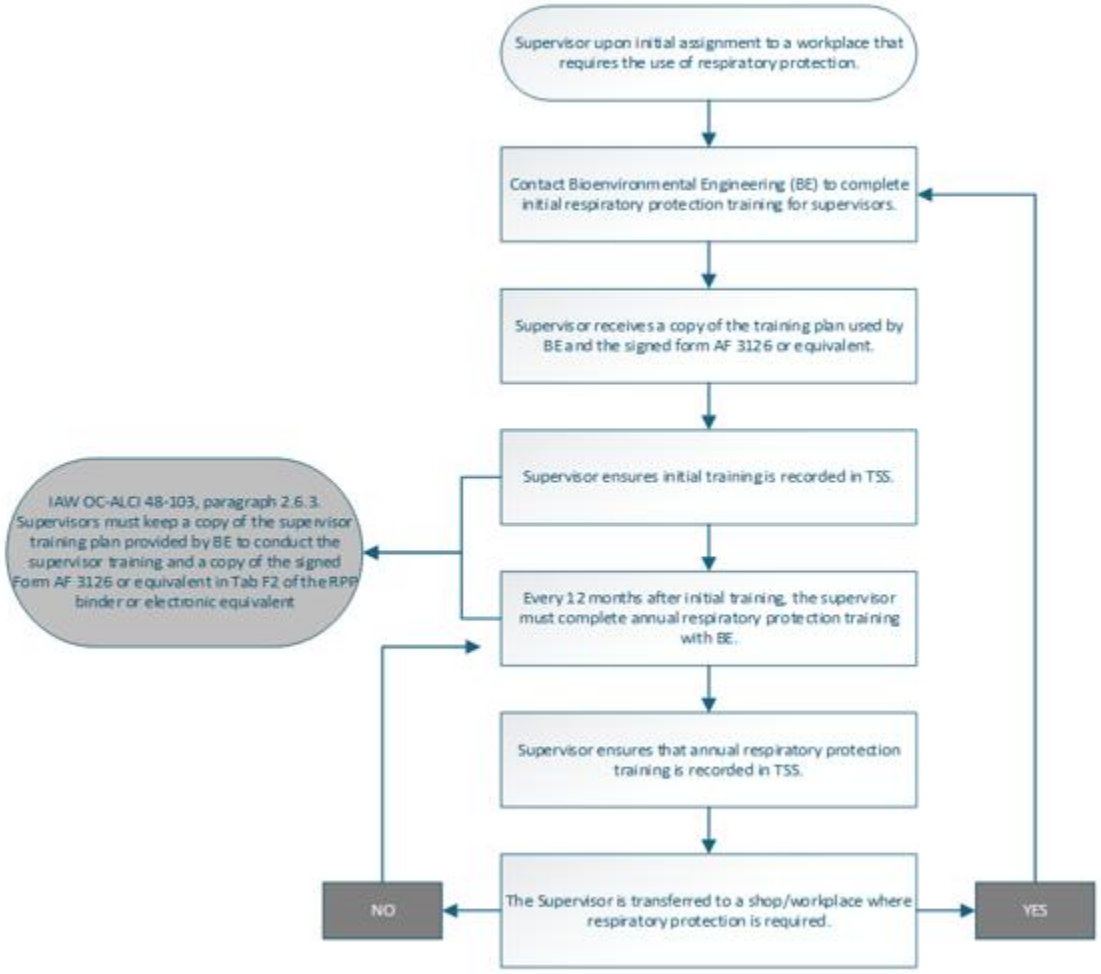

Attachment 7

FLOW CHART OF EMPLOYEE MEDICAL QUALIFICATION, TRAINING AND FIT TESTING FOR TIGHT FITTING RESPIRATORY PROTECTION.


Figure A7.1. Flow Chart of Employee Medical Qualification, Training and Fit Testing for Tight Fitting Respiratory Protection.

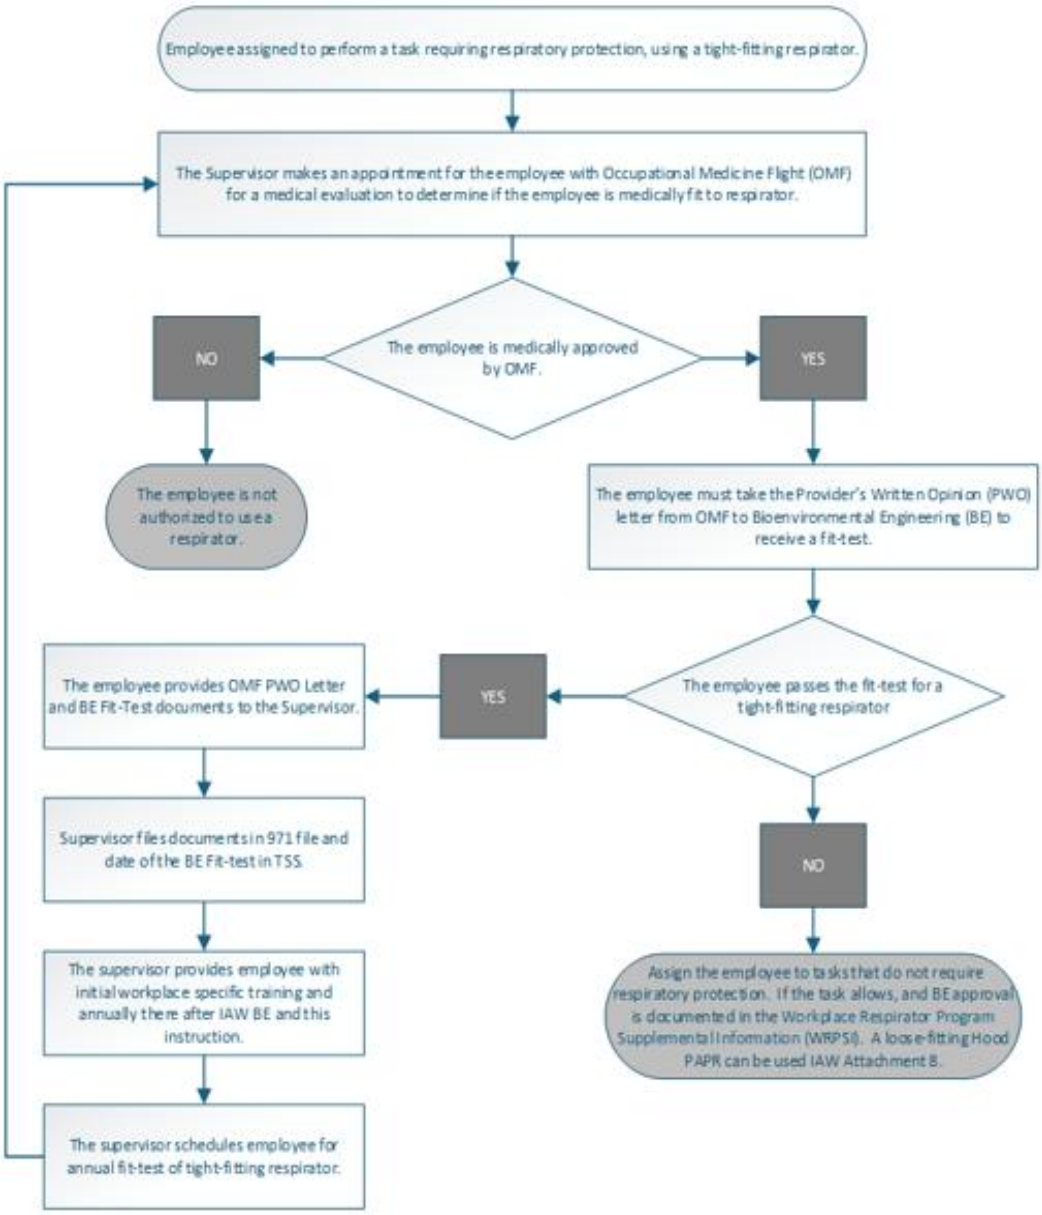

Attachment 8

FLOW CHART OF EMPLOYEE MEDICAL QUALIFICATION AND TRAINING FOR LOOSE FITTING RESPIRATORY PROTECTION

Figure A8.1. Flow Chart of Employee Medical Qualification and Training for Loose Fitting Respiratory Protection.

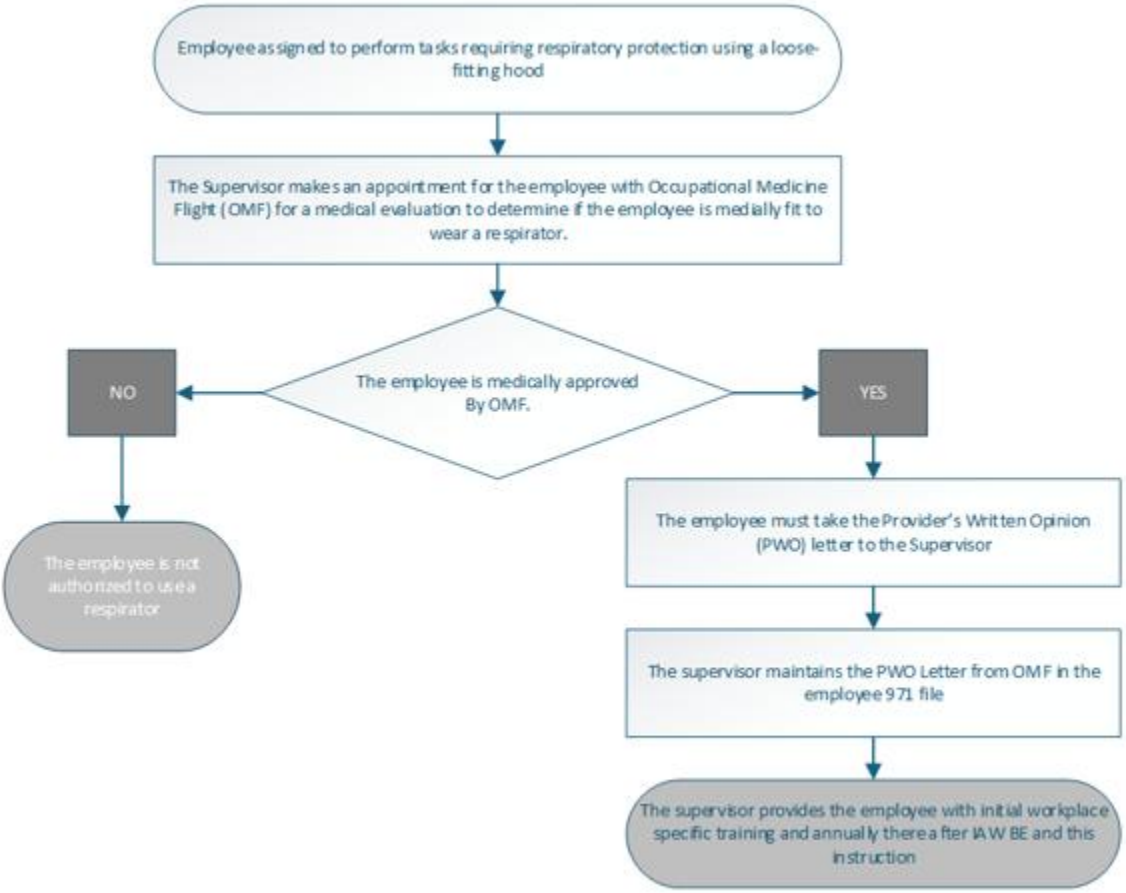


Attachment 9

FLOW CHART REGARDING AUTHORIZATION TO USE AND TRAINING FOR FILTERING FACEPIECE DEVICES (FFPDS) (I.E., DUST MASKS)

A9.1. NOTE: IAW DAFI 48-137, 3.1.4.3., use of FFPDs must be approved and authorized by the Bioenvironmental Engineering (BE).

Figure A9.1. Flow Chart Regarding Authorization to Use and Training for Filtering Face piece Devices (FFPDs) (i.e., Dust Masks).

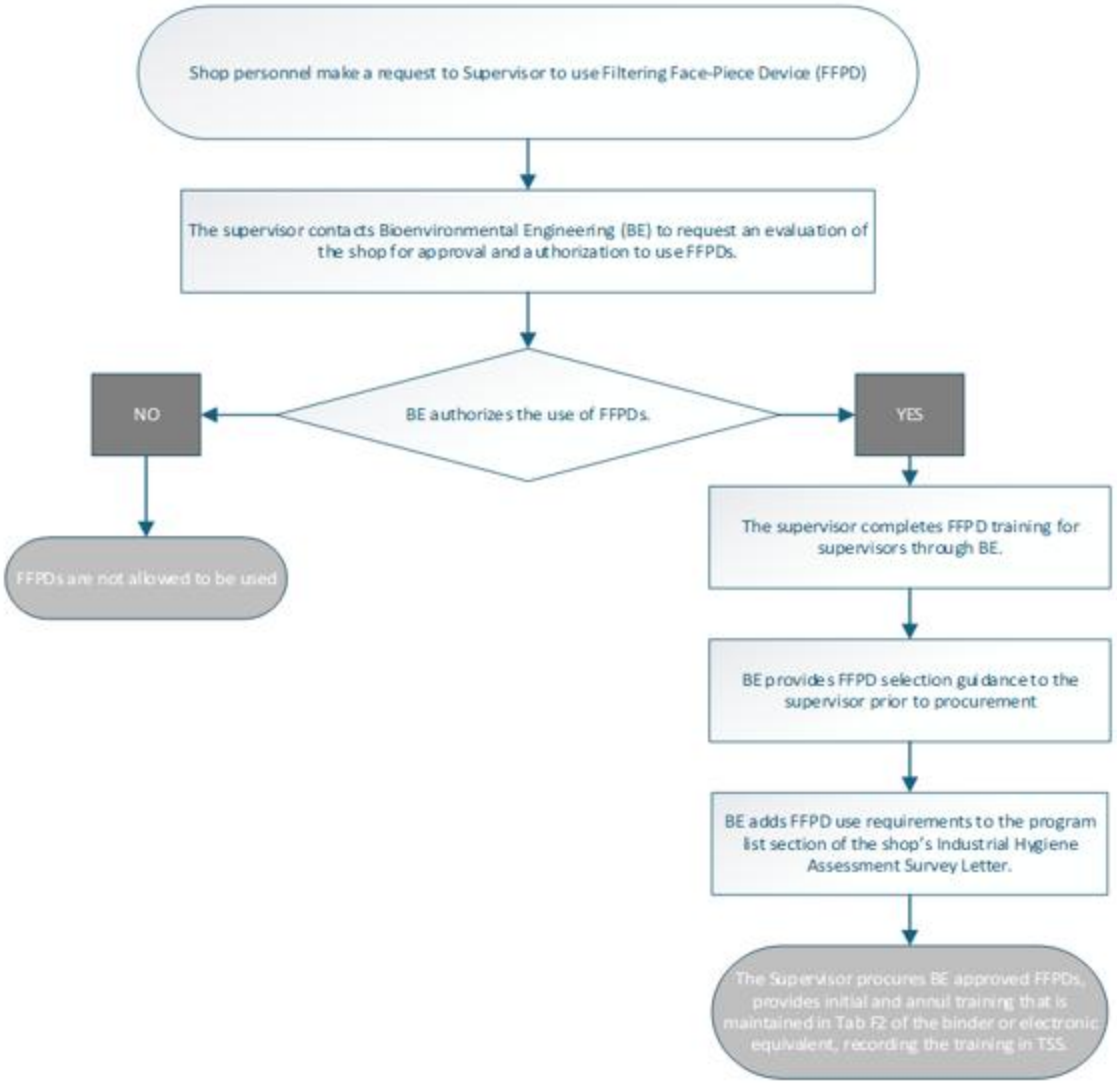

Attachment 10

OC-ALC FORM 106, ANNUAL EVALUATION OF USER KNOWLEDGE AND THE EFFECTIVENESS OF RESPIRATORY PROTECTION PROGRAM TRAINING

Figure A10.1. OC-ALC Form 106, *Annual Evaluation of User Knowledge and the Effectiveness of Respiratory Protection Program Training*.

ANNUAL EVALUATION OF USER KNOWLEDGE AND THE EFFECTIVENESS OF RESPIRATORY PROTECTION PROGRAM TRAINING

This form documents the annual evaluation of user knowledge and the effectiveness of Respiratory Protection Program (RPP) Training IAW 29 CFR 1910.134(k)(1)-(k)(1)(vii), TINKERAFBI 48-103 Chapter 2 and OC-ALCI 48-103 Chapter 8
This form must be maintained in the shop's RPP binder IAW OC-ALCI 48-103.

Supervisor's Signature: Print Name:

Shop Name: Shop Organization/Office Symbol:

WIC# (from IH Assessment Letter): Date Accomplished:

Was each employee able to demonstrate knowledge of the following elements: Number of personnel assessed:	Y	N	N/A
Why is the respiratory protection (RP) necessary?	☐	☐	☐
How does improper fit, usage or maintenance compromise the protective effect of the respirator?	☐	☐	☐
What are the limitations and capabilities of the respiratory protection? • Examples include: HEPA filters alone do not provide protection from organic vapors or acid gases; Air-purifying respirators do not provide protection in an oxygen deficient or immediately dangerous to life and health atmosphere.	☐	☐	☐
What to do when the RP malfunctions?	☐	☐	☐
How to inspect, put on (don), remove (doff) and use the respiratory protection?	☐	☐	☐
How to check the seal of a tight fitting respirator (i.e., perform a seal check)?	☐	☐	☐
How to recognize medical signs and symptoms that may limit or prevent the effective use of the RP? Examples include dizziness, shortness of breath.	☐	☐	☐
The hands on use of the respiratory protection?	☐	☐	☐

Notes and Corrective Actions, or state "No Findings":

EXAMPLE

Attachment 11

OC-ALC FORM 104 ASSESSMENT OF EMPLOYEE VIEWS ON AND EVALUATION OF EFFECTIVENESS OF THE SHOP RESPIRATORY PROTECTION PROGRAM

Figure A11.1. OC-ALC Form 104 Assessment of Employee Views on and Evaluation of Effectiveness of the Shop Respiratory Protection Program.

ASSESSMENT OF EMPLOYEE VIEWS ON AND EVALUATION OF EFFECTIVENESS OF THE SHOP RESPIRATORY PROTECTION PROGRAM

This form documents the annual Respiratory Protection Program (RPP) evaluation required by 29 CFR 1910.134(1)-(1)(2)(IV), DAFI 48-137 paragraph 3.1.9, and OC-ALCI 48-103 Chapter 9. This form must be maintained in the shop's RPP binder IAW OC-ALCI 48-103.

Supervisor Signature: _____ Print Name: _____

Shop Name: _____ Shop Organization/Office Symbol: _____

WIC# (from IH Assessment Letter): _____ Date Accomplished: _____

The supervisor has – • Evaluated the workplace to ensure the provisions of the written program are being effectively implemented. • Has assessed the views of employees' on program effectiveness. • Identified any issues/problems. The following factors have been accessed:	Y	N	N/A
Is respirator fit effective? (for tight fitting respirators)	☐	☐	☐
When personnel are consulted to assess their views on the effectiveness of the respiratory protection program, do they express concerns about the respiratory protection interfering with the effective work performance, hearing, vision, or communication?	☐	☐	☐
Is the appropriate respiratory protection selected for hazards to which the employee is exposed. (Environmental Engineering (BE) selects the respiratory protection. Questions should be directed to BE.)	☐	☐	☐
Do employees use respiratory protection properly under the workplace conditions they encounter? This includes whether the respirator causes discomfort, and whether personnel have confidence in the effectiveness of the respiratory protection.	☐	☐	☐
Is respiratory protection properly maintained? This includes proper storage.	☐	☐	☐

Notes, Problems Identified and Corrective Actions, or state "No Findings":

EXAMPLE