

Exploring Generative Personalized Facial Expression Interfaces for Intelligent Agents

Yate Ge
College of Design and Innovation
Tongji University
Shanghai, China
geyate@tongji.edu.cn

Lin Tian
College of Design and Innovation
Tongji University
Shanghai, China
2433532@tongji.edu.cn

Ge Chen
College of Design and Innovation
Tongji University
Shanghai, China
2433531@tongji.edu.cn

Shuhan Pan
University of Washington
Seattle, Washington, USA
amyshuhan2021@163.com

Weiwei Guo
College of Design and Innovation
Tongji University
Shanghai, China
weiweiguo@tongji.edu.cn

Xiaohua Sun*
School of Design
Southern University of Science and
Technology
Shenzhen, Guangdong, China
sunxh@sustech.edu.cn

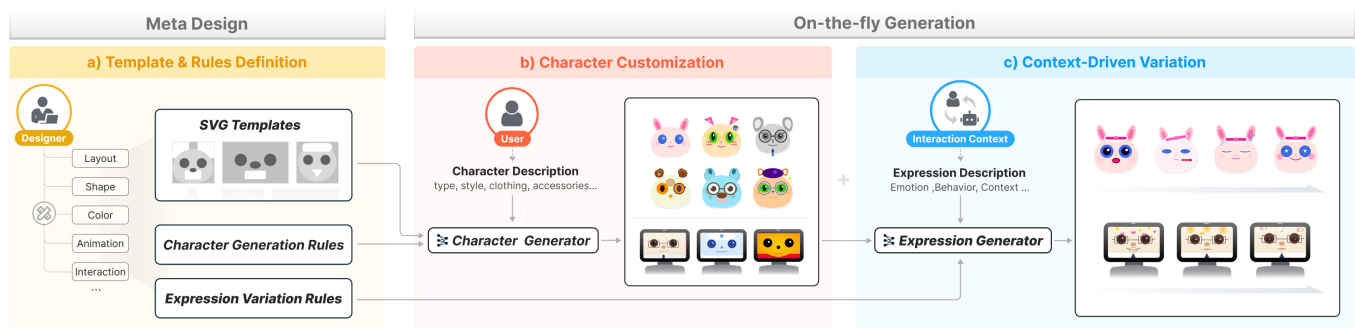


Figure 1: Conceptual framework of our approach. Meta design constrains the facial expression generation space; users participate explicitly or implicitly in character customization; the system adapts expressions based on interaction context.

Abstract

Facial expressions are a key component of intelligent agent interfaces, supporting social presence, character shaping, and context-sensitive interaction. This paper introduces a conceptual framework for generating personalized and adaptive facial expressions with large language models (LLMs). The framework includes three stages: meta-design, where designers define expression templates and transformation rules; character customization, where agents are shaped based on user input or role descriptions; and context-driven variation, where expressions dynamically respond to interaction context. We illustrate the framework through two cases: a virtual pet application that generates character-based emotional expressions from user profiles, and a service robot interface that

adapts expressions in real time based on dialogue. This work-in-progress explores how LLMs can enable personalized and flexible facial expression interfaces for intelligent agents. Future work will focus on advancing the technical implementation and conducting user-centered evaluations.

CCS Concepts

• **Human-centered computing** → **Interaction techniques.**

Keywords

LLMs, Robot Face, Facial Expression, Human-Robot Interaction, Expressive Agents

ACM Reference Format:

Yate Ge, Lin Tian, Ge Chen, Shuhan Pan, Weiwei Guo, and Xiaohua Sun. 2025. Exploring Generative Personalized Facial Expression Interfaces for Intelligent Agents. In *The 38th Annual ACM Symposium on User Interface Software and Technology (UIST Adjunct '25)*, September 28–October 01, 2025, Busan, Republic of Korea. ACM, New York, NY, USA, 3 pages. <https://doi.org/10.1145/3746058.3758382>

1 Introduction

Facial expression is a key component of social intelligence in intelligent agents, including both social robots and conversational agents.

*Corresponding Author.

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for third-party components of this work must be honored. For all other uses, contact the owner/author(s).

UIST Adjunct '25, Busan, Republic of Korea

© 2025 Copyright held by the owner/author(s).

ACM ISBN 979-8-4007-2036-9/25/09

<https://doi.org/10.1145/3746058.3758382>

It plays a vital role in fostering user engagement and shaping the perceived personality and capabilities of the agent[2]. Among various approaches, rendered facial expressions displayed on screens offer high flexibility for defining the agent’s character and social cues[4]. Dynamic adaptation to interaction context is crucial for enhancing social presence and perceived intelligence. Context-sensitive expressions that evolve with interaction improve expressivity and responsiveness[10–12]. In addition, customizable expression interfaces that reflect individual user preferences, instead of relying on pre-defined templates, can further enhance engagement and the agent’s perceived social intelligence[5, 9]. With the rise of LLMs, these models are increasingly integrated into intelligent agents to support expressive behaviors that are more flexible, personalized, and contextually aligned[3, 8, 12, 13]. Among these, the Xpress system specifically demonstrates the use of LLMs for generating facial expressions in response to emotional and contextual cues[1].

In this paper, as illustrated in Figure 1, we propose a conceptual generative facial expression framework designed to support personalized human-agent interaction. The framework consists of three core stages. First, in the meta-design phase, designers constrain the space of facial expression generation by specifying rules and templates, which are subsequently embedded into the prompts used by the LLM-based generator. Second, during character customization, users participate either directly or indirectly in shaping the agent’s character. Based on the character description, the system generates a personalized base facial expression. Third, during interaction, the facial interface adapts to the interaction context by varying its expressions according to the transformation rules defined in the meta-design phase. To demonstrate the framework, we describe two illustrative cases in this paper.

2 Case 1: Virtual Pet

Our first case demonstrates a virtual pet app that creates personalized agent characters based on user profiles. As shown in Figure 2, this app generates a customized virtual companion by taking user-provided information such as age, gender, occupation and MBTI type, and mapping it to a unique character design. The app also adapts the character’s facial expressions according to changes in pet status, including hunger, fatigue, excitement, and other emotional states. To enable this personalization and adaptability, the system first processes the user profile using the Claude Opus 4 model to generate a textual character description. This description is then combined with an SVG template and predefined generation rules to produce the base character design. Building on this base, the system generates animated facial expressions that reflect rich emotional context across different interaction scenarios.

3 Case 2: Service Robot

Our second case demonstrates the use of our method on a service robot, as shown in Figure 3. The robot’s facial interface can be customized based on its service role in a given scenario or shaped according to user intent, enabling flexible character design. During interaction, the system analyzes the dialogue in real time and adjusts the robot’s facial expressions based on contextual cues. Technically, this case shares a similar implementation with the first one,

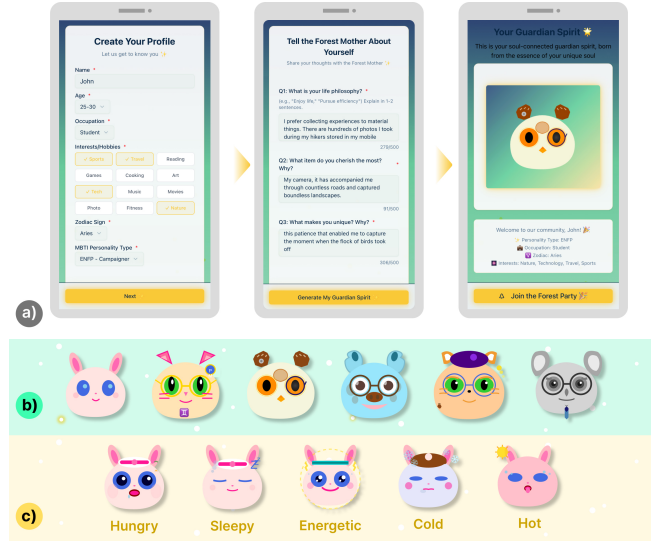


Figure 2: (a) Character customization via user input; (b) different base characters for different users; (c) facial expressions showing pet states.

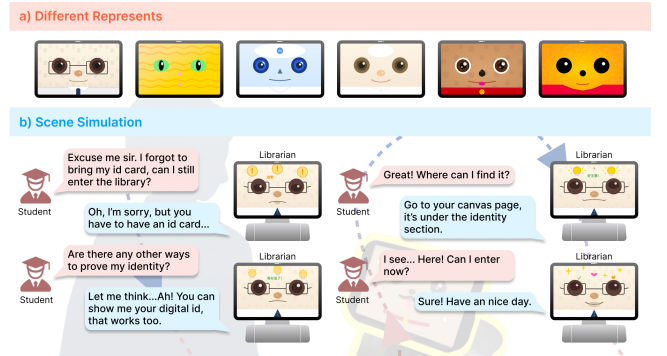


Figure 3: (a) Facial expression interfaces customized based on character-shaping needs; (b) expressions generated in real time according to dialogue context.

but differs in that users directly provide role descriptions, and the system uses live dialogue text as prompt input to drive expression generation.

4 Conclusion and Future Work

We presented a conceptual framework for generating personalized and context-aware facial expression interfaces for intelligent agents, demonstrated through a virtual pet app and a service robot interface. The framework includes meta-design, user-driven character customization, and context-driven expression variation during interaction. Future work will involve user studies in real-world settings to evaluate usability and interaction outcomes. In addition, we will explore how facial expression styles and levels of realism affect user perception and engagement, as discussed in recent work on embodied agents like Dittos [6, 7].

Acknowledgments

This work was supported by the Research Start-up Fund (Grant No. Y01656116) and the Research Start-up Matching Fund (Grant No. Y01656216) from the Southern University of Science and Technology.

References

- [1] Victor Nikhil Antony, Maia Stiber, and Chien-Ming Huang. 2025. Xpress: A System for Dynamic, Context-Aware Robot Facial Expressions Using Language Models. In *2025 20th ACM/IEEE International Conference on Human-Robot Interaction (HRI)*. 958–967. doi:10.1109/HRI61500.2025.10974045
- [2] Cynthia Breazeal. 2002. *Designing sociable robots*. MIT Press, Cambridge, Massachusetts.
- [3] Yate Ge, Meiyang Li, Xipeng Huang, Yuanda Hu, Qi Wang, Xiaohua Sun, and Weiwei Guo. 2025. GenComUI: Exploring Generative Visual Aids as Medium to Support Task-Oriented Human-Robot Communication. In *Proceedings of the 2025 CHI Conference on Human Factors in Computing Systems*. ACM, Yokohama Japan, 1–21. doi:10.1145/3706598.3714238
- [4] Alisa Kalgina, Grace Schroeder, Aidan Allchin, Keara Berlin, and Maya Cakmak. 2018. Characterizing the Design Space of Rendered Robot Faces. In *Proceedings of the 2018 ACM/IEEE International Conference on Human-Robot Interaction*. ACM, Chicago IL USA, 96–104. doi:10.1145/3171221.3171286
- [5] Jiyeon Lee, Haeun Park, Temirlan Dzhoroiev, Byoungheon Kim, and Hui Sung Lee. 2023. The Implementation and Analysis of Facial Expression Customization for a Social Robot. *Journal of Korea Robotics Society* 18, 2 (June 2023), 203–215. doi:10.7746/jkros.2023.18.2.203 Publisher: The Korea Robotics Society.
- [6] Seonghee Lee, Denae Ford, John Tang, Sasa Junuzovic, Asta Roseway, Ed Cutrell, and Kori Inkpen. 2025. IRL Dittos: Embodied Multimodal AI Agent Interactions in Open Spaces. doi:10.48550/arXiv.2504.21347 arXiv:2504.21347 [cs] version: 1.
- [7] Joanne Leong, John Tang, Edward Cutrell, Sasa Junuzovic, Gregory Paul Baribault, and Kori Inkpen. 2024. Dittos: Personalized, Embodied Agents That Participate in Meetings When You Are Unavailable. *Proc. ACM Hum.-Comput. Interact.* 8, CSCW2 (Nov. 2024), 494:1–494:28. doi:10.1145/3687033
- [8] Karthik Mahadevan, Jonathan Chien, Noah Brown, Zhuo Xu, Carolina Parada, Fei Xia, Andy Zeng, Leila Takayama, and Dorsa Sadigh. 2024. Generative Expressive Robot Behaviors using Large Language Models. In *Proceedings of the 2024 ACM/IEEE International Conference on Human-Robot Interaction*. 482–491. doi:10.1145/3610977.3634999 arXiv:2401.14673 [cs].
- [9] Denielle Oliva, Joshua Knight, Tyler J. Becker, Heather Amistani, Monica Nicolescu, and David Feil-Seifer. 2025. Design Activity for Robot Faces: Evaluating Child Responses To Expressive Faces. doi:10.48550/arXiv.2504.08117 arXiv:2504.08117 [cs].
- [10] Ung Park, Minsoo Kim, Youngeun Jang, Gijae Lee, KangGeon Kim, Ig-Jae Kim, and Jongsuk Choi. 2021. Robot Facial Expression Framework for Enhancing Empathy in Human-Robot Interaction. In *2021 30th IEEE International Conference on Robot & Human Interactive Communication (RO-MAN)*. 832–838. doi:10.1109/RO-MAN50785.2021.9515533 ISSN: 1944-9437.
- [11] Niyati Rawal and Ruth Maria Stock-Homburg. 2022. Facial Emotion Expressions in Human–Robot Interaction: A Survey. *International Journal of Social Robotics* 14, 7 (Sept. 2022), 1583–1604. doi:10.1007/s12369-022-00867-0
- [12] Gabriel J Serfaty, Virgil O Barnard, and Joseph P Salisbury. 2023. Generative Facial Expressions and Eye Gaze Behavior from Prompts for Multi-Human-Robot Interaction. In *Adjunct Proceedings of the 36th Annual ACM Symposium on User Interface Software and Technology*. ACM, San Francisco CA USA, 1–3. doi:10.1145/3586182.3616623
- [13] Zining Wang, Paul Reisert, Eric Nichols, and Randy Gomez. 2024. Ain't Misbehavin' – Using LLMs to Generate Expressive Robot Behavior in Conversations with the Tabletop Robot Haru. In *Companion of the 2024 ACM/IEEE International Conference on Human-Robot Interaction*. 1105–1109. doi:10.1145/3610978.3640562 arXiv:2402.11571 [cs].