


Deep Topological Targeting & CSS Custom Variables

Mapping runtime variables and pseudo-class states to SVG vector geometry

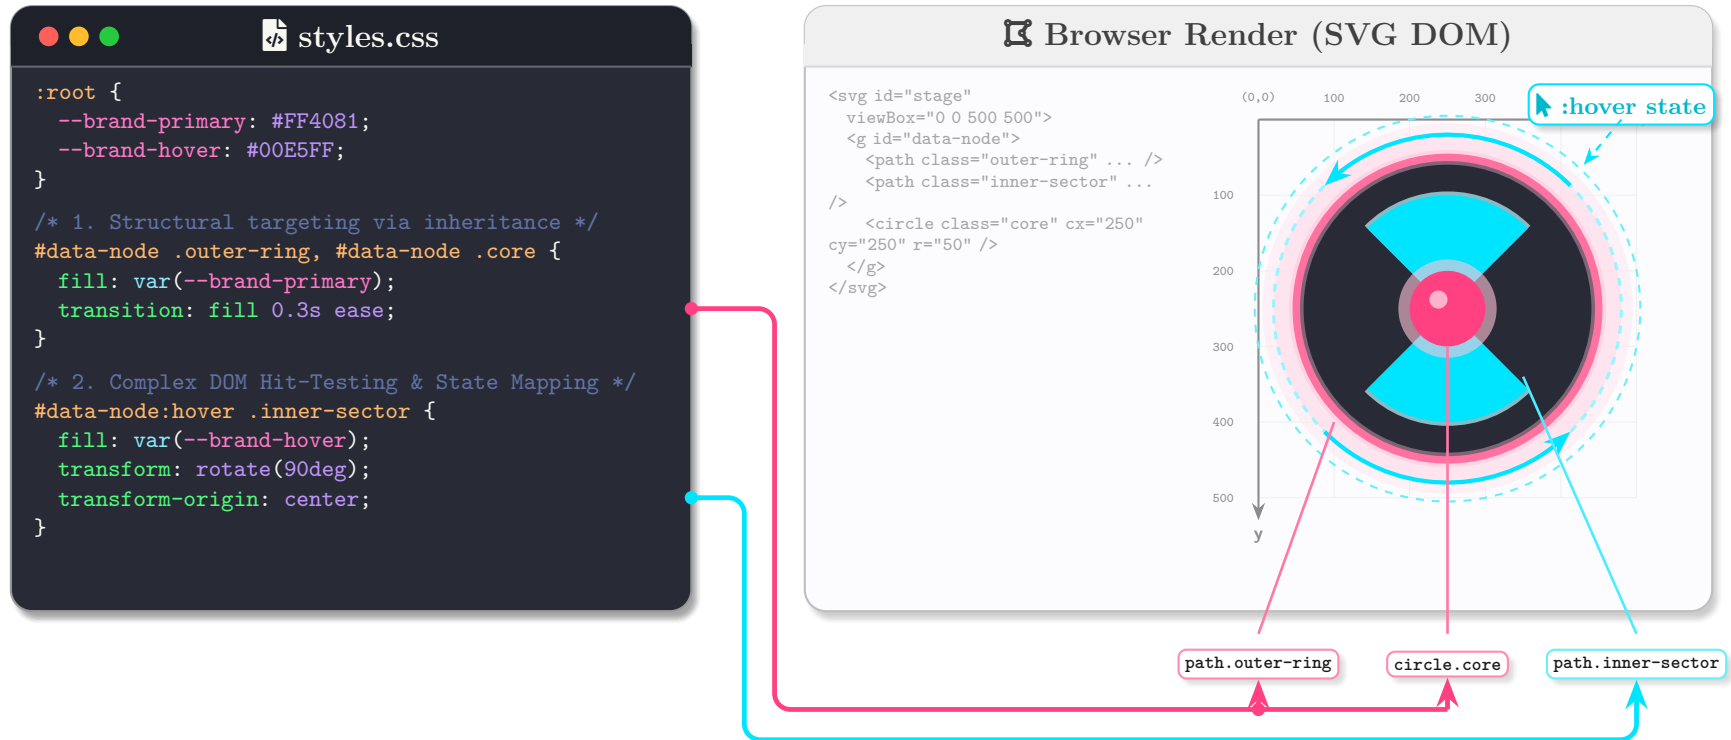

Contextual Inheritance & Geometric Statefulness

By defining variables (`--brand-primary`) at the `:root`, the browser constructs a tunnel directly into the SVG topology. When the user switches to Dark Mode, updating the CSS variable recalculates the matrix and repaints the vector without HTTP requests.

Furthermore, because the DOM handles hit-testing, a `:hover` event on the parent `<svg>` allows precise CSS selectors to reach down and mutate specific descendant paths (e.g., rotating the cyan inner sectors) while leaving the rest of the geometric matrix intact.