


Surrogate-defined inverse training

Trainable params: 387 | Non-trainable params: 4,418 | Total params: 4,805

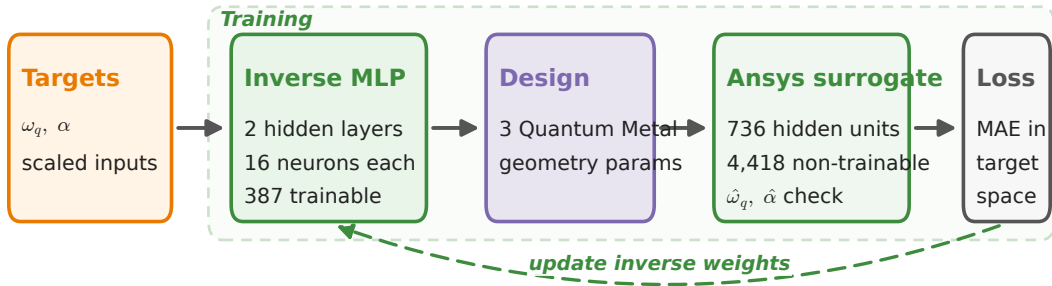

The surrogate is fixed during inverse-model training, so geometry predictions are graded by recovered Hamiltonian parameters.