

CLIE


VIEW - CONTROLLER AND

<<Interface>>
IUpdateVisitor


+ handleUpdateMessage(PlaverScoreUpdate) : void

D STATE

LocalPlayerState
- color : Color

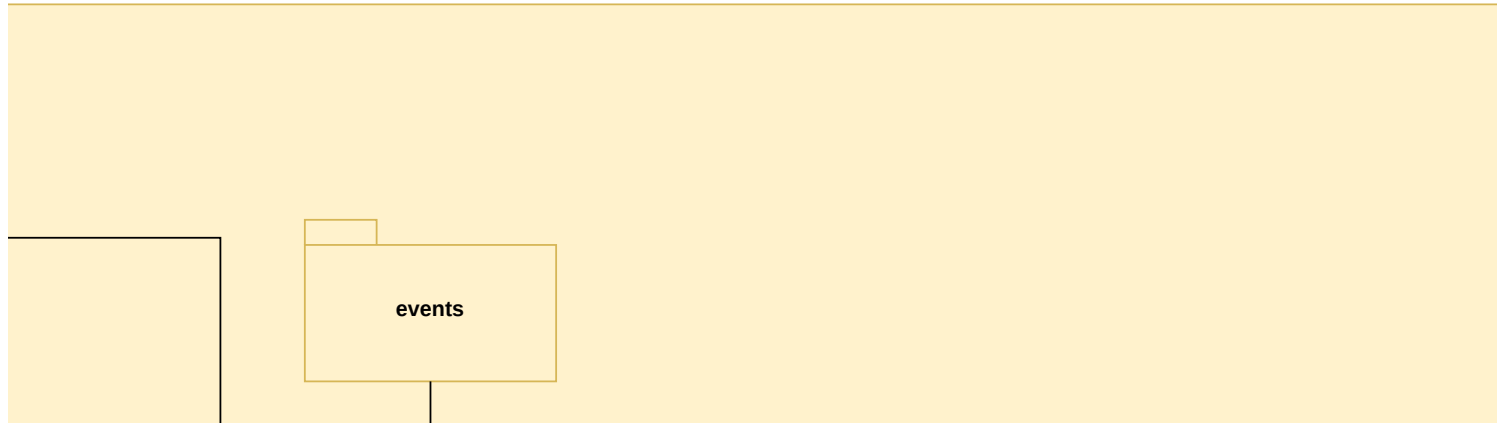

TEXT-USER




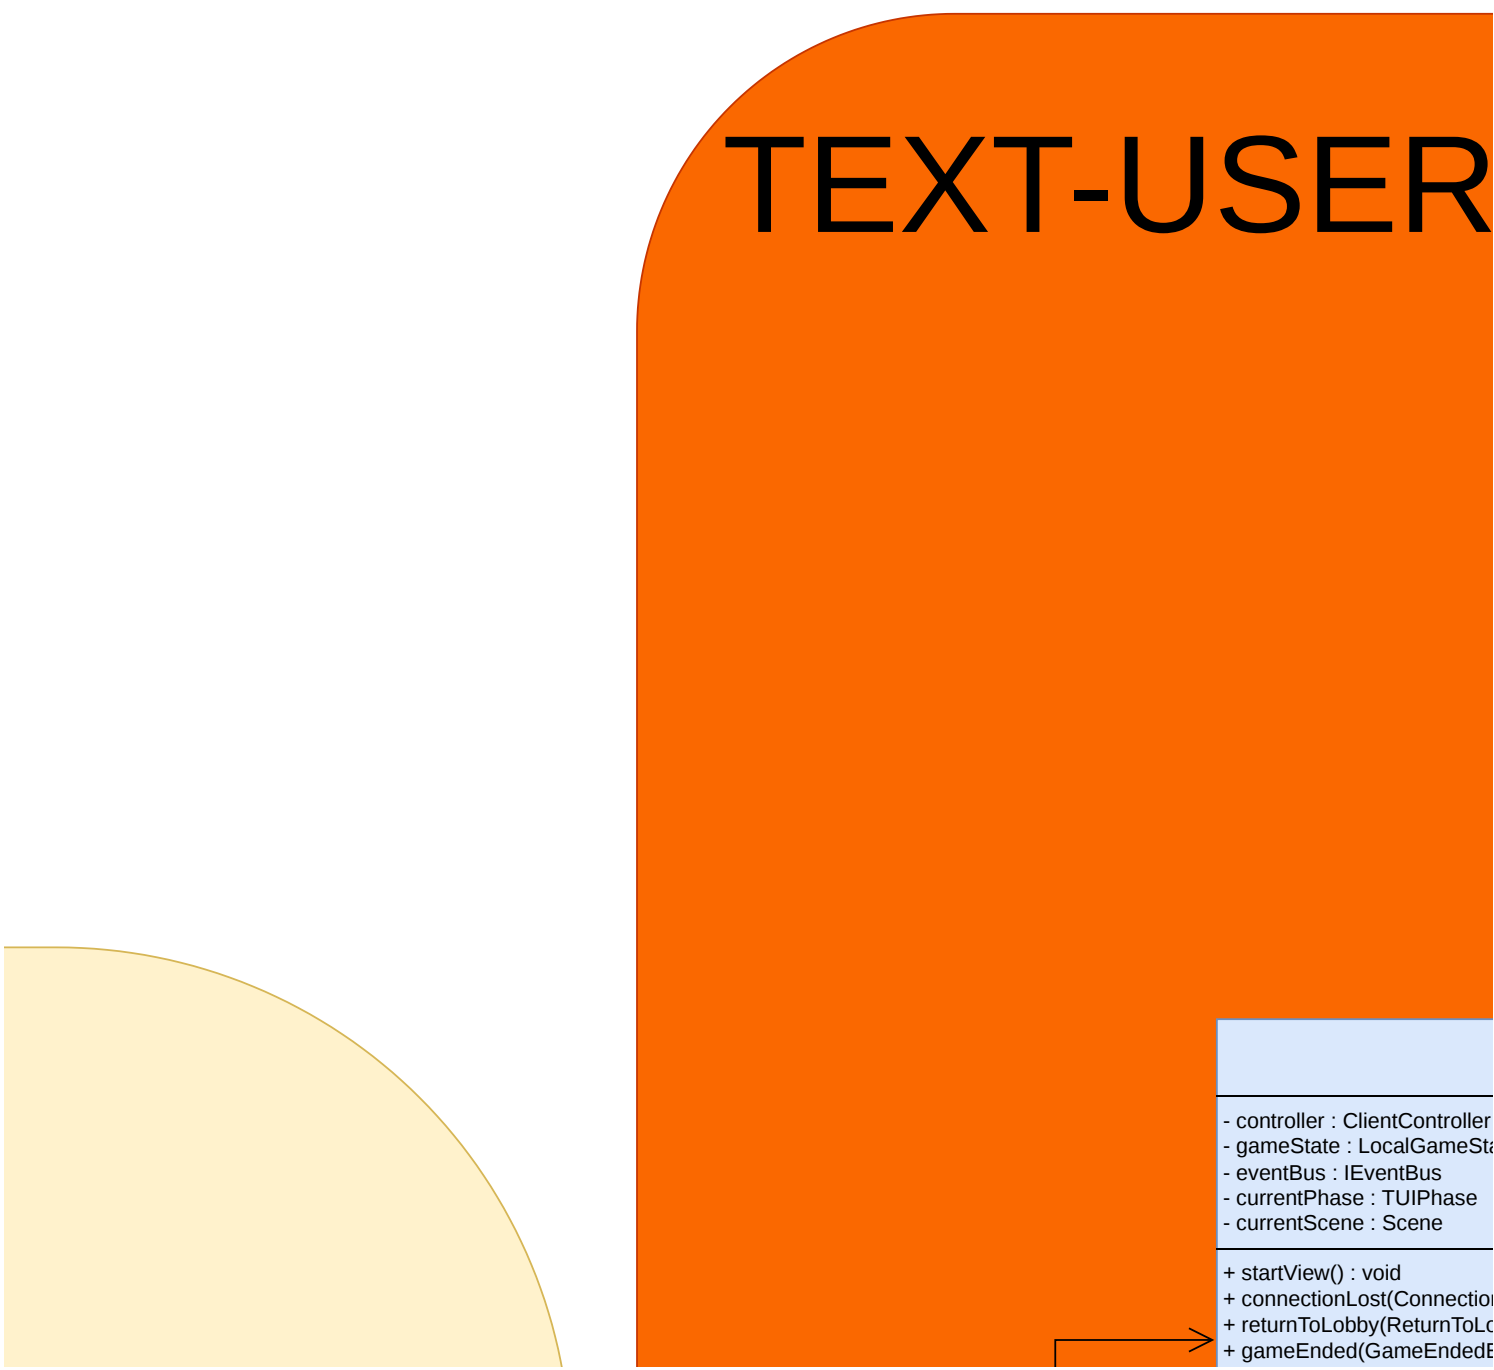




The diagram shows a class named TEXT-USER represented by an orange rounded rectangle. To its left is a yellow rounded rectangle. A light blue box is attached to the bottom right of the orange rectangle, containing a list of attributes and methods. An arrow points from the bottom of the orange rectangle to the top of the light blue box.

```
classDiagram
    class TEXT-USER {
        - controller : ClientController
        - gameState : LocalGameSt
        - eventBus : IEventBus
        - currentPhase : TUIPhase
        - currentScene : Scene
        + startView() : void
        + connectionLost(Connection
        + returnToLobby(ReturnToLc
        + gameEnded(GameEndedE
    }
```

- controller : ClientController
- gameState : LocalGameSt
- eventBus : IEventBus
- currentPhase : TUIPhase
- currentScene : Scene
- + startView() : void
- + connectionLost(Connection
- + returnToLobby(ReturnToLc
- + gameEnded(GameEndedE

-INTERFACE

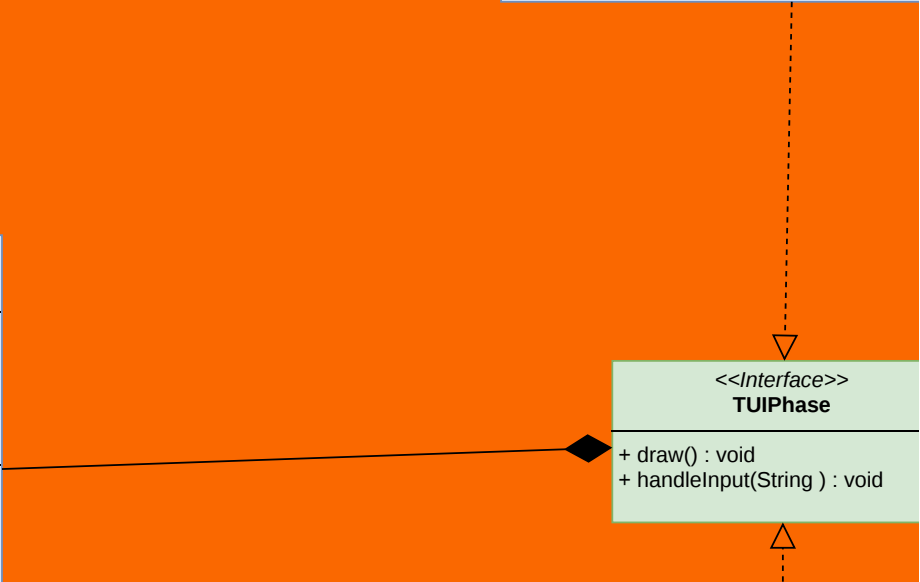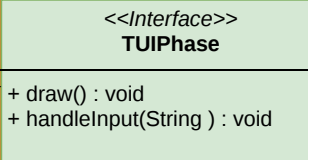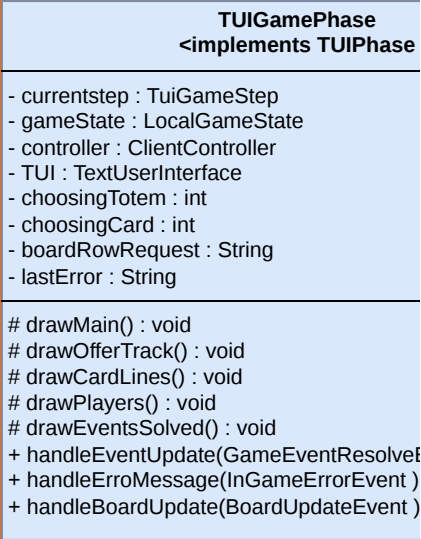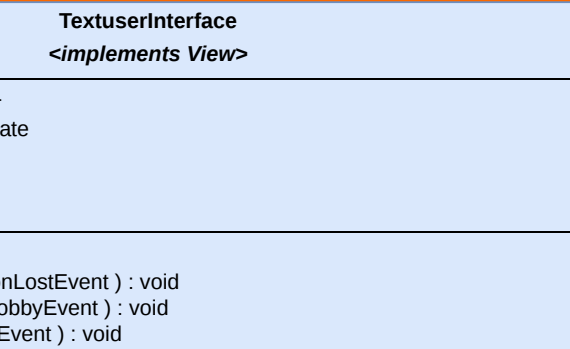

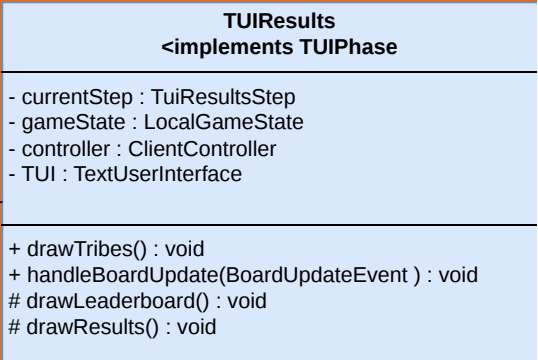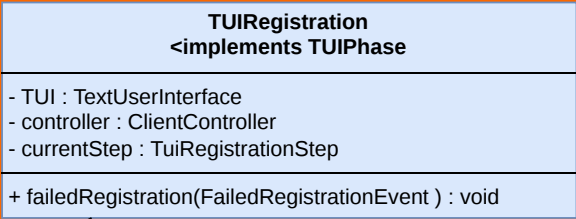



ResourceTranslator

- cardsById : Map<String, Card> - offerTemplatesById : Map<String, LocalOfferCard>

+ retrieveCard(String) : Card + createOfferCard(String, boolean, String) : LocalOfferCard
--

+ handleUpdateMessage(PlayerScoresUpdate) : void
+ handleUpdateMessage(PlayerBuildingsUpdate) : void
+ handleUpdateMessage(EndGameUpdate) : void
+ handleUpdateMessage(GameEventResolveUpdate) : void
+ handleUpdateMessage(PlayerBonusDrawUpdate) : void
+ handleUpdateMessage(SuccessRegistrationUpdate) : void
+ handleUpdateMessage(GameCrashUpdate) : void
+ handleUpdateMessage(PlayerTribeUpdate) : void
+ handleUpdateMessage(GameRoundStatusUpdate) : void
+ handleUpdateMessage(TurnOrderUpdate) : void
+ handleUpdateMessage(OfferTrackUpdate) : void
+ handleUpdateMessage(CardLineUpdate) : void
+ handleUpdateMessage(GameStartUpdate) : void
+ handleUpdateMessage(PlayersListUpdate) : void
+ handleUpdateMessage(ShowLobbyUpdate) : void



POST

StateUpdater

<implements IUpdateVisitor, UpdateHandler>

- gameState : LocalGameState
- translator : LocalResourceTranslator
- eventBus : IEventBus

+ handleUpdate(UpdateMessage) : void

<<Interface>> UpdateHandler

+ handleUpdate(UpdateMessage) : void

StateErrorUpdate







<implements ErrorHandler>

- localState : LocalGameState
- eventBus : IEventBus



+ handleErrorMessage(ErrorMessage)


<<Interface>> ErrorHandler


+ handleUpdate(UpdateMessage) :

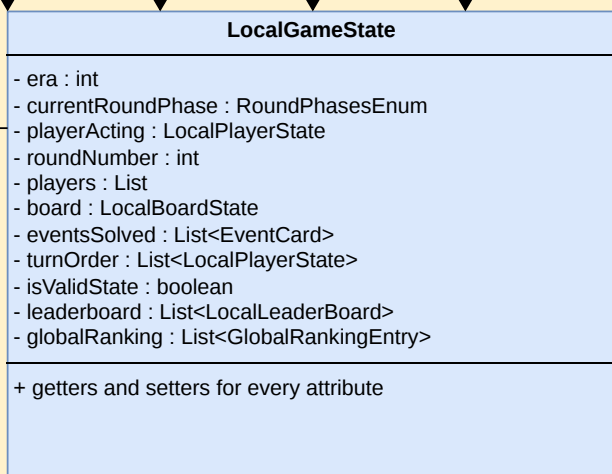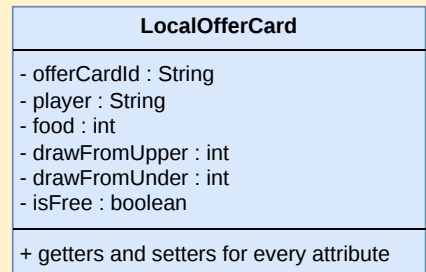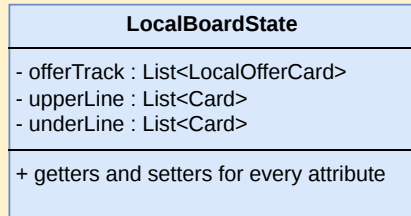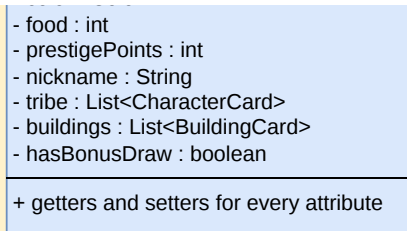

POST



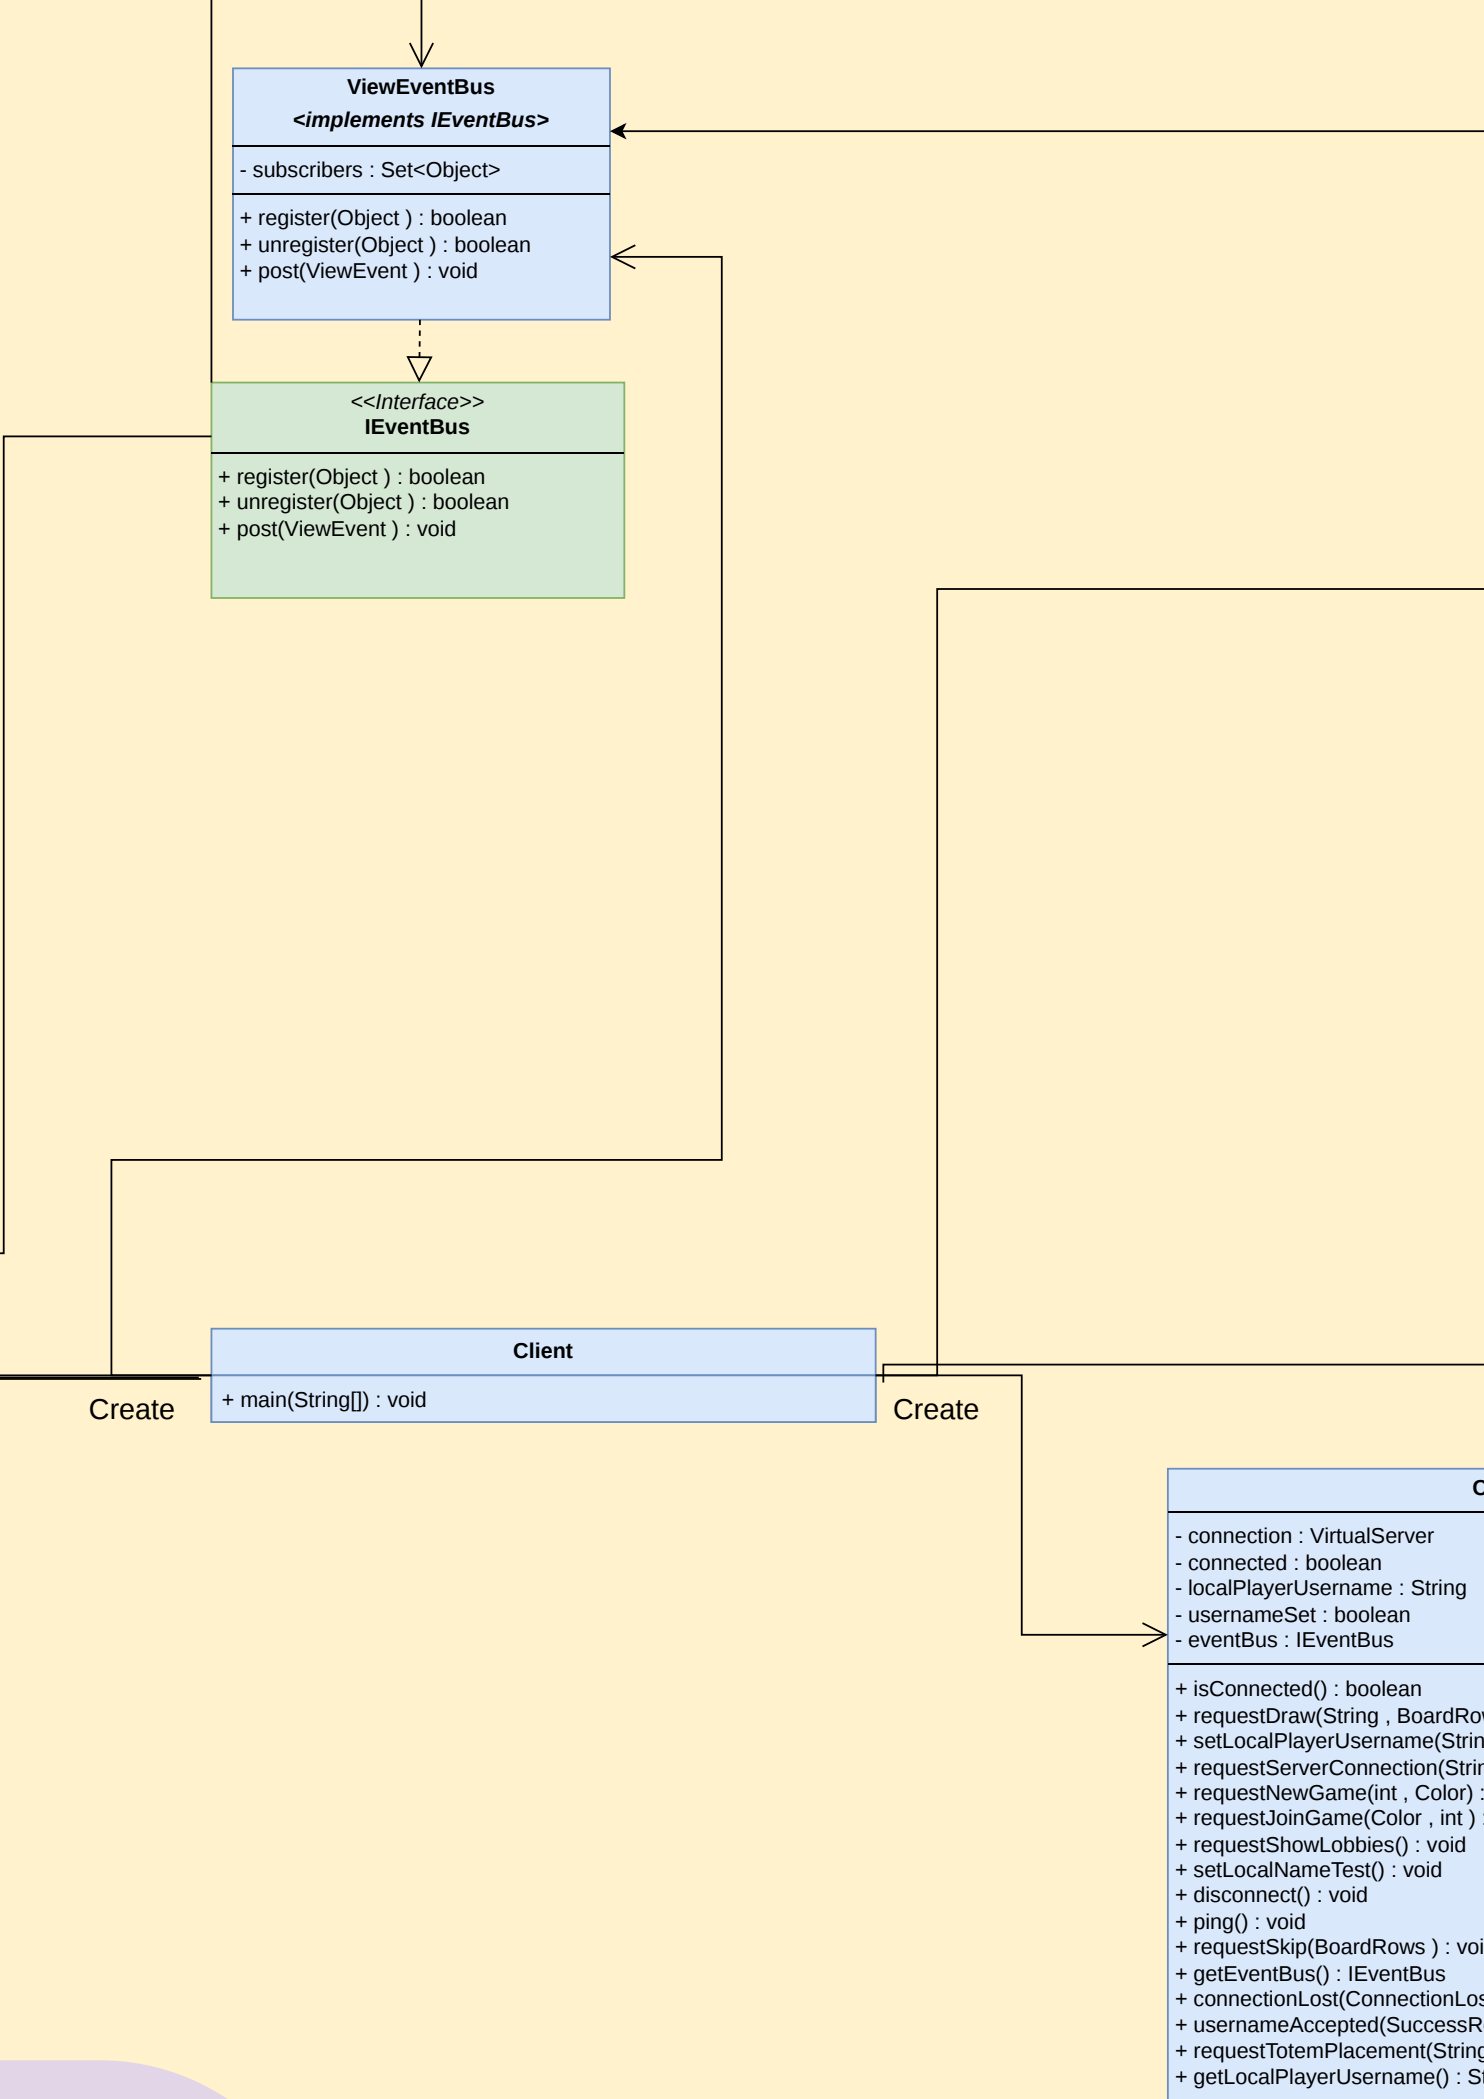

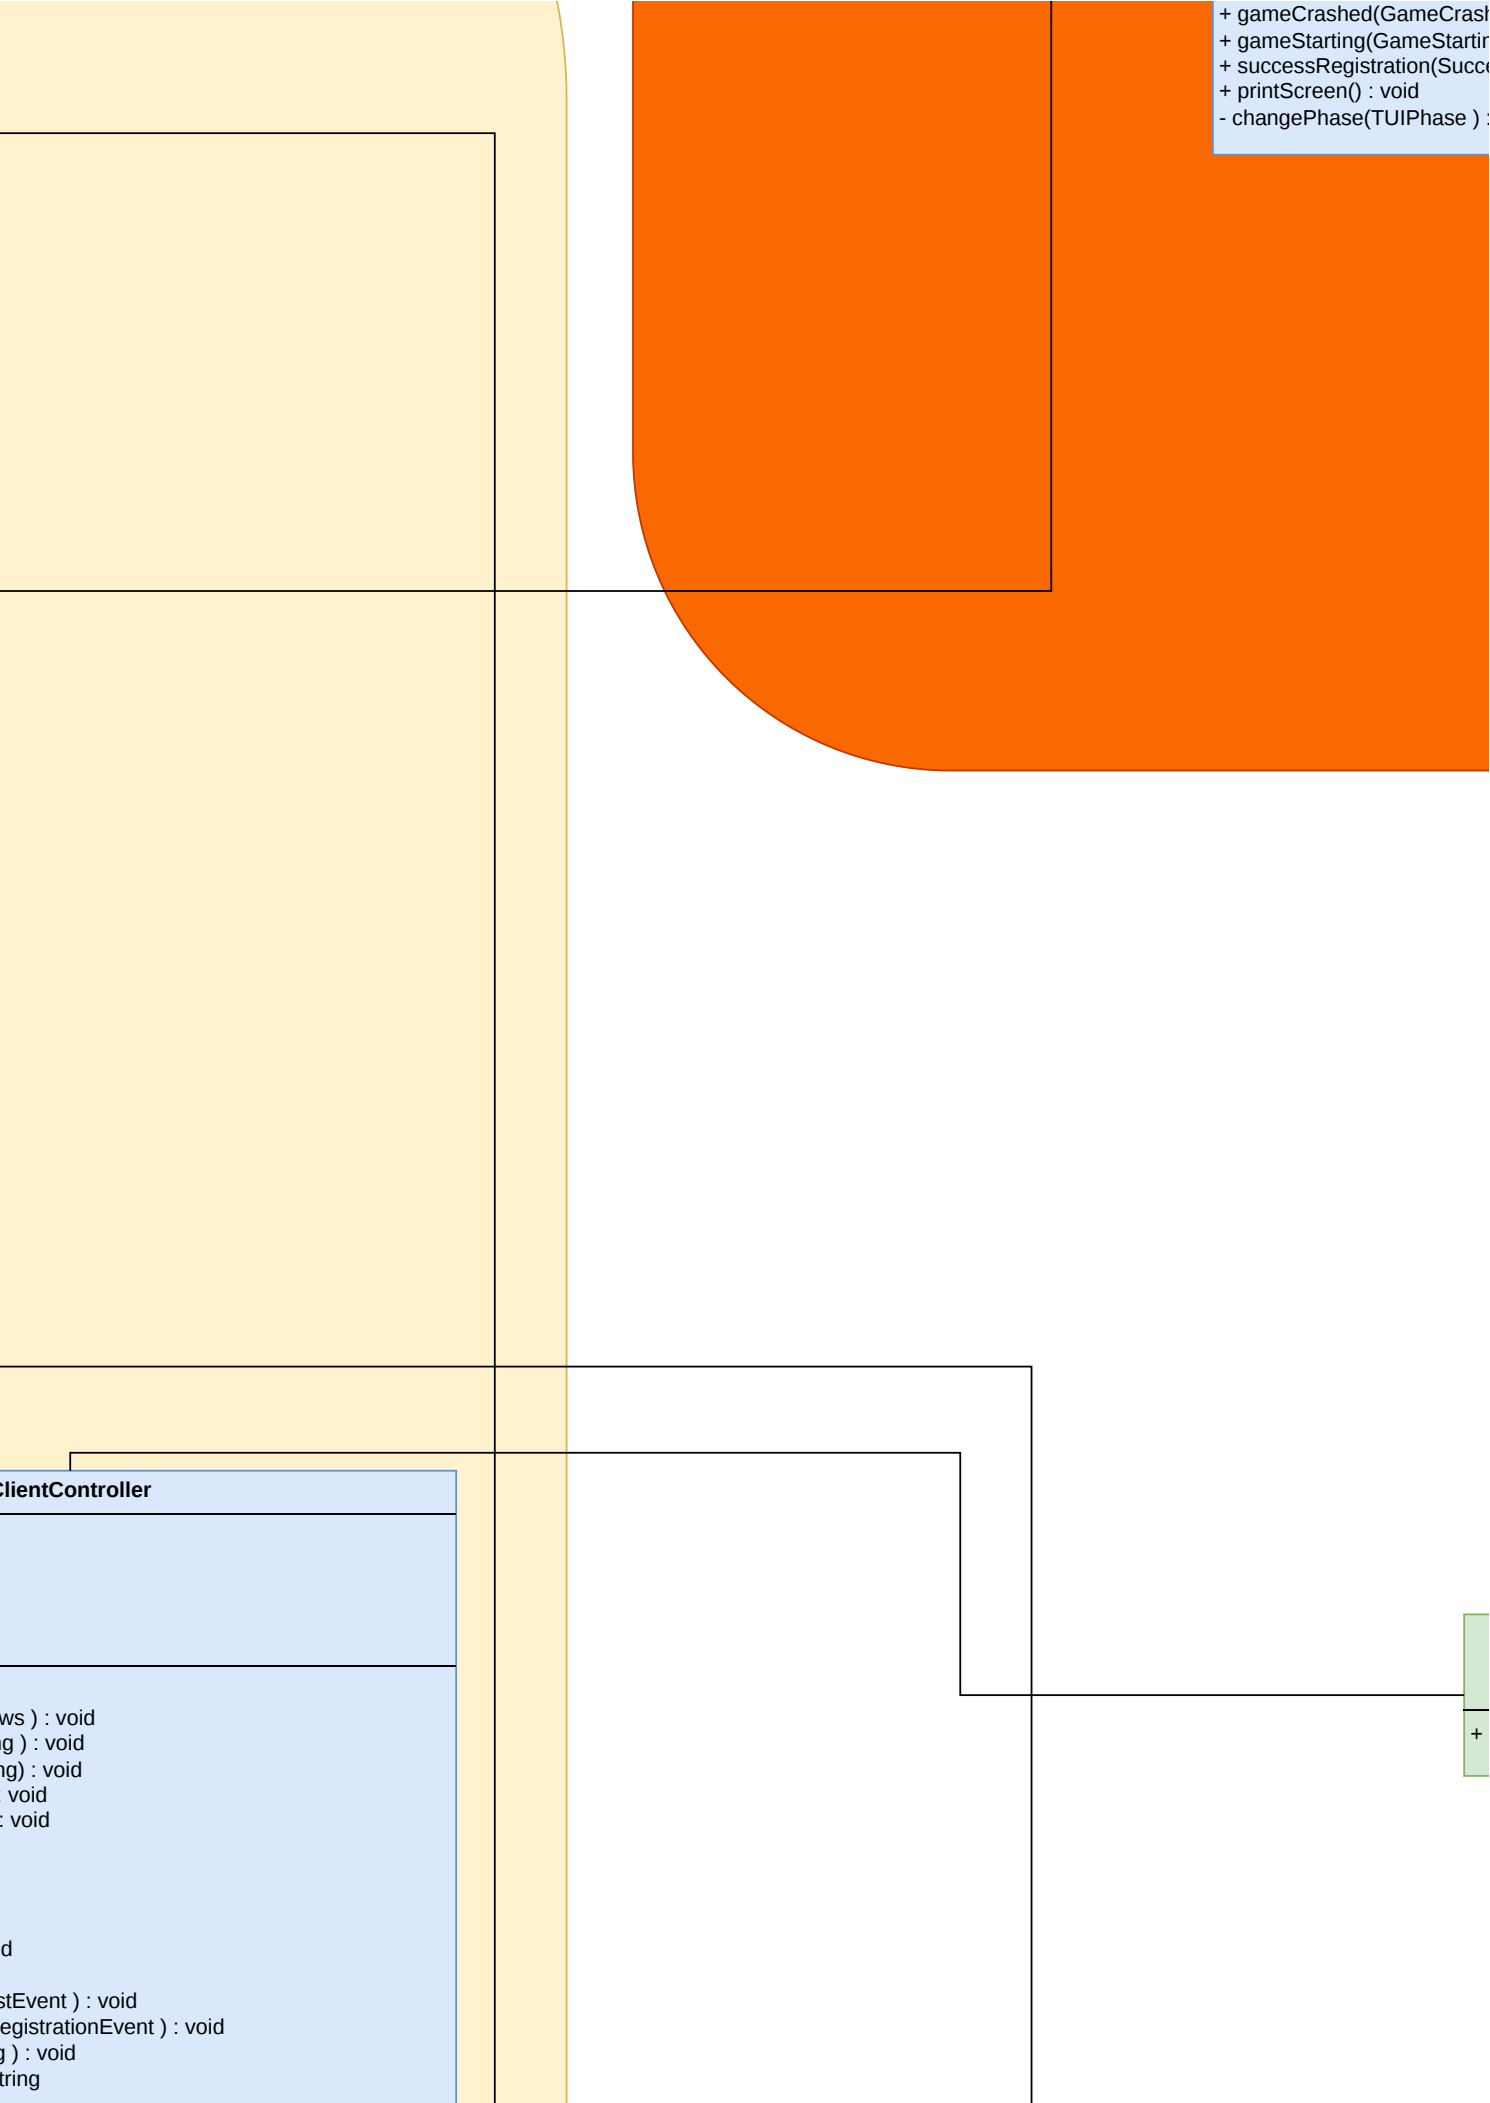

hedEvent) : void
ngEvent) : void
essRegistrationEvent) : void
 : void



TUILobby
<implements TUIPhase

- TUI : TextUserInterface
 - controller : ClientController
 - creatingGame : boolean
 - color : Color
 - gameId : int
 - currentStep : TuiLobbyStep
 - nPlayers : int
-
- + unableToJoin(FailedJoinLobby) : void
 - + invalidColorSelected(InvalidColorPickEvent)
 - + playersChanged(PlayersInLobbyChangedEv
 - + printLobbies(ShowLobbyEvent) : void


GRAPH


<<Interface>>
View


startView() : void





UIC-USER-INTERFACE


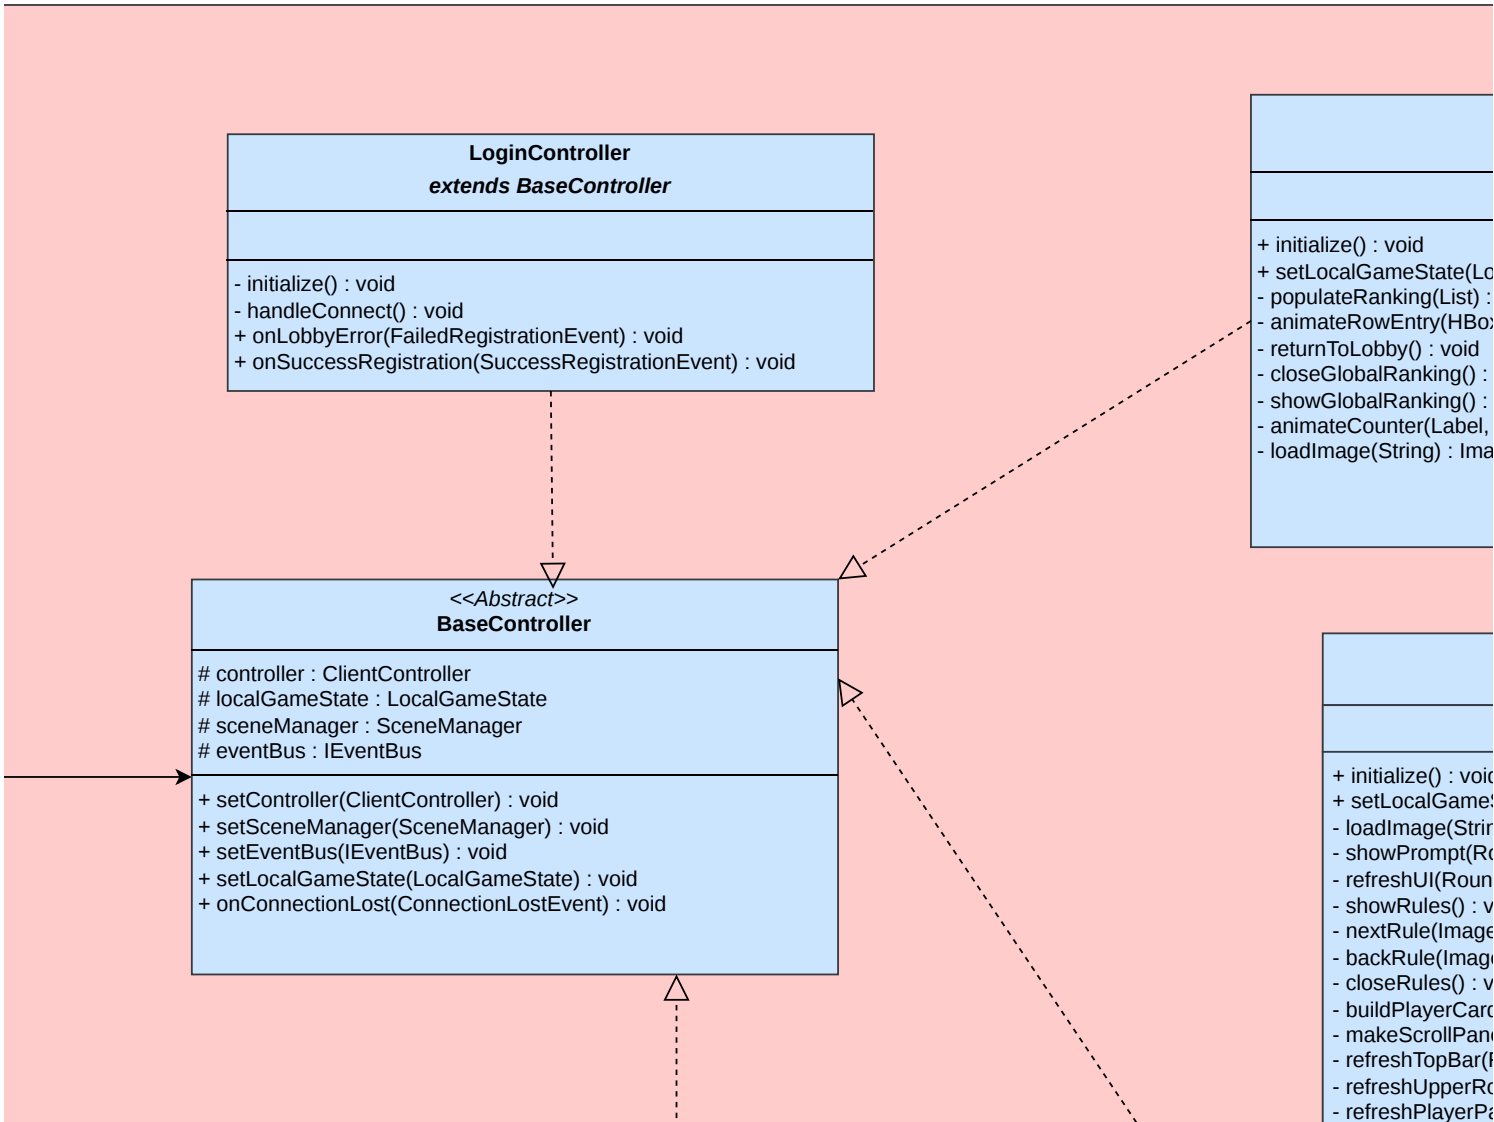



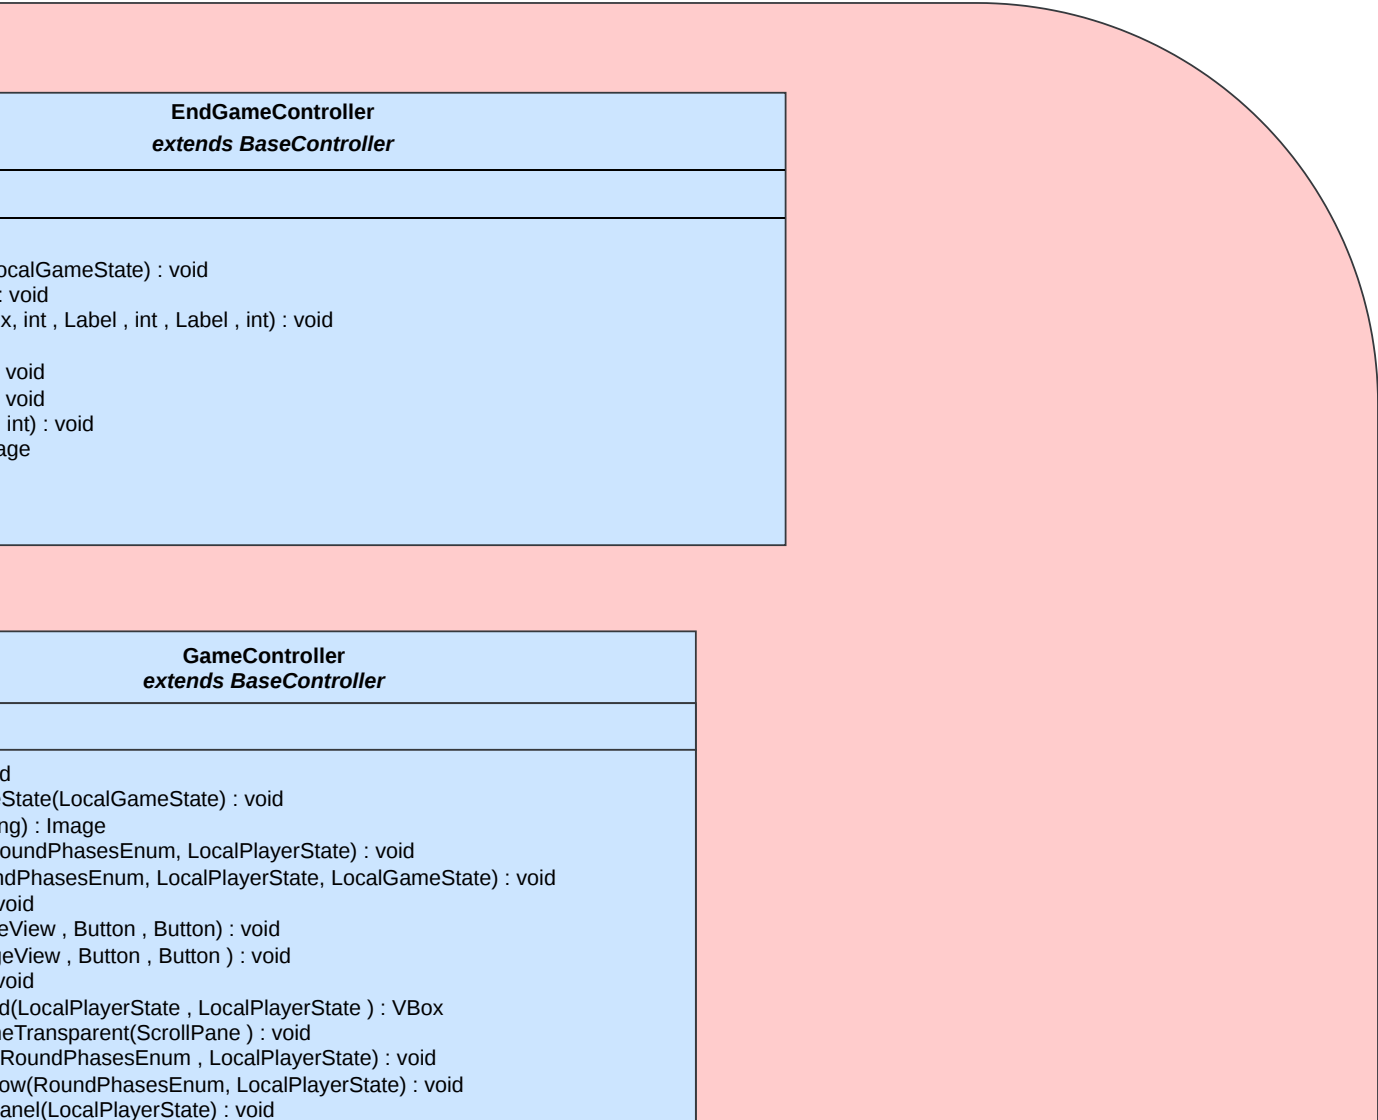



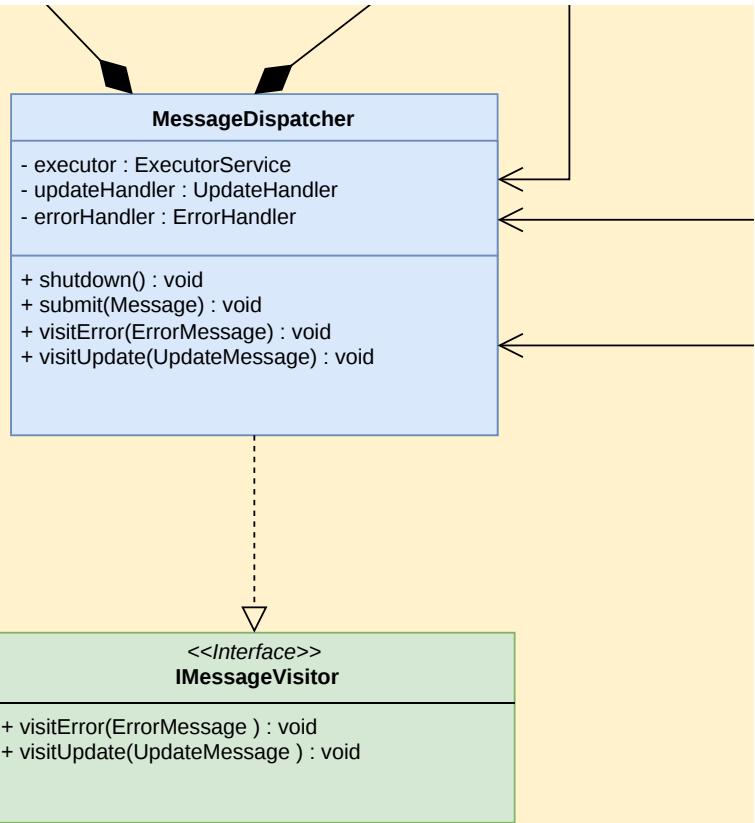


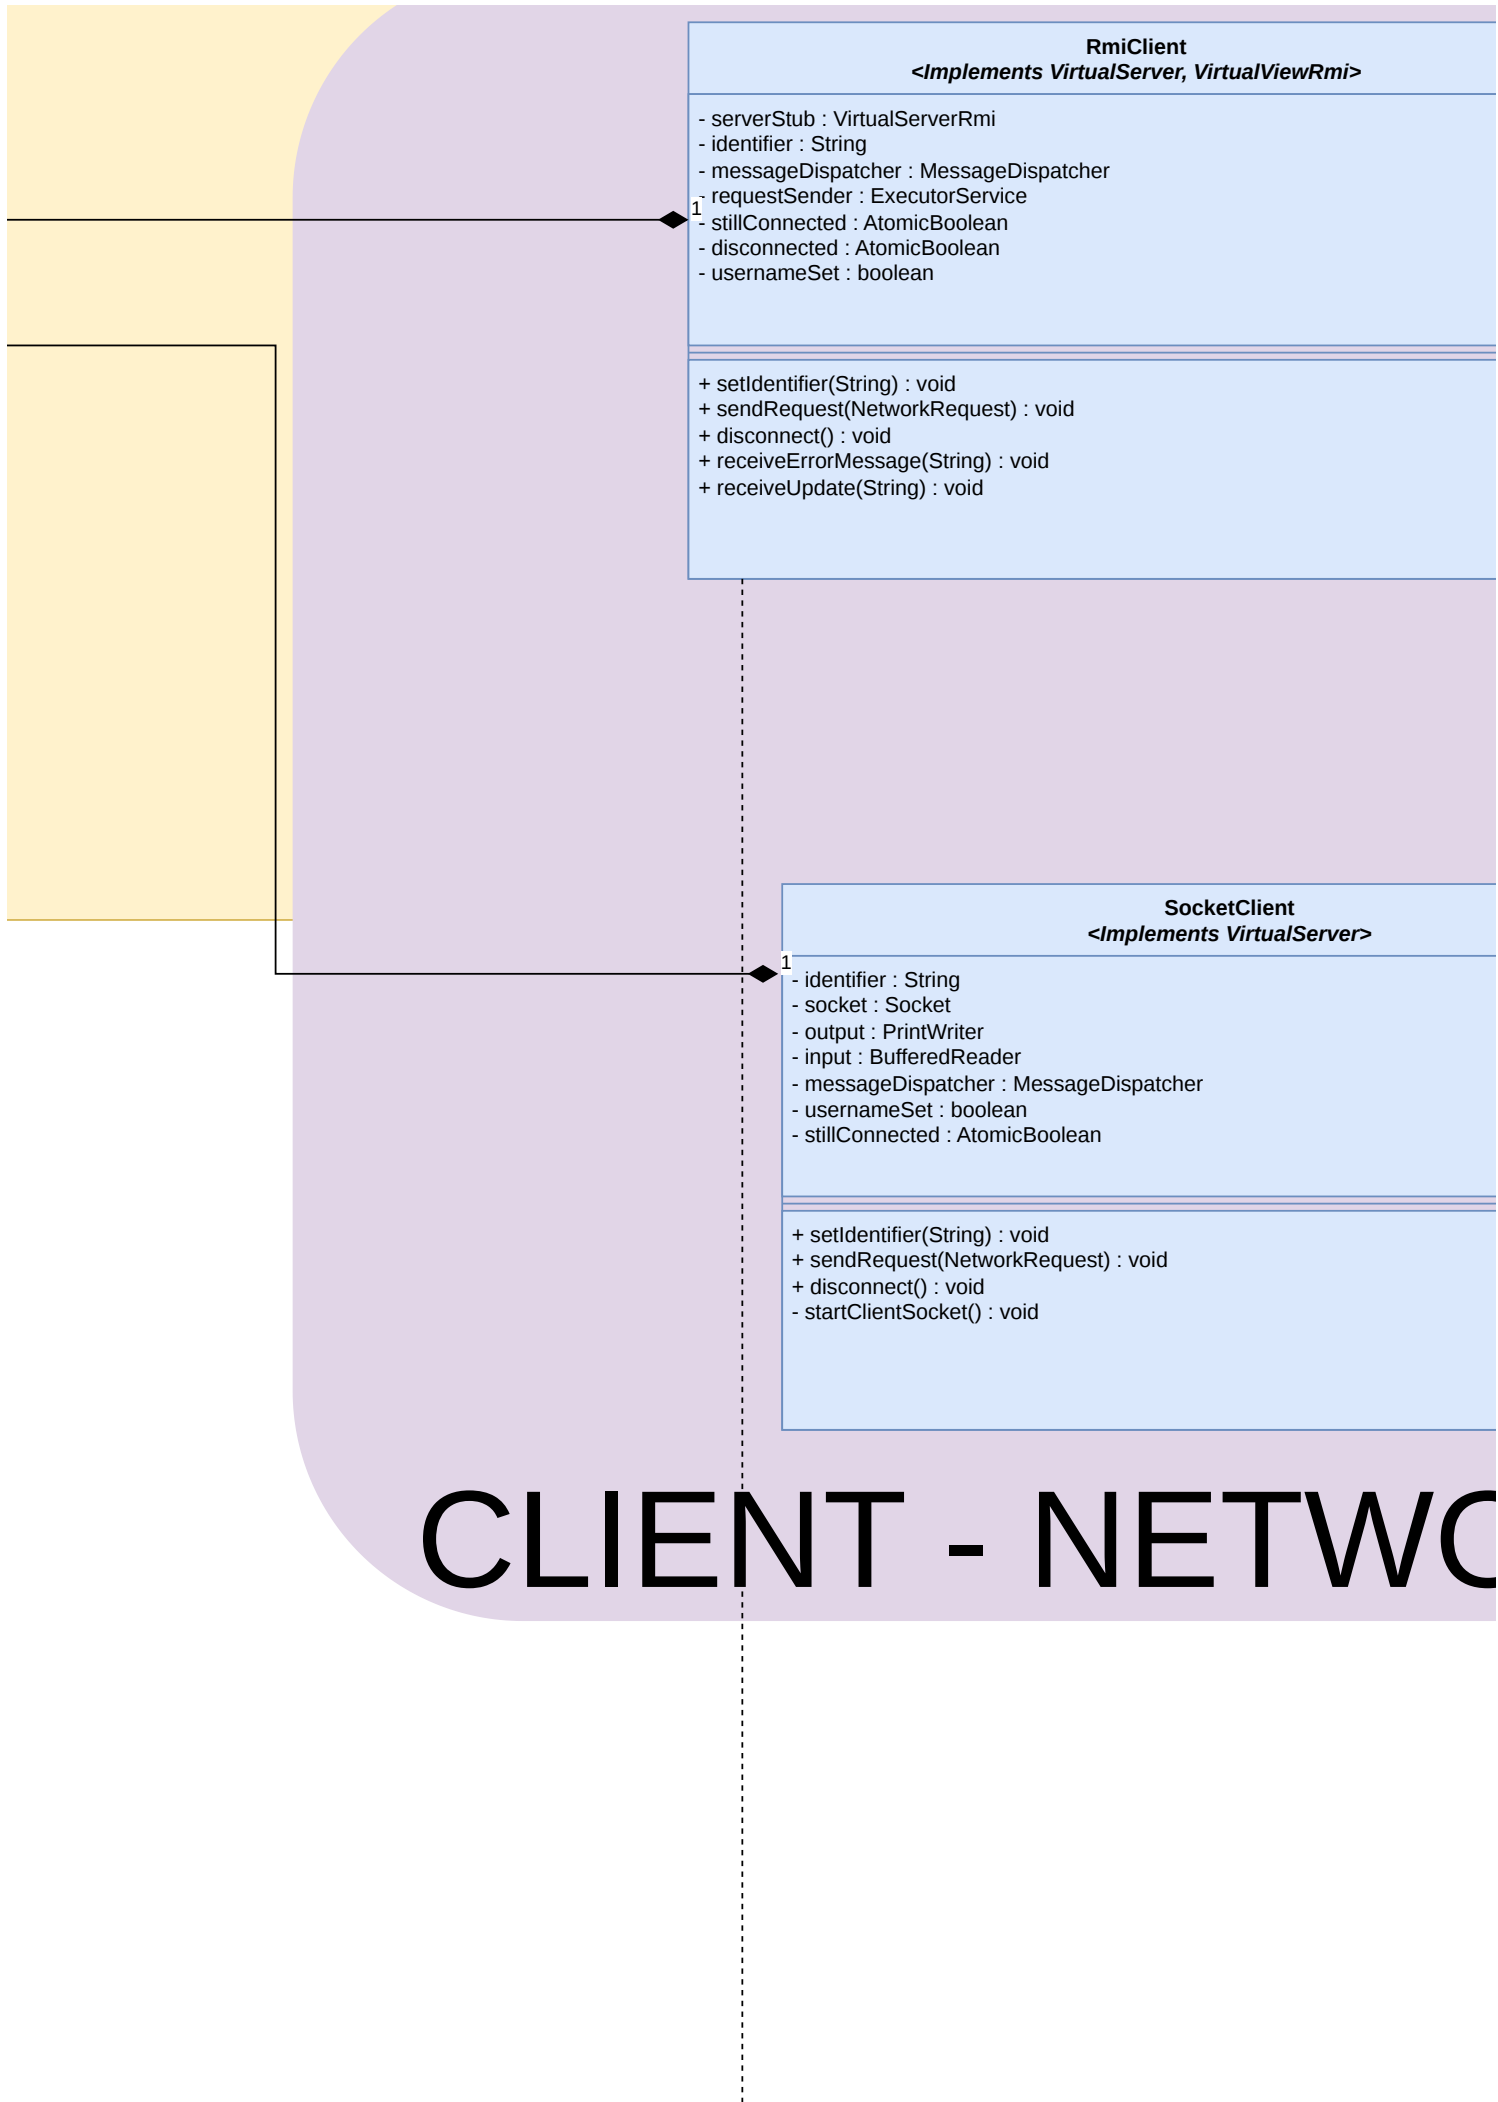

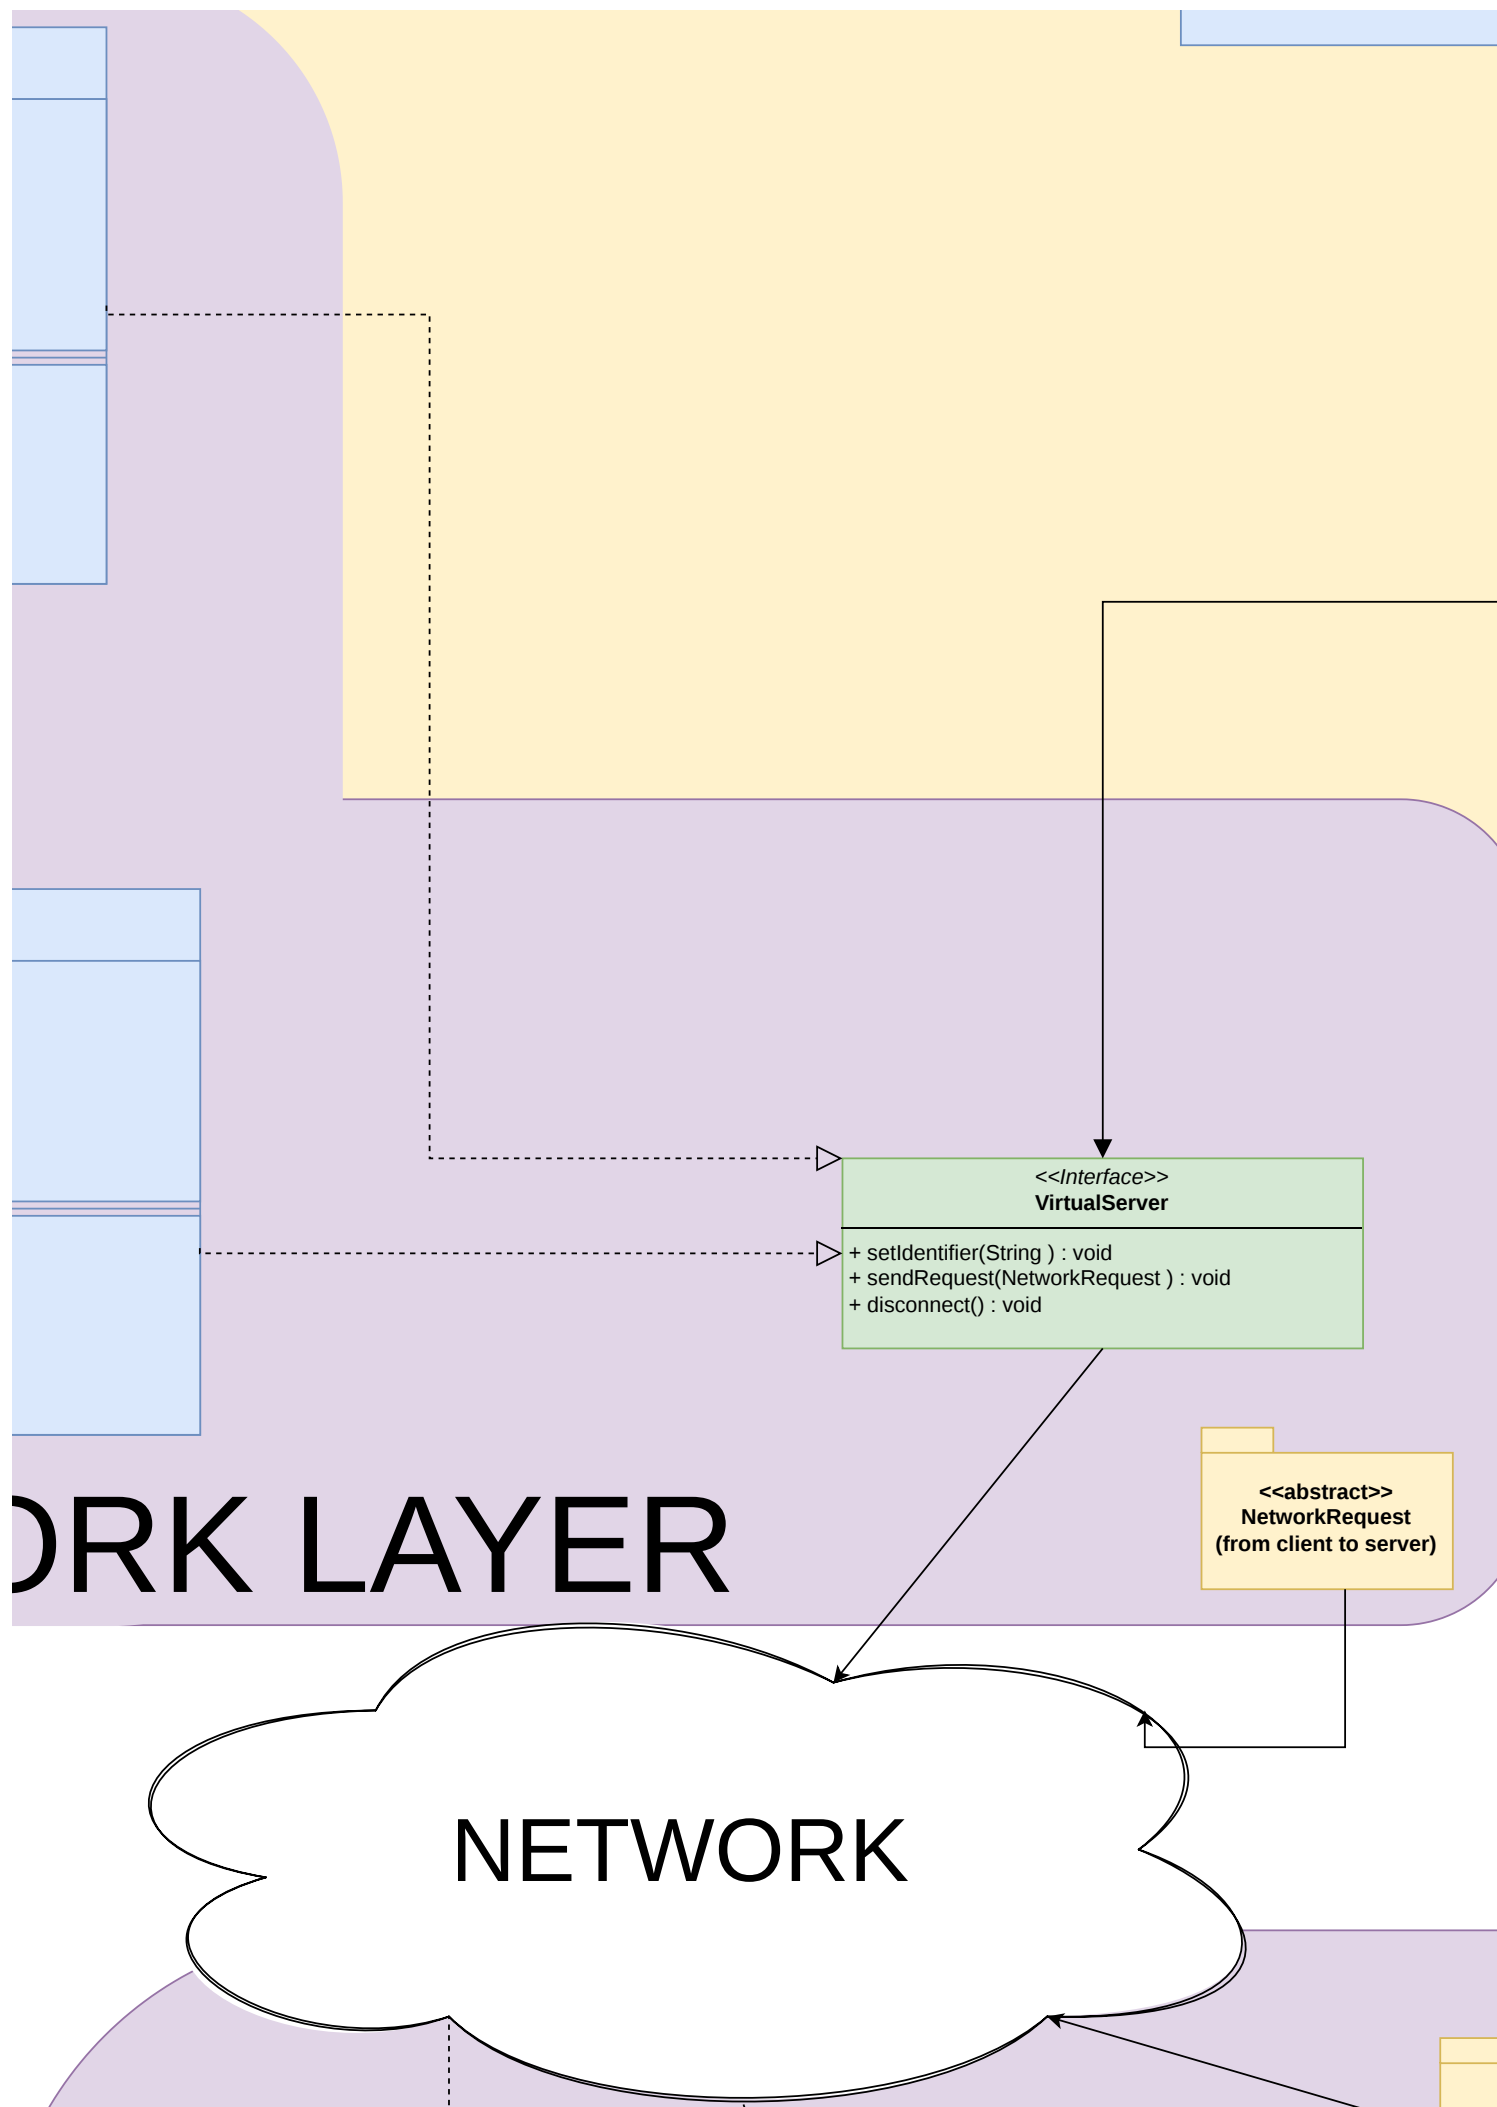

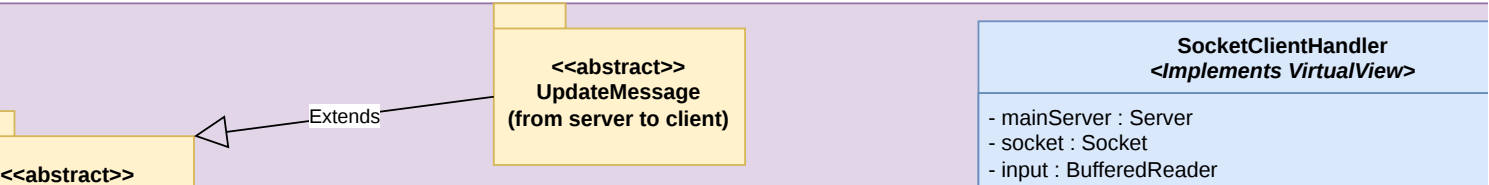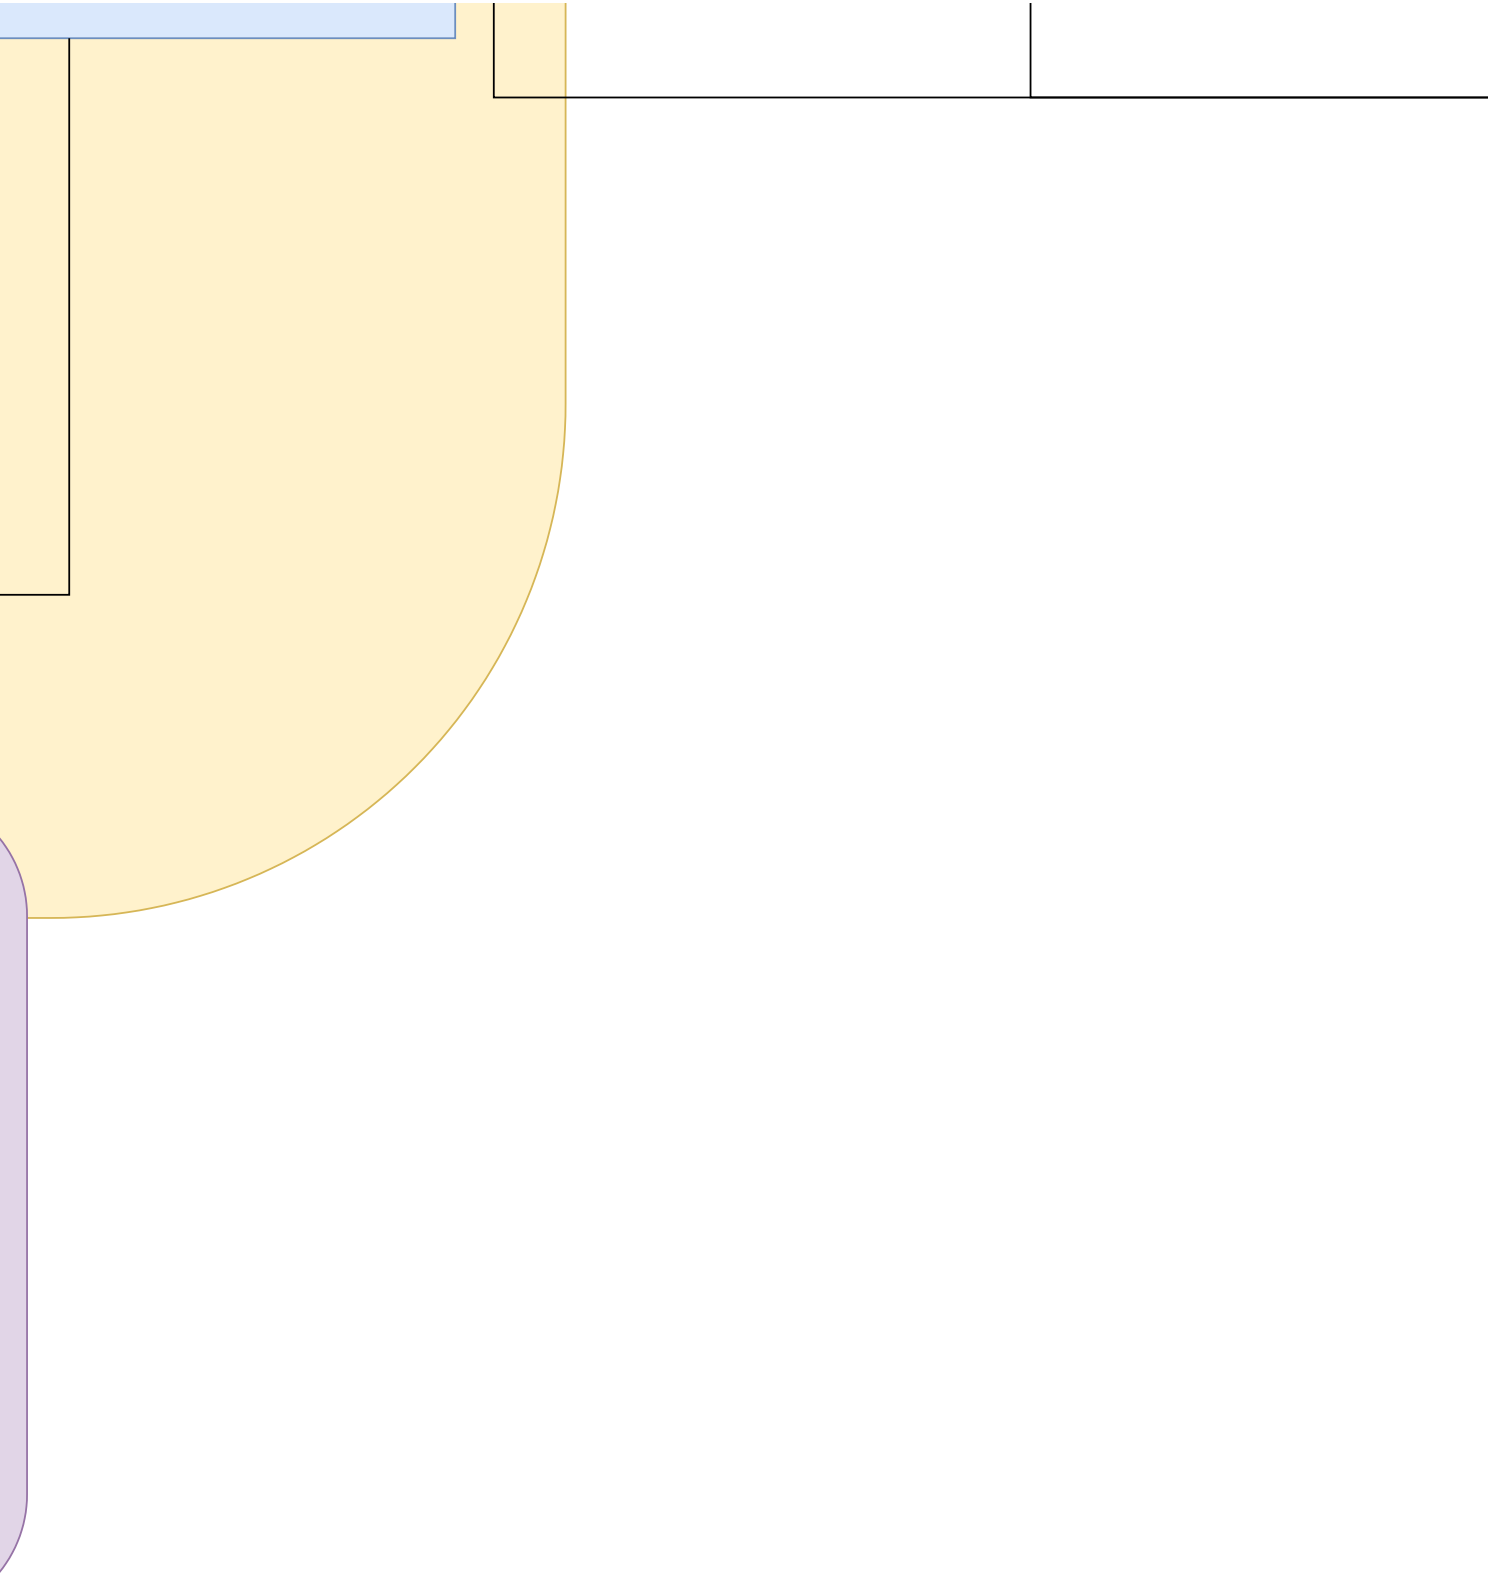

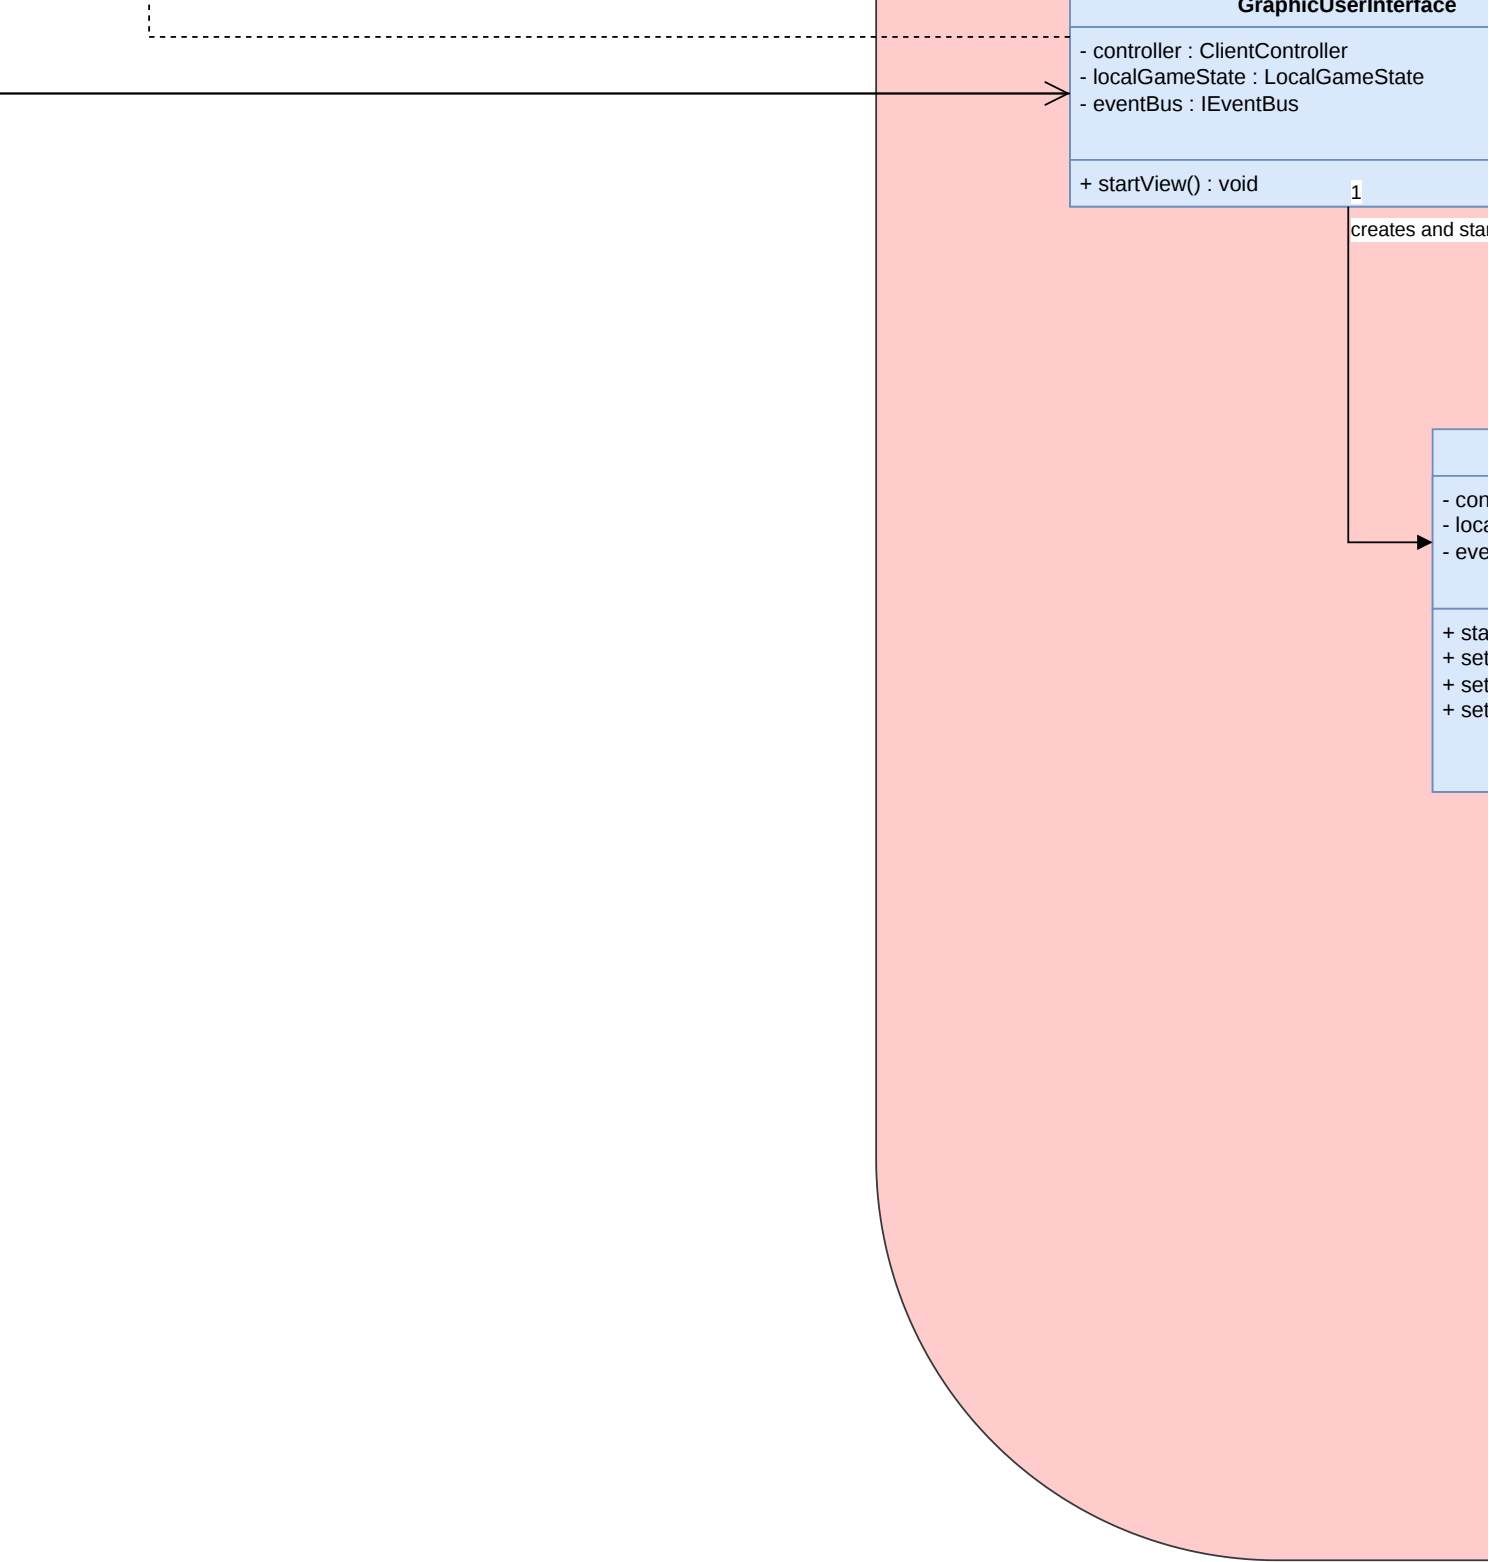

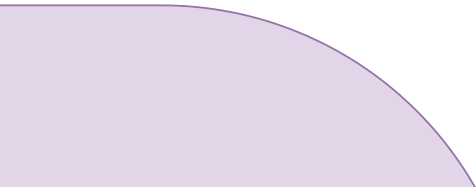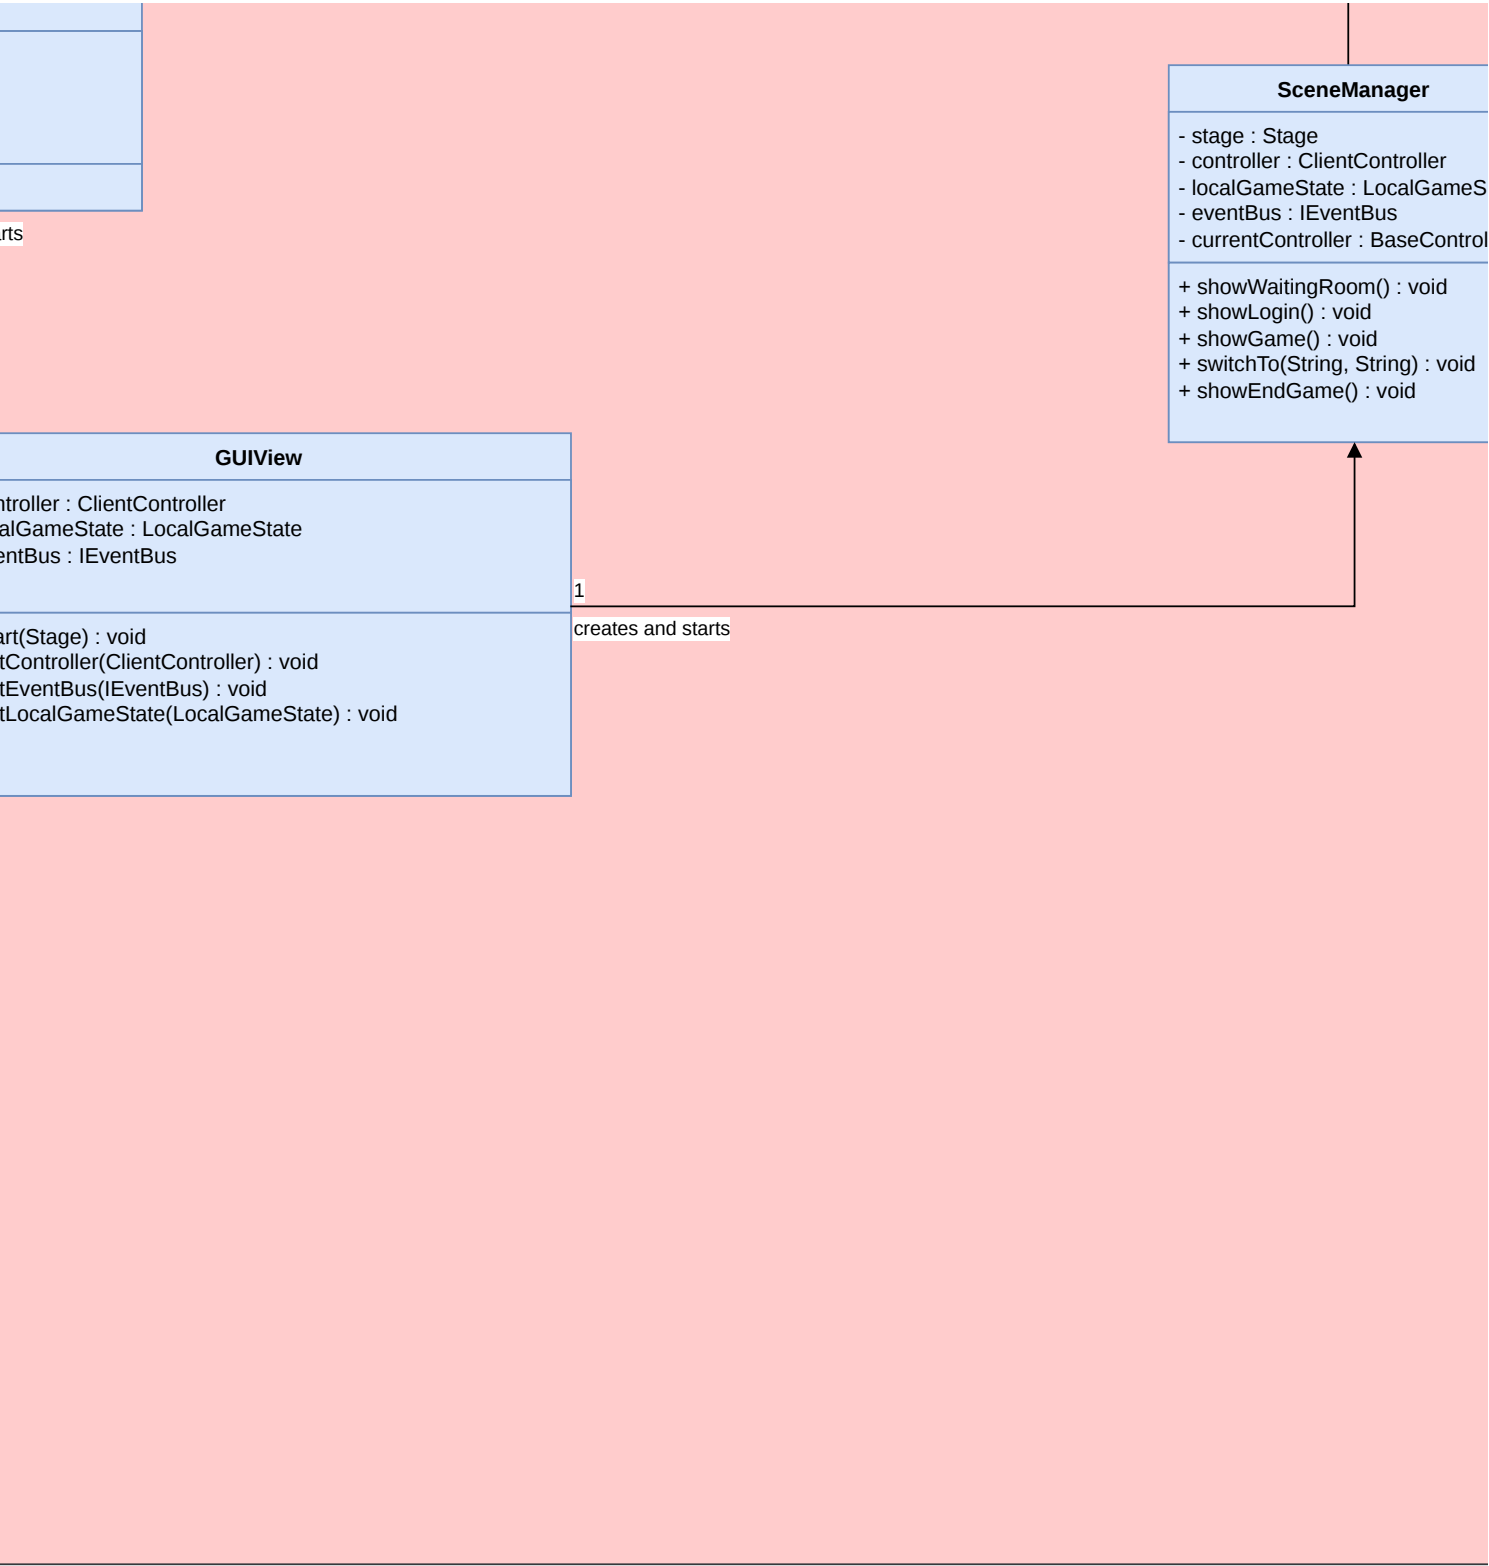

state
ller

WaitingRoomController
extends BaseController

+ initialize() : void

- loadImage(String) : Image

- showRules() : void

- nextRule(ImageView , Button , Button) : void

- backRule(ImageView , Button , Button) : void

- closeRules() : void

- handleBack() : void

- handleJoin() : void

- clearErrorLabels() : void


- handleCreateGame() : void


- handleCreate() : void


- buildOfferTileNe
StackPane
- updateStacked
- allowedDrawsF
- canAffordCard(
- refreshLowerRc
- phaseToString(
- buildCardStack
- refreshSkip(Roi
- refreshOfferTra
- buildTurnOrder
- animateCardEn
- buildCardNode
- removePrompt
- refreshDeck() :
- refreshMyInfo()
- updateCardCor
- loadCardImage
- onOfferTileClick
+ onBoardUpdat
- showNextEvent
- showTribeView
- onCardClicked(
- showSummary(
- skipDrawFromL
+ onGameCrash
- showCardType'
- skipDrawFromL
- closeShowPlay
- closeCardType'
- closeTribeView
+ onGameEndec
+ onGameEventl
- showPlayers() :


```
ode(LocalOfferCard, RoundPhasesEnum, LocalPlayerState) :  
  
Container(HBox, List, Set) : void  
FromRow(BoardRows) : int  
IsCard() : boolean  
Show(RoundPhasesEnum, LocalPlayerState) : void  
RoundPhasesEnum() : String  
Node(String, List) : Node  
RoundPhasesEnum, LocalPlayerState) : void  
Click(RoundPhasesEnum, LocalPlayerState, LocalGameState) : void  
Tile(LocalGameState) : StackPane  
Enter(Node) : void  
(Card, BoardRows, RoundPhasesEnum, LocalPlayerState) : StackPane  
WithFade() : void  
void  
 : void  
ntainer(HBox, List, Set) : void  
:(String) : Image  
ked(LocalOfferCard, StackPane) : void  
e(BoardUpdateEvent) : void  
t() : void  
er(LocalPlayerState) : void  
(Card, BoardRows, StackPane ) : void  
Cards() : void  
Lower() : void  
ied(GameCrashedEvent) : void  
Viewer(String, List) : void  
Jpper() : void  
ers() : void  
Viewer() : void  
er() : void  
d(GameEndedEvent) : void  
Resolved(GameEventResolveEvent) : void  
 : void
```







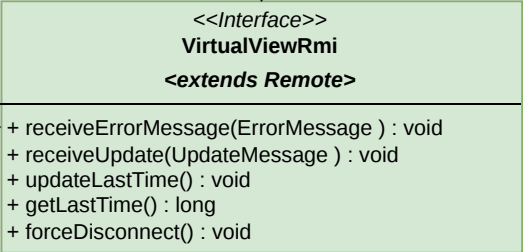


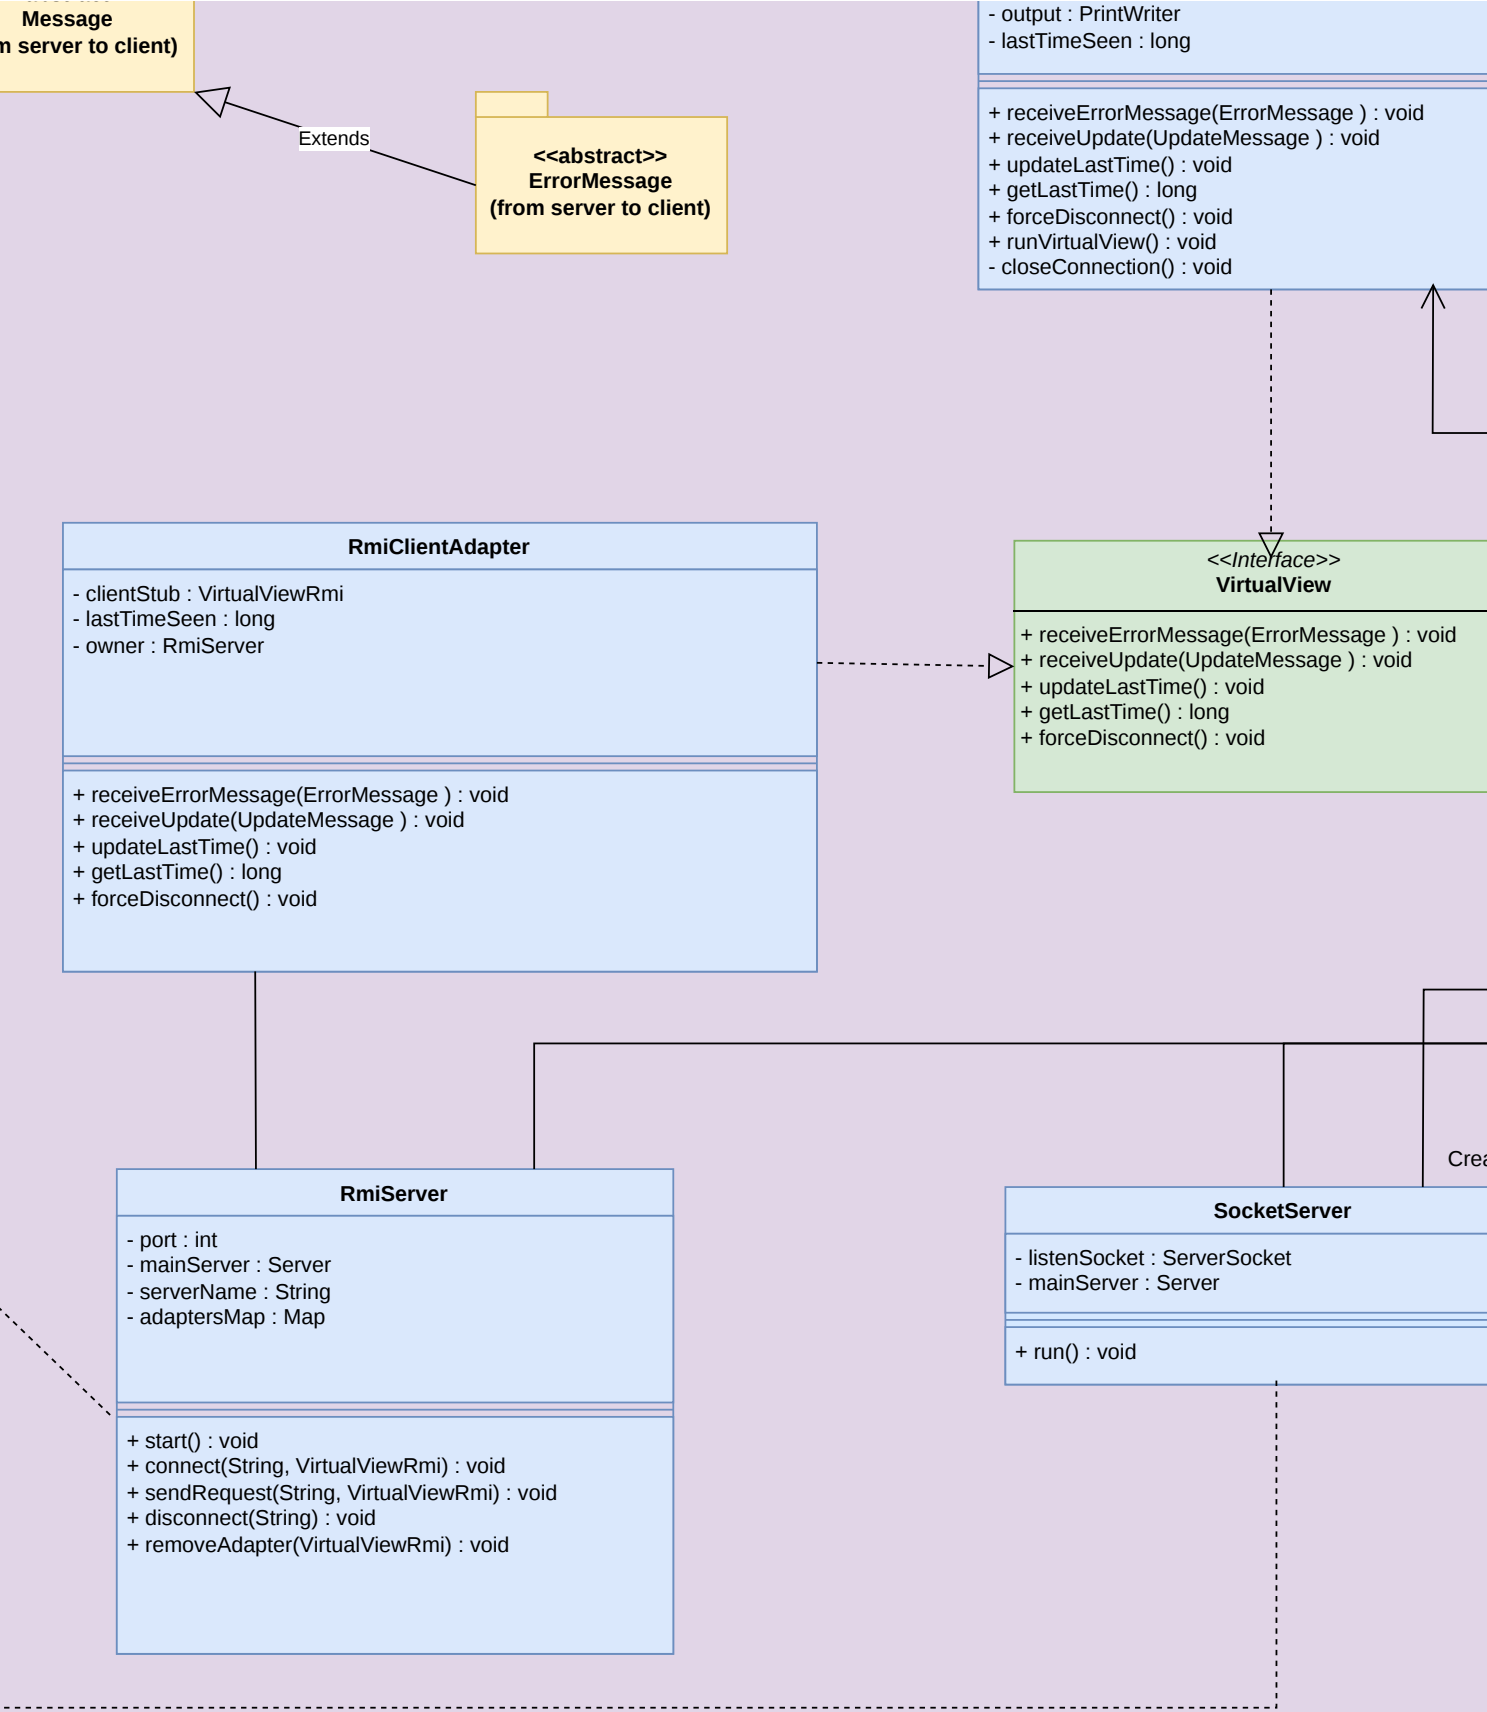

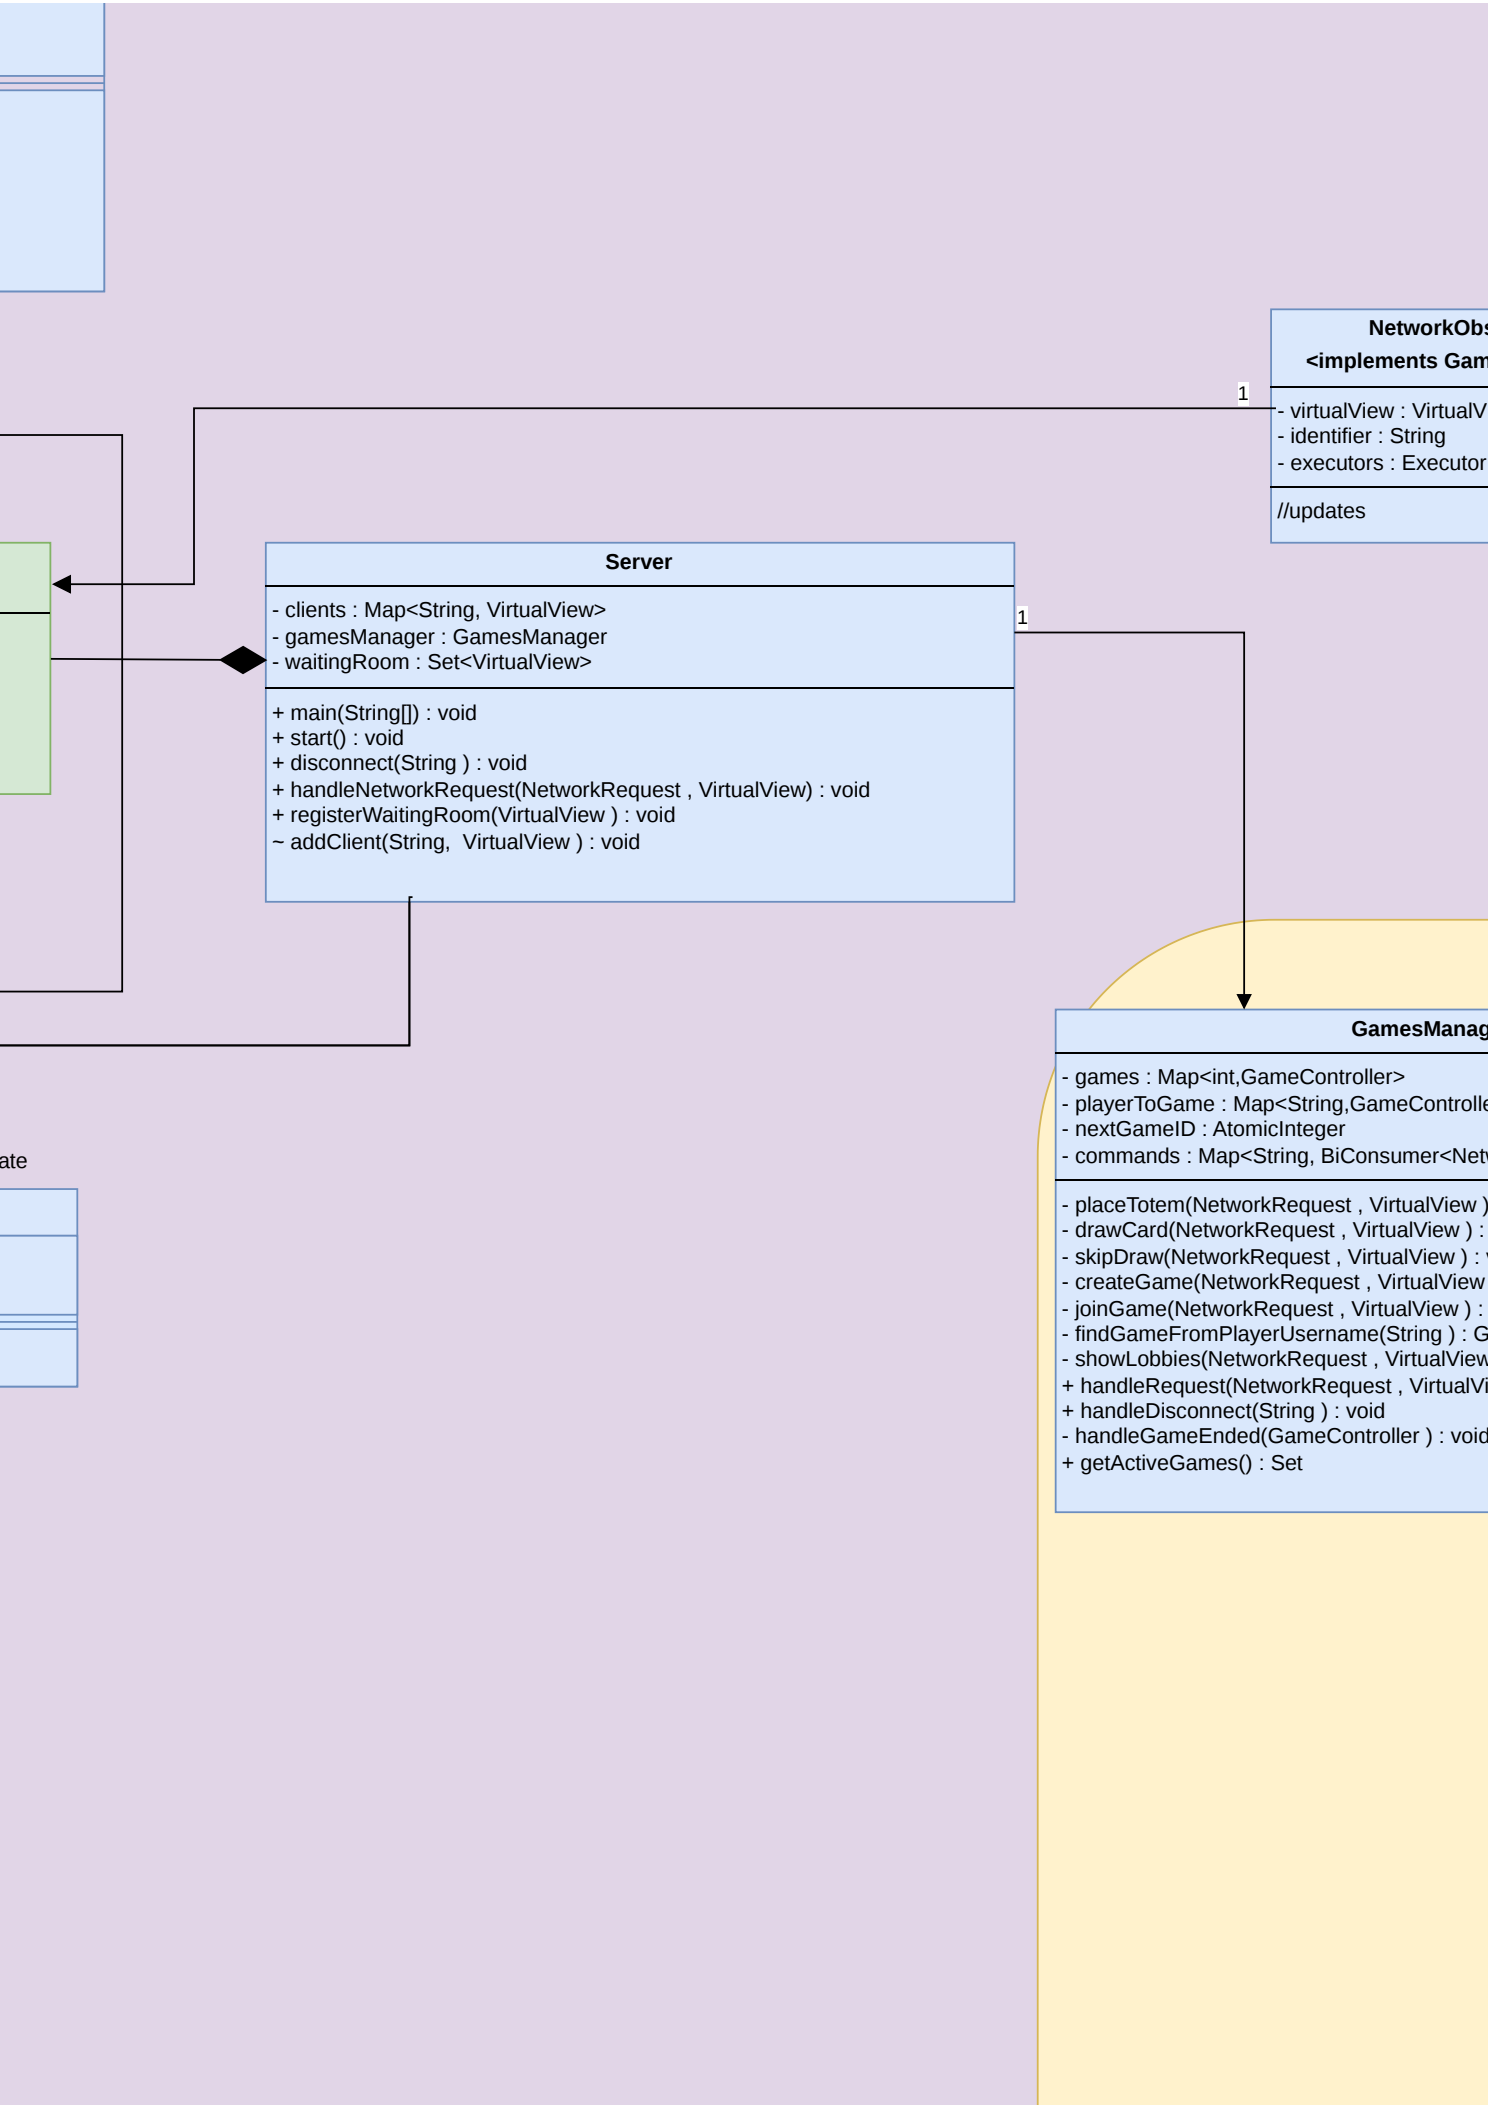


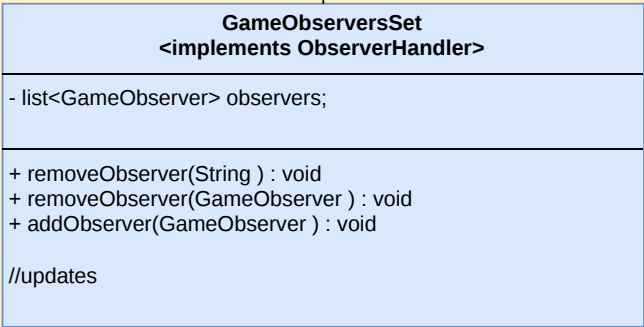


CON'

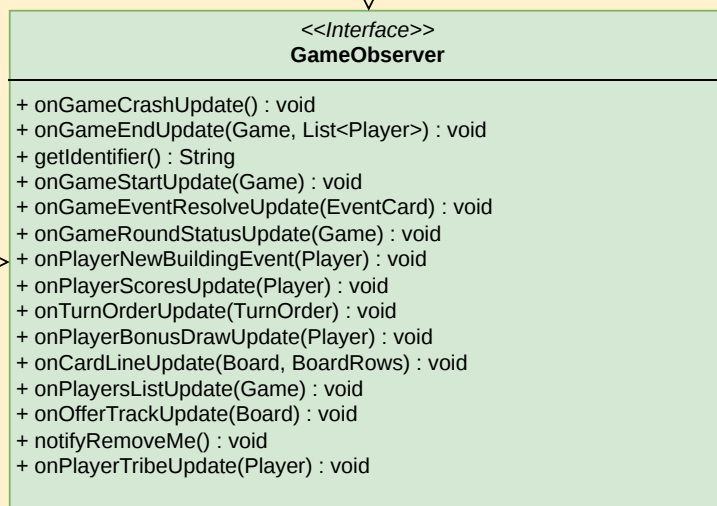


TROLLER


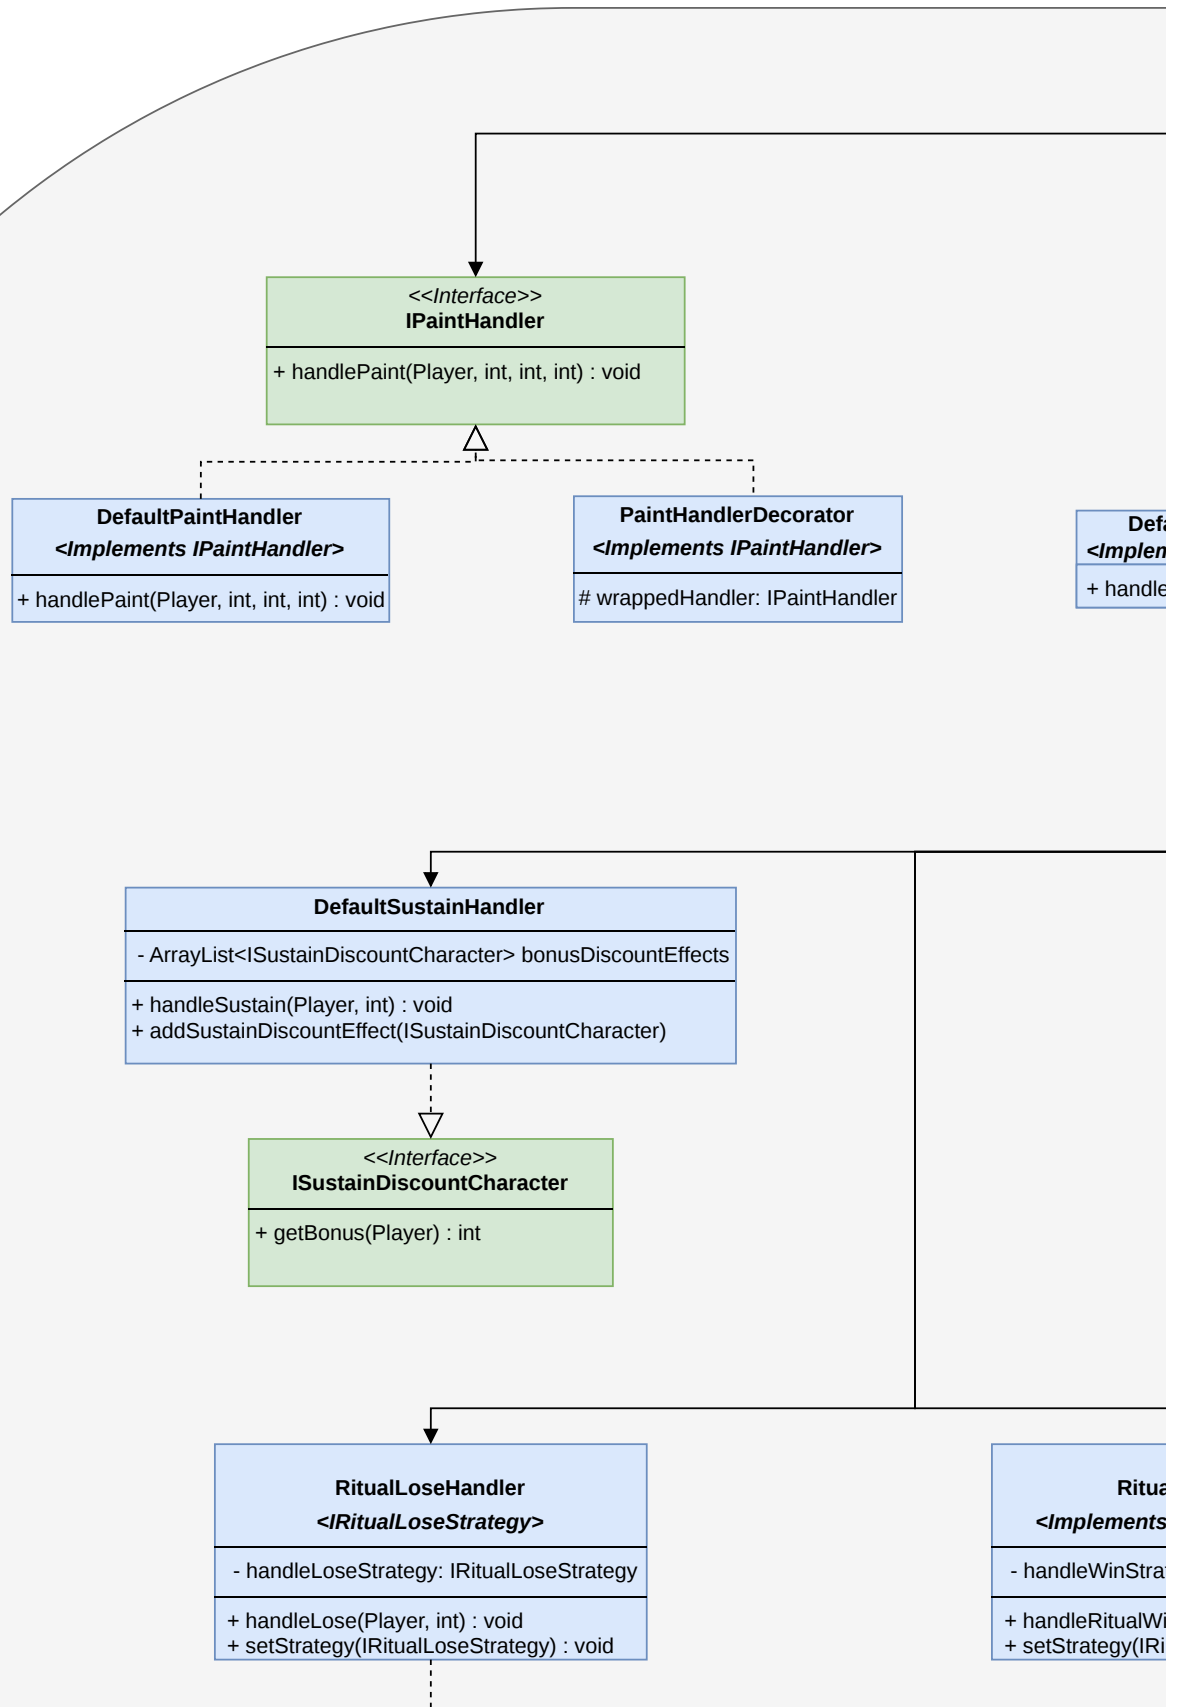



SERVER - NETWORK



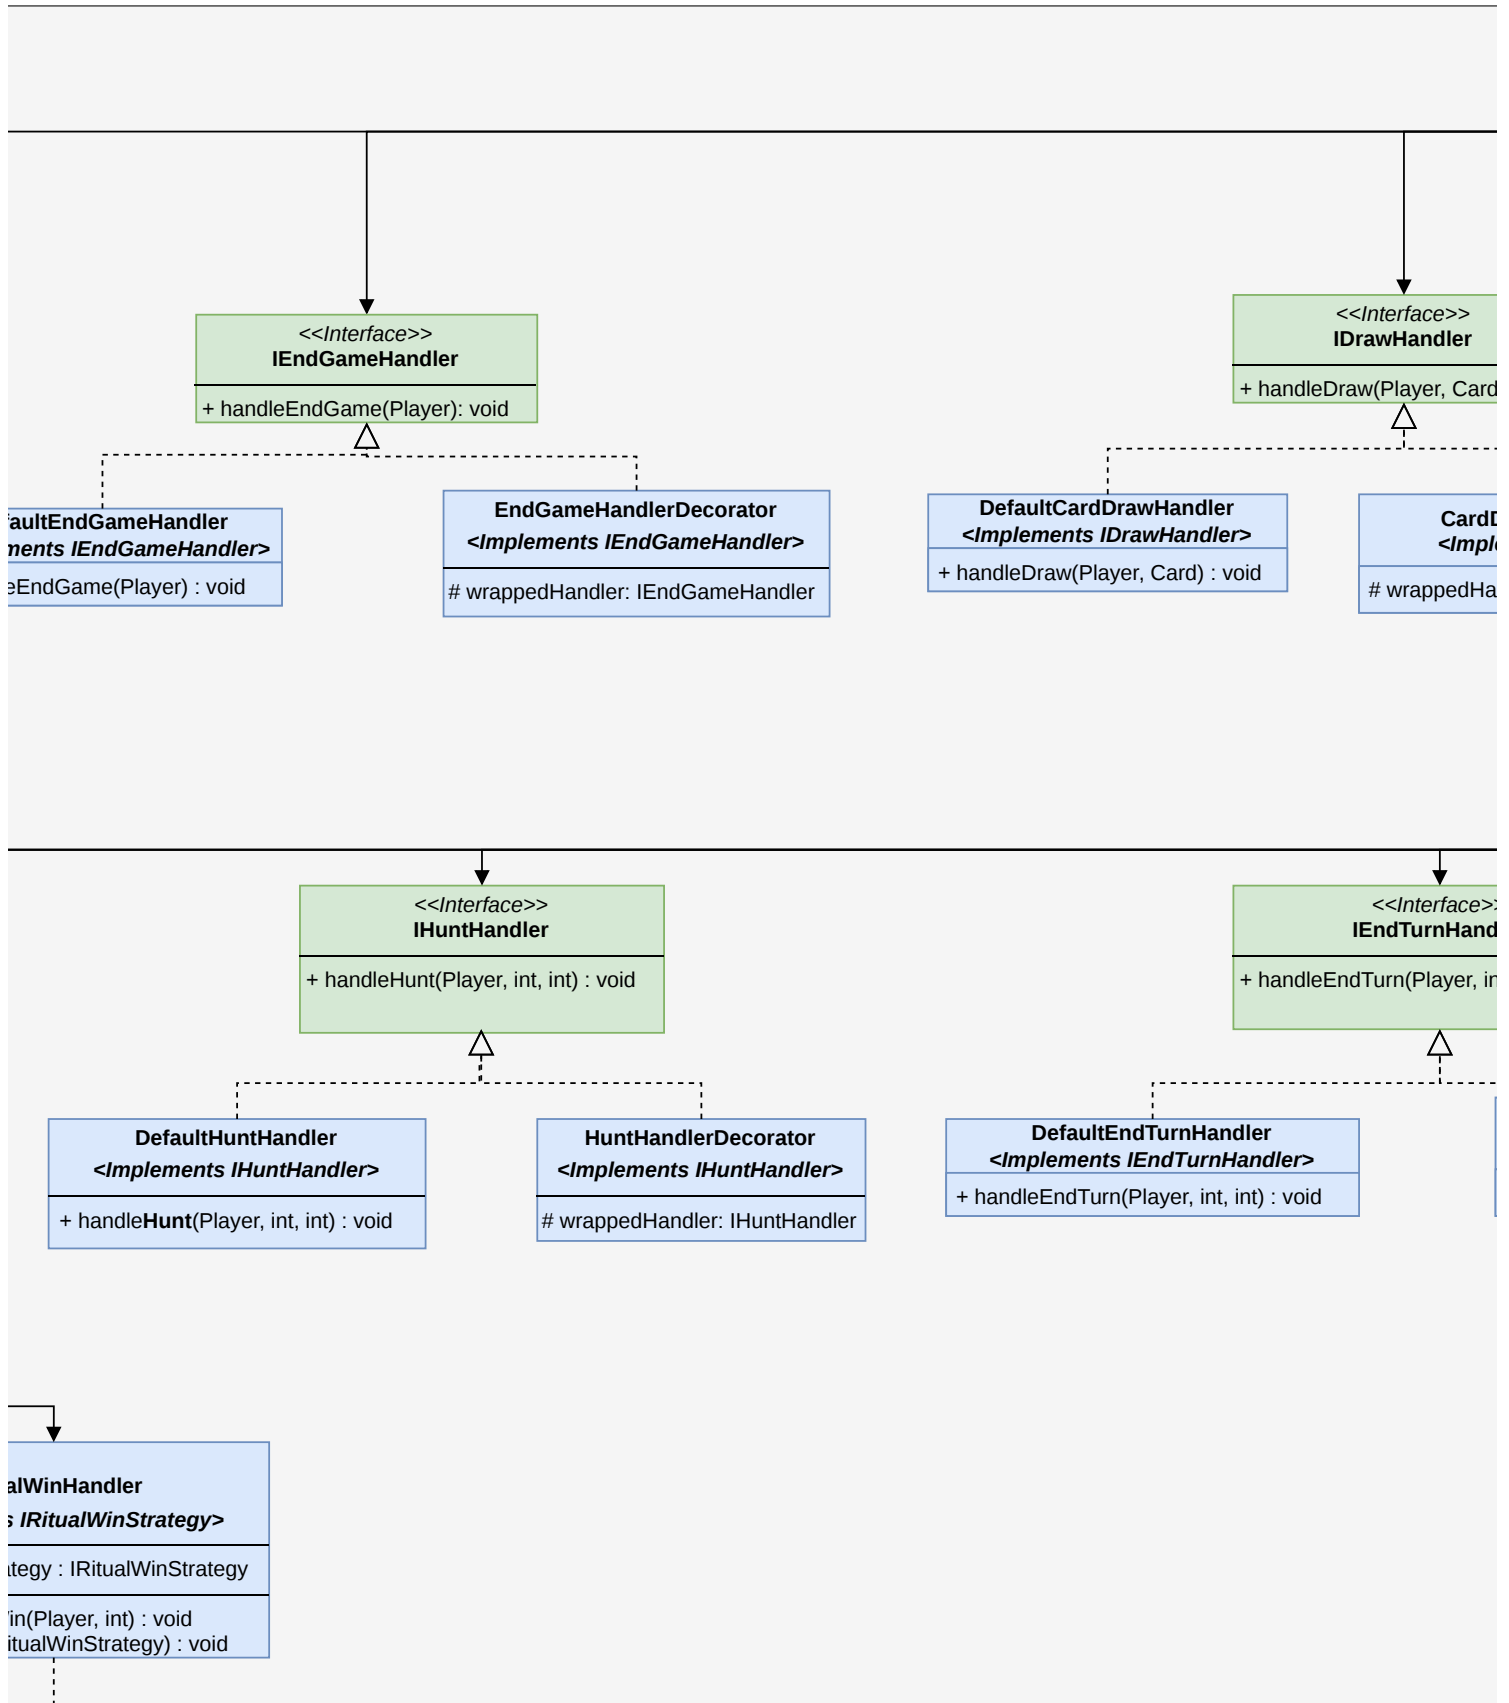



K LAYER

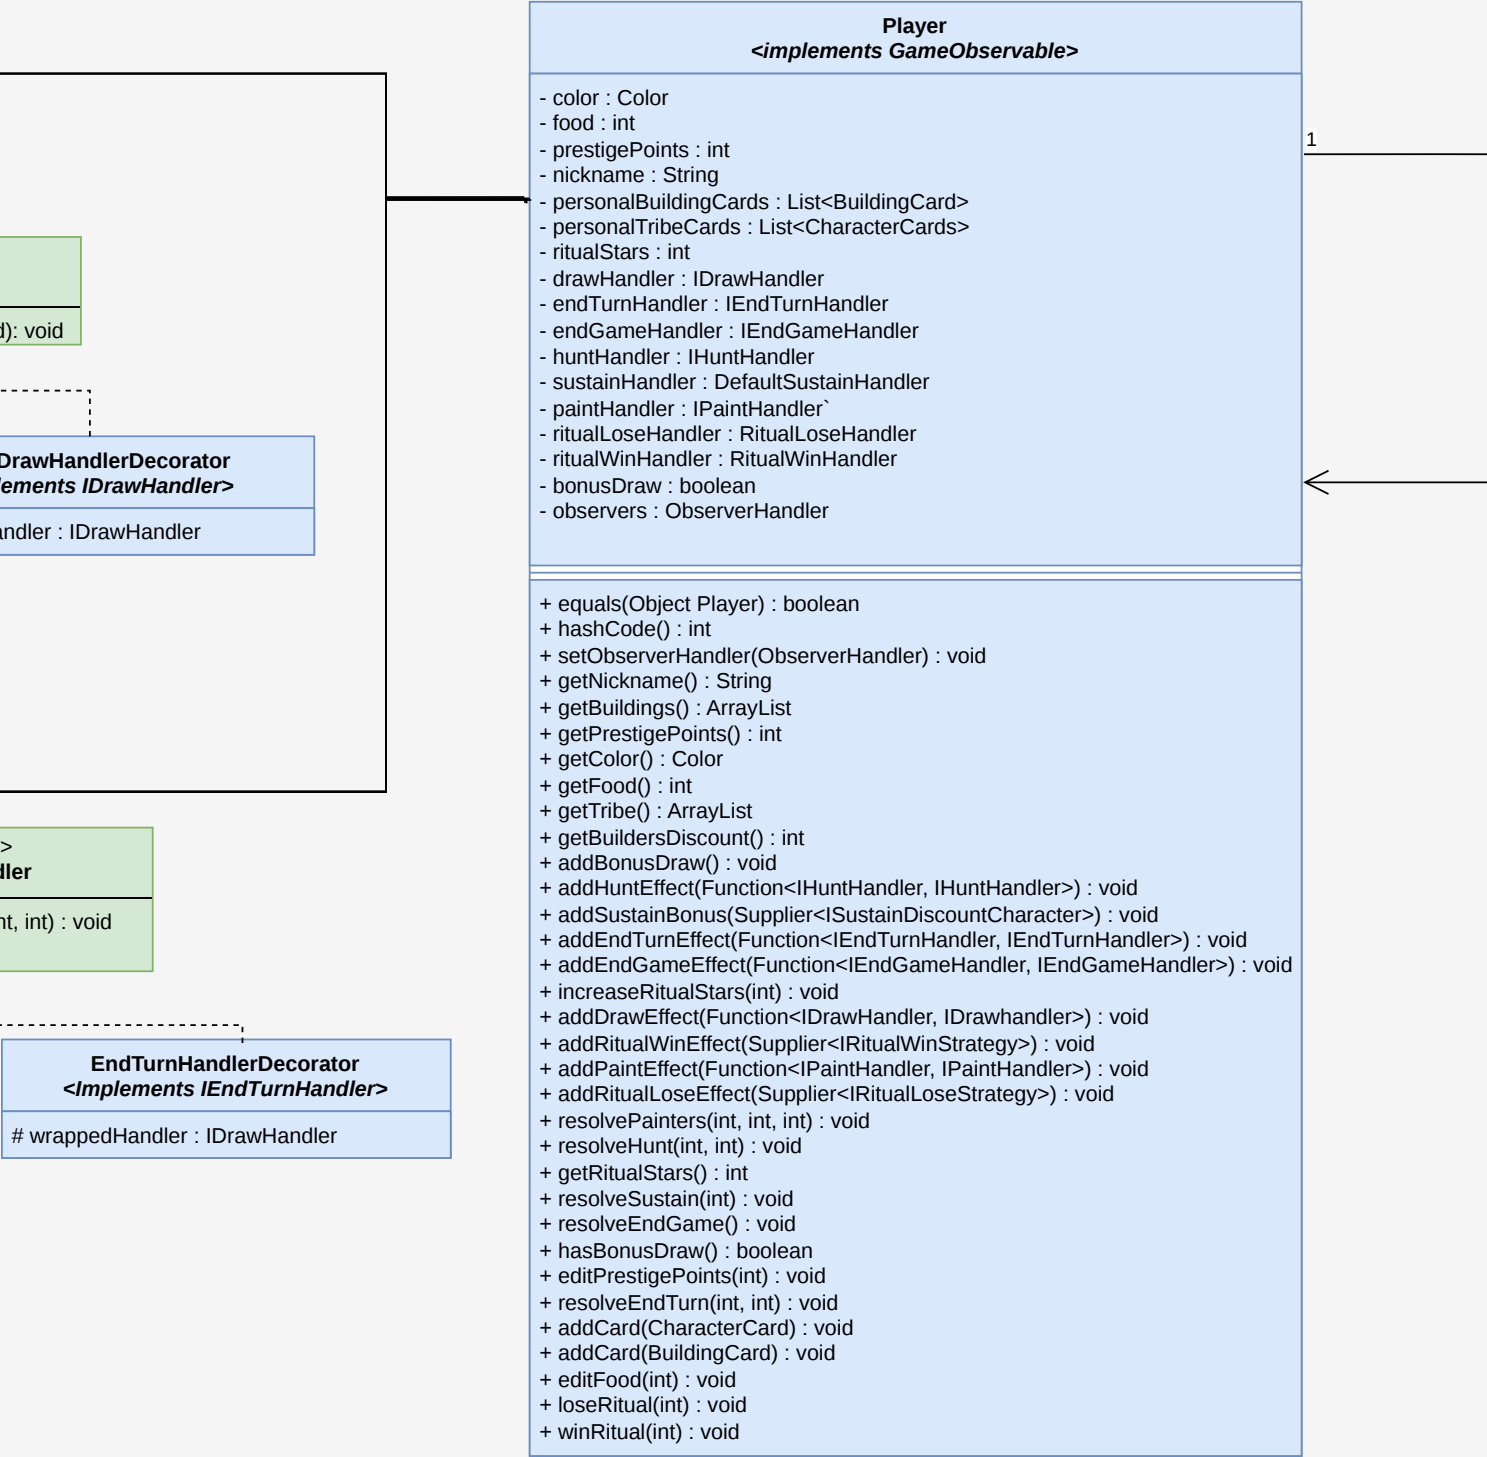

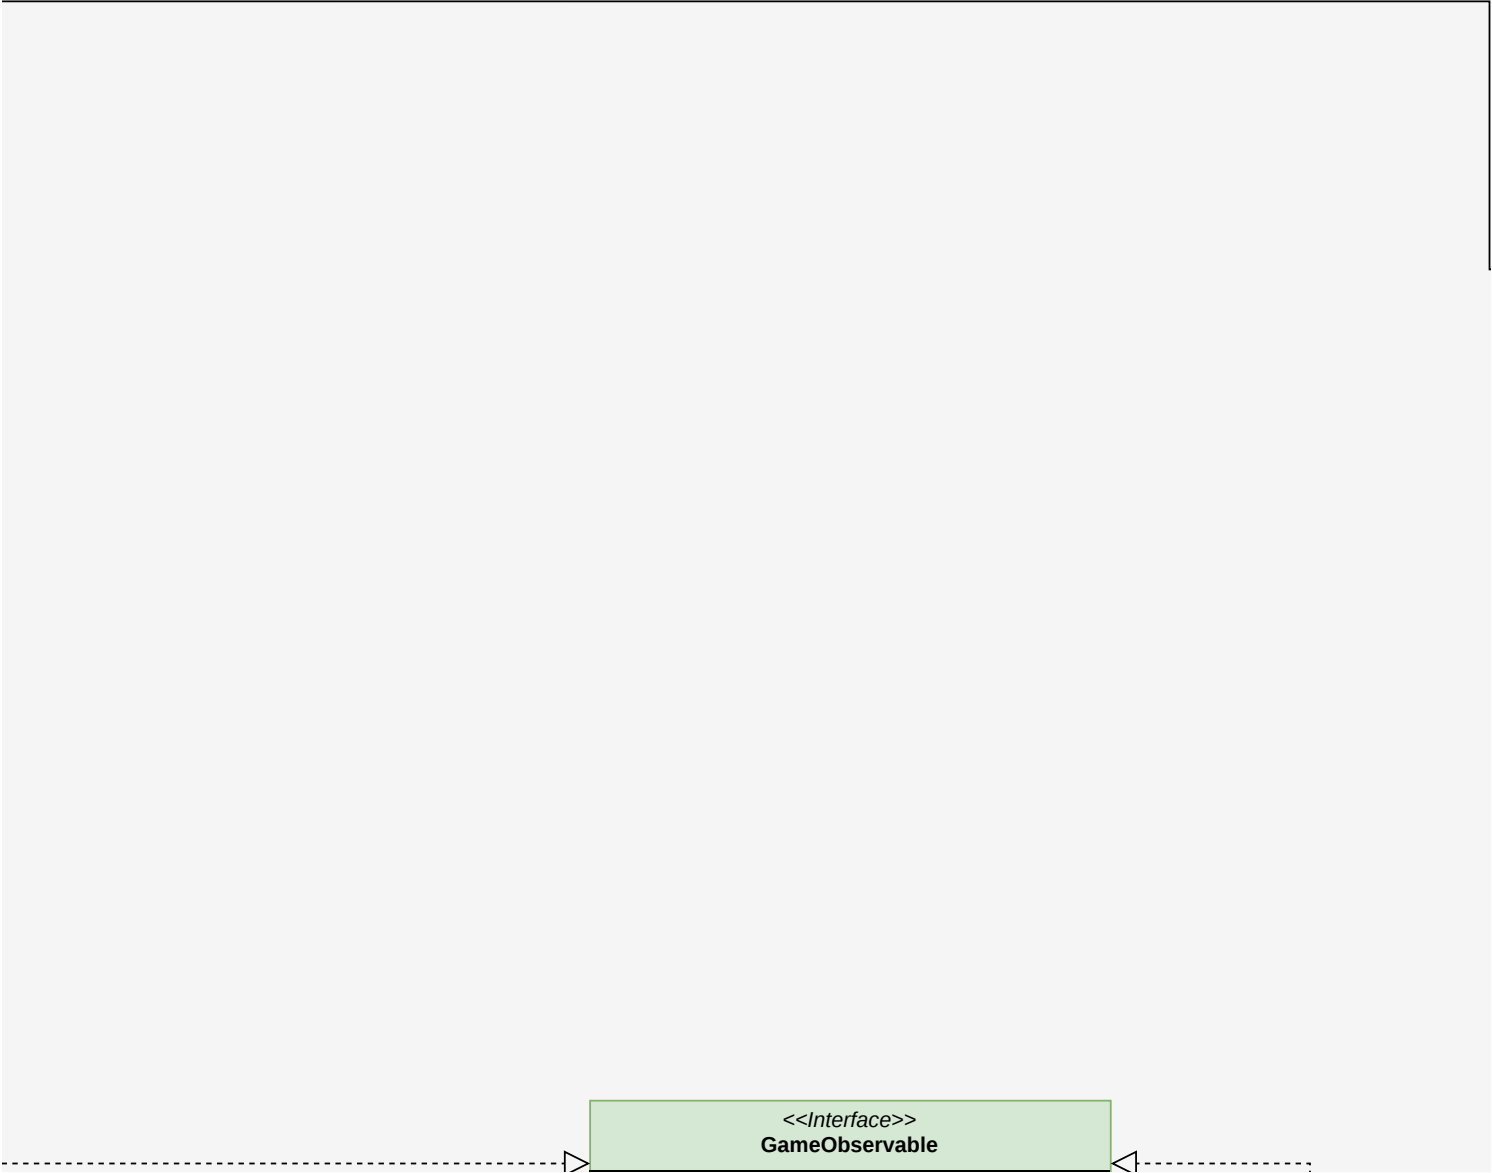
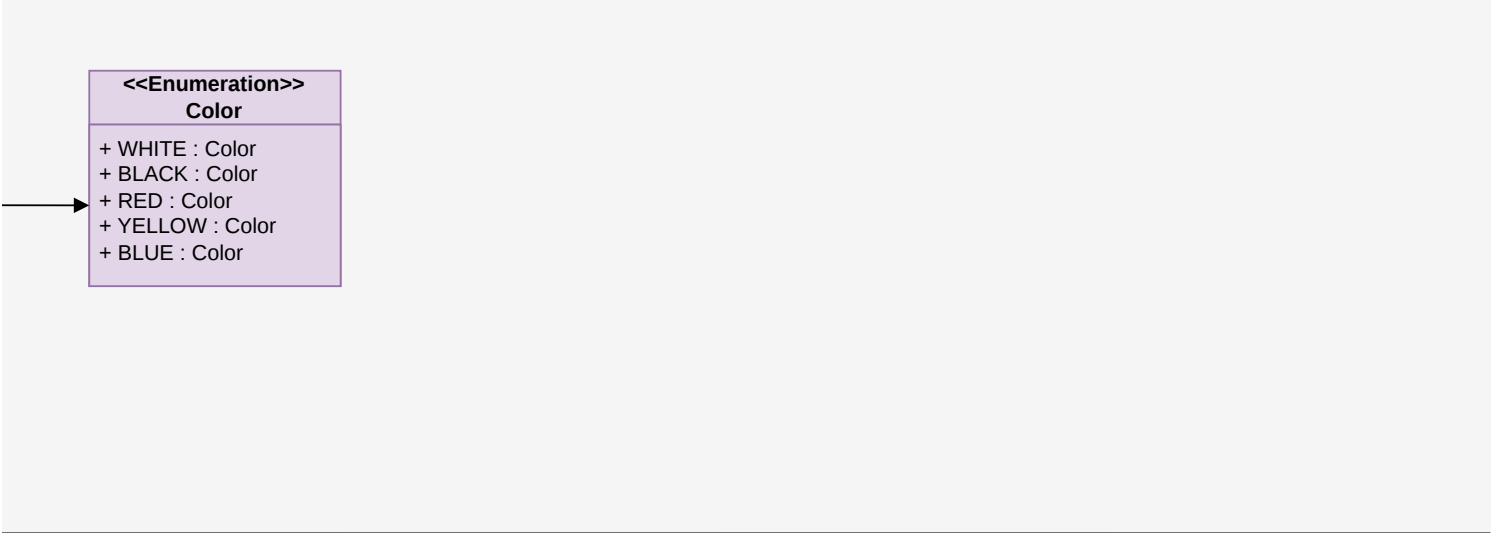


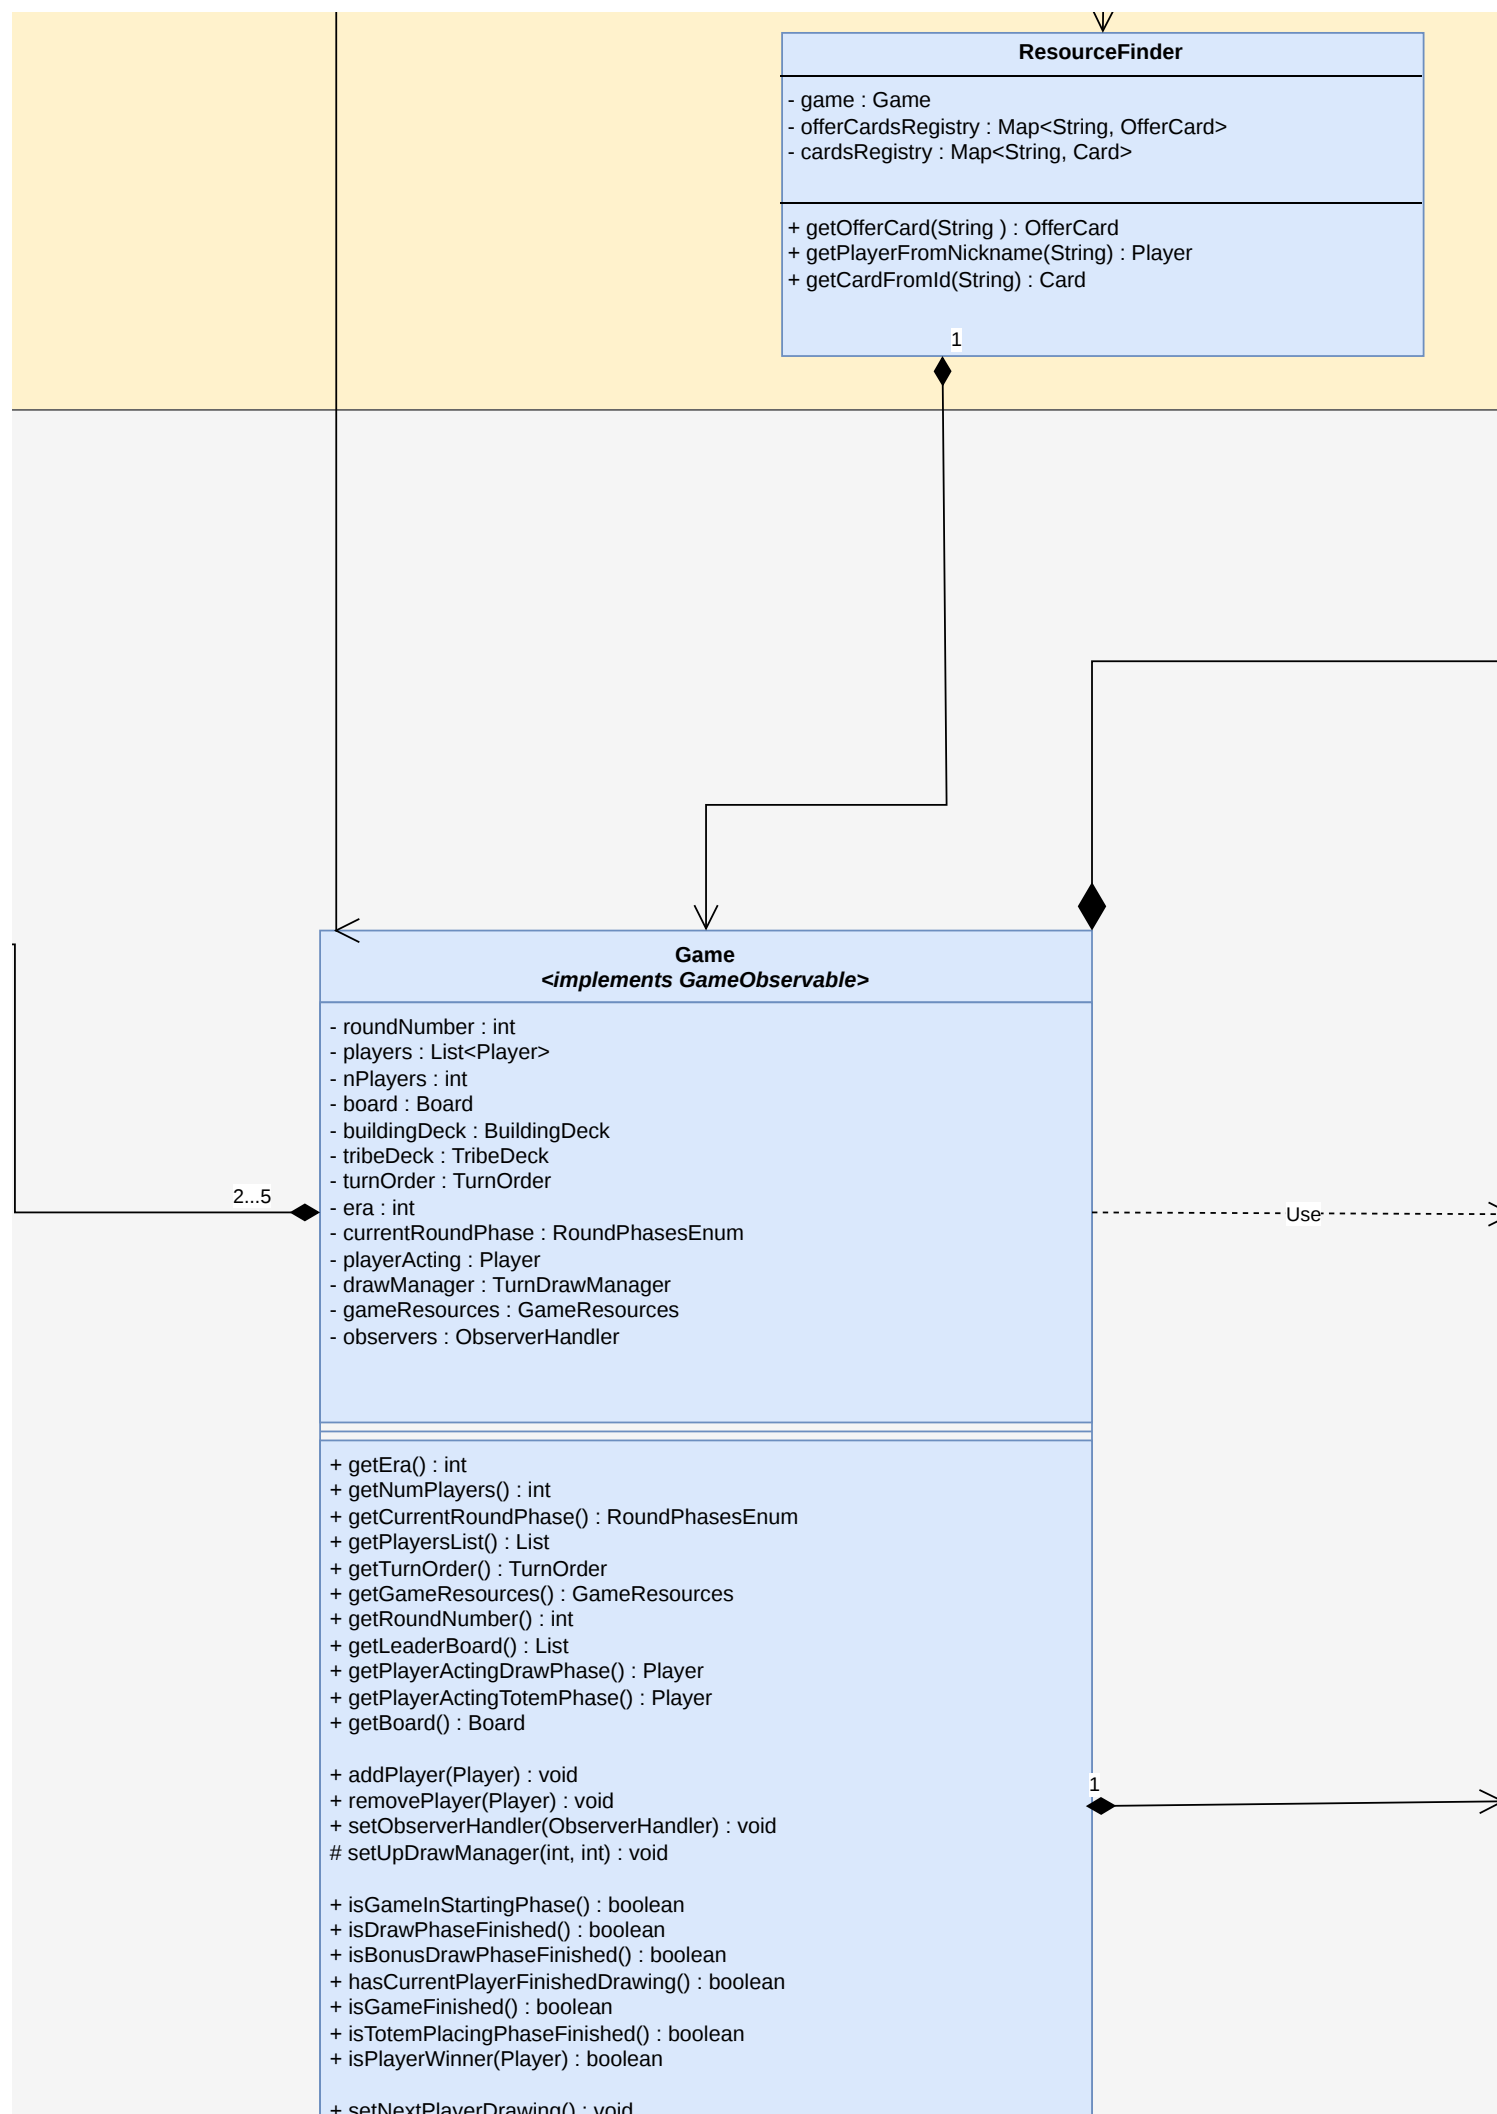


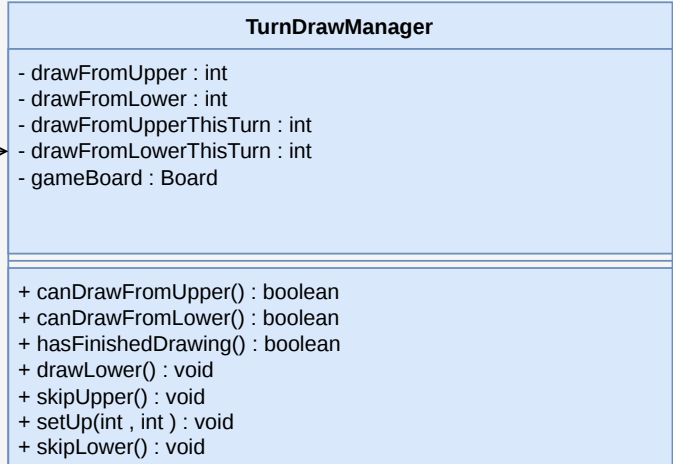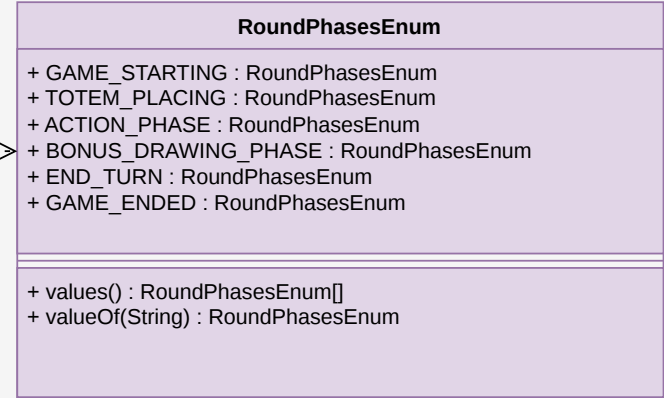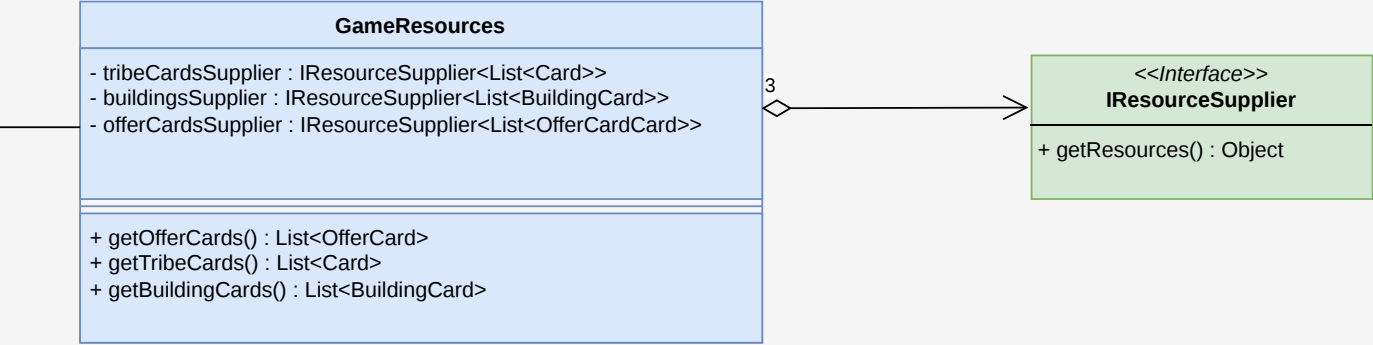


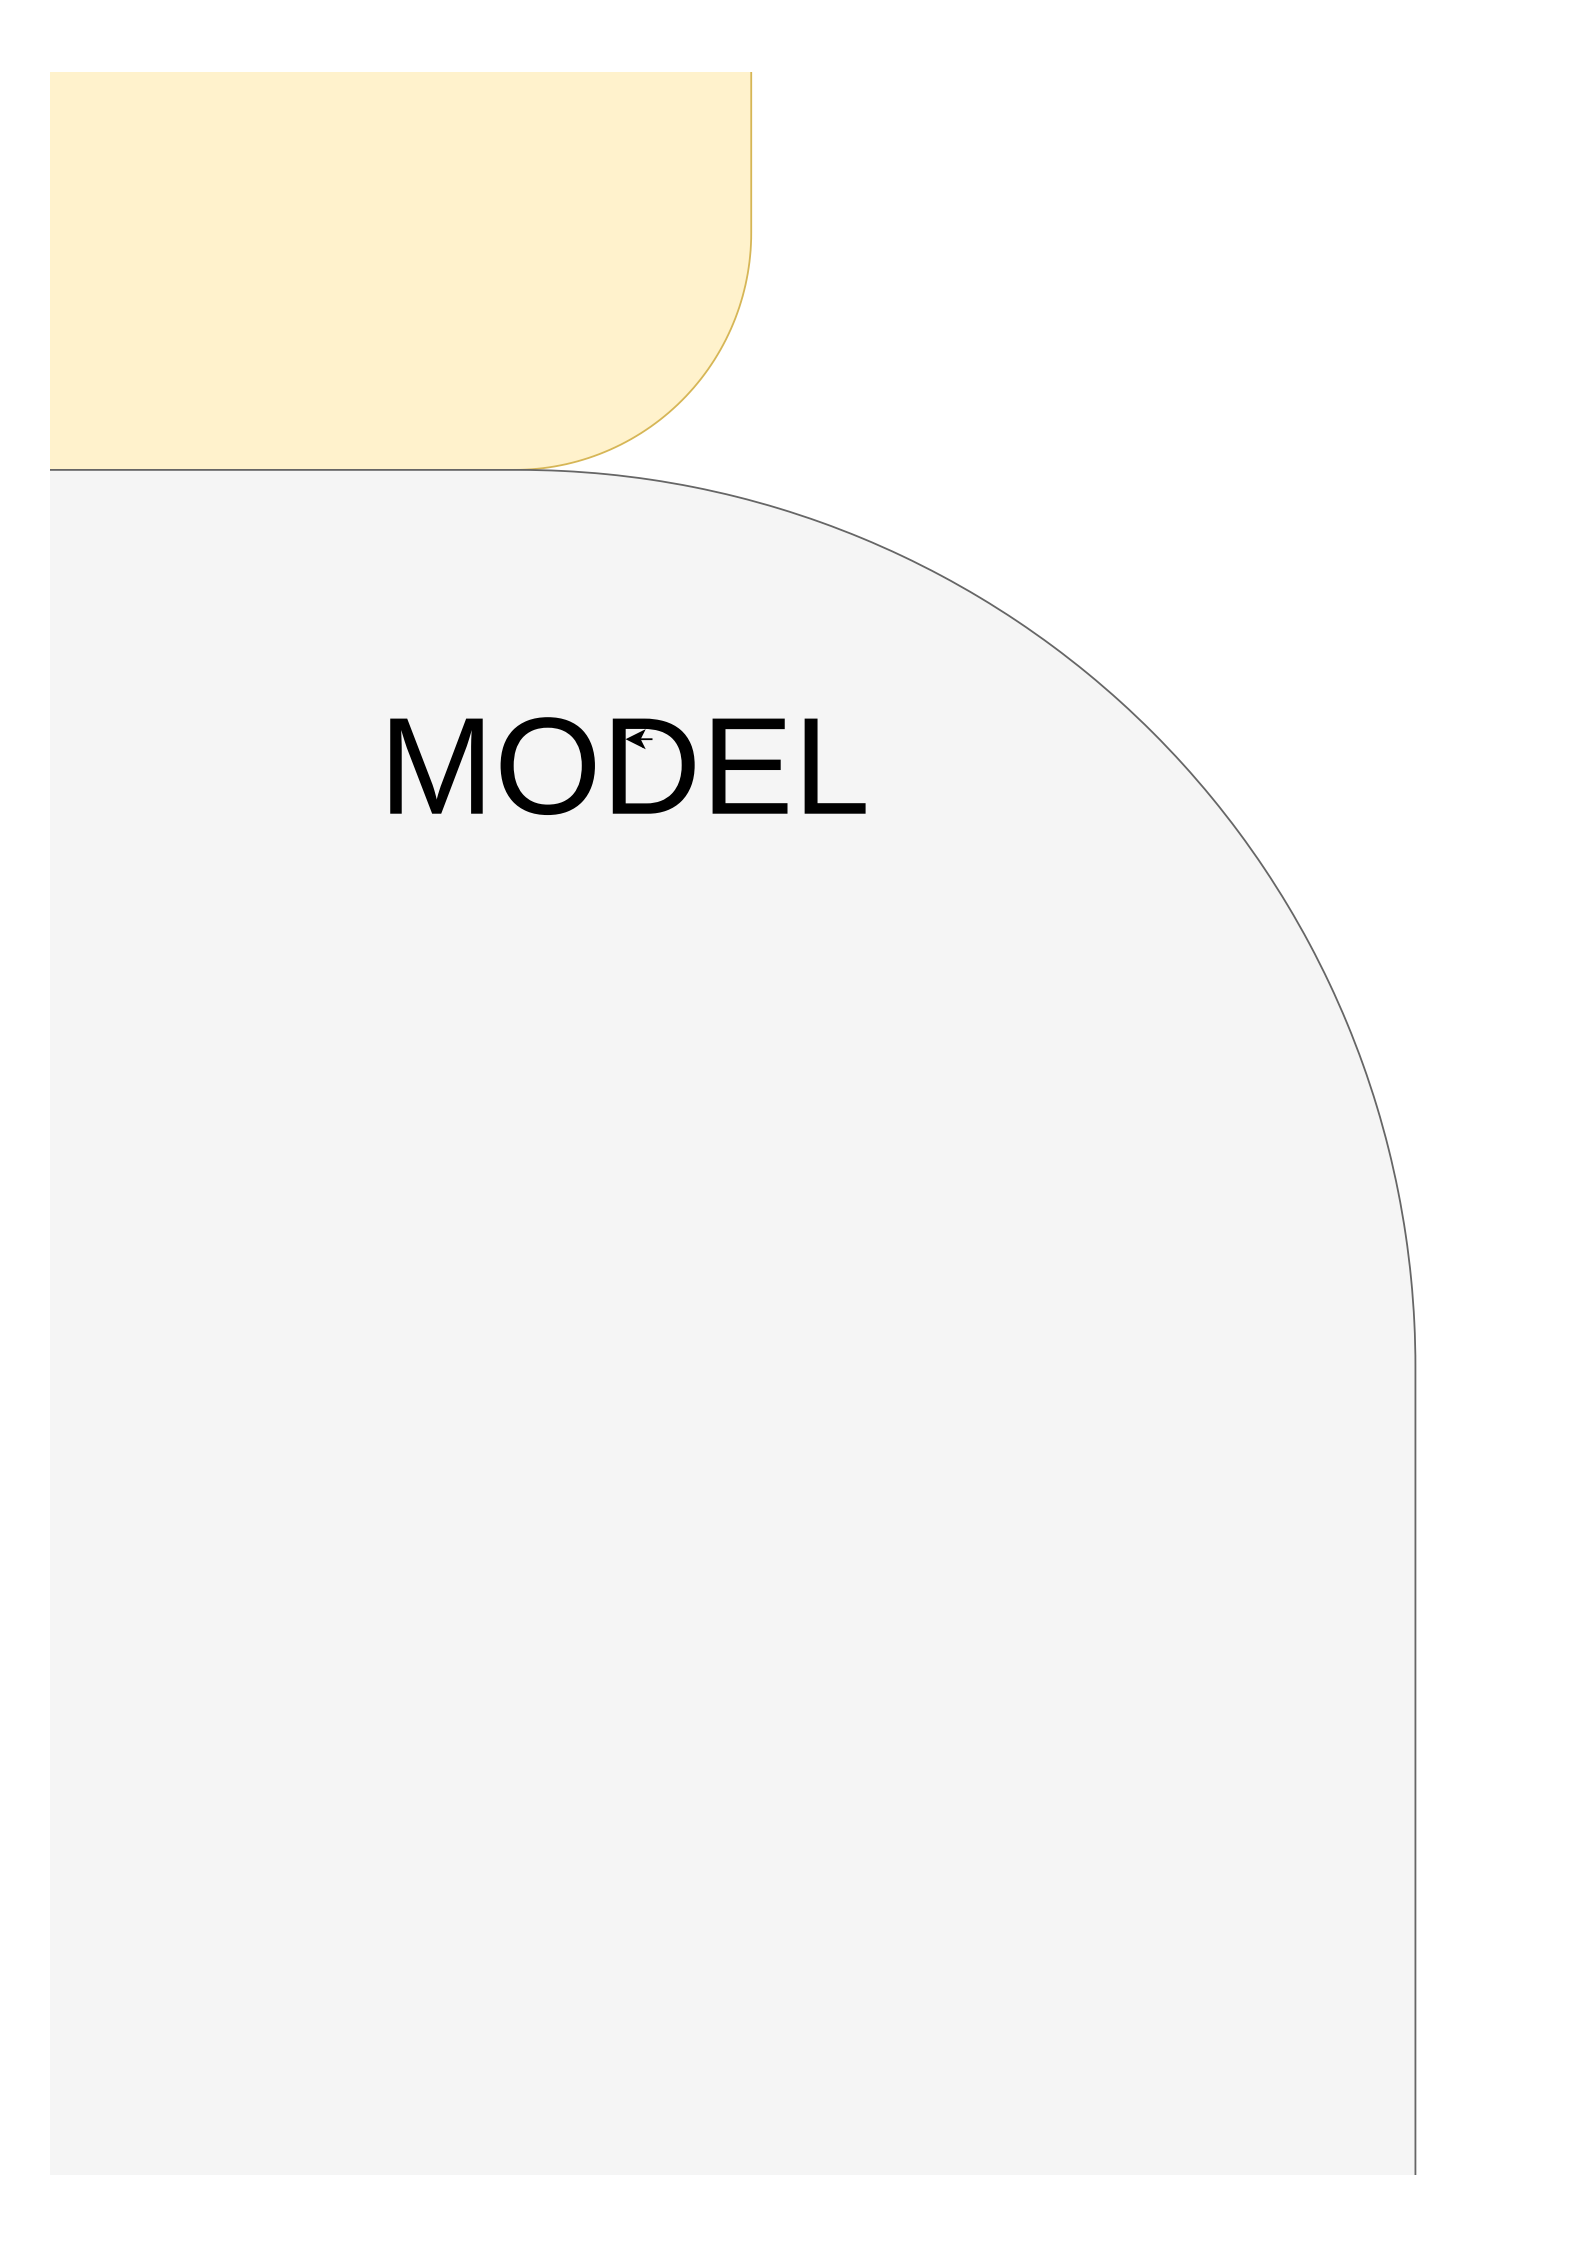


MODEL



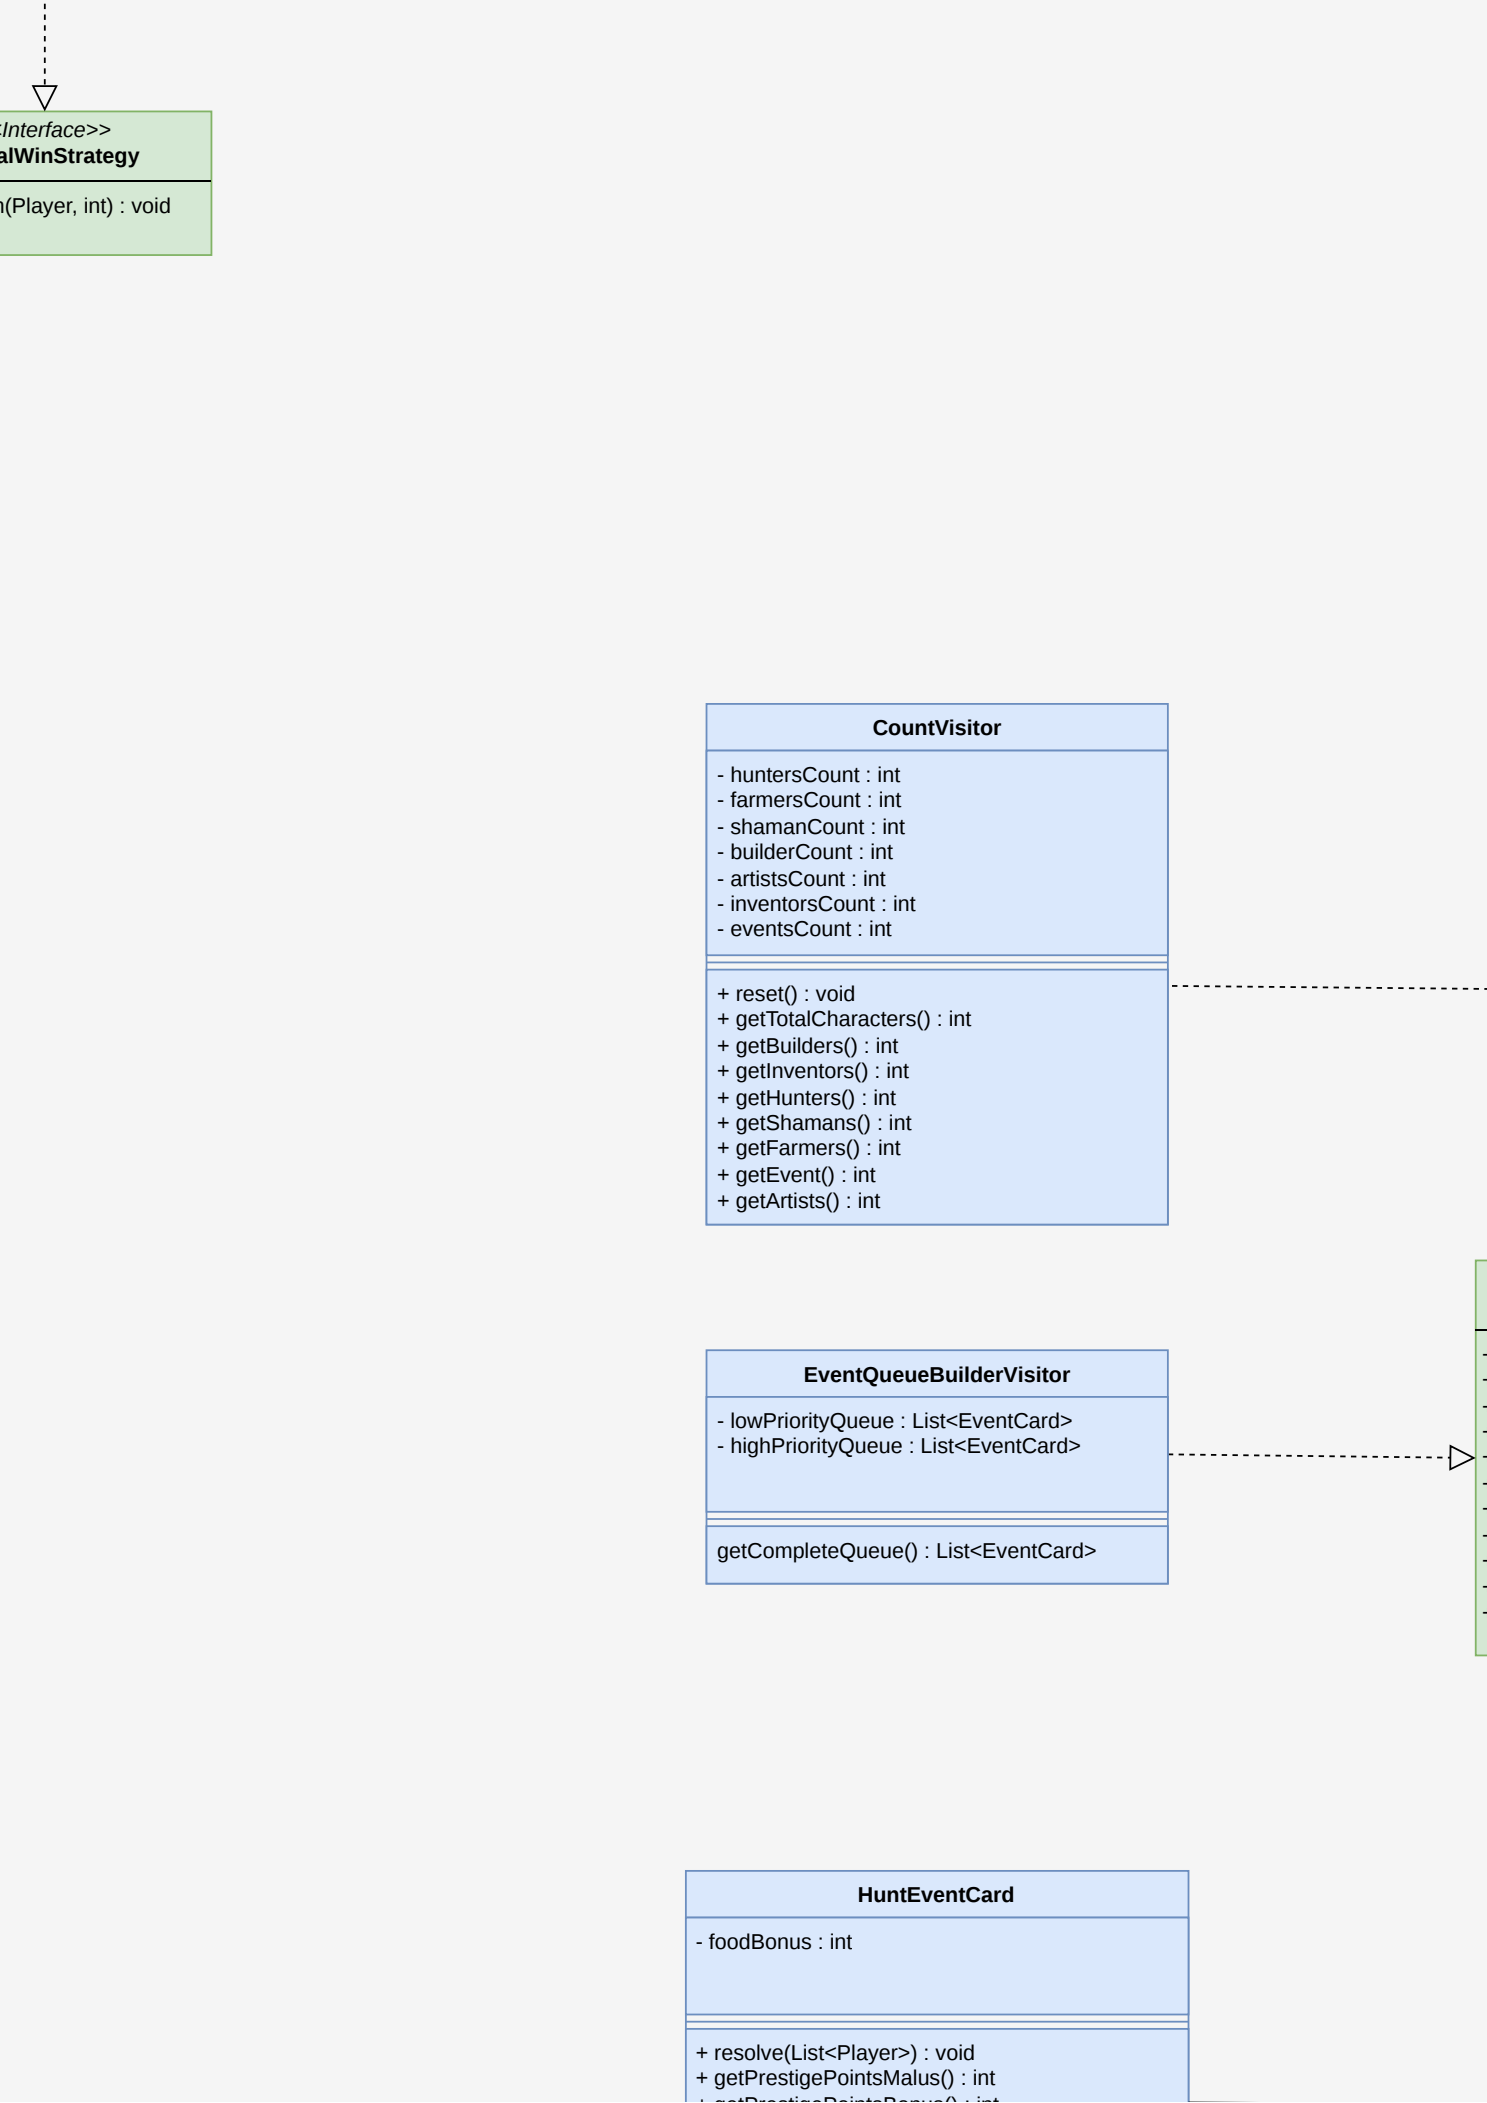

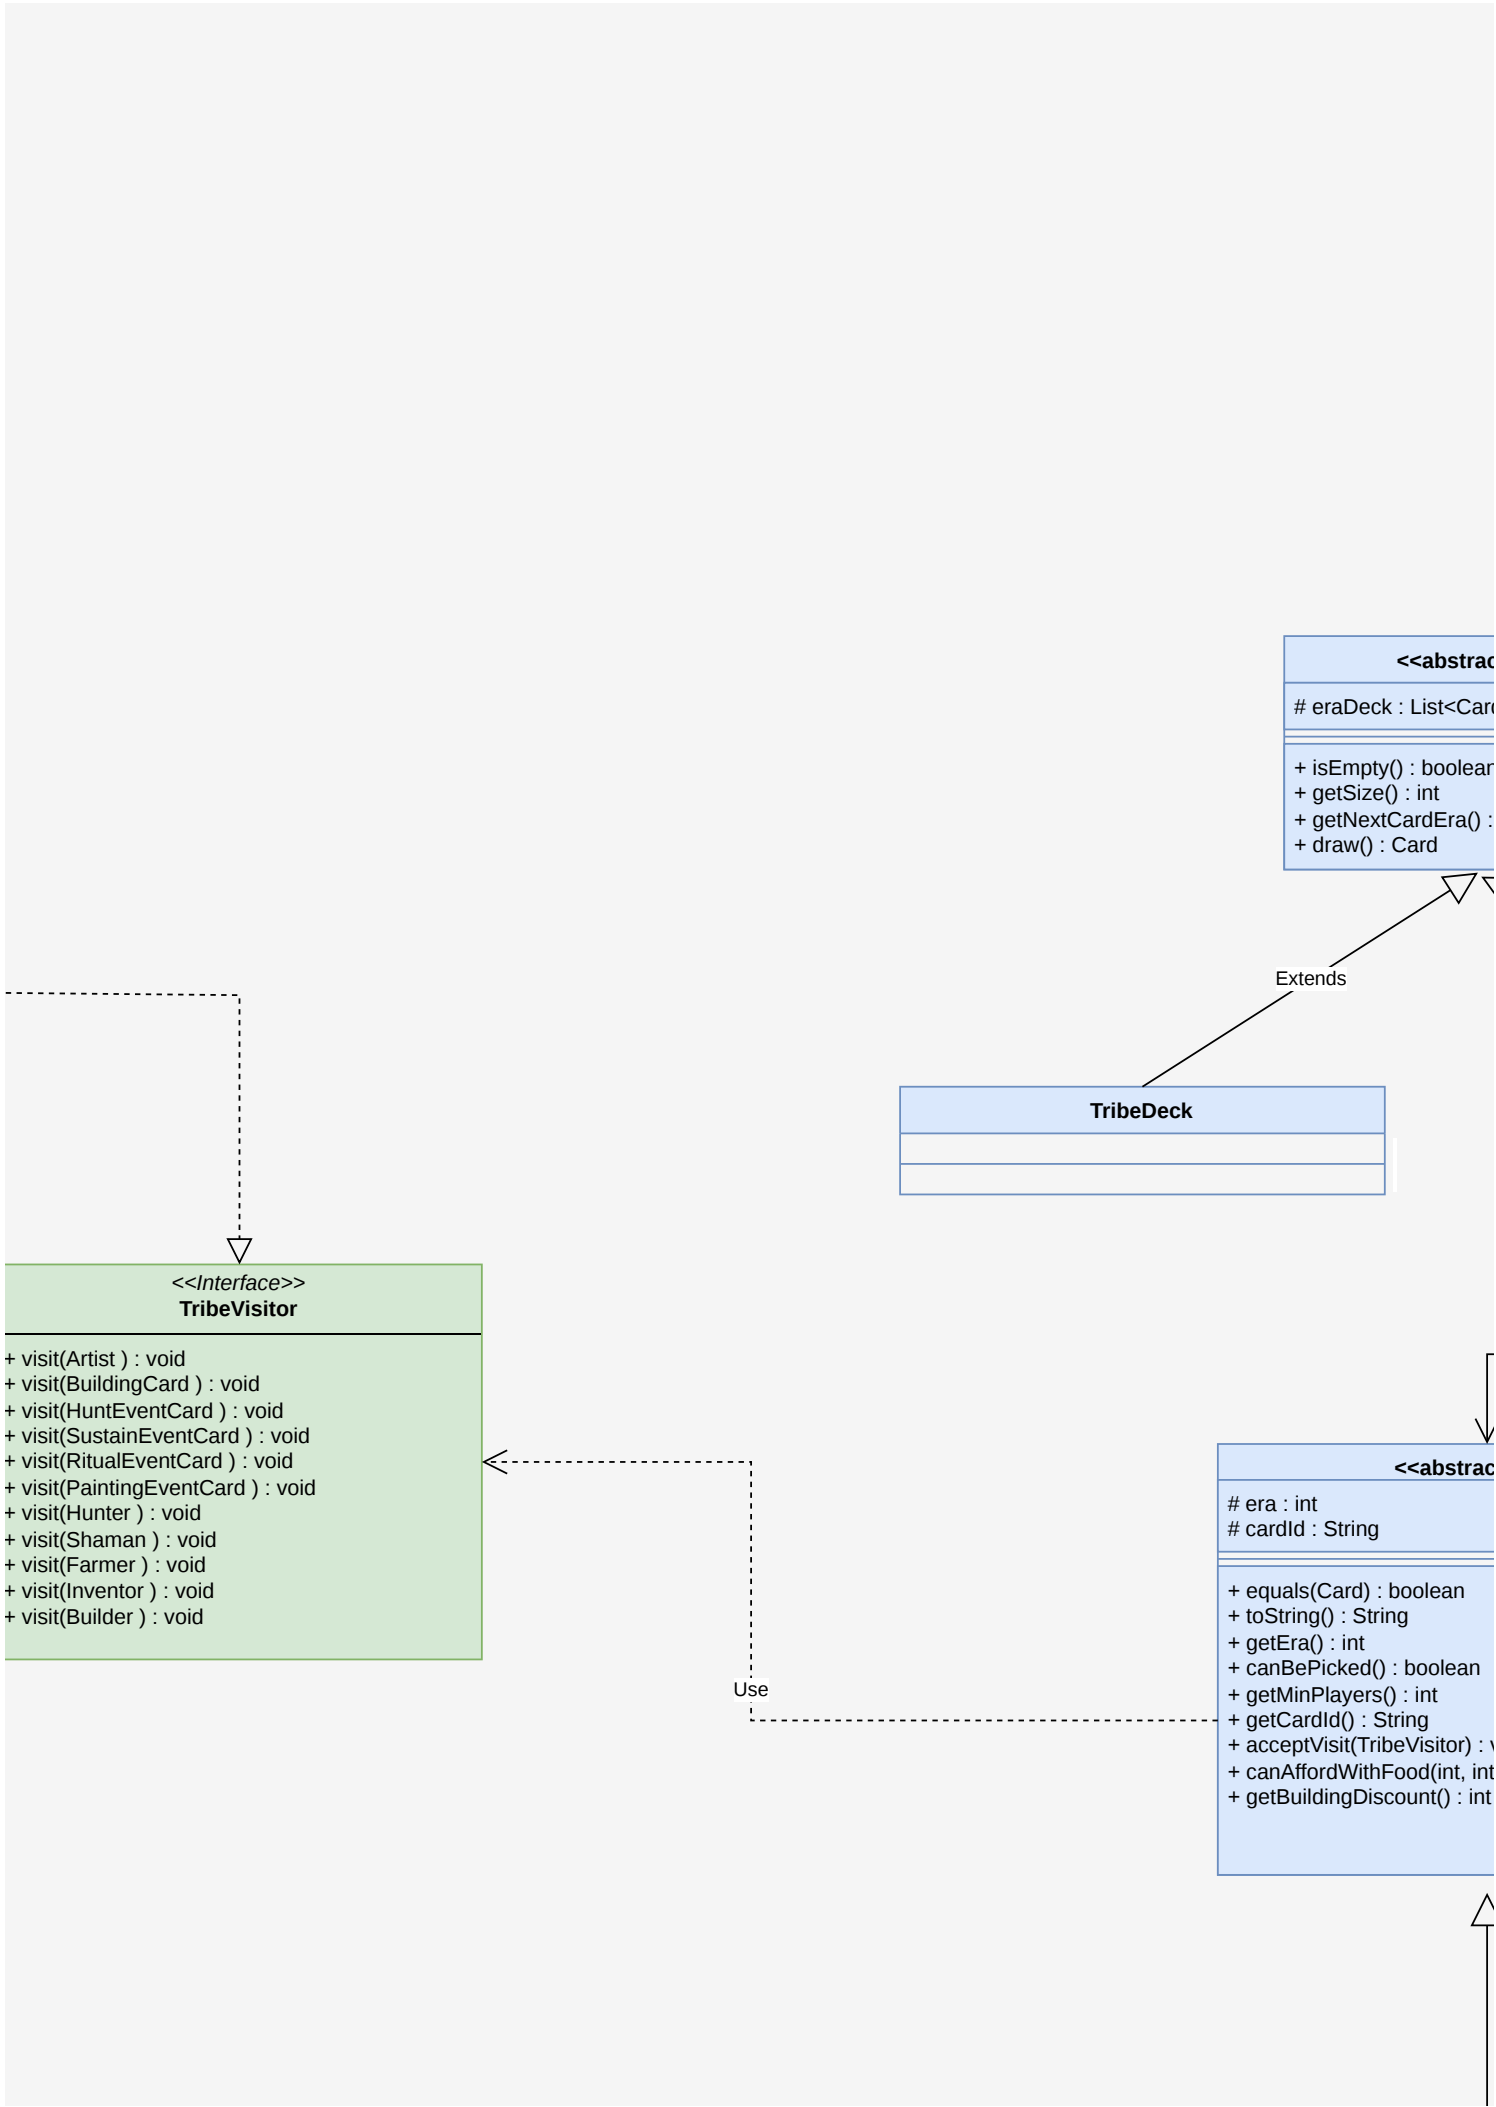

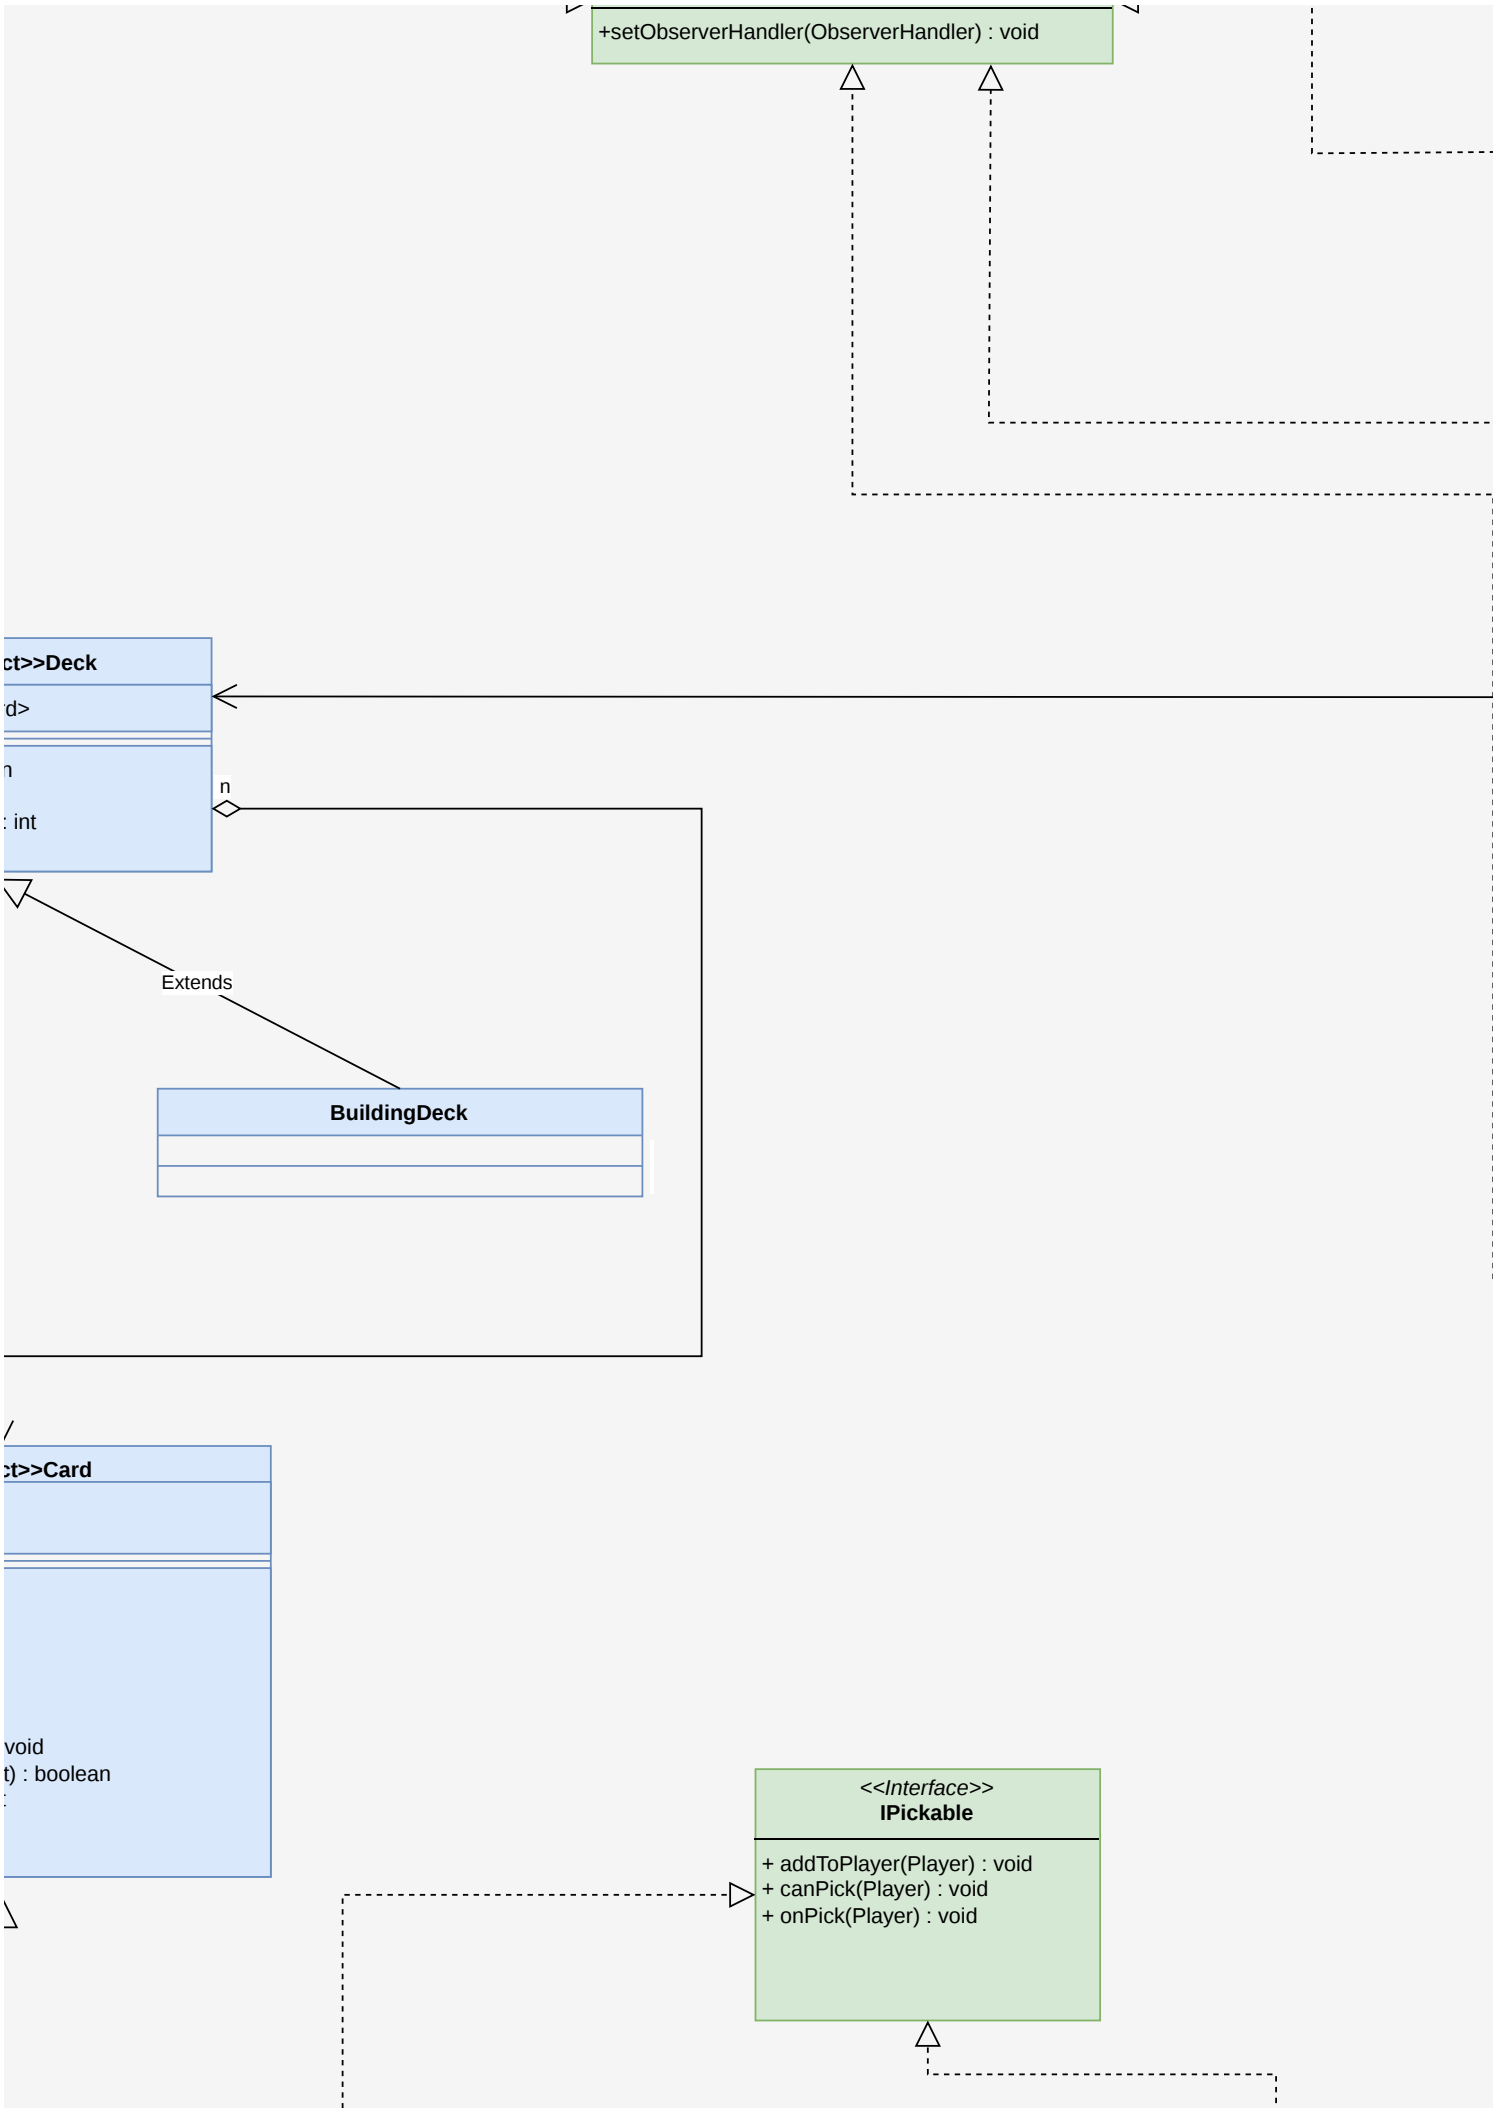

```

+ setNextPlayerDrawing() : void
+ setUpDrawingPhase() : void
+ setUpTotemPlacingPhase() : void
+ setUpBonusDrawingPhase() : void
+ setUpPlayerActing(Player, OfferCard) : void
+ gameStart() : void
+ endRound() : void
+ changeEra() : void
+ resolveEvents() : void
+ gameEnd() : void

+ playerDrawFromUpper(Player, IPickable) : void
+ playerDrawFromLower(Player, IPickable) : void
+ playerSkipUpper(Player) : void
+ playerSkipLower(Player) : void
+ totemChoiceAction(Player, OfferCard) : void

```

1

1

1

Board <implements GameObservable>

```

- offerTrack : ArrayList<OfferCard>
- upperLine : ArrayList<Card>
- underLine : ArrayList<Card>
- upperBLine : ArrayList<BuildingCard>
- underBLine : ArrayList<BuildingCard>
- observers : ObserverHandler

```

```

+ setObserverHandler(ObserverHandler) : void
+ getOfferCards() : List
+ getUpperLine() : List
+ getUnderLine() : List
- hasCharacters(List) : boolean
+ getUnderBLine() : List
+ moveLowerBuildings() : void
+ moveLowerTribes() : void
+ upperLineHasPickable() : boolean
+ drawFromUpper(IPickable) : void
+ drawFromLower(IPickable) : void
+ getUpperBLine() : List
+ underLineHasCharacters() : boolean
+ underLineHasPickable() : boolean
- hasPickable(List) : boolean
+ upperLineHasCharacters() : boolean
+ addUpper(Card) : void
+ addUpper(BuildingCard) : void
+ addLower(BuildingCard) : void
+ addLower(Card) : void

```

Use

```

+ UPPER :
+ LOWER :

```

```

+ values() :
+ valueOf(S

```

1

```

- food : int
- drawFro
- drawFro
- minPlaye
- offerCar
- player : I

```

```

+ free() : v

```

+ drawUpper() : void

TurnOrder<implements GameObservable>

- numPlayers : int

- slots : ArrayList

- nextToAct : int

- nextEmptySlot : int

- isPlacingPhase : boolean

- firstRoundDone : boolean

- observers : ObserverHandler

+ setObserverHandler(ObserverHandler) : void

+ everybodyPlayed() : boolean

+ getOrder() : List

+ goToNextPlayer() : void

+ setPlayerFirstRound(Player) : void

+ getPlayerActing() : Player

+ setPlayer(Player) : void

BoardRows

BoardRows

BoardRows

BoardRows[]

String) : BoardRows

OfferCard

t

mUpper : int


mUnder : int

ers : int

dId : String

Player

void





+ getPrestigePointsBonus() : int

PaintingEventCard

- minArtist : int

+ toString() : String
+ resolve(List<Player>) : void
+ acceptVisit(TribeVisitor) : void
+ getMinArtist() : int


RitualEventCard

+ toString() : String
+ resolve(Lis<Player>) : void
+ acceptVisit(TribeVisitor) : void

SustainEventCard


+ toString() : String
+ resolve(List<Player>) : void
+ acceptVisit(TribeVisitor) : void

External


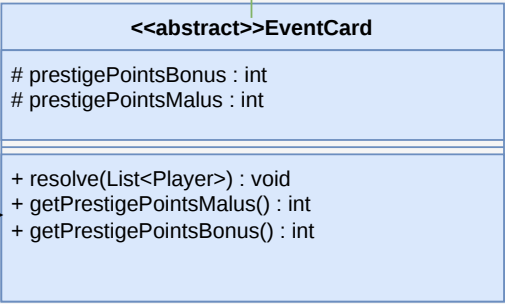



nds

Exter



Extend

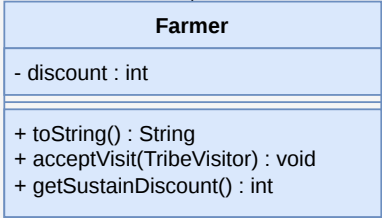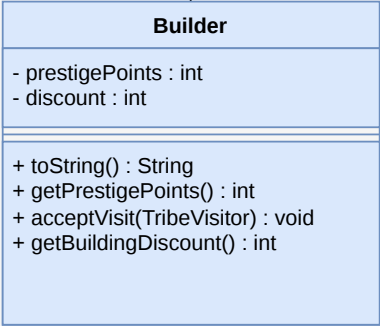

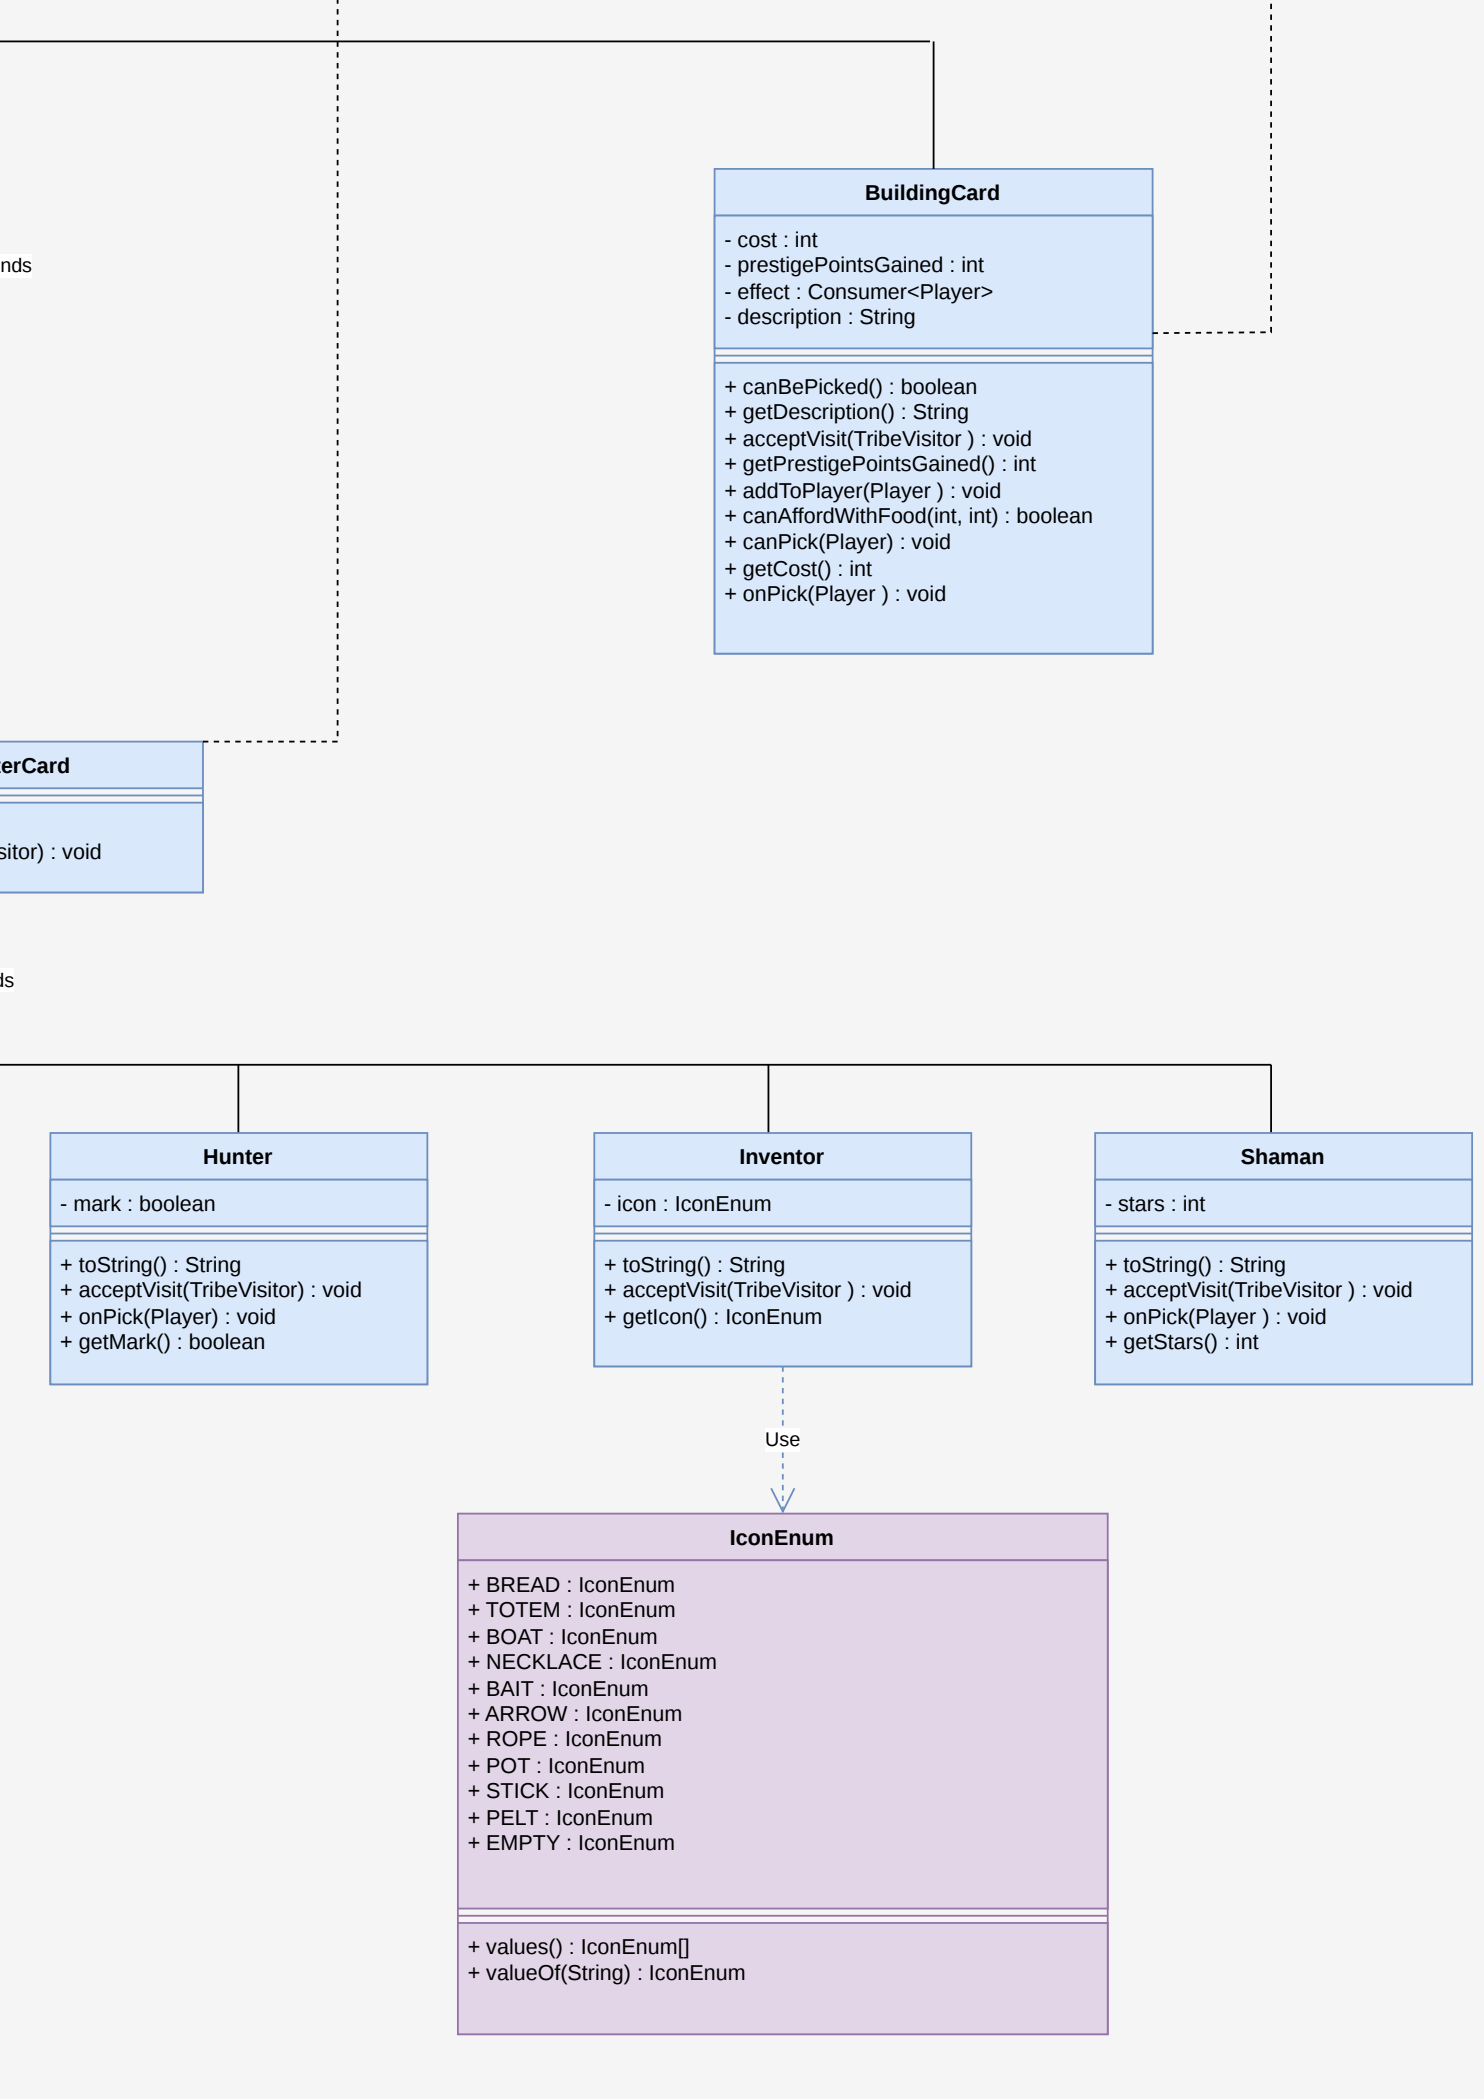

+ getOffer
+ getMinP
+ getFoot
+ getPlay
+ isFree()
+ getDraw
+ getDraw
+ setPlaye

rCardId() : String
Players() : int
Id() : int
er() : Player
l : boolean
vFromUnder() : int
vFromUpper() : int
er(Player) : void





