Sweeny connectivity: paired trajectories, different search cost

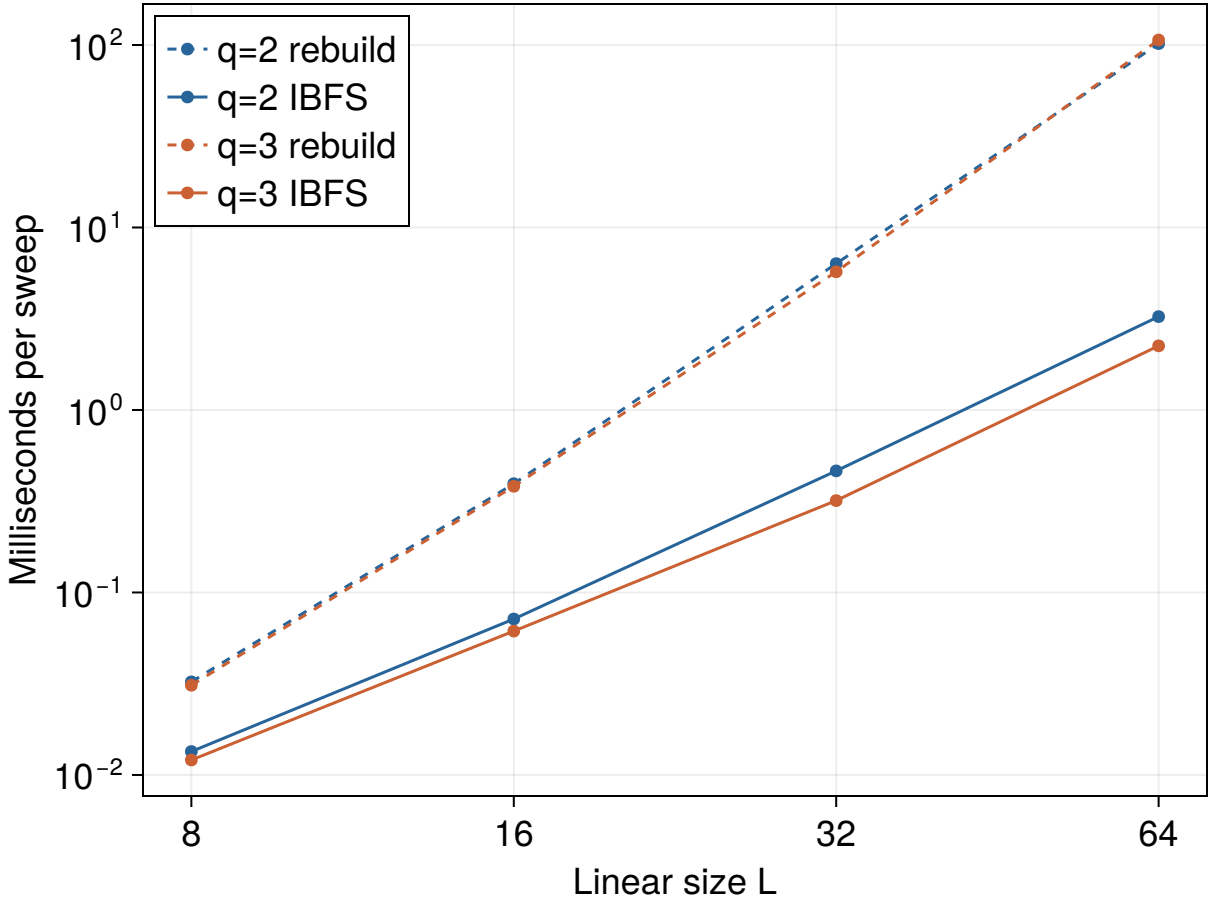

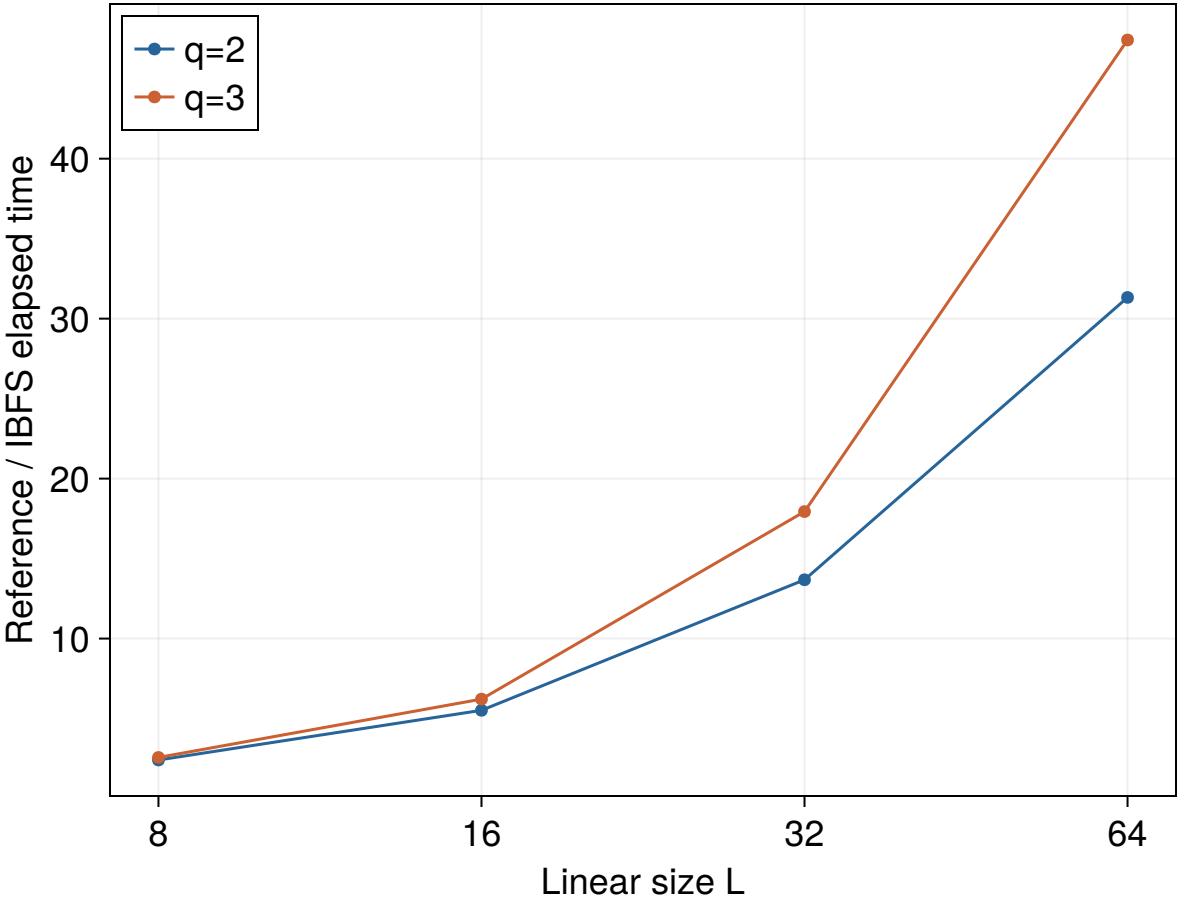

Median of five alternating-order repeats · update only · same configurations and future RNG in each pair

Both reuse scratch and skip lazy queries · 0 allocated bytes per sweep after warmup · single-machine timings