

FiQuant Market Microstructure Simulator

Anton Kolotaev

Ecole Centrale de Paris

anton.kolotaev@gmail.com

June 7, 2013

1 Installation

2 Simulator components

- Scheduler
- Order books
- Orders
- Traders
- Strategies
- Observables
- Using Veusz
- Web interface

Requirements

- OS supported: Linux, Mac OS X, Windows
- Browsers supported: Chrome, Firefox, Safari, Opera
- Python 2.7
- Python packages can be installed using `pip` or `easyinstall`:
 - Veusz (for graph plotting)
 - Flask (to run a Web-server)
 - Blist (sorted collections used by ArbitrageTrader)
- Source code downloadable from SourceForge

- Main class for every discrete event simulation system.
- Maintains a set of actions to fulfill in future and launches them according their action times: from older ones to newer.

Interface:

- Event scheduling:
 - `schedule(actionTime, handler)`
 - `scheduleAfter(dt, handler)`
- Simulation control:
 - `workTill(limitTime)`
 - `advance(dt)`
 - `reset()`

- Represents a single asset traded in some market (Same asset traded in different markets would be represented by different order books)
- Matches incoming orders
- Stores unfulfilled limit orders in two order queues (Asks for sell orders and Bids for buy orders)
- Corrects limit order price with respect to tick size
- Imposes order processing fee
- Supports queries about order book structure
- Notifies listeners about trades and price changes

Order book for a remote trader

- Models a trader connected to a market by a communication channel with non-negligible latency
- Introduces delay in information propagation from a trader to an order book and vice versa (so a trader has outdated information about market and orders are sent to the market with a certain delay)
- Assures correct order of messages: older messages always come earlier than newer ones

Orders supported internally by an order book:

- `Market(side, volume)`
- `Limit(side, price, volume)`
- `Cancel(limitOrder)`

Limit and market orders notifies their listeners about all trades they take part in. Factory functions are usually used in order to create orders.

Meta orders

Follow order interface from trader's perspective (so they can be used instead of basic orders) but behave like a sequence of base orders from an order book point of view.

- `Iceberg(volumeLimit, orderToSplit)` splits `orderToSplit` to pieces with volume less than `volumeLimit` and sends them one by one to an order book ensuring that only one order at time is processed there
- `AlwaysBest(volume, limitOrderFactory)` creates a limit-like order with given volume and the most attractive price, sends it to an order book and if the order book best price changes, cancels it and resends with a better price
- `WithExpiry(lifetime, limitOrderFactory)` sends a limit-like order and after `lifetime` cancels it
- `LimitMarket(limitOrderFactory)` is like `WithExpiry` but with `lifetime` equal to 0

Single asset traders

- send orders to order books
- bookkeep their position and balance
- run a number of trading strategies
- notify listeners about trades done and orders sent

Single asset traders operate on a single or multiple markets. If a trader holds a portfolio composed of multiple assets it should aggregate an array of single asset traders.


Generic strategy

```
class Generic(Strategy):
    def __init__(self, eventGen, sideFunc, ...):
        # ... storing constructor arguments
        event.subscribe(self.eventGen, self.wakeUp)

    def wakeUp(self):
        if not self.suspended:
            # determine side and parameters of an order to create
            side = self.sideFunc()
            if side <> None:
                volume = int(self.volumeFunc())
                if volume > 0:
                    # create order given side and parameters
                    order = self.orderFactory(side)(volume)
                    # send order to the order book
                    self.trader.send(order)
```


Signal strategy

Signal strategy listens to some discrete signal and when the signal becomes more than some threshold it starts to buy. When the signal gets lower than -threshold the strategy starts to sell.

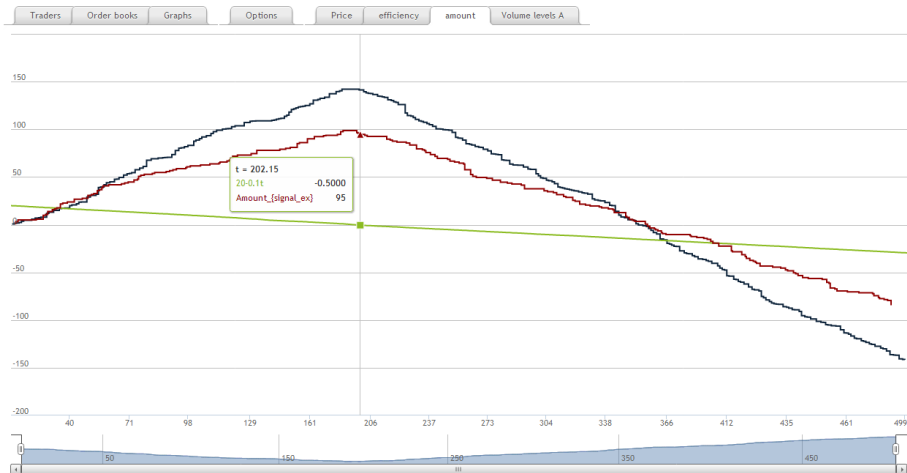


Trend follower strategy

Trend follower is an instance of a signal strategy with signal equal to the first derivative of a moving average of the asset's price (i.e trend).

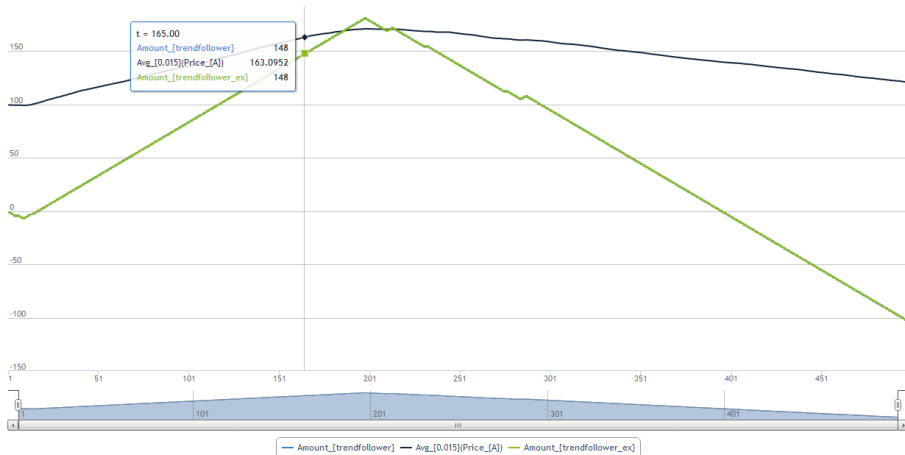


Two averages strategy

Two averages is an instance of a signal strategy with signal equal to the difference between two moving averages of the asset's price (i.e trend).

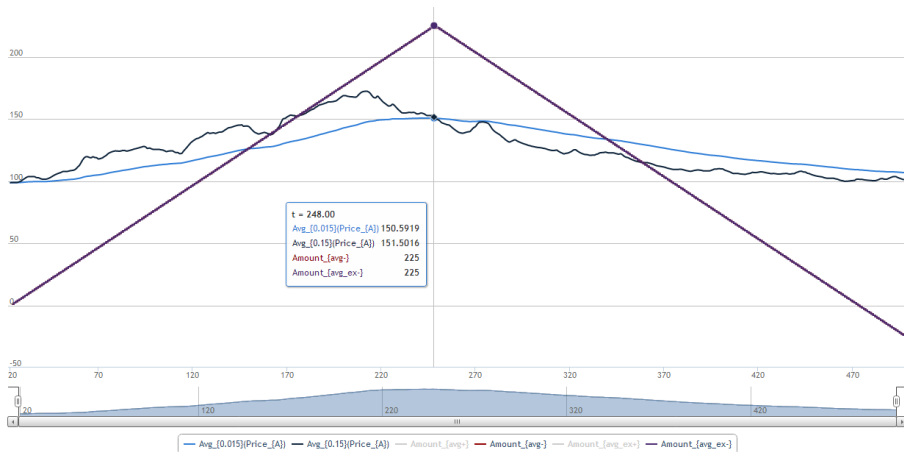


Fundamental value strategy

Fundamental value strategy is an instance of a signal strategy with signal equal to the difference between the asset's price and some fundamental value.

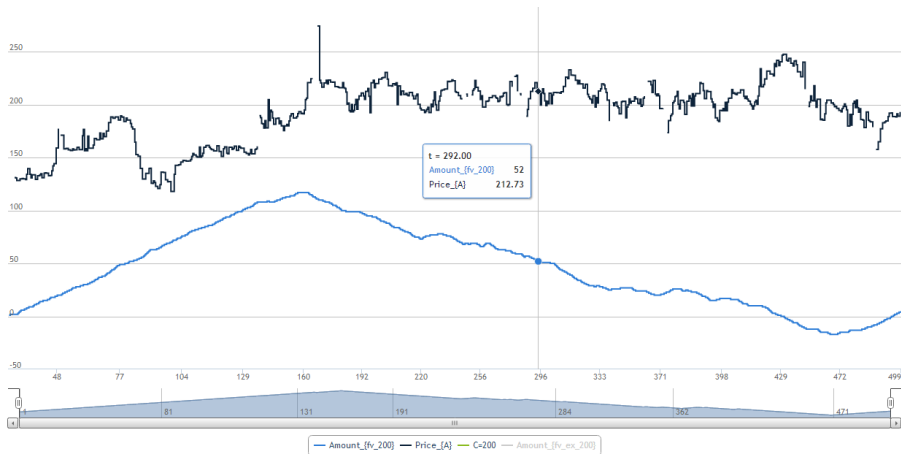

Mean reversion strategy

Mean reversion strategy is an instance of a fundamental value strategy with fundamental value equal to some moving average of the asset's price.

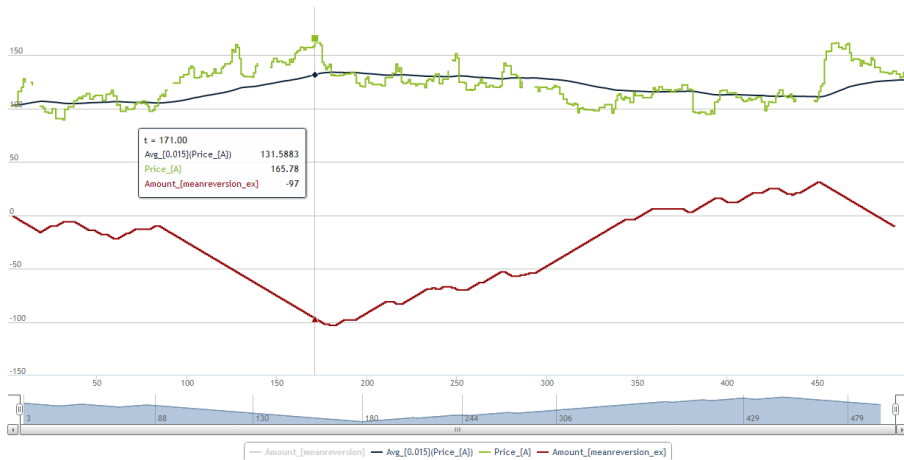

Liquidity provider

Liquidity provider sends limit-like orders with a price equal to the current asset's price multiplied by some randomly chosen factor


```
@registry.expose(["Generic", 'LiquidityProviderSide'], args = ())
def LiquidityProviderSideEx(side                = Side.Sell,
                             orderFactory        = order.LimitFactory,
                             defaultValue        = 100.,
                             creationIntervalDistr = mathutils.rnd.expovariate(1.),
                             priceDistr          = mathutils.rnd.lognormvariate(0., .1),
                             volumeDistr         = mathutils.rnd.expovariate(1.)):

    orderBook = orderbook.OfTrader()
    r = Generic(eventGen    = scheduler.Timer(creationIntervalDistr),
               volumeFunc   = volumeDistr,
               sideFunc     = ConstantSide(side),
               orderFactory= order.AdaptLimit(orderFactory,
                                               mathutils.product(
                                                   SafeSidePrice(orderBook, side, defaultValue),
                                                   priceDistr)))

    return r
```



Trade-if-profitable strategy

Suspends or resumes an underlying strategy basing on its performance backtesting. By default, first derivative of a moving average of 'cleared' trader's balance (trader's balance if its position was cleared) is used to evaluate the efficiency.

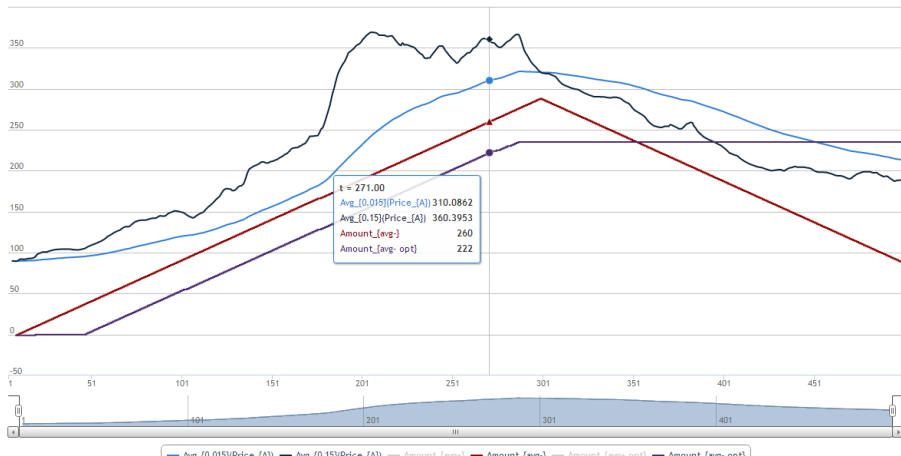

Choose-the-best strategy

Backtests aggregated strategies and allows to run only to that one who has the best performance. By default, first derivative of a moving average of 'cleared' trader's balance is used to evaluate the efficiency.

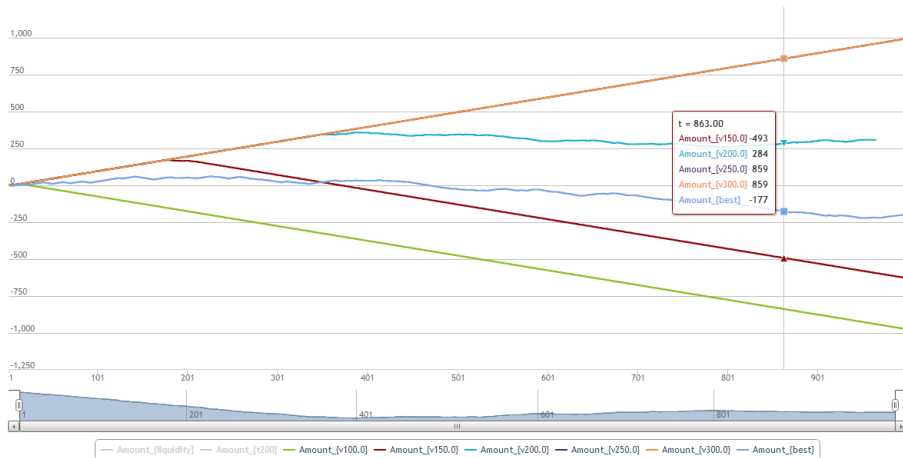

Traders and order books provide basic accessors to their current state but don't collect any statistics. In order to do it in an interoperable way a notion of observable value was introduced: it allows to read its current value and notifies listeners about its change.

- Primitive observables on
 - traders: position, balance, market value of the portfolio, 'cleared' balance etc.
 - order books: ask/mid/bid price, last trade price, price at volume, volume of orders with price better than given etc.
- `OnEveryDt(dt, dataSource)` evaluates `dataSource` every `dt` moments of time. Often used with `Fold(observable, accumulator)` where `accumulator` may be a moving average or another statistics collector.

History of an observable can be stored in a `TimeSerie` and rendered later on a graph.

Using Veusz

When developing a new strategy it is reasonable to test it using scripts and visualize results by Veusz

```
from marketsim import (signal, strategy, observable, mathutils)
from common import run

def Signal(ctx):

    const = mathutils.constant
    linear_signal = signal.RandomWalk(initialValue=20,
                                     deltaDistr=const(-.1),
                                     label="20-0.1t")


    return [
        ctx.makeTrader_A(strategy.LiquidityProvider(volumeDistr=const(4)), "liquidity"),

        ctx.makeTrader_A(strategy.Signal(linear_signal), "signal",
                        [(linear_signal, ctx.amount_graph)]),

        ctx.makeTrader_A(strategy.SignalEx(linear_signal), "signal_ex")
    ]

if __name__ == '__main__':
    run("signal_trader", Signal)
```

Rendering graphs by Veusz

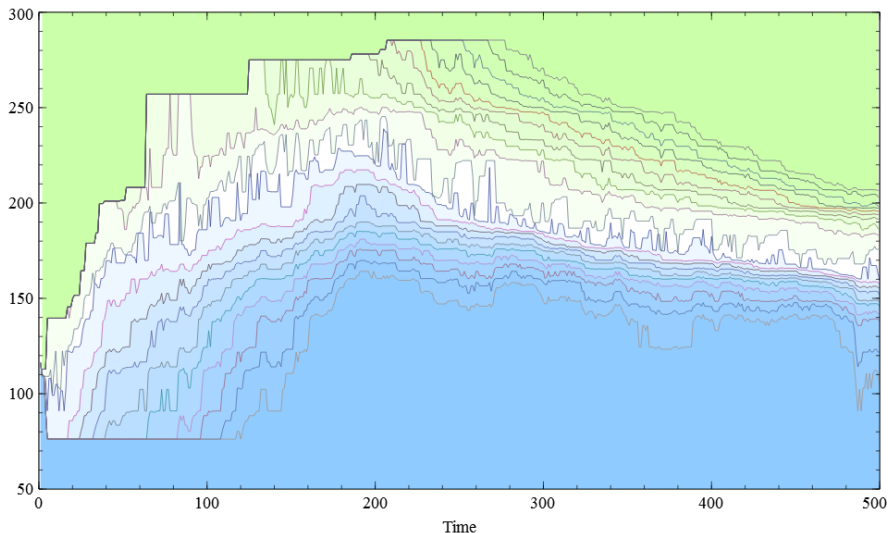

Web interface

Web interface allows to compose a market to simulate from existing objects and set up their parameters

Traders Order books Graphs Options Price efficiency amount Volume levels A

liquidity Clone Delete liquidity ?

strategies ...

Clone Delete Basic ?

LiquidityProvider ?

Price of orders to create as multiplier to the current price Random ?

Log normal distribution ?

μ 0

σ 0.1

Initial order price 100

Time intervals between two order creations Random ?

Exponential distribution ?

λ 1

Order factory WithExpiry ?

Order expiration time Constant ?

value 100

Order factory Limit ?

Volume of orders to create Constant ?

value 70

Trader position -6494

Basic, LiquidityProvider

Liquidity provider is a combination of two LiquidityProviderSide traders with the same parameters but different trading sides.

It has following parameters:

Order factory

order factory function (default: order.Limit.T)

Initial value

initial price which is taken if orderBook is empty (default: 100)

Time intervals between two order creations

defines intervals of time between order creation (default: exponential distribution with $\lambda = 1$)

Price of orders to create as multiplier to the current price

defines multipliers for current asset price when price of order to create is calculated (default: log normal distribution with $\mu = 0$ and $\sigma = 0.1$)

Volume of orders to create


defines volumes of orders to create (default: exponential distribution with $\lambda = 1$)

Time series

Timeseries field of a trader or an order book instructs what data should be collected and rendered on graphs

The screenshot displays a hierarchical configuration window for a market simulator. The top navigation bar includes tabs for Traders, Order books, Graphs, Options, Price, efficiency, amount, and Volume levels A. The main panel is organized into a tree structure with expandable sections (indicated by triangles) and fields for configuration. The 'timeseries' section is expanded, showing a 'Source' field set to 'IndicatorBase' and a 'graph' field set to 'Price'. A context menu is open over the 'IndicatorBase' field, listing various data sources: Random, Constant, Arithmetic, Random walk, Assets, Fold, IndicatorBase, and Trader's. The 'Assets' option is highlighted, and a sub-menu is visible, showing 'Safe order queue price', 'Mid-price', 'Side price' (which is highlighted in blue), and 'Volume levels'. Other visible fields include 'Tick size' (0.01), 'Events when to act', 'Source of data' (Asset's), 'Side' (Sell), 'Order book' (S(OrderBook)), and 'Side' (Buy).

Rendering results

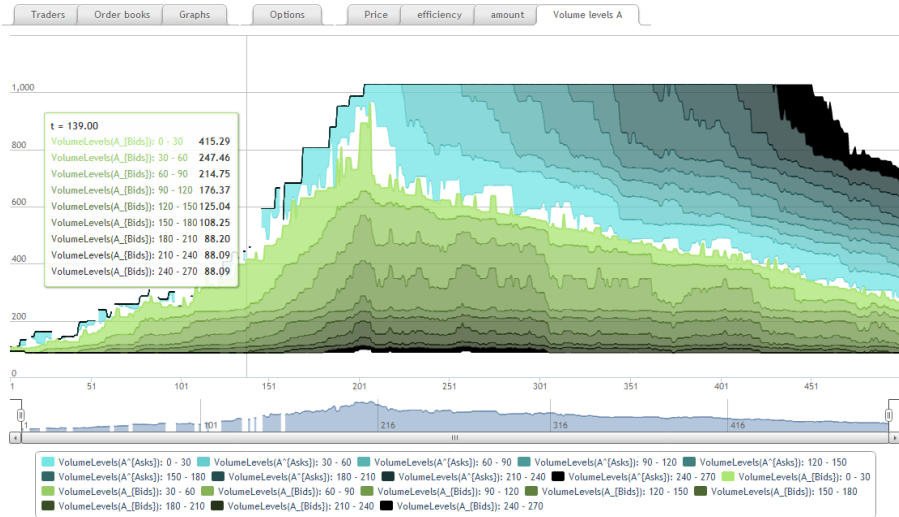

Node aliases

Object tree nodes can be assigned aliases that can be used later to refer to the sub-tree (explicit by-value or by-reference cloning semantics is to be implemented)

The screenshot displays a market simulator interface with a hierarchical tree structure. The top navigation bar includes tabs: Traders, Order books, Graphs, Options, Price, efficiency, amount, and Volume levels A. The left sidebar lists nodes: liquidity, signal, and signal_ex. The main area shows a tree structure for a trading strategy. The root node is 'liquidity', which has a 'Clone' button and a 'Delete' button. It contains a 'signal' dropdown menu and a '?' icon. The 'signal' node is expanded, showing a 'strategies' list with a 'Clone' button and a 'Delete' button. The 'strategies' node is expanded, showing a 'Basic' dropdown menu and a '?' icon. The 'Basic' node is expanded, showing a 'Signal' dropdown menu and a '?' icon. The 'Signal' node is expanded, showing a 'Threshold' field with a value of 0.7. The 'Signal' node is expanded, showing a 'Signal' field with a value of $x = 20 - 0.1t$. The 'Signal' node is expanded, showing a 'Increments of the signal' dropdown menu and a '?' icon. The 'Increments of the signal' node is expanded, showing a 'value' field with a value of -0.1. The 'Increments of the signal' node is expanded, showing an 'Initial value' field with a value of 20. The 'Increments of the signal' node is expanded, showing a 'Time interval between two signal updates' dropdown menu and a '?' icon. The 'Time interval between two signal updates' node is expanded, showing a 'Random' dropdown menu and a '?' icon. The 'Time interval between two signal updates' node is expanded, showing an 'Exponential distribution' dropdown menu and a '?' icon. The 'Time interval between two signal updates' node is expanded, showing a ' λ ' field with a value of 1.

The End