


An introduction to C++ Concepts

Thomas Peters
Dec 13, 2017

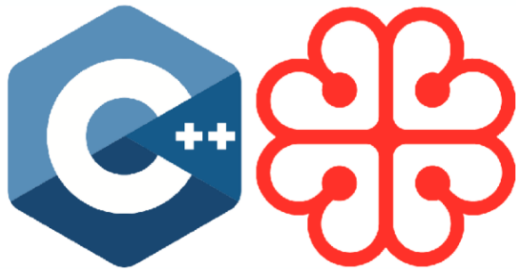

Bonjour

wrnch



UFORA

Summary

- 1) Background, statement of problem.
- 2) Overview of Concepts.
- 3) How we deal without Concepts today.

Brief summary of templates

- Mechanism for generic programming in C++
- Instead of:

```
int add(int x, int y) { return x + y; }  
double add(double x, double y) { return x + y; }
```

Can write “a single function”

```
template <class T>  
T add(T x, T y) { return x + y; }  
  
add(1, 2);  
add(3.0, 4.0);  
add<float>(1, 2.0);  
add("c++", "mtl"); // compile error
```

Similar to dynamic languages

```
template <class T>  
T add(T x, T y) { return x + y; }
```

Similar to Python:

```
def add(x, y):  
    return x + y
```

Similar to dynamic languages

```
template <class T>  
T add(T x, T y) { return x + y; }
```

Actually more similar to:

```
def meta(T):  
    def add_T(x, y):  
        return x + y  
    return add_T
```

Templates: compile time programming on types

- Objects returned by meta functions are (mostly) functions and classes.
- Specialization and overloading introduce branching, recursion
- Class constants allow computation of (integral) numeric values

Template metaprogramming is Turing complete

Design goals of templates (1987-8)

Bjarne wanted:

- Full generality/expressiveness
 - Zero overhead compared to hand coding
 - Well-specified interfaces

Instead got:

- Turing completeness
 - better than hand coded performance
 - *Lousy interfaces*



A solution to the interfaces problem is called *Concepts*.

Originally proposed by Alexander Stepanov
(father of the STL)



Lousy interfaces.

```
std::vector<int> vec { 1, 2, 3, 4 };
```

```
std::sort(vec.begin(), vec.end());    // OK
```

```
std::list<int> a_list { 1, 2, 3, 4 };
```

```
std::sort(a_list.begin(), a_list.end());
```

What could go wrong? (hop over to godbolt.org)

Compiler barfs

- `std::sort` is an unconstrained template
- Templates use compile time duck typing
- Errors are very much in the weeds, and don't offer *helpful* clues

Implicit interfaces

```
template<class T>

void sort(T& c) {
    // code for sorting (depending on various properties of T,
    // such as having [ ] and a value type with <
}
```

Concepts provide explicit requirements:

```
template<class T>
```

```
    requires Sortable<T>
```

```
void sort(T& c) {  
    // ...  
}
```

// or:

```
void sort(Sortable& c) {  
    // ...  
}
```

//or

```
template <Sortable T>  
void sort(T t) { ... }
```

Concepts make code more *readable*

Better error messages

```
sort(lst);
```

```
error: cannot call function 'void sort(T&) [with T = std::list<int>]'
```

```
note:   concept 'Sortable()' was not satisfied
```

Status of Concepts

- Voted down for C++11 (different version)
- Voted down for C++17 (“concepts-lite”)
- Candidate for C++20 (merged into working draft)
- GCC 6 already ships with concepts (Andrew Sutton)
 - Only the language features
 - No standard library
 - Need `-fconcepts` flag
 - Try on godbolt.org!

Andrew Sutton, architect of concepts ->



Concepts today

Consider `std::find` (<http://en.cppreference.com/w/cpp/algorithm/find>)

```
template <class InputIt, class T>
```

```
InputIt find(InputIt first, InputIt last, const T& value);
```

Type requirements

- InputIt must meet the requirements of [InputIterator](#).

Example Concept: InputIterator

<http://en.cppreference.com/w/cpp/concept/InputIterator>

- Gives a list of requirements that must be satisfied by an InputIterator.
- *Not enforced by the compiler*

Similar definitions exist in Boost too.

Eventually may see:

```
template <class R, class T>
```

```
    requires Range<R> && EqualityComparableWith<Value_type<R>, T>
```

```
Iterator_of<R> find(R& range, const T& value);
```

// Using template aliases

```
template <class X> using Value_type = X::value_type;
```

```
template <class X> using Iterator_of = X::iterator;
```

- Concepts not only introduce requirements on single types, but on *relationships between types*
 - Eg, `EqualityComparableWith<Value_type<R>, T>`
- See the Ranges TS for a language feature built with Concepts (<http://en.cppreference.com/w/cpp/experimental/ranges>)

Defining concepts

template < *template-parameter-list* >

concept [*bool*] *concept-name* = *constraint-expression*;

Examples:

// variable concept

```
template <class T, class U>
```

```
concept bool Derived = std::is_base_of<U, T>::value;
```

// function concept (must be invoked)

```
template <class T>
```

```
concept bool EqualityComparable() {  
    return requires(T a, T b) { {a == b} -> Boolean;  
                                {a != b} -> Boolean; };  
}
```

←
expression

Constraint

Constraints

- 1) conjunctions
- 2) disjunctions
- 3) predicate constraints
- 4) expression constraints (only in a requires-expression)
- 5) type constraints (only in a requires-expression)
- 6) implicit conversion constraints (only in a requires-expression)
- 7) argument deduction constraints (only in a requires-expression)
- 8) exception constraints (only in a requires-expression)
- 9) parametrized constraints (only in a requires-expression)

More examples: Range

```
template <class T>

concept bool Range = requires(T t) {

    typename Value_type<T>; // must have a value type typename Iterator_of;

    typename Iterator_type<T>; // must have an iterator type

    { begin(t) } -> Iterator_of<T>; // must have begin() and end() which return iterators

    { end(t) } -> Iterator_of<T>;

    requires Input_iterator<Iterator_of<T>>;

    requires Same_type<Value_type<T>, Value_type<Iterator_of<T>>>;

};
```

More examples: Sortable

```
template <class T>
```

```
concept bool Sortable =
```

```
    Sequence<T>
```

```
    && Random_access_iterator<Iterator_of<T>>
```

```
    && Less_than_comparable<Value_type<T>>
```

```
;
```


Template overloading

```
template<class T1, class T2> void f(T1, T2);
```

```
template<class T> void f(T);
```

```
void f(int, int);    // takes precedence over template functions
```

```
void f(int, int, int);
```

It's hard to provide overloads based on particular properties of T.

Concepts: overloading

```
void advance(Forward_iterator p, int n) { while(n-->0) ++p; }
```

```
void advance(Random_access_iterator p, int n) { p+=n; }
```

```
void use(vector& vs, list& ls) {  
    auto pvs = find(vs, "foo");  
  
    advance(pvs, 2); // use fast advance  
  
    auto pls = find(ls, "foo");  
  
    advance(pls, 2); // use slow advance  
}
```

Concepts: constrained type deduction

// the type of x1 is deduced to whatever f returns

```
auto x1 = f(y);
```

// Return type of f must satisfy Sortable concept to compile

```
Sortable x2 = f(y);
```

Dealing without concepts 1

1. Do nothing. Cry.
2. Use documentation (like the STL)
3. Use gcc 6 with `-fconcepts`

Dealing without concepts 2: plain ol' templates

```
template<class T1, class T2> struct Can_copy {  
    static void constraints(T1 a, T2 b) { T2 c = a; b = a; }  
    Can_copy() { constraints; }  
};
```

```
struct X {};  
struct Y {};
```

```
Can_copy<X, Y>();
```

// Gcc 6.1 output

<source>: In instantiation of 'static void Can_copy<T1, T2>::constraints(T1, T2) [with T1 = X; T2 = Y]':

7 : <source>:7:22: required from 'Can_copy<T1, T2>::Can_copy() [with T1 = X; T2 = Y]'

22 : <source>:22:23: required from here

6 : <source>:6:54: error: conversion from 'X' to non-scalar type 'Y' requested
static void constraints(T1 a, T2 b) { T2 c = a; b = a; }

^

6 : <source>:6:59: error: no match for 'operator=' (operand types are 'Y' and 'X')

static void constraints(T1 a, T2 b) { T2 c = a; b = a; }

~~~~~

# Dealing without concepts 3: static\_assert

```
template <class T>

void foo(T&t) {

    static_assert(std::is_integral<T>::value);

    // ....

}
```

- Errors still come out of body, just as without.
- Again, interface is specified in implementation (function body)
- Doesn't allow overloading

# Dealing without concepts 4: tagged-dispatch

```
namespace std {
    struct input_iterator_tag { };
    struct bidirectional_iterator_tag { };
    struct random_access_iterator_tag { };

    namespace detail {
        template <class InputIterator, class Distance>
        void advance_dispatch(InputIterator& i, Distance n,
                               input_iterator_tag) {
            while (n-- > 0) ++i;
        }

        template <class BidirectionalIterator, class Distance>
        void advance_dispatch(BidirectionalIterator& i, Distance
                               n,
                               bidirectional_iterator_tag) {
            if (n >= 0)
                while (n-- > 0) ++i;
            else
                while (n++ < 0) --i;
        }
    }
}
```

```
template <class RandomAccessIterator, class Distance>
void advance_dispatch(RandomAccessIterator& i, Distance n,
                      random_access_iterator_tag) {
    i += n;
}

template <class InputIterator, class Distance>
void advance(InputIterator& i, Distance n) {
    typename iterator_traits<InputIterator>::iterator_category
category;
    detail::advance_dispatch(i, n, category);
}
}
```

*// A technique for selecting implementations based on compile time properties.*

# Dealing without concepts 5: constexpr if

```
template <class T>

void foo(T t) {           // C++17 feature

    if constexpr (std::is_integral<T>::value) {

        // provide int implementation

    } else {

        // provide non-int implementation

    }

}
```



# Dealing without concepts 6: SFINAE

```
template <class T, typename = std::enable_if_t<std::is_integral<T>::value>> // C++14, almost C++11
```

```
void foo(T t) { } // basically equivalent to requires Integral<T>
```

```
template <class T>
```

```
auto bar(T t) -> decltype(t.member_func(), void())
```

```
{ } // disabled unless has a member function named
```

```
    // `member_func` which accepts no arguments
```

Also see `void_t`, or any talk by Walter Brown. (C++17, yet trivial to implement)



# Dealing without concepts 6: SFINAE

- SFINAE is almost as powerful as concepts. Can almost implement concepts!
  - <https://stackoverflow.com/questions/26513095/void-t-can-implement-concepts>
  - <https://akrzemi1.wordpress.com/2016/03/21/concepts-without-concepts/>
  - [http://www.boost.org/doc/libs/1\\_60\\_0/libs/concept\\_check/concept\\_check.htm](http://www.boost.org/doc/libs/1_60_0/libs/concept_check/concept_check.htm)
- SFINAE can't apply to things like constructors in a template class
- SFINAE can't do partial ordering of overloads
- SFINAE is *ugly*, and hard to get right.

# Why concepts didn't make C++17?

- Only one implementation (gcc)
- Not enough use cases seen (Ranges TS biggest example)
- No library of concepts
- No checking of template definitions
- *Sometimes, error messages are worse*
  - You can end up with a large set of discarded overloads, each with its own reason for rejection.
  - See <http://honermann.net/blog/> for examples

# Conclusion: Concepts simplify generic programming

- Improve readability
- Improve error messages (hopefully)
- Provide explicit interfaces for templates
- Easier overloading, specialization of templates
- Restricted type deduction (`auto` replacement)
- Unclear if will make it as a real language feature.

## Summary:

*A C++ concept is a compile-time predicate on zero or more template argument type argument or value arguments.*

# References

<http://en.cppreference.com/w/cpp/language/constraints>

<http://www.open-std.org/jtc1/sc22/wg21/docs/papers/2017/p0557r0.pdf>

Contact:           thomas.d.peters@gmail.com