TCNOpen TRDP

Prototype

Generated by Doxygen 1.5.6

Thu Oct 18 17:10:21 2012

Contents

1	The	e TRDP Light Library API Specification	1
	1.1	General Information	1
		1.1.1 Purpose	1
		1.1.2 Scope	1
		1.1.3 Related documents	1
		1.1.4 Abbreviations and Definitions	1
	1.2	Terminology	2
	1.3	Conventions of the API	4
2	Data	a Structure Index	5
	2.1	Data Structures	5
3	File	e Index	7
	3.1	File List	7
4	Data	a Structure Documentation	9
	4.1	GNU_PACKED Struct Reference	9
		4.1.1 Detailed Description	10
		4.1.2 Field Documentation	10
		4.1.2.1 protocolVersion	10
		4.1.2.2 msgType	10
		4.1.2.3 datasetLength	10
	4.2	MD_ELE Struct Reference	12
		4.2.1 Detailed Description	12
	4.3	PD_ELE Struct Reference	13
		4.3.1 Detailed Description	14
	4.4	TAU_MARSHALL_INFO_T Struct Reference	15
		4.4.1 Detailed Description	15
	4.5	TRDP CAR INFO T Struct Reference	16

ii CONTENTS

	4.5.1	Detailed Description	17
		•	
	4.5.2		17
			17
		•	17
4.6			18
	4.6.1	•	19
	4.6.2	Field Documentation	19
		4.6.2.1 owner	19
		4.6.2.2 orient	19
		4.6.2.3 pFctInfo	19
		4.6.2.4 pCarInfo	19
4.7	TRDP	_DATASET_ELEMENT_T Struct Reference	20
	4.7.1	Detailed Description	20
	4.7.2	Field Documentation	20
		4.7.2.1 type	20
4.8	TRDP	_DATASET_OFFSET_T Struct Reference	21
	4.8.1	Detailed Description	21
4.9	TRDP	_DATASET_T Struct Reference	22
	4.9.1		22
4.10	TRDP	•	23
			23
4 11		•	24
			25
		•	25 25
	7.11.2		25
4.10	TDDD		23 26
4.12			
4.10		F	26 27
4.13		_	27
		1	27
4.14			28
		•	28
4.15	TRDP_	_MARSHALL_CONFIG_T Struct Reference	29
	4.15.1	Detailed Description	29
4.16	TRDP	_MD_CONFIG_T Struct Reference	30
	4.16.1	Detailed Description	30
4.17	TRDP	_MD_INFO_T Struct Reference	31

	4.17.1 Detailed Description	32
	4.17.2 Field Documentation	32
	4.17.2.1 msgType	32
4.18	TRDP_MD_STATISTICS_T Struct Reference	33
	4.18.1 Detailed Description	34
4.19	TRDP_MEM_CONFIG_T Struct Reference	35
	4.19.1 Detailed Description	35
4.20	TRDP_MEM_STATISTICS_T Struct Reference	36
	4.20.1 Detailed Description	36
4.21	TRDP_PD_CONFIG_T Struct Reference	37
	4.21.1 Detailed Description	37
4.22	TRDP_PD_INFO_T Struct Reference	38
	4.22.1 Detailed Description	39
	4.22.2 Field Documentation	39
	4.22.2.1 msgType	39
4.23	TRDP_PD_STATISTICS_T Struct Reference	40
	4.23.1 Detailed Description	41
4.24	TRDP_PROCESS_CONFIG_T Struct Reference	42
	4.24.1 Detailed Description	42
4.25	TRDP_PROP_INFO_T Struct Reference	43
	4.25.1 Detailed Description	43
4.26	TRDP_PUB_STATISTICS_T Struct Reference	44
	4.26.1 Detailed Description	44
	4.26.2 Field Documentation	44
	4.26.2.1 destAddr	44
4.27	TRDP_RED_STATISTICS_T Struct Reference	45
	4.27.1 Detailed Description	45
4.28	TRDP_SEND_PARAM_T Struct Reference	46
	4.28.1 Detailed Description	46
4.29	TRDP_SESSION Struct Reference	47
	4.29.1 Detailed Description	48
4.30	TRDP_SOCKETS Struct Reference	49
	4.30.1 Detailed Description	49
	4.30.2 Field Documentation	49
	4.30.2.1 usage	49
4.31	TRDP_STATISTICS_T Struct Reference	50

iv CONTENTS

		4.31.1 Detailed Description	51
	4.32	TRDP_SUBS_STATISTICS_T Struct Reference	52
		4.32.1 Detailed Description	52
		4.32.2 Field Documentation	52
		4.32.2.1 filterAddr	52
		4.32.2.2 timeout	52
		4.32.2.3 toBehav	53
		4.32.2.4 numRecv	53
	4.33	TRDP_TRAIN_INFO_T Struct Reference	54
		4.33.1 Detailed Description	55
		4.33.2 Field Documentation	55
		4.33.2.1 operator	55
		4.33.2.2 topoCnt	55
		4.33.2.3 pCstInfo	55
	4.34	VOS_SOCK_OPT_T Struct Reference	56
		4.34.1 Detailed Description	56
		4.34.2 Field Documentation	56
		4.34.2.1 qos	56
	4.35	VOS_TIME_T Struct Reference	57
		4.35.1 Detailed Description	57
		4.35.2 Field Documentation	57
		4.35.2.1 tv_usec	57
5	File 1	Documentation	59
	5.1		59
		5	60
			60
			60
		-	60
	5.2		63
			63
			64
			64
		-	64
			66
	5.3		67
	-		67

	5.3.2	Function	Documentation	. 68
		5.3.2.1	main	. 68
5.4	tau_ad	dr.h File R	eference	. 70
	5.4.1	Detailed	Description	. 72
	5.4.2	Function	Documentation	. 72
		5.4.2.1	tau_addr2CarId	. 72
		5.4.2.2	tau_addr2CarNo	. 73
		5.4.2.3	tau_addr2CstId	. 73
		5.4.2.4	tau_addr2CstNo	. 73
		5.4.2.5	tau_addr2IecCarNo	. 74
		5.4.2.6	tau_addr2IecCstNo	. 74
		5.4.2.7	tau_addr2Uri	. 74
		5.4.2.8	tau_carNo2Ids	. 75
		5.4.2.9	tau_cstNo2CstId	. 75
		5.4.2.10	tau_getOwnAddr	. 75
		5.4.2.11	tau_getOwnIds	. 75
		5.4.2.12	tau_iecCarNo2Ids	. 76
		5.4.2.13	tau_iecCstNo2CstId	. 76
		5.4.2.14	tau_label2CarId	. 77
		5.4.2.15	tau_label2CarNo	. 77
		5.4.2.16	tau_label2CstId	. 77
		5.4.2.17	tau_label2CstNo	. 78
		5.4.2.18	tau_label2IecCarNo	. 78
		5.4.2.19	tau_label2IecCstNo	. 78
		5.4.2.20	tau_uri2Addr	. 79
5.5	tau_ma	arshall.h Fi	ile Reference	. 80
	5.5.1	Detailed	Description	. 81
	5.5.2	Typedef l	Documentation	. 81
		5.5.2.1	tau_calcDatasetSize	. 81
		5.5.2.2	tau_marshallDs	. 82
		5.5.2.3	tau_unmarshallDs	. 82
	5.5.3	Function	Documentation	. 82
		5.5.3.1	tau_initMarshall	. 82
		5.5.3.2	tau_marshall	. 83
		5.5.3.3	tau_unmarshall	. 84
5.6	tau_tci	.h File Ref	ference	. 85

vi CONTENTS

5.6.1	Detailed l	Description	37
5.6.2	Enumerat	tion Type Documentation	37
	5.6.2.1	TRDP_FCT_T	37
	5.6.2.2	TRDP_INAUG_STATE_T 8	88
5.6.3	Function	Documentation	88
	5.6.3.1	tau_getCarDevCnt	88
	5.6.3.2	tau_getCarInfo	88
	5.6.3.3	tau_getCarOrient	39
	5.6.3.4	tau_getCstCarCnt	39
	5.6.3.5	tau_getCstFctCnt	39
	5.6.3.6	tau_getCstFctInfo	90
	5.6.3.7	tau_getCstInfo	90
	5.6.3.8	tau_getDevInfo	91
	5.6.3.9	tau_getEtbState	91
	5.6.3.10	tau_getIecCarOrient	91
	5.6.3.11	tau_getTrnCarCnt	92
	5.6.3.12	tau_getTrnCstCnt	92
	5.6.3.13	tau_getTrnInfo	92
tau_typ	es.h File F	Reference	93
5.7.1	Detailed l	Description	93
tau_xn	nl.h File Re	eference	94
5.8.1	Detailed l	Description	95
5.8.2	Enumerat	tion Type Documentation	95
	5.8.2.1	TRDP_DBG_OPTION_T	95
5.8.3	Function	Documentation	96
	5.8.3.1	tau_readXmlConfig	96
	5.8.3.2	tau_readXmlDatasetConfig	96
trdp_if	c File Ref	erence	98
5.9.1	Detailed l	Description)()
5.9.2	Function	Documentation)()
	5.9.2.1	tlc_closeSession)()
	5.9.2.2	tlc_getInterval)1
	5.9.2.3	tlc_getVersion)2
	5.9.2.4	tlc_init)2
	5.9.2.5	tlc_openSession)3
	5.9.2.6	tlc_process)4
	5.6.2 5.6.3 5.6.3 tau_tyl 5.7.1 tau_xn 5.8.1 5.8.2 5.8.3 trdp_iff 5.9.1	5.6.2 Enumerate 5.6.2.1 5.6.2.2 5.6.3 Function 5.6.3.1 5.6.3.2 5.6.3.3 5.6.3.4 5.6.3.5 5.6.3.6 5.6.3.7 5.6.3.8 5.6.3.9 5.6.3.10 5.6.3.11 5.6.3.12 5.6.3.13 tau_types.h File February 5.8.1 Detailed Bau_xml.h File Ref. 5.8.2 Enumerate 5.8.2.1 5.8.3 Function 5.8.3.1 5.8.3.2 trdp_if.c File Ref. 5.9.1 Detailed B 5.9.2 Function 5.9.2.1 5.9.2.2 5.9.2.3 5.9.2.4 5.9.2.5	5.6.2 Enumeration Type Documentation 8 5.6.2.1 TRDP_FCT_T 8 5.6.2.2 TRDP_INAUG_STATE_T 8 5.6.3.3 Function Documentation 8 5.6.3.1 tau_getCarDevCnt 8 5.6.3.2 tau_getCarDrient 8 5.6.3.3 tau_getCstGarCnt 8 5.6.3.4 tau_getCstFctCnt 8 5.6.3.5 tau_getCstFctInfo 9 5.6.3.6 tau_getCstFctInfo 9 5.6.3.7 tau_getCstFctInfo 9 5.6.3.8 tau_getEbState 9 5.6.3.10 tau_getTrnCarCnt 9 5.6.3.11 tau_getTrnCstCnt 9 5.6.3.12 tau_getTrnCstCnt 9 5.6.3.13 tau_getTrnCstCnt 9 5.6.3.10 tau_getTrnCstCnt 9 5.6.3.12 tau_getTrnCstCnt 9 5.6.3.13 tau_getTrnCstCnt 9 5.8.1 Detailed Description 9 5.8.2.1 TrDP_DBG_OPTON_T 9 5.8.3.1 tau_readXmlConfig 9 <tr< td=""></tr<>

CONTENTS vii

	5.9.2.7	tlc_reinitSession)5
	5.9.2.8	tlc_setTopoCount)6
	5.9.2.9	tlc_terminate)6
	5.9.2.10	tlp_get)7
	5.9.2.11	tlp_getRedundant)9
	5.9.2.12	tlp_publish)9
	5.9.2.13	tlp_put	0
	5.9.2.14	tlp_request	1
	5.9.2.15	tlp_setRedundant	13
	5.9.2.16	tlp_subscribe	14
	5.9.2.17	tlp_unpublish	15
	5.9.2.18	tlp_unsubscribe	6
	5.9.2.19	trdp_getTopoCount	17
	5.9.2.20	trdp_isValidSession	17
	5.9.2.21	trdp_sessionQueue	17
5.10 trdp_if	h File Ref	erence	18
5.10.1	Detailed	Description	18
5.10.2	Function	Documentation	19
	5.10.2.1	trdp_getTopoCount	19
	5.10.2.2	trdp_isValidSession	19
	5.10.2.3	trdp_sessionQueue	20
5.11 trdp_if	_light.h Fi	le Reference	21
5.11.1	Detailed	Description	25
5.11.2	Function	Documentation	25
	5.11.2.1	tlc_closeSession	25
	5.11.2.2	tlc_freeBuf	26
	5.11.2.3	tlc_getInterval	26
	5.11.2.4	tlc_getJoinStatistics	27
	5.11.2.5	tlc_getListStatistics	28
	5.11.2.6	tlc_getPubStatistics	29
	5.11.2.7	tlc_getRedStatistics	29
	5.11.2.8	tlc_getStatistics	30
	5.11.2.9	tlc_getSubsStatistics	31
	5.11.2.10	tlc_getVersion	32
	5.11.2.11	tlc_init	32
	5.11.2.12	tlc_openSession	33

viii CONTENTS

	100
5.11.2.13 tlc_process	
5.11.2.14 tlc_reinitSession	
5.11.2.15 tlc_resetStatistics	
5.11.2.16 tlc_setTopoCount	
5.11.2.17 tlc_terminate	
5.11.2.18 tlm_abortSession	
5.11.2.19 tlm_addListener	
5.11.2.20 tlm_confirm	
5.11.2.21 tlm_delListener	
5.11.2.22 tlm_notify	
5.11.2.23 tlm_reply	
5.11.2.24 tlm_replyErr	
5.11.2.25 tlm_replyQuery	
5.11.2.26 tlm_request	
5.11.2.27 tlp_get	
5.11.2.28 tlp_getRedundant	
5.11.2.29 tlp_publish	146
5.11.2.30 tlp_put	148
5.11.2.31 tlp_request	149
5.11.2.32 tlp_setRedundant	151
5.11.2.33 tlp_subscribe	152
5.11.2.34 tlp_unpublish	154
5.11.2.35 tlp_unsubscribe	155
5.12 trdp_marshall.c File Reference	157
5.12.1 Detailed Description	157
5.13 trdp_mdcom.c File Reference	159
5.13.1 Detailed Description	159
5.13.2 Function Documentation	160
5.13.2.1 trdp_rcvMD	160
5.13.2.2 trdp_sendMD	160
5.14 trdp_mdcom.h File Reference	161
5.14.1 Detailed Description	161
5.14.2 Function Documentation	162
5.14.2.1 trdp_rcvMD	162
5.14.2.2 trdp_sendMD	162
5.15 trdp_pdcom.c File Reference	163

	5.15.1	Detailed	Description
	5.15.2	Function	Documentation
		5.15.2.1	trdp_pdCheck
		5.15.2.2	trdp_pdDataUpdate
		5.15.2.3	trdp_pdInit
		5.15.2.4	trdp_pdReceive
		5.15.2.5	trdp_pdSend
		5.15.2.6	trdp_pdSendQueued
		5.15.2.7	trdp_pdUpdate
5.16	trdp_pc	dcom.h Fil	e Reference
	5.16.1	Detailed	Description
	5.16.2	Function	Documentation
		5.16.2.1	trdp_pdCheck
		5.16.2.2	trdp_pdDataUpdate
		5.16.2.3	trdp_pdInit
		5.16.2.4	trdp_pdReceive
		5.16.2.5	trdp_pdSend
		5.16.2.6	trdp_pdSendQueued
		5.16.2.7	trdp_pdUpdate
5.17	trdp_pr	rivate.h Fil	e Reference
	5.17.1	Detailed	Description
	5.17.2	Enumera	tion Type Documentation
		5.17.2.1	TRDP_PRIV_FLAGS_T
		5.17.2.2	TRDP_SOCK_TYPE_T
5.18	trdp_st	ats.c File I	Reference
	5.18.1	Detailed	Description
	5.18.2	Function	Documentation
		5.18.2.1	tlc_getJoinStatistics
		5.18.2.2	tlc_getListStatistics
		5.18.2.3	tlc_getPubStatistics
		5.18.2.4	tlc_getRedStatistics
		5.18.2.5	tlc_getStatistics
		5.18.2.6	tlc_getSubsStatistics
		5.18.2.7	tlc_resetStatistics
		5.18.2.8	trdp_initStats
		5.18.2.9	trdp_pdPrepareStats

5.18.2.10 trdp_UpdateStats	85
5.19 trdp_stats.h File Reference	86
5.19.1 Detailed Description	86
5.19.2 Function Documentation	87
5.19.2.1 trdp_initStats	87
5.19.2.2 trdp_pdPrepareStats	87
5.20 trdp_types.h File Reference	88
5.20.1 Detailed Description	93
5.20.2 Define Documentation	93
5.20.2.1 TRDP_MAX_FILE_NAME_LEN	93
5.20.2.2 TRDP_MAX_LABEL_LEN	93
5.20.2.3 TRDP_MAX_URI_HOST_LEN	93
5.20.2.4 TRDP_MAX_URI_LEN	93
5.20.2.5 TRDP_MAX_URI_USER_LEN	93
5.20.3 Typedef Documentation	94
5.20.3.1 TRDP_IP_ADDR_T	94
5.20.3.2 TRDP_MARSHALL_T	94
5.20.3.3 TRDP_MD_CALLBACK_T	94
5.20.3.4 TRDP_PD_CALLBACK_T	94
5.20.3.5 TRDP_PRINT_DBG_T	95
5.20.3.6 TRDP_TIME_T	95
5.20.3.7 TRDP_UNMARSHALL_T	95
5.20.4 Enumeration Type Documentation	95
5.20.4.1 TRDP_DATA_TYPE_T	95
5.20.4.2 TRDP_ERR_T	96
5.20.4.3 TRDP_FLAGS_T	97
5.20.4.4 TRDP_MSG_T	97
5.20.4.5 TRDP_OPTION_T	97
5.20.4.6 TRDP_RED_STATE_T	97
5.20.4.7 TRDP_TO_BEHAVIOR_T	98
5.21 trdp_utils.c File Reference	99
5.21.1 Detailed Description	200
5.21.2 Function Documentation	200
5.21.2.1 am_big_endian	200
5.21.2.2 trdp_getSeqCnt	201
5.21.2.3 trdp_initSockets	201

		5.21.2.4	trdp_isRcvSeqCnt)1
		5.21.2.5	trdp_packetSizePD)2
		5.21.2.6	trdp_queueAppLast)2
		5.21.2.7	trdp_queueDelElement)2
		5.21.2.8	trdp_queueFindAddr)2
		5.21.2.9	trdp_queueFindComId)3
		5.21.2.10	trdp_queueInsFirst)3
		5.21.2.11	trdp_releaseSocket)3
		5.21.2.12	trdp_requestSocket)3
5.22	trdp_ut	ils.h File I	Reference)5
;	5.22.1	Detailed ?	Description)6
	5.22.2	Function	Documentation)6
		5.22.2.1	am_big_endian)6
		5.22.2.2	trdp_getSeqCnt)7
		5.22.2.3	trdp_initSockets)7
		5.22.2.4	trdp_isRcvSeqCnt)7
		5.22.2.5	trdp_packetSizePD)8
		5.22.2.6	trdp_queueAppLast)8
		5.22.2.7	trdp_queueDelElement)8
		5.22.2.8	trdp_queueFindAddr)8
		5.22.2.9	trdp_queueFindComId)9
		5.22.2.10	trdp_queueInsFirst)9
		5.22.2.11	trdp_releaseSocket)9
		5.22.2.12	trdp_requestSocket)9
5.23	vos_me	m.h File I	Reference	11
;	5.23.1	Detailed ?	Description	13
:	5.23.2	Define D	ocumentation	13
		5.23.2.1	VOS_MEM_BLOCKSIZES	13
		5.23.2.2	VOS_MEM_PREALLOCATE	13
:	5.23.3	Function	Documentation	13
		5.23.3.1	vos_bsearch	13
		5.23.3.2	vos_memAlloc	15
		5.23.3.3	vos_memCount	15
		5.23.3.4	vos_memDelete	16
		5.23.3.5	vos_memFree	16
		5.23.3.6	vos_memInit	17

xii CONTENTS

5.23.3.7 vos_qsort	218
5.23.3.8 vos_queueCreate	219
5.23.3.9 vos_queueDestroy	220
5.23.3.10 vos_queueReceive	221
5.23.3.11 vos_queueSend	222
5.23.3.12 vos_sharedClose	
5.23.3.13 vos_sharedOpen	223
5.24 vos_sock.h File Reference	225
5.24.1 Detailed Description	
5.24.2 Function Documentation	
5.24.2.1 vos_dottedIP	
5.24.2.2 vos_htonl	
5.24.2.3 vos_htons	
5.24.2.4 vos_ipDotted	229
5.24.2.5 vos_isMulticast	229
5.24.2.6 vos_ntohl	230
5.24.2.7 vos_ntohs	230
5.24.2.8 vos_sockAccept	231
5.24.2.9 vos_sockBind	231
5.24.2.10 vos_sockClose	232
5.24.2.11 vos_sockConnect	233
5.24.2.12 vos_sockGetMAC	233
5.24.2.13 vos_sockInit	234
5.24.2.14 vos_sockJoinMC	234
5.24.2.15 vos_sockLeaveMC	235
5.24.2.16 vos_sockListen	236
5.24.2.17 vos_sockOpenTCP	237
5.24.2.18 vos_sockOpenUDP	237
5.24.2.19 vos_sockReceiveTCP	238
5.24.2.20 vos_sockReceiveUDP	239
5.24.2.21 vos_sockSendTCP	240
5.24.2.22 vos_sockSendUDP	
5.24.2.23 vos_sockSetOptions	242
5.25 vos_thread.h File Reference	
5.25.1 Detailed Description	246
5.25.2 Function Documentation	247

CONTENTS xiii

5.25.2.1 vos_addTime
5.25.2.2 vos_clearTime
5.25.2.3 vos_cmpTime
5.25.2.4 vos_getTime
5.25.2.5 vos_getTimeStamp
5.25.2.6 vos_getUuid
5.25.2.7 vos_mutexCreate
5.25.2.8 vos_mutexDelete
5.25.2.9 vos_mutexLock
5.25.2.10 vos_mutexTryLock
5.25.2.11 vos_mutexUnlock
5.25.2.12 vos_semaCreate
5.25.2.13 vos_semaDelete
5.25.2.14 vos_semaGive
5.25.2.15 vos_semaTake
5.25.2.16 vos_subTime
5.25.2.17 vos_threadCreate
5.25.2.18 vos_threadDelay
5.25.2.19 vos_threadInit
5.25.2.20 vos_threadIsActive
5.25.2.21 vos_threadTerminate
5.26 vos_types.h File Reference
5.26.1 Detailed Description
5.26.2 Typedef Documentation
5.26.2.1 VOS_PRINT_DBG_T
5.26.3 Enumeration Type Documentation
5.26.3.1 VOS_ERR_T
5.26.3.2 VOS_LOG_T
5.26.4 Function Documentation
5.26.4.1 vos_init
5.27 vos_utils.c File Reference
5.27.1 Detailed Description
5.27.2 Function Documentation
5.27.2.1 vos_crc32
5.27.2.2 vos_init
5.28 vos_utils.h File Reference

5.28.1	Detailed 1	Description	57
5.28.2	Define De	ocumentation	57
	5.28.2.1	VOS_MAX_ERR_STR_SIZE	57
	5.28.2.2	VOS_MAX_FRMT_SIZE	57
	5.28.2.3	VOS_MAX_PRNT_STR_SIZE	57
5.28.3	Function	Documentation	57
	5 28 3 1	vos crc32.	57

Chapter 1

The TRDP Light Library API Specification



1.1 General Information

1.1.1 Purpose

The TRDP protocol has been defined as the standard communication protocol in IP-enabled trains. It allows communication via process data (periodically transmitted data using UDP/IP) and message data (client - server messaging using UDP/IP or TCP/IP) This document describes the light API of the TRDP Library.

1.1.2 Scope

The intended audience of this document is the developers and project members of the TRDP project. TRDP Client Applications are programs using the TRDP protocol library to access the services of TRDP. Programmers developing such applications are the main target audience for this documentation.

1.1.3 Related documents

TCN-TRDP2-D-BOM-004-01 IEC61375-2-3_CD_ANNEXA Protocol definition of the TRDP standard

1.1.4 Abbreviations and Definitions

- -API Application Programming Interface
- -ECN Ethernet Consist Network
- -TRDP Train Real-time Data Protocol
- -TCMS Train Control Management System

1.2 Terminology

The API documented here is mainly concerned with three bodies of code:
• TRDP Client Applications (or 'client applications' for short): These are programs using the API to access the services of TRDP. Programmers developing such applications are the main target audience for this documentation.
• TRDP Light Implementations (or just 'TRDP implementation'): These are libraries realising the API as documented here. Programmers developing such implementations will find useful definitions about syntax and semantics of the API wihtin this documentation.
• VOS Subsystem (Virtual Operating System): An OS and hardware abstraction layer which offers memory, networking, threading, queues and debug functions. The VOS API is documented here.
The following diagram shows how these pieces of software are interrelated.

1.2 Terminology 3

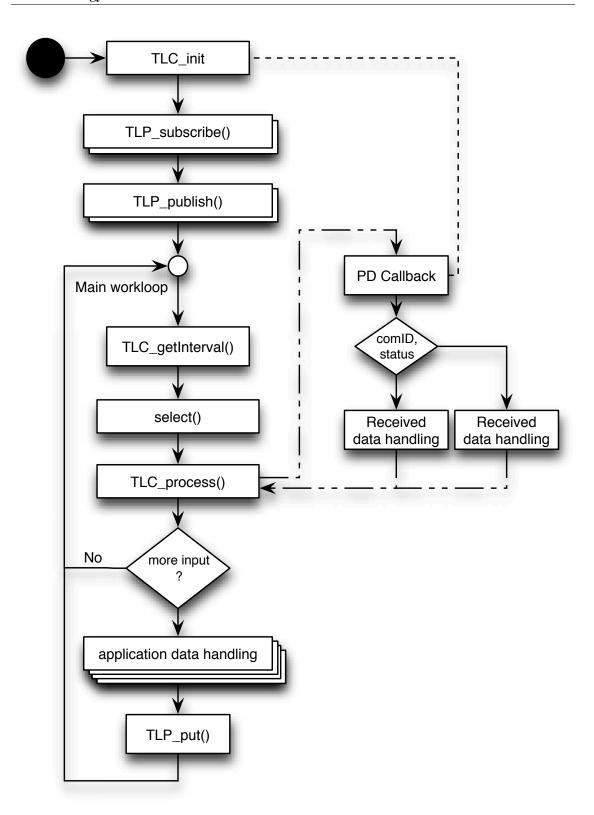


Figure 1.1: Sample client workflow

1.3 Conventions of the API

The API comprises a set of C header files that can also be used from client applications written in C++. These header files are contained in a directory named trdp/api and a subdirectory called trdp/vos/api with declarations not topical to TRDP but needed by the stack. Client applications shall include these header files like:

```
#include "trdp_if_light.h"
```

and, if VOS functions are needed, also the corresponding headers:

```
#include "vos_thread.h"
```

for example.

The subdirectory trdp/doc contains files needed for the API documentation.

Generally client application source code including API headers will only compile if the parent directory of the trdp directory is part of the include path of the used compiler. No other subdirectories of the API should be added to the compiler's include path.

The client API doesn't support a "catch-all" header file that includes all declarations in one step; rather the client application has to include individual headers for each feature set it wants to use.

Chapter 2

Data Structure Index

2.1 Data Structures

Here are the data structures with brief descriptions:

GNU_PACKED (TRDP process data header - network order and alignment)
MD_ELE (Queue element for MD packets to send or receive or acknowledge)
PD_ELE (Queue element for PD packets to send or receive)
TAU_MARSHALL_INFO_T (Marshalling info, used to and from wire)
TRDP_CAR_INFO_T (Car information structure)
TRDP_CST_INFO_T (Consist information structure)
TRDP_DATASET_ELEMENT_T (Dataset element definition)
TRDP_DATASET_OFFSET_T (Dataset offset definition)
TRDP_DATASET_T (Dataset definition)
TRDP_DBG_CONFIG_T (Control for debug output device/file on application level) 23
TRDP_DEVICE_INFO_T (Device information structure)
TRDP_FCT_INFO_T (Device information structure)
TRDP_HANDLE (Hidden handle definition, used as unique addressing item)
TRDP_LIST_STATISTICS_T (Information about a particular MD listener)
TRDP_MARSHALL_CONFIG_T (Marshaling/unmarshalling configuration)
TRDP_MD_CONFIG_T (Default MD configuration)
TRDP_MD_INFO_T (Message data info from received telegram; allows the application to gen-
erate responses)
TRDP_MD_STATISTICS_T (Structure containing all general MD statistics information) 33
TRDP_MEM_CONFIG_T (Structure describing memory (and its pre-fragmentation)) 35
TRDP_MEM_STATISTICS_T (TRDP statistics type definitions) 36
TRDP_PD_CONFIG_T (Default PD configuration)
TRDP_PD_INFO_T (Process data info from received telegram; allows the application to gener-
ate responses)
TRDP_PD_STATISTICS_T (Structure containing all general PD statistics information) 40
TRDP_PROCESS_CONFIG_T (Types to read out the XML configuration)
TRDP_PROP_INFO_T (Properties information structure)
TRDP_PUB_STATISTICS_T (Table containing particular PD publishing information) 44
TRDP_RED_STATISTICS_T (A table containing PD redundant group information) 45
TRDP_SEND_PARAM_T (Quality/type of service and time to live)
TRDP_SESSION (Session/application variables store)
TRDP_SOCKETS (Socket item)

6 Data Structure Index

TRDP_STATISTICS_T (Structure containing all general memory, PD and MD statistics infor-	
mation)	50
TRDP_SUBS_STATISTICS_T (Table containing particular PD subscription information)	52
TRDP_TRAIN_INFO_T (Train information structure)	54
VOS_SOCK_OPT_T (Common socket options)	56
VOS_TIME_T (Timer value compatible with timeval / select)	57

Chapter 3

File Index

3.1 File List

Here is a list of all documented files with brief descriptions:

echoPolling.c (Demo echoing application for TRDP)
echoSelect.c (Demo echoing application for TRDP)
sendHello.c (Demo application for TRDP)
tau_addr.h (TRDP utility interface definitions)
tau_marshall.h (TRDP utility interface definitions)
tau_tci.h (TRDP utility interface definitions) 85
tau_types.h (TRDP utility interface definitions)
tau_xml.h (TRDP utility interface definitions)94
trdp_if.c (Functions for ECN communication)
trdp_if.h (Typedefs for TRDP communication)
trdp_if_light.h (TRDP Light interface functions (API))
trdp_marshall.c (Marshalling functions for TRDP)
trdp_mdcom.c (Functions for MD communication)
trdp_mdcom.h (Functions for MD communication)
trdp_pdcom.c (Functions for PD communication)
trdp_pdcom.h (Functions for PD communication)
trdp_private.h (Typedefs for TRDP communication)
trdp_stats.c (Statistics functions for TRDP communication)
trdp_stats.h (Statistics for TRDP communication)
trdp_types.h (Typedefs for TRDP communication)
trdp_utils.c (Helper functions for TRDP communication)
trdp_utils.h (Common utilities for TRDP communication)
vos_mem.h (Memory and queue functions for OS abstraction)
vos_sock.h (Typedefs for OS abstraction)
vos_thread.h (Threading functions for OS abstraction)
vos_types.h (Typedefs for OS abstraction)
vos_utils.c (Common functions for VOS)
vos_utils.h (Typedefs for OS abstraction)

8 File Index

Chapter 4

Data Structure Documentation

4.1 GNU_PACKED Struct Reference

TRDP process data header - network order and alignment.

```
#include <trdp_private.h>
```

Data Fields

• UINT32 sequenceCounter

Unique counter (autom incremented).

• UINT16 protocolVersion

fix value for compatibility (set by the API)

• UINT16 msgType

```
of datagram: PD Request (0x5072) or PD_MSG (0x5064)
```

• UINT32 comId

set by user: unique id

• UINT32 topoCount

```
set by user: ETB to use, '0' to deacticate
```

• UINT32 datasetLength

length of the data to transmit 0.

UINT16 subsAndReserved

first bit (MSB): indicates substitution transmission

• UINT16 offsetAddress

for process data in traffic store

• UINT32 replyComId

used in PD request

- UINT32 replyIpAddress used for PD request
- UINT32 frameCheckSum CRC32 of header.
- INT32 replyStatus 0 = OK
- UINT8 sessionID [16]

 UUID as a byte stream.
- UINT32 replyTimeout in us
- UINT8 sourceURI [32]

 User part of URI.
- UINT8 destinationURI [32] User part of URI.

4.1.1 Detailed Description

TRDP process data header - network order and alignment.

TRDP message data header - network order and alignment.

4.1.2 Field Documentation

4.1.2.1 UINT16 GNU_PACKED::protocolVersion

fix value for compatibility (set by the API) fix value for compatibility

4.1.2.2 UINT16 GNU_PACKED::msgType

of datagram: PD Request (0x5072) or PD_MSG (0x5064)

of datagram: Mn, Mr, Mp, Mq, Mc or Me

4.1.2.3 UINT32 GNU_PACKED::datasetLength

length of the data to transmit 0.

defined by user: length of data to transmit

..1436 without padding and FCS

The documentation for this struct was generated from the following file:


• trdp_private.h

4.2 MD_ELE Struct Reference

Queue element for MD packets to send or receive or acknowledge.

```
#include <trdp_private.h>
```

Collaboration diagram for MD_ELE:



Data Fields

- struct MD_ELE * pNext pointer to next element or NULL
- TRDP_ADDRESSES addr handle of publisher/subscriber
- TRDP_PRIV_FLAGS_T privFlags private flags
- TRDP_TIME_T interval time out value for received packets or interval for packets to send (set from ms)
- TRDP_TIME_T timeToGo

 next time this packet must be sent/rcv
- INT32 dataSize net data size
- INT32 socketIdx index into the socket list
- MD_HEADER_T frameHead

 Packet header in network byte order.
- UINT8 data [0]

 data ready to be sent (with CRCs)

4.2.1 Detailed Description

Queue element for MD packets to send or receive or acknowledge.

The documentation for this struct was generated from the following file:


• trdp_private.h

4.3 PD_ELE Struct Reference

Queue element for PD packets to send or receive.

#include <trdp_private.h>

Collaboration diagram for PD_ELE:



Data Fields

- struct PD_ELE * pNext

 pointer to next element or NULL
- TRDP_ADDRESSES addr

handle of publisher/subscriber

• TRDP_IP_ADDR_T pullIpAddress

In case of pulling a PD this is the requested Ip.

• UINT32 curSeqCnt

the last sent or received sequence counter

• UINT32 numRxTx

Counter for received packets (statistics).

• UINT32 updPkts

Counter for updated packets (statistics).

• TRDP_ERR_T lastErr

Last error (timeout).

• TRDP_PRIV_FLAGS_T privFlags

private flags

• TRDP_FLAGS_T pktFlags

flags

• TRDP_TIME_T interval

time out value for received packets or interval for packets to send (set from ms)

• TRDP_TIME_T timeToGo

next time this packet must be sent/rcv

• TRDP_TO_BEHAVIOR_T toBehavior

timeout behavior for packets

• UINT32 dataSize

net data size

• UINT32 grossSize

complete packet size (header, data, padding, FCS)

• INT32 socketIdx

index into the socket list

• const void * userRef

from subscribe()

• PD_HEADER_T frameHead

Packet header in network byte order.

• UINT8 data [MAX_PD_PACKET_SIZE]

data ready to be sent or received (with CRCs)

4.3.1 Detailed Description

Queue element for PD packets to send or receive.

The documentation for this struct was generated from the following file:

• trdp_private.h

4.4 TAU_MARSHALL_INFO_T Struct Reference

Marshalling info, used to and from wire.

Data Fields

- const UINT8 * pSrc source pointer
- UINT8 * pDst

 destination pointer
- UINT8 * pDstEnd last destination

4.4.1 Detailed Description

Marshalling info, used to and from wire.

The documentation for this struct was generated from the following files:


- trdp_marshall.c
- trdp_marshall_fast.c

4.5 TRDP_CAR_INFO_T Struct Reference

car information structure.

#include <tau_tci.h>

Collaboration diagram for TRDP_CAR_INFO_T:



Data Fields

• TRDP_LABEL_T id

Unique car identifier (Label) / IEC identification number.

• TRDP_LABEL_T type

car type

• UINT8 orient

0 == opposite, 1 == same orientation rel.

• UINT8 lead

0 == car is not leading

• UINT8 leadDir

0 == leading direction 1, 1 == leading direction 2

• UINT8 no

sequence number of car in consist

• UINT8 iecNo

IEC sequence number of car in train.

• UINT8 reachable

 $0 == car \ not \ reachable, inserted \ manually$

• UINT16 devCnt

number of devices in the car

• TRDP_DEVICE_INFO_T * pDevInfo

Pointer to device info list for application use and convenience.

• UINT16 propLen

car property length

• UINT8 * pProp

Pointer to car properties for application use and convenience.

4.5.1 Detailed Description

car information structure.

4.5.2 Field Documentation

4.5.2.1 UINT8 TRDP_CAR_INFO_T::orient

0 == opposite, 1 == same orientation rel. to consist

4.5.2.2 TRDP_DEVICE_INFO_T* TRDP_CAR_INFO_T::pDevInfo

Pointer to device info list for application use and convenience.

The documentation for this struct was generated from the following file:


• tau_tci.h

4.6 TRDP_CST_INFO_T Struct Reference

consist information structure.

#include <tau_tci.h>

Collaboration diagram for TRDP_CST_INFO_T:



Data Fields

• TRDP_LABEL_T id

Unique consist identifier (Label) / IEC identification number taken from 1st car in consist.

• TRDP_LABEL_T owner

consist owner, e.g.

• TRDP_UUID_T uuid

consist UUID for inauguration purposes

• UINT8 orient

 $opposite(0)\ or\ same(1)\ orientation\ rel.$

• UINT8 lead

0 == consist is not leading

• UINT8 leadDir

 $0 == leading \ direction \ 1, \ 1 == leading \ direction \ 2$

• UINT8 tcnNo

sequence number of consist in train

• UINT8 iecNo

IEC sequence number of consist in train.

• UINT8 reachable

0 == consist not reachable, inserted manually

• UINT8 ecnCnt

number of cars in the consist

• UINT8 etbCnt

number of cars in the consist

• UINT16 fctCnt

number of public functions in the consist

• TRDP_FCT_INFO_T * pFctInfo

Pointer to function info list for application use and convenience.

• UINT16 carCnt

number of cars in the consist

• TRDP_CAR_INFO_T * pCarInfo

Pointer to car info list for application use and convenience.

• UINT16 propLen

consist property length

• UINT8 * pProp

Pointer to consist properties for application use and convenience.

4.6.1 Detailed Description

consist information structure.

4.6.2 Field Documentation

4.6.2.1 TRDP_LABEL_T TRDP_CST_INFO_T::owner

consist owner, e.g.

"trenitalia.it", "sncf.fr", "db.de"

4.6.2.2 UINT8 TRDP_CST_INFO_T::orient

opposite(0) or same(1) orientation rel.

to train

4.6.2.3 TRDP_FCT_INFO_T* TRDP_CST_INFO_T::pFctInfo

Pointer to function info list for application use and convenience.

4.6.2.4 TRDP_CAR_INFO_T* TRDP_CST_INFO_T::pCarInfo

Pointer to car info list for application use and convenience.

The documentation for this struct was generated from the following file:

• tau_tci.h

4.7 TRDP_DATASET_ELEMENT_T Struct Reference

Dataset element definition.

```
#include <trdp_types.h>
```

Data Fields

- UINT32 type

 Data type (TRDP_DATA_TYPE_T 1.
- UINT32 size

 Number of items or TDRP_VAR_SIZE (0).

4.7.1 Detailed Description

Dataset element definition.

4.7.2 Field Documentation

4.7.2.1 UINT32 TRDP_DATASET_ELEMENT_T::type

Data type (TRDP_DATA_TYPE_T 1.

..99) or dataset id > 1000

The documentation for this struct was generated from the following file:

• trdp_types.h

4.8 TRDP_DATASET_OFFSET_T Struct Reference

Dataset offset definition.

Data Fields

- INT32 id

 dataset identifier
- UINT16 numElement

 Number of array elements.
- INT16 pOffsets [] Offset array.

4.8.1 Detailed Description

Dataset offset definition.

The documentation for this struct was generated from the following file:


• trdp_marshall_fast.c

4.9 TRDP_DATASET_T Struct Reference

Dataset definition.

#include <trdp_types.h>

Collaboration diagram for TRDP_DATASET_T:



Data Fields

• UINT32 id

dataset identifier > 1000

• UINT16 reserved1

Reserved for future use, must be zero.

• UINT16 numElement

Number of elements.

• TRDP_DATASET_ELEMENT_T pElement []

Pointer to a dataset element, used as array.

4.9.1 Detailed Description

Dataset definition.

The documentation for this struct was generated from the following file:

4.10 TRDP_DBG_CONFIG_T Struct Reference

Control for debug output device/file on application level.

```
#include <tau_xml.h>
```

Data Fields

- TRDP_DEBUG_OPTION_T option

 Debug printout options for application use.
- UINT32 maxFileSize

 Maximal file size.
- TRDP_FILE_NAME_T fileName Debug file name and path.

4.10.1 Detailed Description

Control for debug output device/file on application level.

The documentation for this struct was generated from the following file:

• tau_xml.h

4.11 TRDP_DEVICE_INFO_T Struct Reference

device information structure

#include <tau_tci.h>

Data Fields

• TRDP_IP_ADDR addr1

First device IP address.

• TRDP_IP_ADDR addr2

Second device IP address.

• TRDP_LABEL_T id

consist unique device identifier (Label) / host name

• TRDP_LABEL_T type

device type (reserved key words ETBN, ETBR, FCT)

• UINT8 orient

device orientation 0=opposite, 1=same rel.

• TRDP_LABEL_T redId

redundant device Id if available

• UINT8 ecnId1

First consist network id the device is connected to.

• UINT8 ecnId2

Second consist network id the device is connected to.

• UINT8 etbId1

First Ethernet train backbone id.

• UINT8 etbId2

Second Ethernet train backbone id.

• UINT16 fctCnt

number of public functions on the device

• UINT32 * pFctNo

Pointer to function number list for application use and convenience.

• UINT16 propLen

device property length

• UINT8 * pProp

Pointer to device properties for application use and convenience.

4.11.1 Detailed Description

device information structure

4.11.2 Field Documentation

4.11.2.1 UINT8 TRDP_DEVICE_INFO_T::orient

device orientation 0=opposite, 1=same rel.

to car

The documentation for this struct was generated from the following file:

• tau_tci.h

4.12 TRDP_FCT_INFO_T Struct Reference

device information structure

#include <tau_tci.h>

Data Fields

• TRDP_LABEL_T id function identifier (name)

• TRDP_FCT_T type function type

• UINT32 no

unique function number in consist, should be the list index number

• TRDP_IP_ADDR addr

Device IP address/multicast address.

• UINT8 ecnId

Consist network id the device is connected to.

• UINT8 etbId

Ethernet train backbone id.

4.12.1 Detailed Description

device information structure

The documentation for this struct was generated from the following file:

• tau_tci.h

4.13 TRDP_HANDLE Struct Reference

Hidden handle definition, used as unique addressing item.

```
#include <trdp_private.h>
```

Data Fields

- UINT32 comId comId for packets to send/receive
- TRDP_IP_ADDR_T srcIpAddr source IP for PD
- TRDP_IP_ADDR_T destIpAddr destination IP for PD
- TRDP_IP_ADDR_T mcGroup multicast group to join for PD

4.13.1 Detailed Description

Hidden handle definition, used as unique addressing item.

The documentation for this struct was generated from the following file:

• trdp_private.h

4.14 TRDP_LIST_STATISTICS_T Struct Reference

Information about a particular MD listener.

```
#include <trdp_types.h>
```

Data Fields

• UINT32 comId

ComId to listen to.

• TRDP_URI_USER_T uri

URI user part to listen to.

• TRDP_IP_ADDR_T joinedAddr

Joined IP address.

• UINT32 callBack

 $Call\ back\ function\ reference\ if\ used.$

• UINT32 queue

Queue reference if used.

• UINT32 userRef

User reference if used.

• UINT32 numRecv

Number of received packets.

4.14.1 Detailed Description

Information about a particular MD listener.

The documentation for this struct was generated from the following file:

4.15 TRDP_MARSHALL_CONFIG_T Struct Reference

Marshaling/unmarshalling configuration.

```
#include <trdp_types.h>
```

Data Fields

• TRDP_MARSHALL_T pfCbMarshall

Pointer to marshall callback function.

• TRDP_UNMARSHALL_T pfCbUnmarshall

Pointer to unmarshall callback function.

void * pRefCon

Pointer to user context for call back.

4.15.1 Detailed Description

Marshaling/unmarshalling configuration.

The documentation for this struct was generated from the following file:

4.16 TRDP_MD_CONFIG_T Struct Reference

Default MD configuration.

#include <trdp_types.h>

Collaboration diagram for TRDP_MD_CONFIG_T:



Data Fields

• TRDP_MD_CALLBACK_T pfCbFunction

Pointer to MD callback function.

void * pRefCon

Pointer to user context for call back.

• TRDP_SEND_PARAM_T sendParam

Default send parameters.

• TRDP_FLAGS_T flags

Default flags for MD packets.

• UINT32 replyTimeout

Default timeout in us.

• UINT32 confirmTimeout

Default timeout in us.

• UINT32 udpPort

Port to be used for UDP MD communication.

• UINT32 tcpPort

Port to be used for TCP MD communication.

4.16.1 Detailed Description

Default MD configuration.

The documentation for this struct was generated from the following file:

4.17 TRDP_MD_INFO_T Struct Reference

Message data info from received telegram; allows the application to generate responses.

```
#include <trdp_types.h>
```

Data Fields

- TRDP_IP_ADDR_T srcIpAddr source IP address for filtering
- TRDP_IP_ADDR_T destIpAddr destination IP address for filtering
- UINT32 seqCount sequence counter
- UINT16 protVersion Protocol version.
- TRDP_MSG_T msgType Protocol ('PD', 'MD', .
- UINT32 comId ComID.
- UINT32 topoCount received topocount
- UINT16 userStatus

 error code, user stat
- TRDP_REPLY_STATUS_T replyStatus reply status
- TRDP_UUID_T sessionId for response
- UINT32 replyTimeout reply timeout in us given with the request
- TRDP_URI_USER_T destURI

 destination URI user part from MD header
- TRDP_URI_USER_T srcURI

 source URI user part from MD header
- UINT32 noOfReplies

 actual number of replies for the request

• const void * pUserRef

User reference given with the local call.

• TRDP_ERR_T resultCode error code

4.17.1 Detailed Description

Message data info from received telegram; allows the application to generate responses.

Note: Not all fields are relevant for each message type!

4.17.2 Field Documentation

4.17.2.1 TRDP_MSG_T TRDP_MD_INFO_T::msgType

```
Protocol ('PD', 'MD', . ..)
```

The documentation for this struct was generated from the following file:

4.18 TRDP_MD_STATISTICS_T Struct Reference

Structure containing all general MD statistics information.

```
#include <trdp_types.h>
```

Data Fields

- UINT32 defQos

 default QoS for MD
- UINT32 defTtl

 default TTL for MD
- UINT32 defReplyTimeout

 default reply timeout in us for MD
- UINT32 defConfirmTimeout

 default confirm timeout in us for MD
- UINT32 numList

 number of listeners
- UINT32 numRcv

 number of received MD packets
- UINT32 numCrcErr

 number of received MD packets with CRC err
- UINT32 numProtErr

 number of received MD packets with protocol err
- UINT32 numTopoErr

 number of received MD packets with wrong topo count
- UINT32 numNoListener

 number of received MD packets without listener
- UINT32 numReplyTimeout number of reply timeouts
- UINT32 numConfirmTimeout number of confirm timeouts
- UINT32 numSend

 number of sent MD packets

4.18.1 Detailed Description

Structure containing all general MD statistics information.

The documentation for this struct was generated from the following file:

4.19 TRDP_MEM_CONFIG_T Struct Reference

Structure describing memory (and its pre-fragmentation).

```
#include <trdp_types.h>
```

Data Fields

- UINT8 * p

 pointer to static or allocated memory
- UINT32 size size of static or allocated memory
- UINT32 prealloc [TRDP_MEM_BLK_524288+1] memory block structure

4.19.1 Detailed Description

Structure describing memory (and its pre-fragmentation).

The documentation for this struct was generated from the following file:

4.20 TRDP_MEM_STATISTICS_T Struct Reference

TRDP statistics type definitions.

```
#include <trdp_types.h>
```

Data Fields

• UINT32 total total memory size

• UINT32 free free memory size

• UINT32 minFree minimal free memory size in statistics interval

• UINT32 numAllocBlocks allocated memory blocks

• UINT32 numAllocErr allocation errors

• UINT32 numFreeErr free errors

• UINT32 allocBlockSize [TRDP_MEM_BLK_524288+1] allocated memory blocks

• UINT32 usedBlockSize [TRDP_MEM_BLK_524288+1] used memory blocks

4.20.1 Detailed Description

TRDP statistics type definitions.

Statistical data regarding the former info provided via SNMP the following information was left out/can be implemented additionally using MD:

- PD subscr table: ComId, sourceIpAddr, destIpAddr, cbFct?, timout, toBehaviour, counter
- PD publish table: ComId, destIpAddr, redId, redState cycle, ttl, qos, counter
- PD join table: joined MC address table
- MD listener table: ComId destIpAddr, destUri, cbFct?, counter
- Memory usage Structure containing all general memory statistics information.


The documentation for this struct was generated from the following file:

4.21 TRDP_PD_CONFIG_T Struct Reference

Default PD configuration.

#include <trdp_types.h>

Collaboration diagram for TRDP_PD_CONFIG_T:



Data Fields

• TRDP_PD_CALLBACK_T pfCbFunction

Pointer to PD callback function.

void * pRefCon

Pointer to user context for call back.

• TRDP_SEND_PARAM_T sendParam

Default send parameters.

• TRDP_FLAGS_T flags

Default flags for PD packets.

• UINT32 timeout

Default timeout in us.

• TRDP_TO_BEHAVIOR_T toBehavior

Default timeout behaviour.

• UINT32 port

Port to be used for PD communication.

4.21.1 Detailed Description

Default PD configuration.

The documentation for this struct was generated from the following file:

4.22 TRDP_PD_INFO_T Struct Reference

Process data info from received telegram; allows the application to generate responses.

```
#include <trdp_types.h>
```

Data Fields

• TRDP_IP_ADDR_T srcIpAddr source IP address for filtering

• TRDP_IP_ADDR_T destIpAddr

destination IP address for filtering

• UINT32 seqCount sequence counter

• UINT16 protVersion

Protocol version.

• TRDP_MSG_T msgType Protocol ('PD', 'MD', .

• UINT32 comId

ComID.

• UINT32 topoCount

received topocount

• BOOL subs

substitution

• UINT16 offsetAddr

offset address for ladder architecture

• UINT32 replyComId

ComID for reply (request only).

• TRDP_IP_ADDR_T replyIpAddr

IP address for reply (request only).

• const void * pUserRef

User reference given with the local subscribe.

• TRDP_ERR_T resultCode

error code

4.22.1 Detailed Description

Process data info from received telegram; allows the application to generate responses.

Note: Not all fields are relevant for each message type!

4.22.2 Field Documentation

4.22.2.1 TRDP_MSG_T TRDP_PD_INFO_T::msgType

```
Protocol ('PD', 'MD', . ..)
```

The documentation for this struct was generated from the following file:

4.23 TRDP_PD_STATISTICS_T Struct Reference

Structure containing all general PD statistics information.

```
#include <trdp_types.h>
```

Data Fields

• UINT32 defQos

default QoS for PD

• UINT32 defTtl

default TTL for PD

• UINT32 defTimeout

default timeout in us for PD

• UINT32 numSubs

number of subscribed ComId's

• UINT32 numPub

number of published ComId's

• UINT32 numRcv
number of received PD packets

• UINT32 numCrcErr

number of received PD packets with CRC err

• UINT32 numProtErr

number of received PD packets with protocol err

• UINT32 numTopoErr

number of received PD packets with wrong topo count

• UINT32 numNoSubs number of received PD push packets without subscription

• UINT32 numNoPub

number of received PD pull packets without publisher

• UINT32 numTimeout

number of PD timeouts

• UINT32 numSend

number of sent PD packets

4.23.1 Detailed Description

Structure containing all general PD statistics information.

The documentation for this struct was generated from the following file:

4.24 TRDP_PROCESS_CONFIG_T Struct Reference

Types to read out the XML configuration.

```
#include <tau_xml.h>
```

Data Fields

• TRDP_LABEL_T hostName

Host name.

• TRDP_LABEL_T leaderName

Leader name dependant on redundanca concept.

• TRDP_IP_ADDR hostIp

Host IP address.

• TRDP_IP_ADDR leaderIp

Leader IP address dependant on redundancy concept.

• UINT32 cycleTime

TRDP main process cycle time in usec.

• UINT32 priority

TRDP main process priority.

• TRDP_OPTION_T options

TRDP default options.

4.24.1 Detailed Description

Types to read out the XML configuration.

Configuration of TRDP main process.

The documentation for this struct was generated from the following file:

• tau_xml.h

4.25 TRDP_PROP_INFO_T Struct Reference

properties information structure

```
#include <tau_tci.h>
```

Data Fields

- UINT32 crc

 property CRC
- UINT16 len function type
- UINT8 ver property version
- UINT8 rel property release
- UINT8 data [1]

 dummy field for data access

4.25.1 Detailed Description

properties information structure

The documentation for this struct was generated from the following file:

• tau_tci.h

4.26 TRDP_PUB_STATISTICS_T Struct Reference

Table containing particular PD publishing information.

```
#include <trdp_types.h>
```

Data Fields

• UINT32 comId

Published ComId.

• TRDP_IP_ADDR_T destAddr

IP address of destination for this publishing.

• UINT32 cycle

Publishing cycle in us.

• UINT32 redId

Redundancy group id.

• UINT32 redState

Redundant state.Leader or Follower.

• UINT32 numPut

Number of packet updates.

• UINT32 numSend

Number of packets sent out.

4.26.1 Detailed Description

Table containing particular PD publishing information.

4.26.2 Field Documentation

4.26.2.1 TRDP_IP_ADDR_T TRDP_PUB_STATISTICS_T::destAddr

IP address of destination for this publishing.

The documentation for this struct was generated from the following file:

4.27 TRDP_RED_STATISTICS_T Struct Reference

A table containing PD redundant group information.

```
#include <trdp_types.h>
```

Data Fields

• UINT32 id

Redundant Id.

• TRDP_RED_STATE_T state

Redundant state.Leader or Follower.

4.27.1 Detailed Description

A table containing PD redundant group information.

The documentation for this struct was generated from the following file:

4.28 TRDP_SEND_PARAM_T Struct Reference

Quality/type of service and time to live.

#include <trdp_types.h>

4.28.1 Detailed Description

Quality/type of service and time to live.


The documentation for this struct was generated from the following file:

4.29 TRDP_SESSION Struct Reference

Session/application variables store.

#include <trdp_private.h>

Collaboration diagram for TRDP_SESSION:

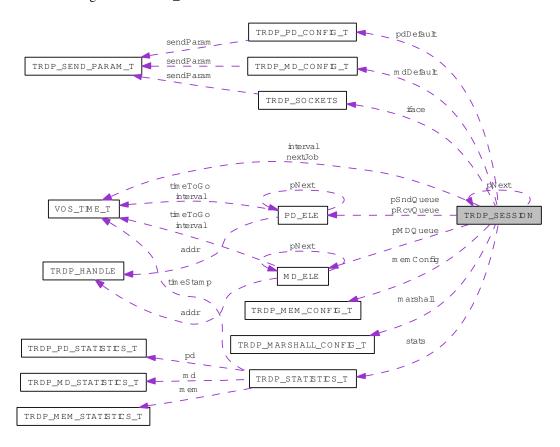

Data Fields

- struct TRDP_SESSION * pNext
 - Pointer to next session.
- VOS_MUTEX_T mutex
 - protect this session
- TRDP_IP_ADDR_T realIP

Real IP address.

• TRDP_IP_ADDR_T virtualIP

Virtual IP address.

- BOOL beQuiet
 - if set, only react on ownIP requests

• UINT32 redID

redundant comId

• UINT32 topoCount

current valid topocount or zero

• TRDP_TIME_T interval

Store for next select interval.

• TRDP_PD_CONFIG_T pdDefault

Default configuration for process data.

• TRDP_SOCKETS_T iface [VOS_MAX_SOCKET_CNT]

Collection of sockets to use.

• PD_ELE_T * pSndQueue

pointer to first element of send queue

• PD_ELE_T * pRcvQueue

pointer to first element of rcv queue

• MD_ELE_T * pMDQueue

pointer to first element of MD session

• TRDP_STATISTICS_T stats

statistics of this session

4.29.1 Detailed Description

Session/application variables store.

The documentation for this struct was generated from the following file:


• trdp_private.h

4.30 TRDP_SOCKETS Struct Reference

Socket item.

#include <trdp_private.h>

Collaboration diagram for TRDP_SOCKETS:



Data Fields

• INT32 sock

vos socket descriptor to use

• TRDP_IP_ADDR_T bindAddr

Defines the interface to use.

• TRDP_SEND_PARAM_T sendParam

Send parameters.

• TRDP_SOCK_TYPE_T type

Usage of this socket.

• UINT16 usage

No.

4.30.1 Detailed Description

Socket item.

4.30.2 Field Documentation

4.30.2.1 UINT16 TRDP_SOCKETS::usage

No.

of current users of this socket

The documentation for this struct was generated from the following file:


• trdp_private.h

4.31 TRDP_STATISTICS_T Struct Reference

Structure containing all general memory, PD and MD statistics information.

#include <trdp_types.h>

Collaboration diagram for TRDP_STATISTICS_T:



Data Fields

- UINT32 version TRDP version.
- TRDP_TIME_T timeStamp actual time stamp
- UINT32 upTime

 time in sec since last initialisation
- UINT32 statisticTime

 time in sec since last reset of statistics
- TRDP_LABEL_T hostName host name
- TRDP_LABEL_T leaderName leader host name
- TRDP_IP_ADDR_T ownIpAddr own IP address
- TRDP_IP_ADDR_T leaderIpAddr leader IP address
- UINT32 processPrio priority of TRDP process
- UINT32 processCycle cycle time of TRDP process in microseconds
- TRDP_MEM_STATISTICS_T mem memory statistics

- TRDP_PD_STATISTICS_T pd pd statistics
- TRDP_MD_STATISTICS_T md md statistics

4.31.1 Detailed Description

Structure containing all general memory, PD and MD statistics information.

The documentation for this struct was generated from the following file:

4.32 TRDP_SUBS_STATISTICS_T Struct Reference

Table containing particular PD subscription information.

#include <trdp_types.h>

Data Fields

• UINT32 comId

Subscribed ComId.

• TRDP_IP_ADDR_T joinedAddr

Joined IP address.

• TRDP_IP_ADDR_T filterAddr

Filter IP address, i.e IP address of the sender for this subscription, 0.0.0.0 in case all senders.

• UINT32 callBack

Reference for call back function if used.

• UINT32 timeout

Time-out value in us.

• TRDP_ERR_T status

Receive status information TRDP_NO_ERR, TRDP_TIMEOUT_ERR.

• TRDP_TO_BEHAVIOR_T toBehav

Behaviour at time-out.

• UINT32 numRecv

Number of packets received for this subscription.

4.32.1 Detailed Description

Table containing particular PD subscription information.

4.32.2 Field Documentation

4.32.2.1 TRDP_IP_ADDR_T TRDP_SUBS_STATISTICS_T::filterAddr

Filter IP address, i.e IP address of the sender for this subscription, 0.0.0.0 in case all senders.

4.32.2.2 UINT32 TRDP_SUBS_STATISTICS_T::timeout

Time-out value in us.

0 =No time-out supervision

${\bf 4.32.2.3} \quad TRDP_TO_BEHAVIOR_T \ TRDP_SUBS_STATISTICS_T:: to Behav$

Behaviour at time-out.

Set data to zero / keep last value

4.32.2.4 UINT32 TRDP_SUBS_STATISTICS_T::numRecv

Number of packets received for this subscription.


The documentation for this struct was generated from the following file:

4.33 TRDP_TRAIN_INFO_T Struct Reference

train information structure.

#include <tau_tci.h>

Collaboration diagram for TRDP_TRAIN_INFO_T:



Data Fields

• UINT32 version

Train info structure version.

• TRDP_LABEL_T id

Train identifier.

• TRDP_LABEL_T operator

Train operator e.g.

• TRDP_INAUG_STATE_T inaugState

 $in augaration\ state$

• UINT32 topoCnt

IEC (i.e.

• UINT8 iecOrient

0 == IEC reference orientation is opposite to TCN

• UINT16 carCnt

Total number of cars in train.

• UINT32 cstCnt

Total number of consists in train.

• TRDP_CST_INFO_T * pCstInfo

Pointer to consist info list for application use and convenience.

4.33.1 Detailed Description

train information structure.

4.33.2 Field Documentation

4.33.2.1 TRDP_LABEL_T TRDP_TRAIN_INFO_T::operator

Train operator e.g.

"trenitalia.it", "sncf.fr", "db.de"

4.33.2.2 UINT32 TRDP_TRAIN_INFO_T::topoCnt

IEC (i.e.

TCN) topography counter

4.33.2.3 TRDP_CST_INFO_T* TRDP_TRAIN_INFO_T::pCstInfo

Pointer to consist info list for application use and convenience.

The documentation for this struct was generated from the following file:

• tau_tci.h

4.34 VOS_SOCK_OPT_T Struct Reference

Common socket options.

```
#include <vos_sock.h>
```

Data Fields

- UINT8 qos quality/type of service 0.
- UINT8 ttl

 time to live for unicast (default 64)
- UINT8 ttl_multicast time to live for multicast
- BOOL reuseAddrPort allow reuse of address and port
- BOOL nonBlocking use non blocking calls

4.34.1 Detailed Description

Common socket options.

4.34.2 Field Documentation

4.34.2.1 UINT8 VOS_SOCK_OPT_T::qos

quality/type of service 0.

..7

The documentation for this struct was generated from the following file:

• vos_sock.h

4.35 VOS_TIME_T Struct Reference

Timer value compatible with timeval / select.

```
#include <vos_types.h>
```

Data Fields

- UINT32 tv_sec full seconds
- UINT32 tv_usec

 Micro seconds (max.

4.35.1 Detailed Description

Timer value compatible with timeval / select.

Relative or absolute date, depending on usage

4.35.2 Field Documentation

4.35.2.1 UINT32 VOS_TIME_T::tv_usec

Micro seconds (max.

value 999999)

The documentation for this struct was generated from the following file:

• vos_types.h

Chapter 5


File Documentation

5.1 echoPolling.c File Reference

Demo echoing application for TRDP.

```
#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <unistd.h>
#include "trdp_if_light.h"
#include "vos_thread.h"
```

Include dependency graph for echoPolling.c:



Functions

• void dbgOut (void *pRefCon, TRDP_LOG_T category, const CHAR8 *pTime, const CHAR8 *pFile, UINT16 LineNumber, const CHAR8 *pMsgStr)

callback routine for TRDP logging/error output

• int main (int argc, char **argv)

main entry

5.1.1 Detailed Description

Demo echoing application for TRDP.

Receive and send process data, single threaded polling, static memory

Note:

Project: TCNOpen TRDP prototype stack

Author:

Bernd Loehr, NewTec GmbH

Remarks:

All rights reserved. Reproduction, modification, use or disclosure to third parties without express authority is forbidden, Copyright Bombardier Transportation GmbH, Germany, 2012.

Id

echoPolling.c 43 2012-10-10 16:30:15Z 97025

5.1.2 Function Documentation

5.1.2.1 void dbgOut (void * pRefCon, TRDP_LOG_T category, const CHAR8 * pTime, const CHAR8 * pFile, UINT16 LineNumber, const CHAR8 * pMsgStr)

callback routine for TRDP logging/error output

Parameters:

- \leftarrow *pRefCon* user supplied context pointer
- ← *category* Log category (Error, Warning, Info etc.)
- ← pTime pointer to NULL-terminated string of time stamp
- ← *pFile* pointer to NULL-terminated string of source module
- $\leftarrow \textit{LineNumber}$ line
- $\leftarrow pMsgStr$ pointer to NULL-terminated string

Return values:

none

5.1.2.2 int main (int argc, char ** argv)


main entry

Return values:

0 no error

1 some error

Here is the call graph for this function:

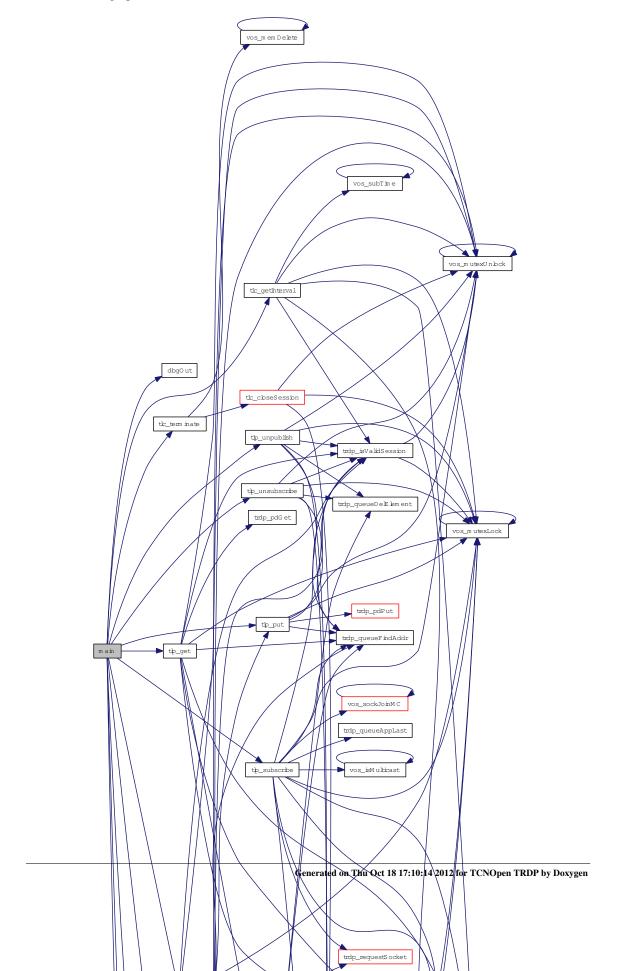


5.2 echoSelect.c File Reference

Demo echoing application for TRDP.

```
#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <sys/select.h>
#include "trdp_if_light.h"
#include "vos_thread.h"
```

Include dependency graph for echoSelect.c:

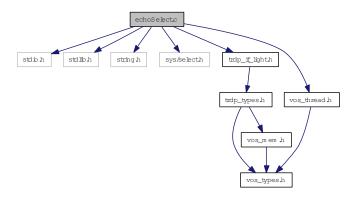

Functions

• void dbgOut (void *pRefCon, TRDP_LOG_T category, const CHAR8 *pTime, const CHAR8 *pFile, UINT16 LineNumber, const CHAR8 *pMsgStr)

callback routine for TRDP logging/error output

• void myPDcallBack (void *pRefCon, const TRDP_PD_INFO_T *pMsg, UINT8 *pData, UINT32 dataSize)

callback routine for receiving TRDP traffic

• int main (int argc, char **argv)

main entry

5.2.1 Detailed Description

Demo echoing application for TRDP.

Receive and send process data, single threaded using select() and heap memory

Note:

Project: TCNOpen TRDP prototype stack

Author:

Bernd Loehr, NewTec GmbH

Remarks:

All rights reserved. Reproduction, modification, use or disclosure to third parties without express authority is forbidden, Copyright Bombardier Transportation GmbH, Germany, 2012.

Id

echoSelect.c 43 2012-10-10 16:30:15Z 97025

5.2.2 Function Documentation

5.2.2.1 void dbgOut (void * pRefCon, TRDP_LOG_T category, const CHAR8 * pTime, const CHAR8 * pFile, UINT16 LineNumber, const CHAR8 * pMsgStr)

callback routine for TRDP logging/error output

Parameters:

- \leftarrow *pRefCon* user supplied context pointer
- ← *category* Log category (Error, Warning, Info etc.)
- ← pTime pointer to NULL-terminated string of time stamp
- \leftarrow *pFile* pointer to NULL-terminated string of source module
- \leftarrow *LineNumber* line
- $\leftarrow pMsgStr$ pointer to NULL-terminated string

Return values:

none

5.2.2.2 int main (int argc, char ** argv)


main entry

Return values:

 $\boldsymbol{\theta}$ no error

1 some error

Here is the call graph for this function:

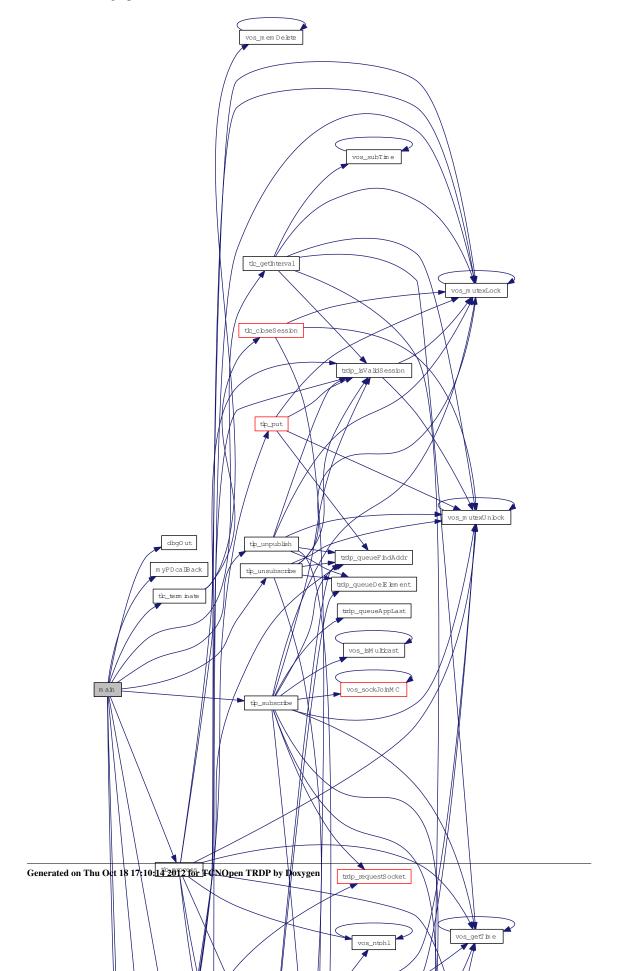

5.2.2.3 void myPDcallBack (void * pRefCon, const TRDP_PD_INFO_T * pMsg, UINT8 * pData, UINT32 dataSize)

callback routine for receiving TRDP traffic

Parameters:

- \leftarrow *pRefCon* user supplied context pointer
- $\leftarrow pMsg$ pointer to header/packet infos
- \leftarrow *pData* pointer to data block
- \leftarrow *dataSize* pointer to data size

Return values:


none

5.3 sendHello.c File Reference

Demo application for TRDP.

```
#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <unistd.h>
#include <sys/select.h>
#include "trdp_if_light.h"
#include "vos_thread.h"
```

Include dependency graph for sendHello.c:

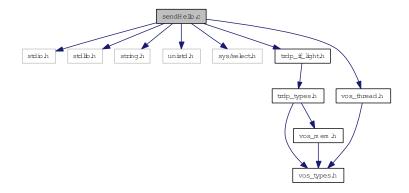

Functions

• int main (int argc, char *argv[])

main entry

5.3.1 Detailed Description

Demo application for TRDP.

Note:

Project: TCNOpen TRDP prototype stack

Author:

Bernd Loehr and Florian Weispfenning, NewTec GmbH

Remarks:

All rights reserved. Reproduction, modification, use or disclosure to third parties without express authority is forbidden, Copyright Bombardier Transportation GmbH, Germany, 2012.

Id

sendHello.c 53 2012-10-17 17:40:43Z 97025

5	3 1) 1	Fun	oction	Docu	man	tation
⊃.		4 1	СШ	ICLIOH	- 170031	шеп	12111011

5.3.2.1 int main (int argc, char * argv[])


main entry

Return values:

0 no error

1 some error

Here is the call graph for this function:

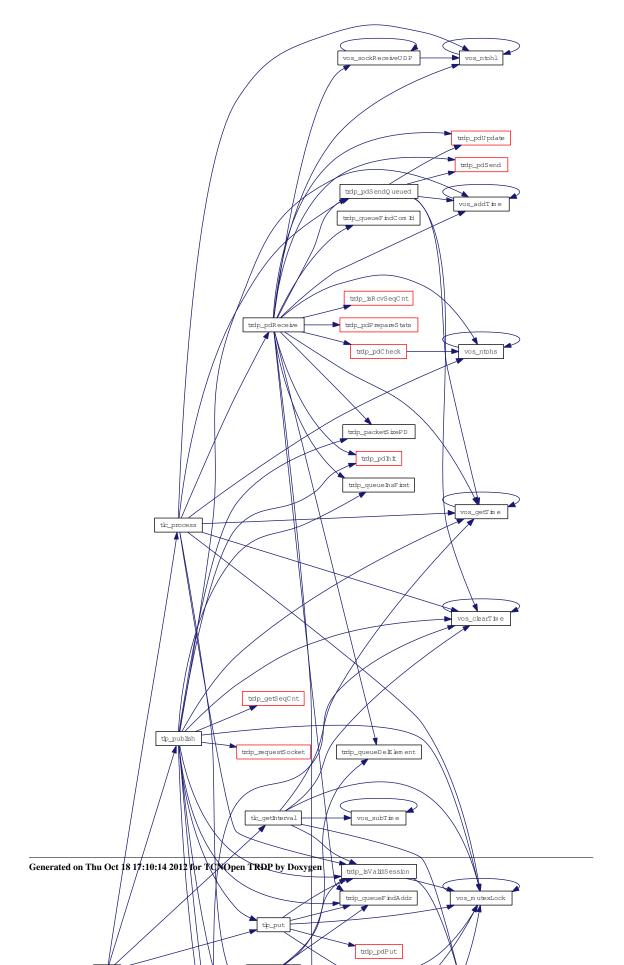


5.4 tau_addr.h File Reference

TRDP utility interface definitions.

```
#include "vos_types.h"
#include "trdp_types.h"
```

Include dependency graph for tau_addr.h:



This graph shows which files directly or indirectly include this file:



Functions

• EXT_DECL TRDP_ERR_T tau_getOwnIds (TRDP_LABEL_T devId, TRDP_LABEL_T carId, TRDP_LABEL_T cstId)

Who am I?.

• EXT_DECL TRDP_IP_ADDR tau_getOwnAddr (void)

Function to get the own IP address.

• EXT_DECL TRDP_ERR_T tau_uri2Addr (TRDP_IP_ADDR *pAddr, UINT32 *pTopoCnt, const TRDP_URI_T uri)

Function to convert a URI to an IP address.

• EXT_DECL TRDP_ERR_T tau_addr2Uri (TRDP_URI_HOST_T uri, UINT32 *pTopoCnt, TRDP IP ADDR addr)

Function to convert an IP address to a URI.

• EXT_DECL TRDP_ERR_T tau_label2CarId (TRDP_LABEL_T carId, UINT32 *pTopoCnt, const TRDP_LABEL_T carLabel, const TRDP_LABEL_T cstLabel)

Function to retrieve the carld of the car with label carLabel in the consist with cstLabel.

• EXT_DECL TRDP_ERR_T tau_label2CarNo (UINT8 *pCarNo, UINT32 *pTopoCnt, const TRDP_LABEL_T carLabel, const TRDP_LABEL_T cstLabel)

Function The function delivers the car number to the given label.

• EXT_DECL TRDP_ERR_T tau_label2IecCarNo (UINT8 *pIecCarNo, UINT32 *pTopoCnt, const TRDP LABEL T carLabel, const TRDP LABEL T cstLabel)

Function The function delivers the IEC car number to the given label.

• EXT_DECL TRDP_ERR_T tau_carNo2Ids (TRDP_LABEL_T carId, TRDP_LABEL_T cstId, UINT32 *pTopoCnt, UINT8 carNo, UINT8 trnCstNo)

Function to retrieve the car and consist id of the car given with carNo and trnCstNo.

• EXT_DECL TRDP_ERR_T tau_iecCarNo2Ids (TRDP_LABEL_T carId, TRDP_LABEL_T cstId, UINT32 *pTopoCnt, UINT8 iecCarNo)

Function to retrieve the car and consist id from a given IEC car sequence number.

• EXT_DECL TRDP_ERR_T tau_addr2CarId (TRDP_LABEL_T carId, UINT32 *pTopoCnt, TRDP_IP_ADDR ipAddr)

Function to retrieve the carld of the car hosting a device with the IPAddress ipAddr.

• EXT_DECL TRDP_ERR_T tau_addr2CarNo (UINT8 *pCarNo, UINT8 *pTopoCnt, TRDP_IP_ADDR ipAddr)

Function to retrieve the car number in consist of the car hosting the device with the IP address ipAddr.

EXT_DECL TRDP_ERR_T tau_addr2IecCarNo (UINT8 *pIecCarNo, UINT8 *pTopoCnt, TRDP_IP_ADDR ipAddr)

Function to retrieve the IEC car sequence number of the car hosting the device with the IP address ipAddr.

EXT_DECL TRDP_ERR_T tau_cstNo2CstId (TRDP_LABEL_T cstId, UINT32 *pTopoCnt, UINT8 cstNo)

Function to retrieve the consist identifier of the consist with train consist sequence number cstNo.

EXT_DECL_TRDP_ERR_T tau_iecCstNo2CstId (TRDP_LABEL_T cstId, UINT32 *pTopoCnt, UINT8 iecCstNo)

Function to retrieve the consist identifier of the consist with IEC sequence consist number iecCstNo.

• EXT_DECL TRDP_ERR_T tau_label2CstId (TRDP_LABEL_T cstId, UINT32 *pTopoCnt, const TRDP_LABEL_T carLabel, const TRDP_LABEL_T cstLabel)

Function to retrieve the consist identifier of the consist hosting a car with label carLabel.

• EXT_DECL TRDP_ERR_T tau_label2CstNo (UINT8 *pCstNo, UINT32 *pTopoCnt, const TRDP LABEL T carLabel)

Function to retrieve the consist sequence number of the consist hosting a car with label carLabel.

• EXT_DECL TRDP_ERR_T tau_label2IecCstNo (UINT8 *pIecCstNo, UINT32 *pTopoCnt, const TRDP_LABEL_T carLabel)

Function to retrieve the leading car depending IEC consist sequence number of the consist hosting a car with label carLabel.

• EXT_DECL TRDP_ERR_T tau_addr2CstId (TRDP_LABEL_T cstId, UINT32 *pTopoCnt, TRDP_IP_ADDR ipAddr)

Function to retrieve the consist identifier of the consist hosting the device with the IP-Address ipAddr.

• EXT_DECL TRDP_ERR_T tau_addr2CstNo (UINT8 *pCstNo, UINT32 *pTopoCnt, TRDP_IP_ADDR ipAddr)

Function to retrieve the consist sequence number of the consist hosting the device with the IP-Address ipAddr.

• EXT_DECL TRDP_ERR_T tau_addr2IecCstNo (UINT8 *pIecCstNo, UINT32 *pTopoCnt, TRDP_IP_ADDR ipAddr)

Function to retrieve the leading car depending iec consist number of the consist hosting the device with the IP-Address addr.

5.4.1 Detailed Description

TRDP utility interface definitions.

This module provides the interface to the following utilities

• IP - URI address translation

Note:

Project: TCNOpen TRDP prototype stack

Author:

Armin-H. Weiss (initial version)

Remarks:

All rights reserved. Reproduction, modification, use or disclosure to third parties without express authority is forbidden, Copyright Bombardier Transportation GmbH, Germany, 2012.

Id

tau addr.h 8 2012-06-06 16:28:19Z 97025

5.4.2 Function Documentation

5.4.2.1 EXT_DECL TRDP_ERR_T tau_addr2CarId (TRDP_LABEL_T carId, UINT32 * pTopoCnt, TRDP_IP_ADDR ipAddr)

Function to retrieve the carId of the car hosting a device with the IPAddress ipAddr.

Parameters:

- \rightarrow carId Pointer to the car id to be returned
- \leftrightarrow **pTopoCnt** Pointer to the actual topo count. If !=0 will be checked. Returns the actual one.
- \leftarrow *ipAddr* IP address. 0 means own address, so the own car id is returned.

Return values:

TRDP_NO_ERR no error
TRDP_PARAM_ERR Parameter error

5.4.2.2 EXT_DECL TRDP_ERR_T tau_addr2CarNo (UINT8 * pCarNo, UINT8 * pTopoCnt, TRDP_IP_ADDR ipAddr)

Function to retrieve the car number in consist of the car hosting the device with the IP address ipAddr.

Parameters:

- \rightarrow *pCarNo* Pointer to the car number in consist to be returned
- \leftrightarrow *pTopoCnt* Pointer to the actual topo count. If !=0 will be checked. Returns the actual one.
- \leftarrow *ipAddr* IP address. 0 means own address, so the own car number is returned.

Return values:

```
TRDP_NO_ERR no error
TRDP_PARAM_ERR Parameter error
```

5.4.2.3 EXT_DECL TRDP_ERR_T tau_addr2CstId (TRDP_LABEL_T cstId, UINT32 * pTopoCnt, TRDP_IP_ADDR ipAddr)

Function to retrieve the consist identifier of the consist hosting the device with the IP-Address ipAddr.

Parameters:

- \rightarrow cstId Pointer to the consist id to be returned
- $\leftrightarrow pTopoCnt$ Pointer to the actual topo count. If !=0 will be checked. Returns the actual one.
- \leftarrow *ipAddr* IP address. 0 means own device, so the own consist id is returned.

Return values:

```
TRDP_NO_ERR no error
TRDP_PARAM_ERR Parameter error
```

5.4.2.4 EXT_DECL TRDP_ERR_T tau_addr2CstNo (UINT8 * pCstNo, UINT32 * pTopoCnt, TRDP_IP_ADDR ipAddr)

Function to retrieve the consist sequence number of the consist hosting the device with the IP-Address ipAddr.

Parameters:

- \rightarrow *pCstNo* Pointer to the train consist number to be returned
- \leftrightarrow *pTopoCnt* Pointer to the actual topo count. If !=0 will be checked. Returns the actual one.
- \leftarrow *ipAddr* IP address. 0 means own device, so the own consist number is returned.

Return values:

```
TRDP_NO_ERR no error
TRDP_PARAM_ERR Parameter error
```

5.4.2.5 EXT_DECL TRDP_ERR_T tau_addr2IecCarNo (UINT8 * pIecCarNo, UINT8 * pTopoCnt, TRDP_IP_ADDR ipAddr)

Function to retrieve the IEC car sequence number of the car hosting the device with the IP address ipAddr.

Parameters:

- → plecCarNo Pointer to the IEC car sequence number to be returned
- \leftrightarrow *pTopoCnt* Pointer to the actual topo count. If !=0 will be checked. Returns the actual one.
- \leftarrow *ipAddr* IP address. 0 means own address, so the own IEC car number is returned.

Return values:

```
TRDP_NO_ERR no error
TRDP_PARAM_ERR Parameter error
```

5.4.2.6 EXT_DECL TRDP_ERR_T tau_addr2IecCstNo (UINT8 * pIecCstNo, UINT32 * pTopoCnt, TRDP_IP_ADDR ipAddr)

Function to retrieve the leading car depending iec consist number of the consist hosting the device with the IP-Address addr.

Parameters:

- \rightarrow *plecCstNo* Pointer to the iec consist number to be returned
- \leftrightarrow pTopoCnt Pointer to the actual topo count. If !=0 will be checked. Returns the actual one.
- \leftarrow *ipAddr* IP address. 0 means own device, so the own IEC consist number is returned.

Return values:

```
TRDP_NO_ERR no error
TRDP_PARAM_ERR Parameter error
```

5.4.2.7 EXT_DECL TRDP_ERR_T tau_addr2Uri (TRDP_URI_HOST_T uri, UINT32 * pTopoCnt, TRDP_IP_ADDR addr)

Function to convert an IP address to a URI.

Receives an IP-Address and translates it into the host part of the corresponding URI. Both unicast and multicast addresses are accepted.

Parameters:

- $\rightarrow uri$ Pointer to a string to return the URI host part
- \leftrightarrow *pTopoCnt* Pointer to the actual topo count. If !=0 will be checked. Returns the actual one.
- \leftarrow addr IP address, 0==own address

Return values:

```
TRDP_NO_ERR no error
TRDP PARAM ERR Parameter error
```

5.4.2.8 EXT_DECL TRDP_ERR_T tau_carNo2Ids (TRDP_LABEL_T carId, TRDP_LABEL_T cstId, UINT32 * pTopoCnt, UINT8 carNo, UINT8 trnCstNo)

Function to retrieve the car and consist id of the car given with carNo and trnCstNo.

Parameters:

- \rightarrow carId Pointer to the car id to be returned
- \rightarrow cstId Pointer to the consist id to be returned
- $\leftrightarrow pTopoCnt$ Pointer to the actual topo count. If !=0 will be checked. Returns the actual one.
- \leftarrow carNo Car number in consist. 0 means own car when trnCstNo == 0.
- ← trnCstNo Consist sequence number in train. 0 means own consist.

Return values:

```
TRDP_NO_ERR no error
TRDP_PARAM_ERR Parameter error
```

5.4.2.9 EXT_DECL TRDP_ERR_T tau_cstNo2CstId (TRDP_LABEL_T cstId, UINT32 * pTopoCnt, UINT8 cstNo)

Function to retrieve the consist identifier of the consist with train consist sequence number cstNo.

Parameters:

- \rightarrow cstId Pointer to the consist id to be returned
- \leftrightarrow *pTopoCnt* Pointer to the actual topo count. If !=0 will be checked. Returns the actual one.
- ← cstNo Consist sequence number based on IP reference direction. 0 means own consist.

Return values:

```
TRDP_NO_ERR no error
TRDP_PARAM_ERR Parameter error
```

5.4.2.10 EXT_DECL TRDP_IP_ADDR tau_getOwnAddr (void)

Function to get the own IP address.

Return values:

own IP address

5.4.2.11 EXT_DECL TRDP_ERR_T tau_getOwnIds (TRDP_LABEL_T devId, TRDP_LABEL_T carId, TRDP_LABEL_T cstId)

Who am I?.

Realizes a kind of ëWho am Ií function. It is used to determine the own identifiers (i.e. the own labels), which may be used as host part of the own fully qualified domain name.

Parameters:

- \rightarrow devId Returns the device label (host name)
- ightarrow carId Returns the car label
- \rightarrow *cstId* Returns the consist label

Return values:

```
TRDP_NO_ERR no error
```

TRDP_PARAM_ERR Parameter error

5.4.2.12 EXT_DECL TRDP_ERR_T tau_iecCarNo2Ids (TRDP_LABEL_T carId, TRDP_LABEL_T cstId, UINT32 * pTopoCnt, UINT8 iecCarNo)

Function to retrieve the car and consist id from a given IEC car sequence number.

Parameters:

- \rightarrow carId Pointer to the car id to be returned
- \rightarrow *cstId* Pointer to the consist id to be returned
- $\leftrightarrow pTopoCnt$ Pointer to the actual topo count. If !=0 will be checked. Returns the actual one.
- \leftarrow *iecCarNo* Iec car sequence number. 0 means own car.

Return values:

```
TRDP_NO_ERR no error
```

TRDP_PARAM_ERR Parameter error

5.4.2.13 EXT_DECL TRDP_ERR_T tau_iecCstNo2CstId (TRDP_LABEL_T cstId, UINT32 * pTopoCnt, UINT8 iecCstNo)

Function to retrieve the consist identifier of the consist with IEC sequence consist number iecCstNo.

Parameters:

- \rightarrow cstId Pointer to the consist id to be returned
- \leftrightarrow *pTopoCnt* Pointer to the actual topo count. If !=0 will be checked. Returns the actual one.
- ← iecCstNo Consist sequence number based on the leading car depending iec reference direction. 0 means own consist.

Return values:

TRDP_NO_ERR no error

TRDP_PARAM_ERR Parameter error

5.4.2.14 EXT_DECL TRDP_ERR_T tau_label2CarId (TRDP_LABEL_T carId, UINT32 * pTopoCnt, const TRDP_LABEL_T carLabel, const TRDP_LABEL_T cstLabel)

Function to retrieve the carId of the car with label carLabel in the consist with cstLabel.

Parameters:

- \rightarrow carId Pointer to a label string to return the car id
- $\leftrightarrow pTopoCnt$ Pointer to the actual topo count. If !=0 will be checked. Returns the actual one.
- \leftarrow carLabel Pointer to the car label. NULL means own car if cstLabel == NULL.
- ← cstLabel Pointer to the consist label. NULL means own consist.

Return values:

```
TRDP_NO_ERR no error
TRDP PARAM ERR Parameter error
```

5.4.2.15 EXT_DECL TRDP_ERR_T tau_label2CarNo (UINT8 * pCarNo, UINT32 * pTopoCnt, const TRDP_LABEL_T carLabel, const TRDP_LABEL_T cstLabel)

Function The function delivers the car number to the given label.

The first match of the table will be returned in case there is no unique label given.

Parameters:

- \rightarrow *pCarNo* Pointer to the car number to be returned
- \leftrightarrow *pTopoCnt* Pointer to the actual topo count. If !=0 will be checked. Returns the actual one.
- \leftarrow carLabel Pointer to the car label. NULL means own car.
- \leftarrow *cstLabel* Pointer to the consist label. NULL means own consist.

Return values:

```
TRDP_NO_ERR no error
TRDP_PARAM_ERR Parameter error
```

5.4.2.16 EXT_DECL TRDP_ERR_T tau_label2CstId (TRDP_LABEL_T cstId, UINT32 * pTopoCnt, const TRDP_LABEL_T cstLabel)

Function to retrieve the consist identifier of the consist hosting a car with label carLabel.

Parameters:

- \rightarrow cstId Pointer to the consist id to be returned
- \leftrightarrow **pTopoCnt** Pointer to the actual topo count. If !=0 will be checked. Returns the actual one.
- ← *carLabel* Pointer to a car label. NULL means any car.
- ← *cstLabel* Pointer to a consist label. NULL means own consist.

Return values:

```
TRDP_NO_ERR no error
TRDP_PARAM_ERR Parameter error
```

5.4.2.17 EXT_DECL TRDP_ERR_T tau_label2CstNo (UINT8 * pCstNo, UINT32 * pTopoCnt, const TRDP_LABEL_T carLabel)

Function to retrieve the consist sequence number of the consist hosting a car with label carLabel.

Parameters:

- \rightarrow pCstNo Pointer to the train consist number to be returned
- \leftrightarrow **pTopoCnt** Pointer to the actual topo count. If !=0 will be checked. Returns the actual one.
- ← carLabel Pointer to a car label, NULL means own car, so the own consist number is returned.

Return values:

```
TRDP_NO_ERR no error
TRDP_PARAM_ERR Parameter error
```

5.4.2.18 EXT_DECL TRDP_ERR_T tau_label2IecCarNo (UINT8 * plecCarNo, UINT32 * pTopoCnt, const TRDP_LABEL_T carLabel, const TRDP_LABEL_T cstLabel)

Function The function delivers the IEC car number to the given label.

The first match of the table will be returned in case there is no unique label given.

Parameters:

- → pIecCarNo Pointer to the IEC car sequence number to be returned
- $\leftrightarrow pTopoCnt$ Pointer to the actual topo count. If !=0 will be checked. Returns the actual one.
- \leftarrow carLabel Pointer to a car label. NULL means own car.
- ← *cstLabel* Pointer to a consist label. NULL menas own consist.

Return values:

```
TRDP_NO_ERR no error
TRDP_PARAM_ERR Parameter error
```

5.4.2.19 EXT_DECL TRDP_ERR_T tau_label2IecCstNo (UINT8 * pIecCstNo, UINT32 * pTopoCnt, const TRDP_LABEL_T carLabel)

Function to retrieve the leading car depending IEC consist sequence number of the consist hosting a car with label carLabel.

Parameters:

- \rightarrow *plecCstNo* Pointer to the iec consist number to be returned
- \leftrightarrow *pTopoCnt* Pointer to the actual topo count. If !=0 will be checked. Returns the actual one.
- ← carLabel Pointer to a car label. NULL means own car, so the own IEC consist number is returned.

Return values:

```
TRDP_NO_ERR no error
TRDP PARAM ERR Parameter error
```

5.4.2.20 EXT_DECL TRDP_ERR_T tau_uri2Addr (TRDP_IP_ADDR * pAddr, UINT32 * pTopoCnt, const TRDP_URI_T uri)

Function to convert a URI to an IP address.

Receives a URI as input variable and translates this URI to an IP-Address. The URI may specify either a unicast or a multicast IP-Address. The caller may specify a topographic counter, which will be checked.

Parameters:

- \rightarrow *pAddr* Pointer to return the IP address
- \leftrightarrow *pTopoCnt* Pointer to the actual topo count. If !=0 will be checked. Returns the actual one.
- ← uri Pointer to a URI or an IP Address string, NULL==own URI

Return values:


TRDP_NO_ERR no error
TRDP_PARAM_ERR Parameter error

5.5 tau_marshall.h File Reference


TRDP utility interface definitions.

```
#include "vos_types.h"
#include "trdp_types.h"
```

Include dependency graph for tau_marshall.h:



This graph shows which files directly or indirectly include this file:



Typedefs

• typedef TRDP_ERR_T tau_marshallDs (void *pRefCon, UINT32 datasetId, const UINT8 *pSrc, UINT8 *pDest, UINT32 *pDestSize)

Marshall data set function.

• typedef TRDP_ERR_T tau_unmarshallDs (void *pRefCon, UINT32 datasetId, const UINT8 *pSrc, UINT8 *pDest, UINT32 *pDestSize)

unmarshall data set function.

• typedef TRDP_ERR_T tau_calcDatasetSize (void *pRefCon, UINT32 datasetId, UINT8 *pSrc, UINT32 *pSize)

Calculate data set size.

Functions

• EXT_DECL TRDP_ERR_T tau_initMarshall (void **ppRefCon, UINT32 numDataSet, TRDP_DATASET_T pDataset[])

Types for marshalling / unmarshalling.

• EXT_DECL TRDP_ERR_T tau_marshall (void *pRefCon, UINT32 comId, const UINT8 *pSrc, UINT8 *pDest, UINT32 *pDestSize)

marshall function.

• EXT_DECL TRDP_ERR_T tau_unmarshall (void *pRefCon, UINT32 comId, const UINT8 *pSrc, UINT8 *pDest, UINT32 *pDestSize)

unmarshall function.

5.5.1 Detailed Description

TRDP utility interface definitions.

This module provides the interface to the following utilities

marshalling/unmarshalling

Note:

Project: TCNOpen TRDP prototype stack

Author:

Armin-H. Weiss (initial version)

Remarks:

All rights reserved. Reproduction, modification, use or disclosure to third parties without express authority is forbidden, Copyright Bombardier Transportation GmbH, Germany, 2012.

Id

tau marshall.h 38 2012-09-07 18:50:21Z 97025

5.5.2 Typedef Documentation

5.5.2.1 typedef TRDP_ERR_T tau_calcDatasetSize(void *pRefCon, UINT32 datasetId, UINT8 *pSrc, UINT32 *pSize)

Calculate data set size.

Parameters:

- \leftarrow *pRefCon* Pointer to user context
- ← *datasetId* Dataset id to identify the structure out of a configuration
- $\leftarrow pSrc$ Pointer to received original message
- \rightarrow *pSize* Pointer to the size of the data set

Return values:

TRDP_NO_ERR no error
TRDP_INIT_ERR marshalling not initialised
TRDP_PARAM_ERR data set id not existing

5.5.2.2 typedef TRDP_ERR_T tau_marshallDs(void *pRefCon, UINT32 datasetId, const UINT8 *pSrc, UINT8 *pDest, UINT32 *pDestSize)

Marshall data set function.

Parameters:

- $\leftarrow pRefCon$ pointer to user context
- ← *datasetId* Dataset Id to identify the structure out of a configuration
- $\leftarrow pSrc$ pointer to received original message
- $\leftarrow pDest$ pointer to a buffer for the treated message
- \leftrightarrow *pDestSize* size of the provide buffer / size of the treated message

Return values:

```
TRDP_NO_ERR no error
TRDP_MEM_ERR provided buffer to small
TRDP_INIT_ERR marshalling not initialised
TRDP_PARAM_ERR data set id not existing
```

5.5.2.3 typedef TRDP_ERR_T tau_unmarshallDs(void *pRefCon, UINT32 datasetId, const UINT8 *pSrc, UINT8 *pDest, UINT32 *pDestSize)

unmarshall data set function.

Parameters:

- \leftarrow *pRefCon* pointer to user context
- \leftarrow *datasetId* Dataset id to identify the structure out of a configuration
- $\leftarrow pSrc$ pointer to received original message
- \leftarrow *pDest* pointer to a buffer for the treated message
- \leftrightarrow *pDestSize* size of the provide buffer / size of the treated message

Return values:

```
TRDP_NO_ERR no error
TRDP_MEM_ERR provided buffer to small
TRDP_INIT_ERR marshalling not initialised
TRDP_PARAM_ERR data set id not existing
```

5.5.3 Function Documentation

5.5.3.1 EXT_DECL TRDP_ERR_T tau_initMarshall (void ** ppRefCon, UINT32 numDataSet, TRDP_DATASET_T pDataset[])

Types for marshalling / unmarshalling.

Function to initialise the marshalling/unmarshalling.

Parameters:

- ↔ ppRefCon Returns a pointer to be used for the reference context of marshalling/unmarshalling
- ← *numDataSet* Number of datasets found in the configuration
- ← pDataset Pointer to an array of structures of type TRDP_DATASET_T

Return values:

TRDP_NO_ERR no error
TRDP_MEM_ERR provided buffer to small
TRDP_PARAM_ERR Parameter error

5.5.3.2 EXT_DECL TRDP_ERR_T tau_marshall (void * pRefCon, UINT32 comId, const UINT8 * pSrc, UINT8 * pDest, UINT32 * pDestSize)

marshall function.

Parameters:

- $\leftarrow pRefCon$ pointer to user context
- \leftarrow comId to identify the structure out of a configuration
- $\leftarrow pSrc$ pointer to received original message
- \leftarrow *pDest* pointer to a buffer for the treated message
- \leftrightarrow *pDestSize* size of the provide buffer / size of the treated message

Return values:

TRDP_NO_ERR no error
TRDP_MEM_ERR provided buffer to small
TRDP_INIT_ERR marshalling not initialised
TRDP_COMID_ERR comid not existing

Parameters:

- \leftarrow *pRefCon* pointer to user context
- \leftarrow *comId* ComId to identify the structure out of a configuration
- \leftarrow *pSrc* pointer to received original message
- \leftarrow *pDest* pointer to a buffer for the treated message
- \leftrightarrow *pDestSize* size of the provide buffer / size of the treated message

Return values:

TRDP_NO_ERR no error
TRDP_MEM_ERR provided buffer to small
TRDP_INIT_ERR marshalling not initialised
TRDP_COMID_ERR comid not existing
TRDP_PARAM_ERR Parameter error

Here is the call graph for this function:



5.5.3.3 EXT_DECL TRDP_ERR_T tau_unmarshall (void * pRefCon, UINT32 comId, const UINT8 * pSrc, UINT8 * pDest, UINT32 * pDestSize)

unmarshall function.

Parameters:

- \leftarrow *pRefCon* pointer to user context
- \leftarrow *comId* ComId to identify the structure out of a configuration
- $\leftarrow pSrc$ pointer to received original message
- \leftarrow *pDest* pointer to a buffer for the treated message
- \leftrightarrow *pDestSize* size of the provide buffer / size of the treated message

Return values:

TRDP_NO_ERR no error
TRDP_MEM_ERR provided buffer to small
TRDP_INIT_ERR marshalling not initialised
TRDP_COMID_ERR comid not existing

Here is the call graph for this function:




5.6 tau_tci.h File Reference

TRDP utility interface definitions.

```
#include "vos_types.h"
#include "trdp_types.h"
```

Include dependency graph for tau_tci.h:



Data Structures

- struct TRDP_FCT_INFO_T device information structure
- struct TRDP_PROP_INFO_T properties information structure
- struct TRDP_DEVICE_INFO_T device information structure
- struct TRDP_CAR_INFO_T car information structure.
- struct TRDP_CST_INFO_T consist information structure.
- struct TRDP_TRAIN_INFO_T train information structure.

Enumerations

```
    enum TRDP_INAUG_STATE_T {
        TRDP_INAUG_INVALID,
        TRDP_INAUG_NOLEAD_UNCONF = 2,
        TRDP_INAUG_LEAD_UNCONF = 3,
        TRDP_INAUG_LEAD_CONF = 4 }
        Types for train configuration information.
```

```
    enum TRDP_FCT_T {
        TRDP_FCT_INVALID,
        TRDP_FCT_CAR = 2,
        TRDP_FCT_CST = 3,
        TRDP_FCT_TRAIN = 4 }
        function types
```

Functions

• EXT_DECL_TRDP_ERR_T tau_getEtbState (TRDP_INAUG_STATE_T *pInaugState, UINT32 *pTopoCnt)

Function to retrieve the inauguration state and the topography counter.

- EXT_DECL TRDP_ERR_T tau_getTrnCstCnt (UINT16 *pTrnCstCnt, UINT32 *pTopoCnt) Function to retrieve the total number of consists in the train.
- EXT_DECL TRDP_ERR_T tau_getTrnCarCnt (UINT16 *pTrnCarCnt, UINT32 *pTopoCnt) Function to retrieve the total number of consists in the train.
- EXT_DECL TRDP_ERR_T tau_getCstCarCnt (UINT16 *pCstCarCnt, UINT32 *pTopoCnt, const TRDP_LABEL_T cstLabel)

Function to retrieve the total number of cars in a consist.

• EXT_DECL TRDP_ERR_T tau_getCstFctCnt (UINT16 *pCstFctCnt, UINT32 *pTopoCnt, const TRDP_LABEL_T cstLabel)

Function to retrieve the total number of functions in a consist.

• EXT_DECL TRDP_ERR_T tau_getCarDevCnt (UINT16 *pDevCnt, UINT32 *pTopoCnt, const TRDP_LABEL_T carLabel, const TRDP_LABEL_T cstLabel)

Function to retrieve the total number of devices in a car.

• EXT_DECL TRDP_ERR_T tau_getCstFctInfo (TRDP_FCT_INFO_T *pFctInfo, UINT32 *pTopoCnt, const TRDP_LABEL_T cstLabel, UINT16 maxFctCnt)

Function to retrieve the function information of the consist.

• EXT_DECL TRDP_ERR_T tau_getDevInfo (TRDP_DEV_INFO_T *pDevInfo, UINT8 *pDevProp, UINT32 *pDevFctNo, UINT32 *pTopoCnt, const TRDP_LABEL_T devLabel, const TRDP_LABEL_T carLabel, const TRDP_LABEL_T cstLabel, UINT32 devPropLen, UINT16 devFctCnt)

Function to retrieve the device information of a car's device.

• EXT_DECL TRDP_ERR_T tau_getCarInfo (TRDP_CAR_INFO_T *pCarInfo, UINT8 *pCarProp, UINT32 *pTopoCnt, const TRDP_LABEL_T carLabel, const TRDP_LABEL_T cstLabel, UINT32 carPropLen)

Function to retrieve the car information of a consist's car.

• EXT_DECL TRDP_ERR_T tau_getCstInfo (TRDP_CST_INFO_T *pCstInfo, UINT8 *pCstProp, UINT32 *pTopoCnt, const TRDP_LABEL_T cstLabel, UINT32 cstPropLen)

Function to retrieve the consist information of a train's consist.

• EXT_DECL TRDP_ERR_T tau_getTrnInfo (TRDP_CST_INFO_T *pTrnInfo, UINT32 *pTopoCnt)

Function to retrieve the train information.

Function to retrieve the orientation of the given car.

• EXT_DECL TRDP_ERR_T tau_getIecCarOrient (UINT8 *pIecCarOrient, UINT8 *pIecCstOrient, UINT32 *pTopoCnt, TRDP_LABEL_T carLabel, TRDP_LABEL_T cstLabel)

Function to retrieve the leading car depending IEC orientation of the given consist.

5.6.1 Detailed Description

TRDP utility interface definitions.

This module provides the interface to the following utilities

• train configuration information access

Note:

Project: TCNOpen TRDP prototype stack

Author:

Armin-H. Weiss (initial version)

Remarks:

All rights reserved. Reproduction, modification, use or disclosure to third parties without express authority is forbidden, Copyright Bombardier Transportation GmbH, Germany, 2012.

Id

tau tci.h 8 2012-06-06 16:28:19Z 97025

5.6.2 Enumeration Type Documentation

5.6.2.1 enum TRDP_FCT_T

function types

Enumerator:

TRDP_FCT_INVALID Invalid type.

Device local function

TRDP_FCT_CAR Car control function.

TRDP_FCT_CST Consist control function.

TRDP_FCT_TRAIN Train control function.

5.6.2.2 enum TRDP_INAUG_STATE_T

Types for train configuration information.

inauguration states

Enumerator:

TRDP_INAUG_INVALID Ongoing inauguration, DNS not yet available, no address transformation possible.

Error in train inauguration, DNS not available, trainwide communication not possible

TRDP_INAUG_NOLEAD_UNCONF inauguration done, no leading vehicle set, inauguration unconfirmed

TRDP_INAUG_LEAD_UNCONF inauguration done, leading vehicle set, inauguration unconfirmed

TRDP_INAUG_LEAD_CONF inauguration done, leading vehicle set, inauguration confirmed

5.6.3 Function Documentation

5.6.3.1 EXT_DECL TRDP_ERR_T tau_getCarDevCnt (UINT16 * pDevCnt, UINT32 * pTopoCnt, const TRDP_LABEL_T carLabel, const TRDP_LABEL_T cstLabel)

Function to retrieve the total number of devices in a car.

Parameters:

- \rightarrow *pDevCnt* Pointer to the device count to be returned
- \leftrightarrow **pTopoCnt** Pointer to the actual topo count. If !=0 will be checked. Returns the actual one.
- \leftarrow carLabel Pointer to a car label. NULL means own car if cstLabel == NULL.
- ← cstLabel Pointer to a consist label. NULL means own consist.

Return values:

TRDP_NO_ERR no error
TRDP PARAM ERR Parameter error

5.6.3.2 EXT_DECL TRDP_ERR_T tau_getCarInfo (TRDP_CAR_INFO_T * pCarInfo, UINT8 * pCarProp, UINT32 * pTopoCnt, const TRDP_LABEL_T carLabel, const TRDP_LABEL_T cstLabel, UINT32 carPropLen)

Function to retrieve the car information of a consist's car.

Parameters:

- \rightarrow *pCarInfo* Pointer to the car info to be returned. Memory needs to be provided by application.
- \rightarrow *pCarProp* Pointer to application specific car properties to be returned. Memory needs to be provided by application. Set NULL if not used.
- $\leftrightarrow pTopoCnt$ Pointer to the actual topo count. If !=0 will be checked. Returns the actual one.
- \leftarrow carLabel Pointer to a car label. NULL means own car if cstLabel refers to own consist.
- ← cstLabel Pointer to a consist label. NULL means own consist.

 \leftarrow carPropLen Length of provided buffer for car properties.

Return values:

TRDP_NO_ERR no error
TRDP_PARAM_ERR Parameter error

EXT_DECL TRDP_ERR_T tau_getCarOrient (UINT8 * pCarOrient, UINT8 * pCstOrient, UINT32 * pTopoCnt, TRDP_LABEL_T carLabel, TRDP_LABEL_T cstLabel)

Function to retrieve the orientation of the given car.

Parameters:

- \rightarrow *pCarOrient* Pointer to the car orientation to be returned
- \rightarrow *pCstOrient* Pointer to the consist orientation to be returned
- \leftrightarrow pTopoCnt Pointer to the actual topo count. If !=0 will be checked. Returns the actual one.
- ← carLabel carLabel = NULL means own car if cstLabel == NULL
- $\leftarrow cstLabel$ cstLabel = NULL means own consist

Return values:

TRDP_NO_ERR no error
TRDP PARAM ERR Parameter error

5.6.3.4 EXT_DECL TRDP_ERR_T tau_getCstCarCnt (UINT16 * pCstCarCnt, UINT32 * pTopoCnt, const TRDP_LABEL_T cstLabel)

Function to retrieve the total number of cars in a consist.

Parameters:

- \rightarrow *pCstCarCnt* Pointer to the number of cars to be returned
- \leftrightarrow **pTopoCnt** Pointer to the actual topo count. If !=0 will be checked. Returns the actual one.
- \leftarrow cstLabel Pointer to a consist label. NULL means own consist.

Return values:

TRDP_NO_ERR no error
TRDP_PARAM_ERR Parameter error

5.6.3.5 EXT_DECL TRDP_ERR_T tau_getCstFctCnt (UINT16 * pCstFctCnt, UINT32 * pTopoCnt, const TRDP_LABEL_T cstLabel)

Function to retrieve the total number of functions in a consist.

Parameters:

 \rightarrow *pCstFctCnt* Pointer to the number of functions to be returned

- $\leftrightarrow pTopoCnt$ Pointer to the actual topo count. If !=0 will be checked. Returns the actual one.
- ← cstLabel Pointer to a consist label. NULL means own consist.

Return values:

```
TRDP_NO_ERR no error
TRDP_PARAM_ERR Parameter error
```

5.6.3.6 EXT_DECL TRDP_ERR_T tau_getCstFctInfo (TRDP_FCT_INFO_T * pFctInfo, UINT32 * pTopoCnt, const TRDP_LABEL_T cstLabel, UINT16 maxFctCnt)

Function to retrieve the function information of the consist.

Parameters:

- → pFctInfo Pointer to function info list to be returned. Memory needs to be provided by application. Memory needs to be provided by application. Set NULL if not used.
- $\leftrightarrow pTopoCnt$ Pointer to the actual topo count. If !=0 will be checked. Returns the actual one.
- ← cstLabel Pointer to a consist label. NULL means own consist.
- \leftarrow *maxFctCnt* Maximal number of functions to be returned in provided buffer.

Return values:

```
TRDP_NO_ERR no error
TRDP_PARAM_ERR Parameter error
```

5.6.3.7 EXT_DECL TRDP_ERR_T tau_getCstInfo (TRDP_CST_INFO_T * pCstInfo, UINT8 * pCstProp, UINT32 * pTopoCnt, const TRDP_LABEL_T cstLabel, UINT32 cstPropLen)

Function to retrieve the consist information of a train's consist.

Parameters:

- \rightarrow *pCstInfo* Pointer to the consist info to be returned. Memory needs to be provided by application.
- \rightarrow *pCstProp* Pointer to application specific consist properties to be returned. Memory needs to be provided by application. Set NULL if not used.
- $\leftrightarrow pTopoCnt$ Pointer to the actual topo count. If !=0 will be checked. Returns the actual one.
- ← *cstLabel* Pointer to a consist label. NULL means own consist.
- \leftarrow cstPropLen Length of provided buffer for consist properties.

Return values:

```
TRDP_NO_ERR no error
TRDP PARAM ERR Parameter error
```

5.6.3.8 EXT_DECL TRDP_ERR_T tau_getDevInfo (TRDP_DEV_INFO_T * pDevInfo, UINT8 * pDevProp, UINT32 * pDevFctNo, UINT32 * pTopoCnt, const TRDP_LABEL_T devLabel, const TRDP_LABEL_T carLabel, const TRDP_LABEL_T cstLabel, UINT32 devPropLen, UINT16 devFctCnt)

Function to retrieve the device information of a car's device.

Parameters:

- \rightarrow pDevInfo Pointer to device infos to be returned. Memory needs to be provided by application.
- \rightarrow *pDevProp* Pointer to application specific device properties to be returned. Memory needs to be provided by application. Set NULL if not used.
- → *pDevFctNo* Pointer to device function number list to be returned. Memory needs to be provided by application. Set NULL if not used.
- \leftrightarrow **pTopoCnt** Pointer to the actual topo count. If !=0 will be checked. Returns the actual one.
- ← *devLabel* Pointer to a device label. NULL means own device if carLabel ist referring to own car. "devxxx" possible, with xxx = 001...999
- ← carLabel Pointer to a car label. NULL means own car if cstLabel refers to the own consist.
- ← cstLabel Pointer to a consist label. NULL means own consist.
- ← *devPropLen* Length of provided buffer for device properties.
- ← *devFctCnt* Maximal number of functions to be returned in provided buffer pDevFctNo.

Return values:

TRDP_NO_ERR no error
TRDP PARAM ERR Parameter error

5.6.3.9 EXT_DECL TRDP_ERR_T tau_getEtbState (TRDP_INAUG_STATE_T * pInaugState, UINT32 * pTopoCnt)

Function to retrieve the inauguration state and the topography counter.

Parameters:

- → pInaugState Pointer to an inauguration state variable to be returned.
- \leftrightarrow pTopoCnt Pointer to the actual topo count. If !=0 will be checked. Returns the actual one.

Return values:

TRDP_NO_ERR no error
TRDP_PARAM_ERR Parameter error

5.6.3.10 EXT_DECL TRDP_ERR_T tau_getIecCarOrient (UINT8 * pIecCarOrient, UINT8 * pIecCstOrient, UINT32 * pTopoCnt, TRDP_LABEL_T carLabel, TRDP_LABEL_T cstLabel)

Function to retrieve the leading car depending IEC orientation of the given consist.

Parameters:

 \rightarrow *plecCarOrient* Pointer to the IEC car orientation to be returned

- → plecCstOrient Pointer to the IEC consist orientation to be returned
- \leftrightarrow **pTopoCnt** Pointer to the actual topo count. If !=0 will be checked. Returns the actual one.
- ← carLabel carLabel = NULL means own car if cstLabel == NULL
- $\leftarrow cstLabel$ cstLabel = NULL means own consist

Return values:

```
TRDP_NO_ERR no error
TRDP_PARAM_ERR Parameter error
```

5.6.3.11 EXT_DECL TRDP_ERR_T tau_getTrnCarCnt (UINT16 * pTrnCarCnt, UINT32 * pTopoCnt)

Function to retrieve the total number of consists in the train.

Parameters:

- $\rightarrow pTrnCarCnt$ Pointer to the number of cars to be returned
- $\leftrightarrow pTopoCnt$ Pointer to the actual topo count. If !=0 will be checked. Returns the actual one.

Return values:

```
TRDP_NO_ERR no error
TRDP_PARAM_ERR Parameter error
```

5.6.3.12 EXT_DECL TRDP_ERR_T tau_getTrnCstCnt (UINT16 * pTrnCstCnt, UINT32 * pTopoCnt)

Function to retrieve the total number of consists in the train.

Parameters:

- $\rightarrow pTrnCstCnt$ Pointer to the number of consists to be returned
- \leftrightarrow *pTopoCnt* Pointer to the actual topo count. If !=0 will be checked. Returns the actual one.

Return values:

```
TRDP_NO_ERR no error
TRDP_PARAM_ERR Parameter error
```

5.6.3.13 EXT_DECL TRDP_ERR_T tau_getTrnInfo (TRDP_CST_INFO_T * pTrnInfo, UINT32 * pTopoCnt)

Function to retrieve the train information.

Parameters:

- \rightarrow pTrnInfo Pointer to the train info to be returned. Memory needs to be provided by application.
- \leftrightarrow **pTopoCnt** Pointer to the actual topo count. If !=0 will be checked. Returns the actual one.

Return values:


```
TRDP_NO_ERR no error
TRDP_PARAM_ERR Parameter error
```

5.7 tau_types.h File Reference

TRDP utility interface definitions.

```
#include "trdp_types.h"
#include "tau_addr.h"
#include "tau_marshall.h"
#include "tau_xml.h"
```

Include dependency graph for tau_types.h:



5.7.1 Detailed Description

TRDP utility interface definitions.

This module provides the interface to the following utilities

- marshalling/unmarshalling
- xml configuration interpreter
- IP URI address translation

Note:

Project: TCNOpen TRDP prototype stack

Author:

Armin-H. Weiss (initial version)

Remarks:

All rights reserved. Reproduction, modification, use or disclosure to third parties without express authority is forbidden, Copyright Bombardier Transportation GmbH, Germany, 2012.

Id


tau_types.h 2 2012-06-04 11:25:16Z 97025

5.8 tau_xml.h File Reference

TRDP utility interface definitions.

```
#include "vos_types.h"
#include "trdp_types.h"
```

Include dependency graph for tau_xml.h:



This graph shows which files directly or indirectly include this file:



Data Structures

- struct TRDP_PROCESS_CONFIG_T

 Types to read out the XML configuration.
- struct TRDP_DBG_CONFIG_T

 Control for debug output device/file on application level.

Enumerations

```
• enum TRDP_DBG_OPTION_T {
   TRDP_DBG_DEFAULT = 0,
   TRDP_DBG_OFF = 0x01,
   TRDP_DBG_ERR = 0x02,
   TRDP_DBG_WARN = 0x04,
   TRDP_DBG_INFO = 0x08,
   TRDP_DBG_DBG = 0x10,
   TRDP_DBG_TIME = 0x20,
```

```
TRDP_DBG_LOC = 0x40,
TRDP_DBG_CAT = 0x80 }
```

Control for debug output format on application level.

Functions

• EXT_DECL TRDP_ERR_T tau_readXmlConfig (const CHAR8 *pFileName, TRDP_PROCESS_-CONFIG_T *pProcessConfig, TRDP_MEM_CONFIG_T *pMemConfig, TRDP_PD_CONFIG_T *pPdConfig, TRDP_MD_CONFIG_T *pMdConfig, UINT32 *pNumExchgPar, TRDP_EXCHG_-PAR_T **ppExchgPar, UINT32 *pNumComPar, TRDP_COM_PAR_T **ppComPar, TRDP_-DBG_CONFIG_T *pDbgPar)

Function to read the TRDP configuration parameters out of the XML configuration file.

• EXT_DECL TRDP_ERR_T tau_readXmlDatasetConfig (const CHAR8 *pFileName, UINT32 *pNumDataset, TRDP_DATASET_T **ppDataset)

Function to read the DataSet configuration out of the XML configuration file.

5.8.1 Detailed Description

TRDP utility interface definitions.

This module provides the interface to the following utilities

• read xml configuration interpreter

Note:

Project: TCNOpen TRDP prototype stack

Author:

Armin-H. Weiss (initial version)

Remarks:

All rights reserved. Reproduction, modification, use or disclosure to third parties without express authority is forbidden, Copyright Bombardier Transportation GmbH, Germany, 2012.

Id

tau_xml.h 2 2012-06-04 11:25:16Z 97025

5.8.2 Enumeration Type Documentation

5.8.2.1 enum TRDP_DBG_OPTION_T

Control for debug output format on application level.

Enumerator:

TRDP_DBG_DEFAULT Printout default.

```
TRDP_DBG_OFF Printout off.

TRDP_DBG_ERR Printout error.

TRDP_DBG_WARN Printout warning and error.

TRDP_DBG_INFO Printout info, warning and error.

TRDP_DBG_DBG Printout debug, info, warning and error.

TRDP_DBG_TIME Printout timestamp.

TRDP_DBG_LOC Printout file name and line.

TRDP_DBG_CAT Printout category (DBG, INFO, WARN, ERR).
```

5.8.3 Function Documentation

5.8.3.1 EXT_DECL TRDP_ERR_T tau_readXmlConfig (const CHAR8 * pFileName, TRDP_PROCESS_CONFIG_T * pProcessConfig, TRDP_MEM_CONFIG_T * pMemConfig, TRDP_PD_CONFIG_T * pPdConfig, TRDP_MD_CONFIG_T * pMdConfig, UINT32 * pNumExchgPar, TRDP_EXCHG_PAR_T ** ppExchgPar, UINT32 * pNumComPar, TRDP_COM_PAR_T ** ppComPar, TRDP_DBG_CONFIG_T * pDbgPar)

Function to read the TRDP configuration parameters out of the XML configuration file.

Parameters:

- ← *pFileName* Path and filename of the xml configuration file
- → pProcessConfig TRDP main process configuration
- \rightarrow *pMemConfig* Memory configuration
- → *pPdConfig* PD default configuration
- → *pMdConfig* MD default configuration
- → *pNumExchgPar* Number of configured telegrams
- → *ppExchgPar* Pointer to array of telegram configurations
- \rightarrow *pNumComPar* Number of configured com parameters
- \rightarrow ppComPar Pointer to array of com parameters
- \rightarrow *pDbgPar* Debug printout options for application use

Return values:

```
TRDP_NO_ERR no error
TRDP_MEM_ERR provided buffer to small
TRDP_PARAM_ERR File not existing
```

5.8.3.2 EXT_DECL TRDP_ERR_T tau_readXmlDatasetConfig (const CHAR8 * pFileName, UINT32 * pNumDataset, TRDP_DATASET_T ** ppDataset)

Function to read the DataSet configuration out of the XML configuration file.

Parameters:

← *pFileName* Path and filename of the xml configuration file

- \rightarrow *pNumDataset* Pointer to the number of datasets found in the configuration
- \rightarrow ppDataset Pointer to an array of a structures of type TRDP_DATASET_T

Return values:


TRDP_NO_ERR no error
TRDP_MEM_ERR provided buffer to small
TRDP_PARAM_ERR File not existing

5.9 trdp_if.c File Reference

Functions for ECN communication.

```
#include <string.h>
#include "trdp_if_light.h"
#include "trdp_utils.h"
#include "trdp_pdcom.h"
#include "trdp_stats.h"
#include "vos_sock.h"
#include "vos_mem.h"
```

Include dependency graph for trdp_if.c:

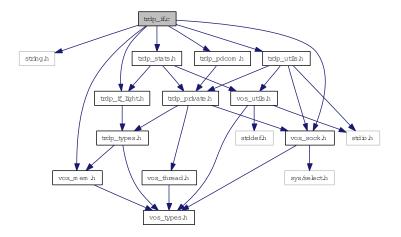

Functions

- BOOL trdp_isValidSession (TRDP_APP_SESSION_T pSessionHandle) Check if the session handle is valid.
- TRDP_APP_SESSION_T * trdp_sessionQueue (void)

 Get the session queue head pointer.
- EXT_DECL_TRDP_ERR_T_tlc_init (const_TRDP_PRINT_DBG_T_pPrintDebugString, const_TRDP_MEM_CONFIG_T *pMemConfig)

Initialize the TRDP stack.

• EXT_DECL TRDP_ERR_T tlc_openSession (TRDP_APP_SESSION_T *pAppHandle, TRDP_IP_ADDR_T ownIpAddr, TRDP_IP_ADDR_T leaderIpAddr, const TRDP_MARSHALL_CONFIG_T *pMarshall, const TRDP_PD_CONFIG_T *pPdDefault, const TRDP_MD_CONFIG_T *pMdDefault, TRDP_OPTION_T option)

Open a session with the TRDP stack.

• EXT_DECL TRDP_ERR_T tlc_closeSession (TRDP_APP_SESSION_T appHandle) Close a session.

• EXT_DECL TRDP_ERR_T tlc_terminate (void)

Un-Initialize.

- EXT_DECL TRDP_ERR_T tlc_reinitSession (TRDP_APP_SESSION_T appHandle)

 Re-Initialize.
- const char * tlc_getVersion (void)

Return a human readable version representation.

• TRDP_ERR_T tlp_setRedundant (TRDP_APP_SESSION_T appHandle, UINT32 redId, BOOL leader)

Do not send non-redundant PDs when we are follower.

• EXT_DECL TRDP_ERR_T tlp_getRedundant (TRDP_APP_SESSION_T appHandle, UINT32 redId, BOOL *pLeader)

Get status of redundant ComIds.

• EXT_DECL void tlc_setTopoCount (UINT32 topoCount)

Set new topocount for trainwide communication.

UINT32 trdp_getTopoCount (void)

Get current topocount.

• EXT_DECL TRDP_ERR_T tlp_publish (TRDP_APP_SESSION_T appHandle, TRDP_PUB_T *pPubHandle, UINT32 comId, UINT32 topoCount, TRDP_IP_ADDR_T srcIpAddr, TRDP_IP_ADDR_T destIpAddr, UINT32 interval, UINT32 redId, TRDP_FLAGS_T pktFlags, const TRDP_SEND_PARAM_T *pSendParam, const UINT8 *pData, UINT32 dataSize, BOOL subs, UINT16 offsetAddress)

Prepare for sending PD messages.

- TRDP_ERR_T tlp_unpublish (TRDP_APP_SESSION_T appHandle, TRDP_PUB_T pubHandle) Stop sending PD messages.
- TRDP_ERR_T tlp_put (TRDP_APP_SESSION_T appHandle, TRDP_PUB_T pubHandle, const UINT8 *pData, UINT32 dataSize)

Update the process data to send.

• EXT_DECL TRDP_ERR_T tlc_getInterval (TRDP_APP_SESSION_T appHandle, TRDP_TIME_T *pInterval, TRDP_FDS_T *pFileDesc, INT32 *pNoDesc)

Get the lowest time interval for PDs.

• EXT_DECL_TRDP_ERR_T tlc_process (TRDP_APP_SESSION_T appHandle, TRDP_FDS_T *pRfds, INT32 *pCount)

Work loop of the TRDP handler.

• EXT_DECL TRDP_ERR_T tlp_request (TRDP_APP_SESSION_T appHandle, TRDP_SUB_T subHandle, UINT32 comId, UINT32 topoCount, TRDP_IP_ADDR_T srcIpAddr, TRDP_IP_ADDR_T destIpAddr, UINT32 redId, TRDP_FLAGS_T pktFlags, const TRDP_SEND_PARAM_T *pSendParam, const UINT8 *pData, UINT32 dataSize, UINT32 replyComId, TRDP_IP_ADDR_T replyIpAddr, BOOL subs, UINT16 offsetAddr)

Initiate sending PD messages (PULL).

• EXT_DECL TRDP_ERR_T tlp_subscribe (TRDP_APP_SESSION_T appHandle, TRDP_SUB_T *pSubHandle, const void *pUserRef, UINT32 comId, UINT32 topoCount, TRDP_IP_ADDR_T srcIpAddr1, TRDP_IP_ADDR_T srcIpAddr2, TRDP_IP_ADDR_T destIpAddr, UINT32 timeout, TRDP_TO_BEHAVIOR_T toBehavior, UINT32 maxDataSize)

Prepare for receiving PD messages.

• EXT_DECL TRDP_ERR_T tlp_unsubscribe (TRDP_APP_SESSION_T appHandle, TRDP_SUB_T subHandle)

Stop receiving PD messages.

• EXT_DECL TRDP_ERR_T tlp_get (TRDP_APP_SESSION_T appHandle, TRDP_SUB_T sub-Handle, TRDP_FLAGS_T pktFlags, TRDP_PD_INFO_T *pPdInfo, UINT8 *pData, UINT32 *pDataSize)

Get the last valid PD message.

5.9.1 Detailed Description

Functions for ECN communication.

Note:

Project: TCNOpen TRDP prototype stack

Author:

Bernd Loehr, NewTec GmbH

Remarks:

All rights reserved. Reproduction, modification, use or disclosure to third parties without express authority is forbidden, Copyright Bombardier Transportation GmbH, Germany, 2012.

Id

trdp_if.c 54 2012-10-17 17:48:19Z 97025

5.9.2 Function Documentation

5.9.2.1 EXT_DECL TRDP_ERR_T tlc_closeSession (TRDP_APP_SESSION_T appHandle)

Close a session.

Clean up and release all resources of that session

Parameters:

← appHandle The handle returned by tlc openSession


Return values:

TRDP_NO_ERR no error

TRDP_NOINIT_ERR handle invalid

TRDP_PARAM_ERR handle NULL

Here is the call graph for this function:

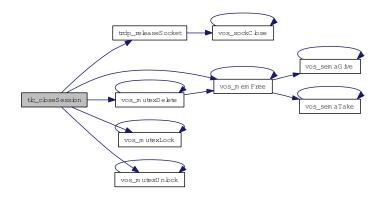

$\begin{array}{ll} \textbf{5.9.2.2} & \textbf{EXT_DECL\ TRDP_ERR_T\ tlc_getInterval\ (TRDP_APP_SESSION_T\ appHandle,} \\ & \textbf{TRDP_TIME_T}*pInterval,\ \textbf{TRDP_FDS_T}*pFileDesc,\ \textbf{INT32}*pNoDesc) \\ \end{array}$

Get the lowest time interval for PDs.

Return the maximum time interval suitable for 'select()' so that we can send due PD packets in time. If the PD send queue is empty, return zero time

Parameters:


- ← *appHandle* The handle returned by tlc_init
- \rightarrow *pInterval* pointer to needed interval
- \leftrightarrow *pFileDesc* pointer to file descriptor set
- \rightarrow *pNoDesc* pointer to put no of used descriptors (for select())

Return values:

TRDP_NO_ERR no error

TRDP_NOINIT_ERR handle invalid

Here is the call graph for this function:



5.9.2.3 const char* tlc_getVersion (void)

Return a human readable version representation.

Return string in the form 'v.r.u.b'

Return values:

const string

5.9.2.4 EXT_DECL TRDP_ERR_T tlc_init (const TRDP_PRINT_DBG_T pPrintDebugString, const TRDP_MEM_CONFIG_T * pMemConfig)

Initialize the TRDP stack.

tlc_init returns in pAppHandle a unique handle to be used in further calls to the stack.

Parameters:

- $\leftarrow \textit{pPrintDebugString} \; \; \text{Pointer to debug print function}$
- ← *pMemConfig* Pointer to memory configuration


Return values:

TRDP_NO_ERR no error

TRDP_MEM_ERR memory allocation failed

TRDP_PARAM_ERR initialization error

Here is the call graph for this function:



5.9.2.5 EXT_DECL TRDP_ERR_T tlc_openSession (TRDP_APP_SESSION_T * pAppHandle, TRDP_IP_ADDR_T ownIpAddr, TRDP_IP_ADDR_T leaderIpAddr, const TRDP_MARSHALL_CONFIG_T * pMarshall, const TRDP_PD_CONFIG_T * pPdDefault, const TRDP_MD_CONFIG_T * pMdDefault, TRDP_OPTION_T option)

Open a session with the TRDP stack.

tlc_openSession returns in pAppHandle a unique handle to be used in further calls to the stack.

Parameters:

- \rightarrow *pAppHandle* A handle for further calls to the trdp stack
- ← ownIpAddr Own IP address, can be different for each process in multihoming systems, if zero, the default interface / IP will be used.
- \leftarrow *leaderIpAddr* IP address of redundancy leader
- \leftarrow *pMarshall* Pointer to marshalling configuration
- ← *pPdDefault* Pointer to default PD configuration
- ← *pMdDefault* Pointer to default MD configuration
- \leftarrow *option* options for library behavior

Return values:


TRDP_NO_ERR no error

TRDP_INIT_ERR not yet inited

TRDP_PARAM_ERR parameter error

TRDP_SOCK_ERR socket error

Here is the call graph for this function:

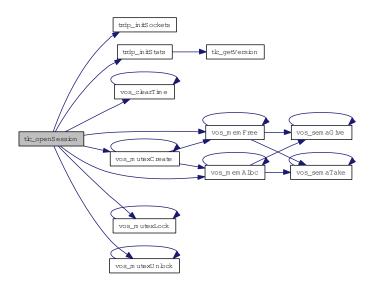

5.9.2.6 EXT_DECL TRDP_ERR_T tlc_process (TRDP_APP_SESSION_T appHandle, TRDP_FDS_T * pRfds, INT32 * pCount)

Work loop of the TRDP handler.

Search the queue for pending PDs to be sent Search the receive queue for pending PDs (time out)

Parameters:


- ← *appHandle* The handle returned by tlc_init
- \leftarrow *pRfds* pointer to set of ready descriptors
- \leftrightarrow *pCount* pointer to number of ready descriptors

Return values:

TRDP_NO_ERR no error

TRDP_NOINIT_ERR handle invalid

Here is the call graph for this function:

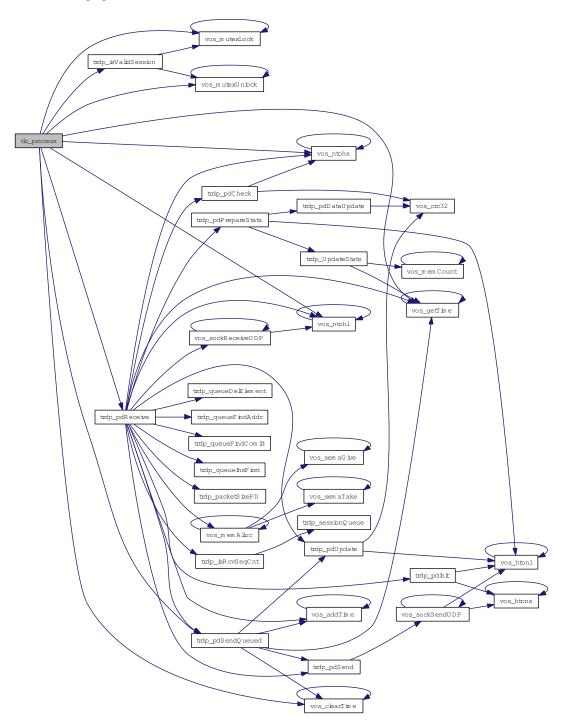

5.9.2.7 EXT_DECL TRDP_ERR_T tlc_reinitSession (TRDP_APP_SESSION_T appHandle)

Re-Initialize.

Should be called by the application when a link-down/link-up event has occured during normal operation.

We need to re-join the multicast groups...


Parameters:

← *appHandle* The handle returned by tlc_openSession

Return values:

TRDP_NO_ERR no error
TRDP_NOINIT_ERR handle invalid
TRDP_PARAM_ERR handle NULL

Here is the call graph for this function:



5.9.2.8 EXT_DECL void tlc_setTopoCount (UINT32 topoCount)


Set new topocount for trainwide communication.

This value is used for validating outgoing and incoming packets only!

Parameters:

 \leftarrow *topoCount* New topoCount value

Here is the call graph for this function:



5.9.2.9 EXT_DECL TRDP_ERR_T tlc_terminate (void)


Un-Initialize.

Clean up and close all sessions. Mainly used for debugging/test runs. No further calls to library allowed

Return values:

TRDP_NO_ERR no error TRDP_INIT_ERR no error

Here is the call graph for this function:

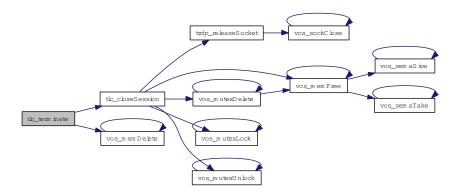

5.9.2.10 EXT_DECL TRDP_ERR_T tlp_get (TRDP_APP_SESSION_T appHandle, TRDP_SUB_T subHandle, TRDP_FLAGS_T pktFlags, TRDP_PD_INFO_T * pPdInfo, UINT8 * pData, UINT32 * pDataSize)

Get the last valid PD message.

This allows polling of PDs instead of event driven handling by callbacks

Parameters:

- ← appHandle the handle returned by tlc_init
- \leftarrow *subHandle* the handle returned by subscription
- \leftarrow *pktFlags* OPTION: TRDP_FLAGS_MARSHALL
- \leftrightarrow *pPdInfo* pointer to application's info buffer
- \leftrightarrow *pData* pointer to application's data buffer
- \leftrightarrow *pDataSize* in: size of buffer, out: size of data

Return values:

TRDP_NO_ERR no error

TRDP_PARAM_ERR parameter error


TRDP_SUB_ERR not subscribed

TRDP_TIMEOUT_ERR packet timed out

TRDP_NOINIT_ERR handle invalid

TRDP_COMID_ERR ComID not found when marshalling

Here is the call graph for this function:

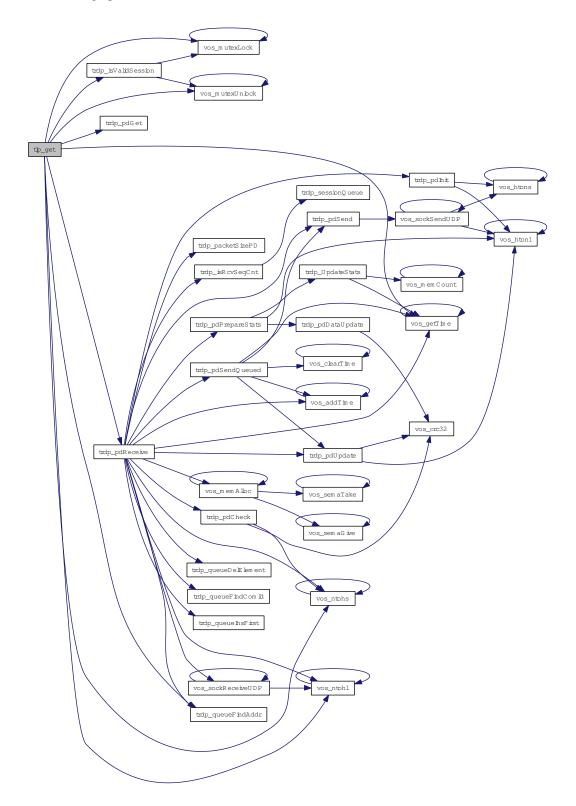

5.9.2.11 EXT_DECL TRDP_ERR_T tlp_getRedundant (TRDP_APP_SESSION_T appHandle, UINT32 redId, BOOL * pLeader)

Get status of redundant ComIds.


Parameters:

- ← appHandle the handle returned by tlc_init
- ← redId will be returned for all ComID's with the given redId, 0 for all redId
- \leftrightarrow *pLeader* TRUE if we send (leader)

Return values:

TRDP_NO_ERR no error
TRDP_PARAM_ERR parameter error / redId not existing
TRDP NOINIT ERR handle invalid

Here is the call graph for this function:



5.9.2.12 EXT_DECL TRDP_ERR_T tlp_publish (TRDP_APP_SESSION_T appHandle, TRDP_PUB_T * pPubHandle, UINT32 comId, UINT32 topoCount, TRDP_IP_ADDR_T srcIpAddr, TRDP_IP_ADDR_T destIpAddr, UINT32 interval, UINT32 redId, TRDP_FLAGS_T pktFlags, const TRDP_SEND_PARAM_T * pSendParam, const UINT8 * pData, UINT32 dataSize, BOOL subs, UINT16 offsetAddress)

Prepare for sending PD messages.

Queue a PD message, it will be send when trdp_work has been called

Parameters:


- ← appHandle the handle returned by tlc_init
- → *pPubHandle* returned handle for related unprepare
- $\leftarrow comId$ comId of packet to send
- \leftarrow topoCount valid topocount, 0 for local consist
- \leftarrow *srcIpAddr* own IP address, 0 srcIP will be set by the stack
- \leftarrow *destIpAddr* where to send the packet to
- \leftarrow *interval* frequency of PD packet (>= 10ms) in usec, 0 if PD PULL
- \leftarrow redId 0 Non-redundant, > 0 valid redundancy group
- \leftarrow pktFlags OPTIONS: TRDP_FLAGS_MARSHALL, TRDP_FLAGS_CALLBACK
- \leftarrow *pSendParam* optional pointer to send parameter, NULL default parameters are used
- ← pData pointer to packet data / dataset

- ← *dataSize* size of packet data <= 1436 without FCS
- \leftarrow *subs* substitution (Ladder)
- \leftarrow offsetAddress offset (Ladder)

Return values:

TRDP_NO_ERR no error
TRDP_PARAM_ERR parameter error
TRDP_MEM_ERR could not insert (out of memory)
TRDP_NOINIT_ERR handle invalid
TRDP_NOPUB_ERR Already published

Here is the call graph for this function:

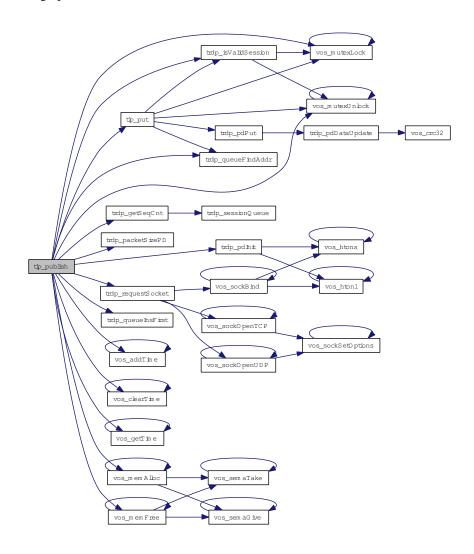

5.9.2.13 TRDP_ERR_T tlp_put (TRDP_APP_SESSION_T appHandle, TRDP_PUB_T pubHandle, const UINT8 * pData, UINT32 dataSize)

Update the process data to send.

Update previously published data. The new telegram will be sent earliest when tlc_process is called.

Parameters:

- ← appHandle the handle returned by tlc_init
- \leftarrow *pubHandle* the handle returned by publish
- \leftrightarrow *pData* pointer to application's data buffer
- \leftrightarrow dataSize size of data

Return values:

TRDP NO ERR no error


TRDP_PARAM_ERR parameter error

TRDP_NOPUB_ERR not published

TRDP_NOINIT_ERR handle invalid

TRDP_COMID_ERR ComID not found when marshalling

Here is the call graph for this function:

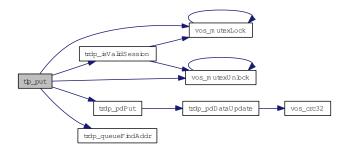

5.9.2.14 EXT_DECL TRDP_ERR_T tlp_request (TRDP_APP_SESSION_T appHandle, TRDP_SUB_T subHandle, UINT32 comId, UINT32 topoCount, TRDP_IP_ADDR_T srcIpAddr, TRDP_IP_ADDR_T destIpAddr, UINT32 redId, TRDP_FLAGS_T pktFlags, const TRDP_SEND_PARAM_T * pSendParam, const UINT8 * pData, UINT32 dataSize, UINT32 replyComId, TRDP_IP_ADDR_T replyIpAddr, BOOL subs, UINT16 offsetAddr)

Initiate sending PD messages (PULL).


Send a PD request message

Parameters:

- ← appHandle the handle returned by tlc_init
- \leftarrow *subHandle* handle from related subscribe
- \leftarrow *comId* comId of packet to be sent
- $\leftarrow topoCount$ valid topocount, 0 for local consist
- \leftarrow *srcIpAddr* own IP address, 0 *srcIP* will be set by the stack
- \leftarrow *destIpAddr* where to send the packet to
- \leftarrow redId 0 Non-redundant, > 0 valid redundancy group

```
\leftarrow pktFlags OPTIONS: TRDP_FLAGS_MARSHALL, TRDP_FLAGS_CALLBACK
    \leftarrow pSendParam optional pointer to send parameter, NULL - default parameters are used
    \leftarrow pData pointer to packet data / dataset
    \leftarrow dataSize size of packet data
    \leftarrow replyComId comId of reply
    \leftarrow replyIpAddr IP for reply
    \leftarrow subs substitution (Ladder)
    \leftarrow \textit{offsetAddr} offset (Ladder)
Return values:
    TRDP_NO_ERR no error
    TRDP_PARAM_ERR parameter error
    TRDP_MEM_ERR could not insert (out of memory)
    TRDP_NOINIT_ERR handle invalid
    TRDP_NOSUB_ERR no matching subscription found
```

Here is the call graph for this function:

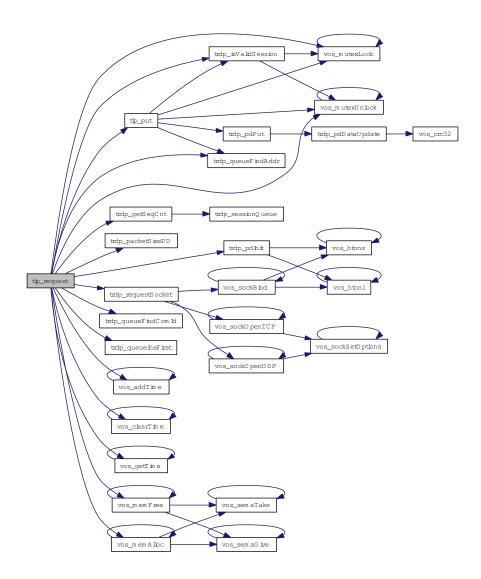

5.9.2.15 TRDP_ERR_T tlp_setRedundant (TRDP_APP_SESSION_T appHandle, UINT32 redId, BOOL leader)

Do not send non-redundant PDs when we are follower.

Parameters:

- ← *appHandle* the handle returned by tlc_init
- $\leftarrow \textit{redId}$ will be set for all ComID's with the given redId, 0 to change for all redId
- \leftarrow *leader* TRUE if we send


Return values:

TRDP_NO_ERR no error

TRDP_PARAM_ERR parameter error / redId not existing

TRDP_NOINIT_ERR handle invalid

Here is the call graph for this function:



5.9.2.16 EXT_DECL TRDP_ERR_T tlp_subscribe (TRDP_APP_SESSION_T appHandle, TRDP_SUB_T * pSubHandle, const void * pUserRef, UINT32 comId, UINT32 topoCount, TRDP_IP_ADDR_T srcIpAddr1, TRDP_IP_ADDR_T srcIpAddr2, TRDP_IP_ADDR_T destIpAddr, UINT32 timeout, TRDP_TO_BEHAVIOR_T toBehavior, UINT32 maxDataSize)

Prepare for receiving PD messages.

Subscribe to a specific PD ComID and source IP To unsubscribe, set maxDataSize to zero!

Parameters:

- ← appHandle the handle returned by tlc_init
- \rightarrow *pSubHandle* return a handle for these messages
- $\leftarrow pUserRef$ user supplied value returned within the info structure
- \leftarrow *comId* comId of packet to receive
- \leftarrow *topoCount* valid topocount, 0 for local consist
- \leftarrow *srcIpAddr1* IP for source filtering, set 0 if not used
- ← srcIpAddr2 Second source IP address for source filtering, set to zero if not used. Used e.g. for source filtering of redundant devices.
- $\leftarrow destIpAddr$ IP address to join
- \leftarrow *timeout* timeout (>= 10ms) in usec
- ← toBehavior timeout behavior
- ← maxDataSize expected max. size of packet data

Return values:


TRDP NO ERR no error

TRDP_PARAM_ERR parameter error

TRDP_MEM_ERR could not reserve memory (out of memory)

TRDP_NOINIT_ERR handle invalid

Here is the call graph for this function:

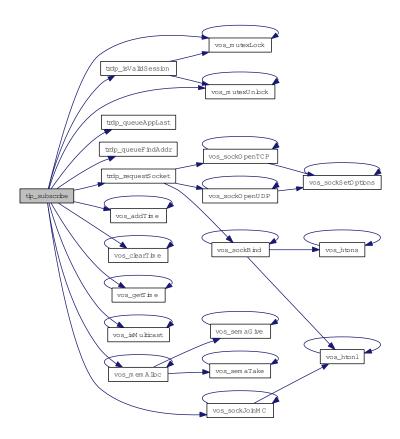

5.9.2.17 TRDP_ERR_T tlp_unpublish (TRDP_APP_SESSION_T appHandle, TRDP_PUB_T pubHandle)

Stop sending PD messages.

Parameters:

- ← *appHandle* the handle returned by tlc_init
- \leftarrow *pubHandle* the handle returned by prepare

Return values:


TRDP_NO_ERR no error

TRDP_PARAM_ERR parameter error

TRDP_NOPUB_ERR not published

TRDP_NOINIT_ERR handle invalid

Here is the call graph for this function:

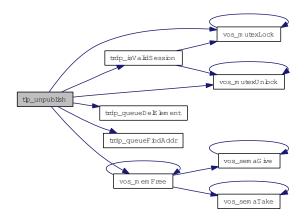

5.9.2.18 EXT_DECL TRDP_ERR_T tlp_unsubscribe (TRDP_APP_SESSION_T appHandle, TRDP_SUB_T subHandle)

Stop receiving PD messages.

Unsubscribe to a specific PD ComID


Parameters:

- ← *appHandle* the handle returned by tlc_init
- \leftarrow *subHandle* the handle returned by subscription

Return values:

TRDP_NO_ERR no error
TRDP_PARAM_ERR parameter error
TRDP_SUB_ERR not subscribed
TRDP_NOINIT_ERR handle invalid

Here is the call graph for this function:



5.9.2.19 UINT32 trdp_getTopoCount (void)

Get current topocount.

This value is used for validating outgoing and incoming packets only!

Return values:

topoCount Current topoCount value

5.9.2.20 BOOL trdp_isValidSession (TRDP_APP_SESSION_T pSessionHandle)

Check if the session handle is valid.


Parameters:

← *pSessionHandle* pointer to packet data (dataset)

Return values:

TRUE is validFALSE is invalid

Here is the call graph for this function:



5.9.2.21 TRDP_APP_SESSION_T* trdp_sessionQueue (void)

Get the session queue head pointer.

Return values:


&sSession

5.10 trdp_if.h File Reference


Typedefs for TRDP communication.

#include "trdp_if_light.h"

Include dependency graph for trdp_if.h:



This graph shows which files directly or indirectly include this file:



Functions

• UINT32 trdp_getTopoCount (void) Get current topocount.

• BOOL trdp_isValidSession (TRDP_APP_SESSION_T pSessionHandle) Check if the session handle is valid.

 $\bullet \ TRDP_APP_SESSION_T*trdp_sessionQueue \ (void)$

Get the session queue head pointer.

5.10.1 Detailed Description

Typedefs for TRDP communication.

Note:

Project: TCNOpen TRDP prototype stack

Author:

Bernd Loehr, NewTec GmbH

Remarks:

All rights reserved. Reproduction, modification, use or disclosure to third parties without express authority is forbidden, Copyright Bombardier Transportation GmbH, Germany, 2012.

Id

trdp_if.h 53 2012-10-17 17:40:43Z 97025

5.10.2 Function Documentation

5.10.2.1 UINT32 trdp_getTopoCount (void)

Get current topocount.

This value is used for validating outgoing and incoming packets only!

Return values:

topoCount Current topoCount value

5.10.2.2 BOOL trdp_isValidSession (TRDP_APP_SESSION_T pSessionHandle)

Check if the session handle is valid.

Parameters:

← *pSessionHandle* pointer to packet data (dataset)

Return values:

TRUE is valid **FALSE** is invalid


Parameters:

 \leftarrow *pSessionHandle* pointer to packet data (dataset)

Return values:

TRUE is valid **FALSE** is invalid

Here is the call graph for this function:



${\bf 5.10.2.3} \quad TRDP_APP_SESSION_T*\ trdp_sessionQueue\ (void)$

Get the session queue head pointer.

Return values:

&sSession


&sSession

5.11 trdp_if_light.h File Reference


TRDP Light interface functions (API).

#include "trdp_types.h"

Include dependency graph for trdp_if_light.h:



This graph shows which files directly or indirectly include this file:



Defines

• #define MD_SUPPORT 1

Support for message data can only be excluded during compile time!

Functions

• EXT_DECL TRDP_ERR_T tlc_init (const TRDP_PRINT_DBG_T pPrintDebugString, const TRDP_MEM_CONFIG_T *pMemConfig)

Initialize the TRDP stack.

• EXT_DECL TRDP_ERR_T tlc_openSession (TRDP_APP_SESSION_T *pAppHandle, TRDP_IP_ADDR_T ownIpAddr, TRDP_IP_ADDR_T leaderIpAddr, const TRDP_MARSHALL_CONFIG_T *pMarshall, const TRDP_PD_CONFIG_T *pPdDefault, const TRDP_MD_CONFIG_T *pMdDefault, TRDP_OPTION_T option)

Open a session with the TRDP stack.

• EXT_DECL TRDP_ERR_T tlc_reinitSession (TRDP_APP_SESSION_T appHandle) Re-Initialize.

• EXT_DECL TRDP_ERR_T tlc_closeSession (TRDP_APP_SESSION_T appHandle) Close a session.

• EXT_DECL TRDP_ERR_T tlc_terminate (void)

Un-Initialize.

• EXT_DECL void tlc_setTopoCount (UINT32 topoCount)

Set new topocount for trainwide communication.

• EXT_DECL TRDP_ERR_T tlc_freeBuf (TRDP_APP_SESSION_T appHandle, char *pBuf)

Frees the buffer reserved by the TRDP layer.

• EXT_DECL TRDP_ERR_T tlc_getInterval (TRDP_APP_SESSION_T appHandle, TRDP_TIME_T *pInterval, TRDP_FDS_T *pFileDesc, INT32 *pNoDesc)

Get the lowest time interval for PDs.

• EXT_DECL TRDP_ERR_T tlc_process (TRDP_APP_SESSION_T appHandle, TRDP_FDS_T *pRfds, INT32 *pCount)

Work loop of the TRDP handler.

• EXT_DECL TRDP_ERR_T tlp_publish (TRDP_APP_SESSION_T appHandle, TRDP_PUB_T *pPubHandle, UINT32 comId, UINT32 topoCount, TRDP_IP_ADDR_T srcIpAddr, TRDP_IP_ADDR_T destIpAddr, UINT32 interval, UINT32 redId, TRDP_FLAGS_T pktFlags, const TRDP_SEND_PARAM_T *pSendParam, const UINT8 *pData, UINT32 dataSize, BOOL subs, UINT16 offsetAddress)

Prepare for sending PD messages.

• EXT_DECL TRDP_ERR_T tlp_unpublish (TRDP_APP_SESSION_T appHandle, TRDP_PUB_T pubHandle)

Stop sending PD messages.

• EXT_DECL TRDP_ERR_T tlp_put (TRDP_APP_SESSION_T appHandle, TRDP_PUB_T pub-Handle, const UINT8 *pData, UINT32 dataSize)

Update the process data to send.

EXT_DECL TRDP_ERR_T tlp_setRedundant (TRDP_APP_SESSION_T appHandle, UINT32 redId. BOOL leader)

Do not send non-redundant PDs when we are follower.

• EXT_DECL TRDP_ERR_T tlp_getRedundant (TRDP_APP_SESSION_T appHandle, UINT32 redId, BOOL *pLeader)

Get status of redundant ComIds.

• EXT_DECL TRDP_ERR_T tlp_request (TRDP_APP_SESSION_T appHandle, TRDP_SUB_T subHandle, UINT32 comId, UINT32 topoCount, TRDP_IP_ADDR_T srcIpAddr, TRDP_IP_ADDR_T destIpAddr, UINT32 redId, TRDP_FLAGS_T pktFlags, const TRDP_SEND_PARAM_T *pSendParam, const UINT8 *pData, UINT32 dataSize, UINT32 replyComId, TRDP_IP_ADDR_T replyIpAddr, BOOL subs, UINT16 offsetAddr)

Initiate sending PD messages (PULL).

• EXT_DECL TRDP_ERR_T tlp_subscribe (TRDP_APP_SESSION_T appHandle, TRDP_SUB_T *pSubHandle, const void *pUserRef, UINT32 comId, UINT32 topoCount, TRDP_IP_ADDR_T srcIpAddr1, TRDP_IP_ADDR_T srcIpAddr2, TRDP_IP_ADDR_T destIpAddr, UINT32 timeout, TRDP_TO_BEHAVIOR_T toBehavior, UINT32 maxDataSize)

Prepare for receiving PD messages.

EXT_DECL TRDP_ERR_T tlp_unsubscribe (TRDP_APP_SESSION_T appHandle, TRDP_SUB_T subHandle)

Stop receiving PD messages.

• EXT_DECL TRDP_ERR_T tlp_get (TRDP_APP_SESSION_T appHandle, TRDP_SUB_T sub-Handle, TRDP_FLAGS_T pktFlags, TRDP_PD_INFO_T *pPdInfo, UINT8 *pData, UINT32 *pDataSize)

Get the last valid PD message.

• EXT_DECL TRDP_ERR_T tlm_notify (TRDP_APP_SESSION_T appHandle, const void *pUserRef, UINT32 comId, UINT32 topoCount, TRDP_IP_ADDR_T srcIpAddr, TRDP_IP_ADDR_T destIpAddr, TRDP_FLAGS_T pktFlags, const TRDP_SEND_PARAM_T *pSendParam, const UINT8 *pData, UINT32 dataSize, const TRDP_URI_USER_T sourceURI, const TRDP_URI_USER_T destURI)

Initiate sending MD notification message.

• EXT_DECL TRDP_ERR_T tlm_request (TRDP_APP_SESSION_T appHandle, const void *pUserRef, TRDP_UUID_T *pSessionId, UINT32 comId, UINT32 topoCount, TRDP_IP_ADDR_T srcIpAddr, TRDP_IP_ADDR_T destIpAddr, TRDP_FLAGS_T pktFlags, UINT32 noOfRepliers, UINT32 replyTimeout, const TRDP_SEND_PARAM_T *pSendParam, const UINT8 *pData, UINT32 dataSize, const TRDP_URI_USER_T srcURI, const TRDP_URI_USER_T destURI)

Initiate sending MD request message.

• EXT_DECL TRDP_ERR_T tlm_confirm (TRDP_APP_SESSION_T appHandle, const void *pUserRef, const TRDP_UUID_T *pSessionId, UINT32 comId, UINT32 topoCount, TRDP_IP_ADDR_T srcIpAddr, TRDP_IP_ADDR_T destIpAddr, TRDP_FLAGS_T pktFlags, UINT16 user-Status, TRDP_REPLY_STATUS_T replyStatus, const TRDP_SEND_PARAM_T *pSendParam, const TRDP_URI_USER_T srcURI, const TRDP_URI_USER_T destURI)

Initiate sending MD confirm message.

• EXT_DECL_TRDP_ERR_T tlm_abortSession (TRDP_APP_SESSION_T appHandle, TRDP_UUID_T *pSessionId)

Cancel an open session.

EXT_DECL TRDP_ERR_T tlm_addListener (TRDP_APP_SESSION_T appHandle, TRDP_LIS_T *pListenHandle, const void *pUserRef, UINT32 comId, UINT32 topoCount, TRDP_IP_ADDR_T destIpAddr, TRDP_FLAGS_T pktFlags, const TRDP_URI_USER_T destURI)

Subscribe to MD messages.

• EXT_DECL TRDP_ERR_T tlm_delListener (TRDP_APP_SESSION_T appHandle, UINT32 listenHandle)

Remove Listener.

 EXT_DECL_TRDP_ERR_T tlm_reply (TRDP_APP_SESSION_T appHandle, void *pUserRef, TRDP_UUID_T *pSessionId, UINT32 topoCount, UINT32 comId, TRDP_IP_ADDR_T srcIpAddr,

TRDP_IP_ADDR_T destIpAddr, TRDP_FLAGS_T pktFlags, UINT16 userStatus, const TRDP_SEND_PARAM_T *pSendParam, const UINT8 *pData, UINT32 dataSize, const TRDP_URI_USER_T srcURI, const TRDP_URI_USER_T destURI)

Send a MD reply message.

• EXT_DECL TRDP_ERR_T tlm_replyQuery (TRDP_APP_SESSION_T appHandle, void *pUserRef, TRDP_UUID_T *pSessionId, UINT32 topoCount, UINT32 comId, TRDP_IP_ADDR_T srcIpAddr, TRDP_IP_ADDR_T destIpAddr, TRDP_FLAGS_T pktFlags, UINT16 userStatus, UINT32 confirmTimeout, const TRDP_SEND_PARAM_T *pSendParam, const UINT8 *pData, UINT32 dataSize, const TRDP_URI_USER_T srcURI, const TRDP_URI_USER_T destURI)

Send a MD reply message.

• EXT_DECL TRDP_ERR_T tlm_replyErr (TRDP_APP_SESSION_T appHandle, TRDP_UUID_T *pSessionId, UINT32 topoCount, UINT32 comId, TRDP_IP_ADDR_T srcIpAddr, TRDP_IP_ADDR_T destIpAddr, TRDP_REPLY_STATUS_T replyState, const TRDP_SEND_PARAM_T *pSendParam, const TRDP_URI_USER_T srcURI, const TRDP_URI_USER_T destURI)

Send a MD reply message.

• EXT_DECL const CHAR8 * tlc_getVersion (void)

Return a human readable version representation.

• EXT_DECL_TRDP_ERR_T_tlc_getStatistics (TRDP_APP_SESSION_T_appHandle, TRDP_STATISTICS_T *pStatistics)

Return statistics.

• EXT_DECL TRDP_ERR_T tlc_getSubsStatistics (TRDP_APP_SESSION_T appHandle, UINT16 *pNumSubs, TRDP_SUBS_STATISTICS_T *pStatistics)

Return PD subscription statistics.

• EXT_DECL TRDP_ERR_T tlc_getPubStatistics (TRDP_APP_SESSION_T appHandle, UINT16 *pNumPub, TRDP PUB STATISTICS T *pStatistics)

Return PD publish statistics.

• EXT_DECL TRDP_ERR_T tlc_getListStatistics (TRDP_APP_SESSION_T appHandle, UINT16 *pNumList, TRDP_LIST_STATISTICS_T *pStatistics)

Return MD listener statistics.

• EXT_DECL TRDP_ERR_T tlc_getRedStatistics (TRDP_APP_SESSION_T appHandle, UINT16 *pNumRed, TRDP_RED_STATISTICS_T *pStatistics)

Return redundancy group statistics.

• EXT_DECL TRDP_ERR_T tlc_getJoinStatistics (TRDP_APP_SESSION_T appHandle, UINT16 *pNumJoin, UINT32 *pIpAddr)

Return join statistics.

• EXT_DECL TRDP_ERR_T tlc_resetStatistics (TRDP_APP_SESSION_T appHandle)

Reset statistics.

5.11.1 Detailed Description

TRDP Light interface functions (API).

Low level functions for communicating using the TRDP protocol

Note:

Project: TCNOpen TRDP prototype stack

Author:

Bernd Loehr, NewTec GmbH

Remarks:

All rights reserved. Reproduction, modification, use or disclosure to third parties without express authority is forbidden, Copyright Bombardier Transportation GmbH, Germany, 2012.

Id

trdp_if_light.h 53 2012-10-17 17:40:43Z 97025

5.11.2 Function Documentation

5.11.2.1 EXT_DECL TRDP_ERR_T tlc_closeSession (TRDP_APP_SESSION_T appHandle)

Close a session.

Clean up and release all resources of that session


Parameters:

← *appHandle* The handle returned by tlc_openSession

Return values:

TRDP_NO_ERR no error
TRDP_NOINIT_ERR handle invalid
TRDP_PARAM_ERR handle NULL

Here is the call graph for this function:

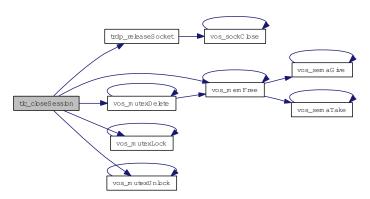

5.11.2.2 EXT_DECL TRDP_ERR_T tlc_freeBuf (TRDP_APP_SESSION_T appHandle, char * pBuf)

Frees the buffer reserved by the TRDP layer.

Parameters:

- ← appHandle The handle returned by tlc_init
- $\leftarrow pBuf$ pointer to the buffer to be freed

Return values:

```
TRDP_NO_ERR no error
TRDP_NOINIT_ERR handle invalid
TRDP PARAM ERR buffer pointer invalid
```

5.11.2.3 EXT_DECL TRDP_ERR_T tlc_getInterval (TRDP_APP_SESSION_T appHandle, TRDP_TIME_T * pInterval, TRDP_FDS_T * pFileDesc, INT32 * pNoDesc)

Get the lowest time interval for PDs.

Return the maximum time interval suitable for 'select()' so that we can send due PD packets in time. If the PD send queue is empty, return zero time

Parameters:

- ← *appHandle* The handle returned by tlc_init
- \rightarrow *pInterval* pointer to needed interval
- \leftrightarrow *pFileDesc* pointer to file descriptor set
- \rightarrow *pNoDesc* pointer to put no of used descriptors (for select())

Return values:

```
TRDP_NO_ERR no error
TRDP_NOINIT_ERR handle invalid
```

Return the maximum time interval suitable for 'select()' so that we can send due PD packets in time. If the PD send queue is empty, return zero time


Parameters:

- ← *appHandle* The handle returned by tlc_init
- \rightarrow *pInterval* pointer to needed interval
- $\leftrightarrow pFileDesc$ pointer to file descriptor set
- \rightarrow *pNoDesc* pointer to put no of used descriptors (for select())

Return values:

```
TRDP_NO_ERR no error
TRDP_NOINIT_ERR handle invalid
```

Here is the call graph for this function:



5.11.2.4 EXT_DECL TRDP_ERR_T tlc_getJoinStatistics (TRDP_APP_SESSION_T appHandle, UINT16 * pNumJoin, UINT32 * pIpAddr)

Return join statistics.

Memory for statistics information must be provided by the user.

Parameters:

- ← *appHandle* the handle returned by tlc_openSession
- \leftrightarrow *pNumJoin* Pointer to the number of joined IP Adresses
- \rightarrow *pIpAddr* Pointer to a list with the joined IP adresses

Return values:

TRDP_NO_ERR no error
TRDP_NOINIT_ERR handle invalid
TRDP_PARAM_ERR parameter error
TRDP_NODATA_ERR there are more items than requested

Memory for statistics information must be provided by the user.

Parameters:

- ← appHandle the handle returned by tlc_openSession
- \leftrightarrow *pNumJoin* Pointer to the number of joined IP Adresses
- \rightarrow *pIpAddr* Pointer to a list with the joined IP adresses

Return values:

TRDP_NO_ERR no error
TRDP_NOINIT_ERR handle invalid
TRDP_PARAM_ERR parameter error
TRDP_NODATA_ERR there are more items than requested

Here is the call graph for this function:



5.11.2.5 EXT_DECL TRDP_ERR_T tlc_getListStatistics (TRDP_APP_SESSION_T appHandle, UINT16 * pNumList, TRDP_LIST_STATISTICS_T * pStatistics)

Return MD listener statistics.

Memory for statistics information must be provided by the user.

Parameters:

- ← *appHandle* the handle returned by tlc_openSession
- \leftrightarrow *pNumList* Pointer to the number of listeners
- \rightarrow pStatistics Pointer to a list with the listener statistics information

Return values:

TRDP_NO_ERR no error

TRDP_NOINIT_ERR handle invalid

TRDP_PARAM_ERR parameter error

TRDP_NODATA_ERR there are more subscriptions than requested

Memory for statistics information must be provided by the user.

Parameters:

- ← *appHandle* the handle returned by tlc_openSession
- \leftrightarrow *pNumList* Pointer to the number of listeners
- \rightarrow **pStatistics** Pointer to a list with the listener statistics information

Return values:

TRDP_NO_ERR no error

TRDP_NOINIT_ERR handle invalid

TRDP_PARAM_ERR parameter error

TRDP_NODATA_ERR there are more subscriptions than requested

Here is the call graph for this function:



5.11.2.6 EXT_DECL TRDP_ERR_T tlc_getPubStatistics (TRDP_APP_SESSION_T appHandle, UINT16 * pNumPub, TRDP_PUB_STATISTICS_T * pStatistics)

Return PD publish statistics.

Memory for statistics information must be provided by the user.

Parameters:

- ← *appHandle* the handle returned by tlc_openSession
- \leftrightarrow *pNumPub* Pointer to the number of publishers
- \rightarrow *pStatistics* Pointer to a list with the publish statistics information

Return values:


TRDP_NO_ERR no error

TRDP_NOINIT_ERR handle invalid

TRDP_PARAM_ERR parameter error

TRDP_NODATA_ERR there are more subscriptions than requested

Here is the call graph for this function:



5.11.2.7 EXT_DECL TRDP_ERR_T tlc_getRedStatistics (TRDP_APP_SESSION_T appHandle, UINT16 * pNumRed, TRDP_RED_STATISTICS_T * pStatistics)

Return redundancy group statistics.

Memory for statistics information must be provided by the user.

Parameters:

- ← appHandle the handle returned by tlc_openSession
- \leftrightarrow *pNumRed* Pointer to the number of redundancy groups
- \rightarrow *pStatistics* Pointer to a list with the redundancy group information

Return values:

TRDP_NO_ERR no error

TRDP_NOINIT_ERR handle invalid

TRDP_PARAM_ERR parameter error

TRDP_NODATA_ERR there are more subscriptions than requested

Memory for statistics information must be provided by the user.

Parameters:

- ← *appHandle* the handle returned by tlc_openSession
- \leftrightarrow *pNumRed* Pointer to the number of redundancy groups
- \rightarrow *pStatistics* Pointer to a list with the redundancy group information

Return values:

TRDP_NO_ERR no error

TRDP_NOINIT_ERR handle invalid

TRDP_PARAM_ERR parameter error

TRDP_NODATA_ERR there are more subscriptions than requested

Here is the call graph for this function:



5.11.2.8 EXT_DECL TRDP_ERR_T tlc_getStatistics (TRDP_APP_SESSION_T appHandle, TRDP_STATISTICS_T * pStatistics)

Return statistics.

Memory for statistics information must be preserved by the user.

Parameters:

- ← appHandle the handle returned by tlc_init
- \rightarrow *pStatistics* Pointer to statistics for this application session

Return values:

TRDP_NO_ERR no error

TRDP_NOINIT_ERR handle invalid TRDP_PARAM_ERR parameter error

Memory for statistics information must be provided by the user.

Parameters:

- ← *appHandle* the handle returned by tlc_openSession
- \rightarrow pStatistics Pointer to statistics for this application session


Return values:

TRDP_NO_ERR no error

TRDP_NOINIT_ERR handle invalid

TRDP_PARAM_ERR parameter error

Here is the call graph for this function:



5.11.2.9 EXT_DECL TRDP_ERR_T tlc_getSubsStatistics (TRDP_APP_SESSION_T appHandle, UINT16 * pNumSubs, TRDP_SUBS_STATISTICS_T * pStatistics)

Return PD subscription statistics.

Memory for statistics information must be provided by the user.

Parameters:

- ← *appHandle* the handle returned by tlc_openSession
- \leftrightarrow pNumSubs In: The number of subscriptions requested Out: Number of subscriptions returned
- \leftrightarrow **pStatistics** Pointer to an array with the subscription statistics information

Return values:

TRDP_NO_ERR no error

TRDP_NOINIT_ERR handle invalid

TRDP_PARAM_ERR parameter error

TRDP_NODATA_ERR there are more subscriptions than requested

Memory for statistics information must be provided by the user.

Parameters:

- $\leftarrow \textit{appHandle} \ \ \text{the handle returned by tlc_openSession}$
- \leftrightarrow pNumSubs In: The number of subscriptions requested Out: Number of subscriptions returned
- \leftrightarrow **pStatistics** Pointer to an array with the subscription statistics information

Return values:

TRDP_NO_ERR no error

TRDP_NOINIT_ERR handle invalid

TRDP_PARAM_ERR parameter error

TRDP_NODATA_ERR there are more subscriptions than requested

Here is the call graph for this function:



5.11.2.10 EXT_DECL const CHAR8* tlc_getVersion (void)

Return a human readable version representation.

Return string in the form 'v.r.u.b'

Return values:

const string

5.11.2.11 EXT_DECL TRDP_ERR_T tlc_init (const TRDP_PRINT_DBG_T pPrintDebugString, const TRDP_MEM_CONFIG_T * pMemConfig)

Initialize the TRDP stack.

tlc_init returns in pAppHandle a unique handle to be used in further calls to the stack.

Parameters:

- ← pPrintDebugString Pointer to debug print function
- \leftarrow *pMemConfig* Pointer to memory configuration


Return values:

TRDP_NO_ERR no error

TRDP_MEM_ERR memory allocation failed

TRDP_PARAM_ERR initialization error

Here is the call graph for this function:



5.11.2.12 EXT_DECL TRDP_ERR_T tlc_openSession (TRDP_APP_SESSION_T * pAppHandle, TRDP_IP_ADDR_T ownIpAddr, TRDP_IP_ADDR_T leaderIpAddr, const TRDP_MARSHALL_CONFIG_T * pMarshall, const TRDP_PD_CONFIG_T * pPdDefault, const TRDP_MD_CONFIG_T * pMdDefault, TRDP_OPTION_T option)

Open a session with the TRDP stack.

tlc_openSession returns in pAppHandle a unique handle to be used in further calls to the stack.


Parameters:

- \rightarrow *pAppHandle* A handle for further calls to the trdp stack
- ← ownIpAddr Own IP address, can be different for each process in multihoming systems, if zero, the default interface / IP will be used.
- \leftarrow *leaderIpAddr* IP address of redundancy leader
- \leftarrow *pMarshall* Pointer to marshalling configuration
- ← *pPdDefault* Pointer to default PD configuration
- ← *pMdDefault* Pointer to default MD configuration
- \leftarrow *option* options for library behavior

Return values:

TRDP_NO_ERR no error
TRDP_INIT_ERR not yet inited
TRDP_PARAM_ERR parameter error
TRDP_SOCK_ERR socket error

Here is the call graph for this function:

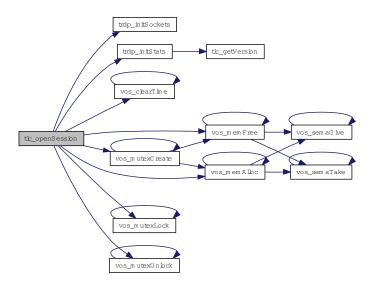

5.11.2.13 EXT_DECL TRDP_ERR_T tlc_process (TRDP_APP_SESSION_T appHandle, TRDP_FDS_T * pRfds, INT32 * pCount)

Work loop of the TRDP handler.

Search the queue for pending PDs to be sent Search the receive queue for pending PDs (time out)

Parameters:

- ← *appHandle* The handle returned by tlc_init
- \leftarrow *pRfds* pointer to set of ready descriptors
- \leftrightarrow *pCount* pointer to number of ready descriptors

Return values:

TRDP_NO_ERR no error

TRDP_NOINIT_ERR handle invalid

Search the queue for pending PDs to be sent Search the receive queue for pending PDs (time out)

Parameters:


- ← *appHandle* The handle returned by tlc_init
- \leftarrow *pRfds* pointer to set of ready descriptors
- \leftrightarrow *pCount* pointer to number of ready descriptors

Return values:

TRDP_NO_ERR no error

TRDP_NOINIT_ERR handle invalid

Here is the call graph for this function:

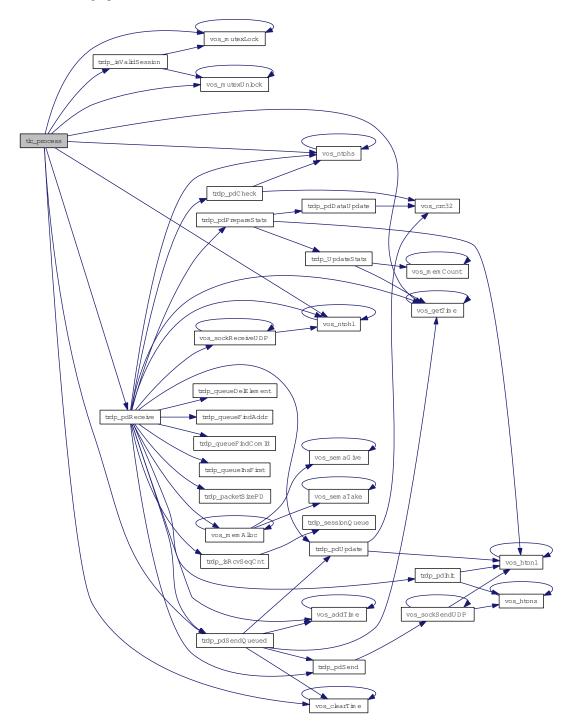

5.11.2.14 EXT_DECL TRDP_ERR_T tlc_reinitSession (TRDP_APP_SESSION_T appHandle)

Re-Initialize.

Should be called by the application when a link-down/link-up event has occured during normal operation.

We need to re-join the multicast groups...

Parameters:

← *appHandle* The handle returned by tlc_openSession


Return values:

TRDP_NO_ERR no error

TRDP_NOINIT_ERR handle invalid

TRDP_PARAM_ERR handle NULL

Here is the call graph for this function:

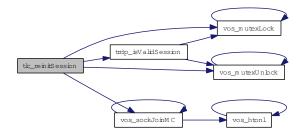

5.11.2.15 EXT_DECL TRDP_ERR_T tlc_resetStatistics (TRDP_APP_SESSION_T appHandle)

Reset statistics.

Parameters:

← appHandle the handle returned by tlc_init

Return values:

TRDP_NO_ERR no error

TRDP_NOINIT_ERR handle invalid

TRDP_PARAM_ERR parameter error


Parameters:

← *appHandle* the handle returned by tlc_openSession

Return values:

TRDP_NO_ERR no error
TRDP_NOINIT_ERR handle invalid
TRDP_PARAM_ERR parameter error

Here is the call graph for this function:



5.11.2.16 EXT_DECL void tlc_setTopoCount (UINT32 topoCount)

Set new topocount for trainwide communication.

This value is used for validating outgoing and incoming packets only!

Parameters:


 $\leftarrow topoCount$ New topocount value

This value is used for validating outgoing and incoming packets only!

Parameters:

← *topoCount* New topoCount value

Here is the call graph for this function:



5.11.2.17 EXT_DECL TRDP_ERR_T tlc_terminate (void)

Un-Initialize.

Clean up and close all sessions. Mainly used for debugging/test runs. No further calls to library allowed

Return values:

TRDP_NO_ERR no error


Clean up and close all sessions. Mainly used for debugging/test runs. No further calls to library allowed

Return values:

TRDP_NO_ERR no error

TRDP_INIT_ERR no error

Here is the call graph for this function:

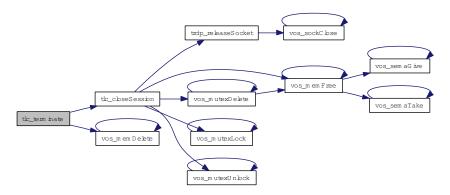

5.11.2.18 EXT_DECL TRDP_ERR_T tlm_abortSession (TRDP_APP_SESSION_T appHandle, TRDP_UUID_T * pSessionId)

Cancel an open session.

Abort an open session; any pending messages will be dropped; session id set to zero

Parameters:

- ← *appHandle* the handle returned by tlc_init
- \leftrightarrow *pSessionId* Session ID returned by request

Return values:

TRDP_NO_ERR no error
TRDP_NO_SESSION_ERR no such session
TRDP_NOINIT_ERR handle invalid

5.11.2.19 EXT_DECL TRDP_ERR_T tlm_addListener (TRDP_APP_SESSION_T appHandle, TRDP_LIS_T * pListenHandle, const void * pUserRef, UINT32 comId, UINT32 topoCount, TRDP_IP_ADDR_T destIpAddr, TRDP_FLAGS_T pktFlags, const TRDP_URI_USER_T destURI)

Subscribe to MD messages.

Add a listener to TRDP to get notified when messages are received

Parameters:

- \leftarrow appHandle the handle returned by tlc_init
- → pListenHandle Listener ID returned
- $\leftarrow pUserRef$ user supplied value returned with reply
- \leftarrow *comId* comId to be observed
- $\leftarrow topoCount$ topocount to use
- \leftarrow *destIpAddr* destination IP address

- \leftarrow *pktFlags* optional marshalling
- \leftarrow **destURI** only functional group of destination URI

Return values:

TRDP_NO_ERR no error
TRDP_PARAM_ERR parameter error
TRDP_MEM_ERR out of memory
TRDP_NOINIT_ERR handle invalid

5.11.2.20 EXT_DECL TRDP_ERR_T tlm_confirm (TRDP_APP_SESSION_T appHandle, const void * pUserRef, const TRDP_UUID_T * pSessionId, UINT32 comId, UINT32 topoCount, TRDP_IP_ADDR_T srcIpAddr, TRDP_IP_ADDR_T destIpAddr, TRDP_FLAGS_T pktFlags, UINT16 userStatus, TRDP_REPLY_STATUS_T replyStatus, const TRDP_SEND_PARAM_T * pSendParam, const TRDP_URI_USER_T srcURI, const TRDP_URI_USER_T destURI)

Initiate sending MD confirm message.

Send a MD confirmation message

Parameters:

- ← *appHandle* the handle returned by tlc_init
- $\leftarrow pUserRef$ user supplied value returned with reply
- \leftarrow *pSessionId* Session ID returned by request
- $\leftarrow comId$ comId of packet to be sent
- $\leftarrow topoCount$ topocount to use
- \leftarrow *srcIpAddr* own IP address, 0 srcIP will be set by the stack
- \leftarrow *destIpAddr* where to send the packet to
- \leftarrow pktFlags OPTION: TRDP_FLAGS_CALLBACK
- ← userStatus Info for requester about application errors
- ← *replyStatus* Info for requester about stack errors
- ← *pSendParam* Pointer to send parameters, NULL to use default send parameters
- \leftarrow *srcURI* only functional group of source URI
- \leftarrow *destURI* only functional group of destination URI

Return values:

TRDP_NO_ERR no error

TRDP_PARAM_ERR parameter error

TRDP_MEM_ERR out of memory

TRDP_NO_SESSION_ERR no such session

TRDP_NOINIT_ERR handle invalid

5.11.2.21 EXT_DECL TRDP_ERR_T tlm_delListener (TRDP_APP_SESSION_T appHandle, UINT32 listenHandle)

Remove Listener.

Parameters:

- ← *appHandle* the handle returned by tlc_init
- → *listenHandle* Listener ID returned

Return values:

TRDP_NO_ERR no error
TRDP_PARAM_ERR parameter error
TRDP_NOINIT_ERR handle invalid

5.11.2.22 EXT_DECL TRDP_ERR_T tlm_notify (TRDP_APP_SESSION_T appHandle, const void * pUserRef, UINT32 comId, UINT32 topoCount, TRDP_IP_ADDR_T srcIpAddr, TRDP_IP_ADDR_T destIpAddr, TRDP_FLAGS_T pktFlags, const TRDP_SEND_PARAM_T * pSendParam, const UINT8 * pData, UINT32 dataSize, const TRDP_URI_USER_T sourceURI, const TRDP_URI_USER_T destURI)

Initiate sending MD notification message.

Send a MD notification message

Parameters:

- ← *appHandle* the handle returned by tlc_init
- \leftarrow *pUserRef* user supplied value returned with reply
- \leftarrow *comId* comId of packet to be sent
- $\leftarrow topoCount$ topocount to use
- \leftarrow srcIpAddr own IP address, 0 srcIP will be set by the stack
- \leftarrow *destIpAddr* where to send the packet to
- \leftarrow pktFlags OPTIONS: TRDP_FLAGS_MARSHALL, TRDP_FLAGS_CALLBACK
- \leftarrow *pSendParam* optional pointer to send parameter, NULL default parameters are used
- ← pData pointer to packet data / dataset
- ← *dataSize* size of packet data
- \leftarrow source URI only functional group of source URI
- ← *destURI* only functional group of destination URI

Return values:

TRDP_NO_ERR no error
TRDP_PARAM_ERR parameter error
TRDP_MEM_ERR out of memory
TRDP_NOINIT_ERR handle invalid

5.11.2.23 EXT_DECL TRDP_ERR_T tlm_reply (TRDP_APP_SESSION_T appHandle, void *pUserRef, TRDP_UUID_T *pSessionId, UINT32 topoCount, UINT32 comId, TRDP_IP_ADDR_T srcIpAddr, TRDP_IP_ADDR_T destIpAddr, TRDP_FLAGS_T pktFlags, UINT16 userStatus, const TRDP_SEND_PARAM_T *pSendParam, const UINT8 *pData, UINT32 dataSize, const TRDP_URI_USER_T srcURI, const TRDP_URI_USER_T destURI)

Send a MD reply message.

Send a MD reply message after receiving an request

Parameters:

- ← *appHandle* the handle returned by tlc_init
- $\leftarrow pUserRef$ user supplied value returned with reply
- \leftarrow *pSessionId* Session ID returned by indication
- $\leftarrow topoCount$ topocount to use
- \leftarrow *comId* comId of packet to be sent
- \leftarrow *srcIpAddr* own IP address, 0 srcIP will be set by the stack
- \leftarrow *destIpAddr* where to send the packet to
- \leftarrow *pktFlags* optional marshalling
- ← userStatus Info for requester about application errors
- ← *pSendParam* Pointer to send parameters, NULL to use default send parameters
- ← pData pointer to packet data / dataset
- ← *dataSize* size of packet data
- \leftarrow *srcURI* only user part of source URI
- \leftarrow destURI only user part of destination URI

Return values:

TRDP_NO_ERR no error
TRDP_PARAM_ERR parameter error
TRDP_MEM_ERR out of memory
TRDP_NO_SESSION_ERR no such session
TRDP NOINIT ERR handle invalid

5.11.2.24 EXT_DECL TRDP_ERR_T tlm_replyErr (TRDP_APP_SESSION_T appHandle, TRDP_UUID_T * pSessionId, UINT32 topoCount, UINT32 comId, TRDP_IP_ADDR_T srcIpAddr, TRDP_IP_ADDR_T destIpAddr, TRDP_REPLY_STATUS_T replyState, const TRDP_SEND_PARAM_T * pSendParam, const TRDP_URI_USER_T srcURI, const TRDP_URI_USER_T destURI)

Send a MD reply message.

Send a MD error reply message after receiving an request

Parameters:

← *appHandle* the handle returned by tlc_init

- \leftarrow *pSessionId* Session ID returned by indication
- $\leftarrow topoCount$ topocount to use
- \leftarrow *comId* comId of packet to be sent
- \leftarrow srcIpAddr own IP address, 0 srcIP will be set by the stack
- \leftarrow *destIpAddr* where to send the packet to
- ← *replyState* Info for requester about stack errors
- ← *pSendParam* Pointer to send parameters, NULL to use default send parameters
- \leftarrow *srcURI* only user part of source URI
- \leftarrow *destURI* only user part of destination URI

Return values:

TRDP_NO_ERR no error

TRDP_PARAM_ERR parameter error

TRDP MEM ERR out of memory

TRDP_NO_SESSION_ERR no such session

TRDP_NOINIT_ERR handle invalid

5.11.2.25 EXT_DECL TRDP_ERR_T tlm_replyQuery (TRDP_APP_SESSION_T appHandle, void * pUserRef, TRDP_UUID_T * pSessionId, UINT32 topoCount, UINT32 comId, TRDP_IP_ADDR_T srcIpAddr, TRDP_IP_ADDR_T destIpAddr, TRDP_FLAGS_T pktFlags, UINT16 userStatus, UINT32 confirmTimeout, const TRDP_SEND_PARAM_T * pSendParam, const UINT8 * pData, UINT32 dataSize, const TRDP_URI_USER_T srcURI, const TRDP_URI_USER_T destURI)

Send a MD reply message.

Send a MD reply message after receiving a request and ask for confirmation.

Parameters:

- ← appHandle the handle returned by tlc init
- $\leftarrow pUserRef$ user supplied value returned with reply
- \leftarrow *pSessionId* Session ID returned by indication
- $\leftarrow topoCount$ topocount to use
- \leftarrow *comId* comId of packet to be sent
- \leftarrow *srcIpAddr* own IP address, 0 srcIP will be set by the stack
- $\leftarrow destIpAddr$ where to send the packet to
- \leftarrow *pktFlags* optional marshalling
- ← userStatus Info for requester about application errors
- \leftarrow *confirmTimeout* timeout for confirmation
- ← *pSendParam* Pointer to send parameters, NULL to use default send parameters
- ← pData pointer to packet data / dataset
- ← *dataSize* size of packet data
- \leftarrow *srcURI* only user part of source URI

 \leftarrow *destURI* only user part of destination URI

Return values:

TRDP_NO_ERR no error
TRDP_PARAM_ERR parameter error
TRDP_MEM_ERR out of memory
TRDP_NO_SESSION_ERR no such session
TRDP_NOINIT_ERR handle invalid

5.11.2.26 EXT_DECL TRDP_ERR_T tlm_request (TRDP_APP_SESSION_T appHandle, const void * pUserRef, TRDP_UUID_T * pSessionId, UINT32 comId, UINT32 topoCount, TRDP_IP_ADDR_T srcIpAddr, TRDP_IP_ADDR_T destIpAddr, TRDP_FLAGS_T pktFlags, UINT32 noOfRepliers, UINT32 replyTimeout, const TRDP_SEND_PARAM_T * pSendParam, const UINT8 * pData, UINT32 dataSize, const TRDP_URI_USER_T srcURI, const TRDP_URI_USER_T destURI)

Initiate sending MD request message.

Send a MD request message

Parameters:

- ← *appHandle* the handle returned by tlc_init
- $\leftarrow pUserRef$ user supplied value returned with reply
- \rightarrow *pSessionId* return session ID
- \leftarrow *comId* comId of packet to be sent
- $\leftarrow topoCount$ topocount to use
- \leftarrow *srcIpAddr* own IP address, 0 srcIP will be set by the stack
- \leftarrow *destIpAddr* where to send the packet to
- \leftarrow pktFlags OPTIONS: TRDP_FLAGS_MARSHALL, TRDP_FLAGS_CALLBACK
- ← noOfRepliers number of expected repliers, 0 if unknown
- \leftarrow *replyTimeout* timeout for reply
- ← *pSendParam* Pointer to send parameters, NULL to use default send parameters
- $\leftarrow pData$ pointer to packet data / dataset
- ← *dataSize* size of packet data
- \leftarrow *srcURI* only functional group of source URI
- \leftarrow *destURI* only functional group of destination URI

Return values:

TRDP_NO_ERR no error
TRDP_PARAM_ERR parameter error
TRDP_MEM_ERR out of memory
TRDP NOINIT ERR handle invalid

5.11.2.27 EXT_DECL TRDP_ERR_T tlp_get (TRDP_APP_SESSION_T appHandle, TRDP_SUB_T subHandle, TRDP_FLAGS_T pktFlags, TRDP_PD_INFO_T * pPdInfo, UINT8 * pData, UINT32 * pDataSize)

Get the last valid PD message.

This allows polling of PDs instead of event driven handling by callback

Parameters:

- ← *appHandle* the handle returned by tlc_init
- ← *subHandle* the handle returned by subscription
- ← pktFlags OPTION: TRDP_FLAGS_MARSHALL
- \leftrightarrow *pPdInfo* pointer to application's info buffer
- \leftrightarrow *pData* pointer to application's data buffer
- \leftrightarrow *pDataSize* in: size of buffer, out: size of data

Return values:

TRDP_NO_ERR no error

TRDP_PARAM_ERR parameter error

TRDP_SUB_ERR not subscribed

TRDP_TIMEOUT_ERR packet timed out

TRDP_NOINIT_ERR handle invalid

TRDP_COMID_ERR ComID not found when marshalling

This allows polling of PDs instead of event driven handling by callbacks

Parameters:

- ← appHandle the handle returned by tlc_init
- \leftarrow *subHandle* the handle returned by subscription
- ← pktFlags OPTION: TRDP_FLAGS_MARSHALL
- \leftrightarrow *pPdInfo* pointer to application's info buffer
- \leftrightarrow *pData* pointer to application's data buffer
- \leftrightarrow *pDataSize* in: size of buffer, out: size of data

Return values:

TRDP_NO_ERR no error

TRDP_PARAM_ERR parameter error


TRDP_SUB_ERR not subscribed

TRDP_TIMEOUT_ERR packet timed out

TRDP_NOINIT_ERR handle invalid

TRDP_COMID_ERR ComID not found when marshalling

Here is the call graph for this function:

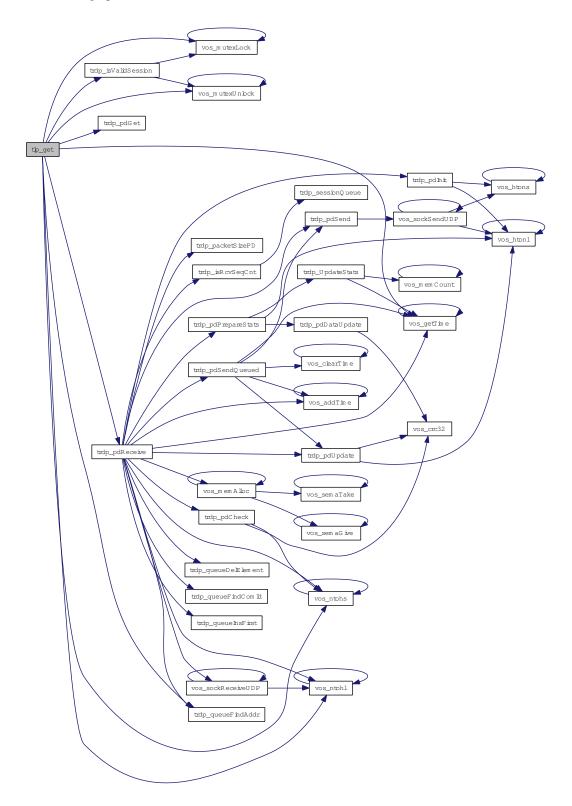

5.11.2.28 EXT_DECL TRDP_ERR_T tlp_getRedundant (TRDP_APP_SESSION_T appHandle, UINT32 redId, BOOL * pLeader)

Get status of redundant ComIds.

Parameters:

- ← appHandle the handle returned by tlc_init
- \leftarrow redId will be set for all ComID's with the given redId, 0 for all redId
- \leftrightarrow *pLeader* TRUE if we send (leader)

Return values:

TRDP_NO_ERR no error

TRDP_PARAM_ERR parameter error / redId not existing

TRDP NOINIT ERR handle invalid

Parameters:


- ← *appHandle* the handle returned by tlc_init
- \leftarrow redId will be returned for all ComID's with the given redId, 0 for all redId
- \leftrightarrow *pLeader* TRUE if we send (leader)

TRDP_NOINIT_ERR handle invalid

Return values:

TRDP_NO_ERR no error
TRDP_PARAM_ERR parameter error / redId not existing

Here is the call graph for this function:



5.11.2.29 EXT_DECL TRDP_ERR_T tlp_publish (TRDP_APP_SESSION_T appHandle, TRDP_PUB_T * pPubHandle, UINT32 comId, UINT32 topoCount, TRDP_IP_ADDR_T srcIpAddr, TRDP_IP_ADDR_T destIpAddr, UINT32 interval, UINT32 redId, TRDP_FLAGS_T pktFlags, const TRDP_SEND_PARAM_T * pSendParam, const UINT8 * pData, UINT32 dataSize, BOOL subs, UINT16 offsetAddress)

Prepare for sending PD messages.

Queue a PD message, it will be send when trdp_work has been called

Parameters:

← appHandle the handle returned by tlc_init

- → *pPubHandle* returned handle for related unprepare
- $\leftarrow comId$ comId of packet to send
- \leftarrow topoCount valid topocount, 0 for local consist
- \leftarrow *srcIpAddr* own IP address, 0 *srcIP* will be set by the stack
- \leftarrow *destIpAddr* where to send the packet to
- ← *interval* frequency of PD packet (>= 10ms) in usec
- \leftarrow *redId* 0 Non-redundant, > 0 valid redundancy group
- $\leftarrow \textit{pktFlags} \ \ \mathsf{OPTIONS:} \ \mathsf{TRDP_FLAGS_MARSHALL}, \ \mathsf{TRDP_FLAGS_CALLBACK}$
- \leftarrow *pSendParam* optional pointer to send parameter, NULL default parameters are used
- ← pData pointer to packet data / dataset
- \leftarrow *dataSize* size of packet data
- \leftarrow *subs* substitution (Ladder)
- \leftarrow offsetAddress offset (Ladder)

Return values:

```
TRDP_NO_ERR no error
TRDP_PARAM_ERR parameter error
TRDP_MEM_ERR could not insert (out of memory)
TRDP NOINIT ERR handle invalid
```

Queue a PD message, it will be send when trdp_work has been called

Parameters:

- ← appHandle the handle returned by tlc_init
- → *pPubHandle* returned handle for related unprepare
- $\leftarrow comId$ comId of packet to send
- $\leftarrow topoCount$ valid topocount, 0 for local consist
- \leftarrow srcIpAddr own IP address, 0 srcIP will be set by the stack
- \leftarrow *destIpAddr* where to send the packet to
- ← interval frequency of PD packet (>= 10ms) in usec, 0 if PD PULL
- \leftarrow redId 0 Non-redundant, > 0 valid redundancy group
- $\leftarrow \textit{pktFlags} \ \ \mathsf{OPTIONS:TRDP_FLAGS_MARSHALL}, \mathsf{TRDP_FLAGS_CALLBACK}$
- \leftarrow *pSendParam* optional pointer to send parameter, NULL default parameters are used
- ← pData pointer to packet data / dataset
- ← *dataSize* size of packet data <= 1436 without FCS
- \leftarrow *subs* substitution (Ladder)
- \leftarrow offsetAddress offset (Ladder)

Return values:


```
TRDP_NO_ERR no error

TRDP_PARAM_ERR parameter error

TRDP_MEM_ERR could not insert (out of memory)
```

TRDP_NOINIT_ERR handle invalid TRDP_NOPUB_ERR Already published

Here is the call graph for this function:

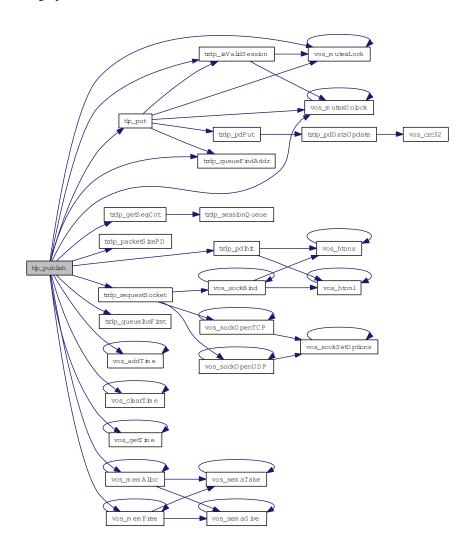

5.11.2.30 EXT_DECL TRDP_ERR_T tlp_put (TRDP_APP_SESSION_T appHandle, TRDP_PUB_T pubHandle, const UINT8 * pData, UINT32 dataSize)

Update the process data to send.

Update previously published data. The new telegram will be sent earliest when tlc_process is called.

Parameters:

- ← appHandle the handle returned by tlc_init
- \leftarrow *pubHandle* the handle returned by publish
- \leftrightarrow *pData* pointer to application's data buffer
- \leftrightarrow dataSize size of data

Return values:

TRDP_NO_ERR no error

TRDP_PARAM_ERR parameter error

TRDP_PUB_ERR not published

TRDP_NOINIT_ERR handle invalid

TRDP_COMID_ERR ComID not found when marshalling

Update previously published data. The new telegram will be sent earliest when tlc_process is called.

Parameters:

- ← appHandle the handle returned by tlc_init
- \leftarrow *pubHandle* the handle returned by publish
- \leftrightarrow *pData* pointer to application's data buffer
- \leftrightarrow dataSize size of data

Return values:

TRDP_NO_ERR no error


TRDP_PARAM_ERR parameter error

TRDP_NOPUB_ERR not published

TRDP_NOINIT_ERR handle invalid

TRDP_COMID_ERR ComID not found when marshalling

Here is the call graph for this function:



5.11.2.31 EXT_DECL TRDP_ERR_T tlp_request (TRDP_APP_SESSION_T appHandle, TRDP_SUB_T subHandle, UINT32 comId, UINT32 topoCount, TRDP_IP_ADDR_T srcIpAddr, TRDP_IP_ADDR_T destIpAddr, UINT32 redId, TRDP_FLAGS_T pktFlags, const TRDP_SEND_PARAM_T * pSendParam, const UINT8 * pData, UINT32 dataSize, UINT32 replyComId, TRDP_IP_ADDR_T replyIpAddr, BOOL subs, UINT16 offsetAddr)

Initiate sending PD messages (PULL).

Send a PD request message

Parameters:

← *appHandle* the handle returned by tlc_init

- ← *subHandle* handle from related subscribe
- \leftarrow *comId* comId of packet to be sent
- \leftarrow topoCount valid topocount, 0 for local consist
- \leftarrow *srcIpAddr* own IP address, 0 srcIP will be set by the stack
- $\leftarrow destIpAddr$ where to send the packet to
- \leftarrow redId 0 Non-redundant, > 0 valid redundancy group
- \leftarrow pktFlags OPTIONS: TRDP_FLAGS_MARSHALL, TRDP_FLAGS_CALLBACK
- \leftarrow *pSendParam* optional pointer to send parameter, NULL default parameters are used
- ← pData pointer to packet data / dataset
- ← *dataSize* size of packet data
- \leftarrow *replyComId* comId of reply
- $\leftarrow replyIpAddr$ IP for reply
- \leftarrow *subs* substitution (Ladder)
- \leftarrow offsetAddr offset (Ladder)

Return values:

TRDP_NO_ERR no error
TRDP_PARAM_ERR parameter error
TRDP_MEM_ERR could not insert (out of memory)
TRDP_NOINIT_ERR handle invalid

Send a PD request message

Parameters:


- ← *appHandle* the handle returned by tlc_init
- \leftarrow *subHandle* handle from related subscribe
- $\leftarrow comId$ comId of packet to be sent
- \leftarrow *topoCount* valid topocount, 0 for local consist
- \leftarrow *srcIpAddr* own IP address, 0 srcIP will be set by the stack
- \leftarrow *destIpAddr* where to send the packet to
- \leftarrow redId 0 Non-redundant, > 0 valid redundancy group
- \leftarrow pktFlags OPTIONS: TRDP_FLAGS_MARSHALL, TRDP_FLAGS_CALLBACK
- \leftarrow *pSendParam* optional pointer to send parameter, NULL default parameters are used
- ← pData pointer to packet data / dataset
- ← *dataSize* size of packet data
- \leftarrow *replyComId* comId of reply
- $\leftarrow replyIpAddr$ IP for reply
- \leftarrow *subs* substitution (Ladder)
- \leftarrow offsetAddr offset (Ladder)

Return values:

TRDP_NO_ERR no error

TRDP_PARAM_ERR parameter error
TRDP_MEM_ERR could not insert (out of memory)
TRDP_NOINIT_ERR handle invalid
TRDP_NOSUB_ERR no matching subscription found

Here is the call graph for this function:

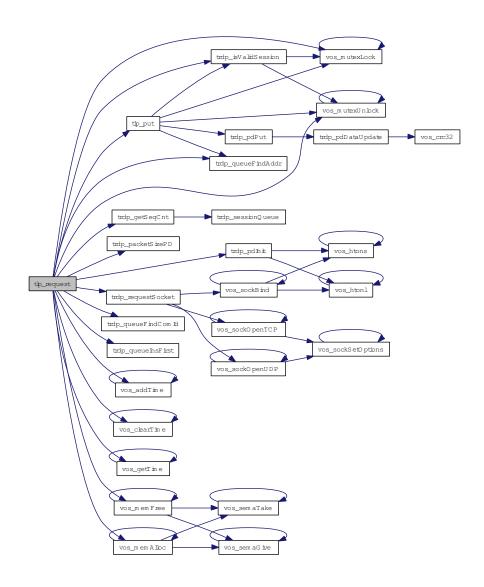

5.11.2.32 EXT_DECL TRDP_ERR_T tlp_setRedundant (TRDP_APP_SESSION_T appHandle, UINT32 redId, BOOL leader)

Do not send non-redundant PDs when we are follower.

Parameters:

← *appHandle* the handle returned by tlc_init

- \leftarrow redId will be set for all ComID's with the given redId, 0 to change for all redId
- \leftarrow *leader* TRUE if we send

Return values:

TRDP_NO_ERR no error
TRDP_PARAM_ERR parameter error / redId not existing
TRDP NOINIT ERR handle invalid


Parameters:

- ← *appHandle* the handle returned by tlc_init
- \leftarrow redId will be set for all ComID's with the given redId, 0 to change for all redId
- \leftarrow *leader* TRUE if we send

Return values:

TRDP_NO_ERR no error
TRDP_PARAM_ERR parameter error / redId not existing
TRDP_NOINIT_ERR handle invalid

Here is the call graph for this function:



5.11.2.33 EXT_DECL TRDP_ERR_T tlp_subscribe (TRDP_APP_SESSION_T appHandle, TRDP_SUB_T * pSubHandle, const void * pUserRef, UINT32 comId, UINT32 topoCount, TRDP_IP_ADDR_T srcIpAddr1, TRDP_IP_ADDR_T srcIpAddr2, TRDP_IP_ADDR_T destIpAddr, UINT32 timeout, TRDP_TO_BEHAVIOR_T toBehavior, UINT32 maxDataSize)

Prepare for receiving PD messages.

Subscribe to a specific PD ComID and source IP To unsubscribe, set maxDataSize to zero!

Parameters:

- ← appHandle the handle returned by tlc_init
- \rightarrow *pSubHandle* return a handle for these messages
- $\leftarrow pUserRef$ user supplied value returned within the info structure
- $\leftarrow comId$ comId of packet to receive
- \leftarrow *topoCount* valid topocount, 0 for local consist
- \leftarrow *srcIpAddr1* IP for source filtering, set 0 if not used
- ← srcIpAddr2 Second source IP address for source filtering, set to zero if not used. Used e.g. for source filtering of redundant devices.

- \leftarrow *destIpAddr* IP address to join
- \leftarrow *timeout* timeout (>= 10ms) in usec
- ← *toBehavior* timeout behavior
- ← maxDataSize expected max. size of packet data

Return values:

```
TRDP_NO_ERR no error
```

TRDP_PARAM_ERR parameter error

TRDP_MEM_ERR could not reserve memory (out of memory)

TRDP_NOINIT_ERR handle invalid

Subscribe to a specific PD ComID and source IP To unsubscribe, set maxDataSize to zero!

Parameters:

- ← *appHandle* the handle returned by tlc_init
- \rightarrow *pSubHandle* return a handle for these messages
- \leftarrow *pUserRef* user supplied value returned within the info structure
- \leftarrow *comId* comId of packet to receive
- $\leftarrow topoCount$ valid topocount, 0 for local consist
- \leftarrow *srcIpAddr1* IP for source filtering, set 0 if not used
- ← srcIpAddr2 Second source IP address for source filtering, set to zero if not used. Used e.g. for source filtering of redundant devices.
- \leftarrow *destIpAddr* IP address to join
- \leftarrow *timeout* timeout (>= 10ms) in usec
- \leftarrow *toBehavior* timeout behavior
- ← maxDataSize expected max. size of packet data

Return values:


TRDP_NO_ERR no error

TRDP_PARAM_ERR parameter error

TRDP_MEM_ERR could not reserve memory (out of memory)

TRDP_NOINIT_ERR handle invalid

Here is the call graph for this function:

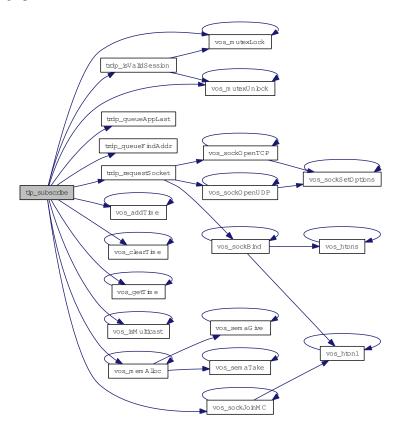

$\begin{array}{ll} \textbf{5.11.2.34} & \textbf{EXT_DECL\ TRDP_ERR_T\ tlp_unpublish\ (TRDP_APP_SESSION_T\ appHandle,} \\ & \textbf{TRDP_PUB_T\ pubHandle)} \end{array}$

Stop sending PD messages.

Parameters:

- \leftarrow appHandle the handle returned by tlc_init
- \leftarrow *pubHandle* the handle returned by prepare

Return values:

TRDP_NO_ERR no error
TRDP_PARAM_ERR parameter error
TRDP_NOPUB_ERR not published
TRDP_NOINIT_ERR handle invalid


Parameters:

- ← *appHandle* the handle returned by tlc_init
- \leftarrow *pubHandle* the handle returned by prepare

Return values:

TRDP_NO_ERR no error
TRDP_PARAM_ERR parameter error
TRDP_NOPUB_ERR not published
TRDP_NOINIT_ERR handle invalid

Here is the call graph for this function:



5.11.2.35 EXT_DECL TRDP_ERR_T tlp_unsubscribe (TRDP_APP_SESSION_T appHandle, TRDP_SUB_T subHandle)

Stop receiving PD messages.

Unsubscribe to a specific PD ComID

Parameters:

- ← appHandle the handle returned by tlc_init
- \leftarrow *subHandle* the handle returned by subscription

Return values:

TRDP_NO_ERR no error
TRDP_PARAM_ERR parameter error
TRDP_SUB_ERR not subscribed
TRDP_NOINIT_ERR handle invalid

Unsubscribe to a specific PD ComID

Parameters:


- ← *appHandle* the handle returned by tlc_init
- \leftarrow *subHandle* the handle returned by subscription

Return values:

TRDP_NO_ERR no error

TRDP_PARAM_ERR parameter error
TRDP_SUB_ERR not subscribed
TRDP_NOINIT_ERR handle invalid

Here is the call graph for this function:




5.12 trdp_marshall.c File Reference

Marshalling functions for TRDP.

```
#include <string.h>
#include "trdp_types.h"
#include "trdp_if_light.h"
#include "trdp_utils.h"
#include "vos_mem.h"
#include "tau_marshall.h"
```

Include dependency graph for trdp_marshall.c:

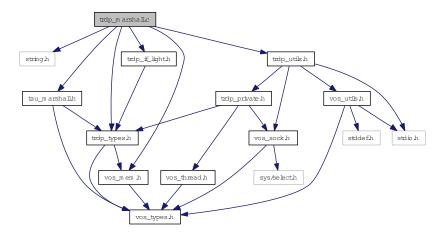

Data Structures

• struct TAU_MARSHALL_INFO_T

Marshalling info, used to and from wire.

5.12.1 Detailed Description

Marshalling functions for TRDP.

Note:

Project: TCNOpen TRDP prototype stack

Author:

Bernd Loehr, NewTec GmbH

Remarks:

All rights reserved. Reproduction, modification, use or disclosure to third parties without express authority is forbidden, Copyright Bombardier Transportation GmbH, Germany, 2012.

Id

trdp_marshall.c 38 2012-09-07 18:50:21Z 97025

Note:

Project: TCNOpen TRDP prototype stack

Author:

Bernd Loehr, NewTec GmbH

Remarks:

All rights reserved. Reproduction, modification, use or disclosure to third parties without express authority is forbidden, Copyright Bombardier Transportation GmbH, Germany, 2012.

Id


trdp_marshall.c 30 2012-08-10 15:36:25Z 97025

5.13 trdp_mdcom.c File Reference

Functions for MD communication.

```
#include "trdp_utils.h"
#include "trdp_mdcom.h"
```

Include dependency graph for trdp_mdcom.c:



Functions

- TRDP_ERR_T trdp_sendMD (int mdSock, const MD_ELE_T *pPacket)

 Send MD packet.
- TRDP_ERR_T trdp_rcvMD (int mdSock, MD_HEADER_T **ppPacket, INT32 *pSize, UINT32 *pIPAddr)

Receive MD packet.

5.13.1 Detailed Description

Functions for MD communication.

Note:

Project: TCNOpen TRDP prototype stack

Author:

Bernd Loehr, NewTec GmbH

Remarks:

All rights reserved. Reproduction, modification, use or disclosure to third parties without express authority is forbidden, Copyright Bombardier Transportation GmbH, Germany, 2012.

Id

trdp_mdcom.c 9 2012-06-12 15:30:12Z 97025

5.13.2 Function Documentation

5.13.2.1 TRDP_ERR_T trdp_rcvMD (int mdSock, MD_HEADER_T ** ppPacket, INT32 * pSize, UINT32 * pIPAddr)

Receive MD packet.

Parameters:

- $\leftarrow mdSock$ socket descriptor
- \rightarrow *ppPacket* pointer to pointer to received packet
- \rightarrow *pSize* pointer to size of received packet
- \rightarrow *pIPAddr* pointer to source IP address of packet

Return values:

```
TRDP_NO_ERR no error
TRDP_UNKNOWN_ERR error
```

5.13.2.2 TRDP_ERR_T trdp_sendMD (int mdSock, const MD_ELE_T * pPacket)

Send MD packet.

Parameters:

- \leftarrow *mdSock* socket descriptor
- \leftarrow *pPacket* pointer to packet to be sent

Return values:


TRDP_NO_ERR no error
TRDP_UNKNOWN_ERR error

5.14 trdp_mdcom.h File Reference

Functions for MD communication.

#include "trdp_private.h"

Include dependency graph for trdp_mdcom.h:



This graph shows which files directly or indirectly include this file:



Functions

- TRDP_ERR_T trdp_sendMD (int sock, const MD_ELE_T *)

 Send MD packet.
- TRDP_ERR_T trdp_rcvMD (int sock, MD_HEADER_T **pPacket, INT32 *pSize, UINT32 *pIPAddr)

Receive MD packet.

5.14.1 Detailed Description

Functions for MD communication.

Note:

Project: TCNOpen TRDP prototype stack

Author:

Bernd Loehr, NewTec GmbH

Remarks:

All rights reserved. Reproduction, modification, use or disclosure to third parties without express authority is forbidden, Copyright Bombardier Transportation GmbH, Germany, 2012.

Id

trdp_mdcom.h 9 2012-06-12 15:30:12Z 97025

5.14.2 Function Documentation

5.14.2.1 TRDP_ERR_T trdp_rcvMD (int mdSock, MD_HEADER_T ** ppPacket, INT32 * pSize, UINT32 * pIPAddr)

Receive MD packet.

Parameters:

- \leftarrow *mdSock* socket descriptor
- \rightarrow *ppPacket* pointer to pointer to received packet
- \rightarrow *pSize* pointer to size of received packet
- \rightarrow *pIPAddr* pointer to source IP address of packet

Return values:

```
TRDP_NO_ERR no error
TRDP_UNKNOWN_ERR error
```

5.14.2.2 TRDP_ERR_T trdp_sendMD (int mdSock, const MD_ELE_T * pPacket)

Send MD packet.

Parameters:

- \leftarrow *mdSock* socket descriptor
- \leftarrow *pPacket* pointer to packet to be sent

Return values:


```
TRDP_NO_ERR no error
TRDP_UNKNOWN_ERR error
```

5.15 trdp_pdcom.c File Reference

Functions for PD communication.

```
#include <string.h>
#include "trdp_types.h"
#include "trdp_utils.h"
#include "trdp_pdcom.h"
#include "trdp_if.h"
#include "trdp_stats.h"
#include "vos_sock.h"
#include "vos_mem.h"
```

Include dependency graph for trdp_pdcom.c:

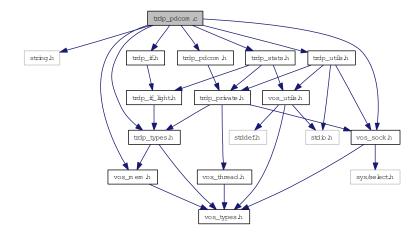

Functions

- void trdp_pdInit (PD_ELE_T *pPacket, TRDP_MSG_T type, UINT32 topoCount, UINT16 subs, UINT16 offsetAddress, UINT32 replyComId, UINT32 replyIpAddress)
 - Initialize/construct the packet Set the header infos.
- TRDP_ERR_T trdp_pdPut (PD_ELE_T *pPacket, TRDP_MARSHALL_T marshall, void *refCon, const UINT8 *pData, UINT32 dataSize)

Copy data Set the header infos.

- void trdp_pdDataUpdate (PD_ELE_T *pPacket)

 Add padding and update data CRC.
- TRDP_ERR_T trdp_pdGet (PD_ELE_T *pPacket, TRDP_UNMARSHALL_T unmarshall, void *refCon, const UINT8 *pData, UINT32 dataSize)

Copy data Set the header infos.

• TRDP_ERR_T trdp_pdSendQueued (TRDP_SESSION_PT appHandle)

Send all due PD messages.

• TRDP_ERR_T trdp_pdReceive (TRDP_SESSION_PT appHandle, INT32 sock)

Receiving PD messages Read the receive socket for arriving PDs, copy the packet to a new PD_ELE_T Check for protocol errors and compare the received data to the data in our receive queue.

• void trdp_pdUpdate (PD_ELE_T *pPacket)

Update the header values.

• TRDP_ERR_T trdp_pdCheck (PD_HEADER_T *pPacket, INT32 packetSize)

Check if the PD header values and the CRCs are sane.

• TRDP_ERR_T trdp_pdSend (INT32 pdSock, PD_ELE_T *pPacket)

Send one PD packet.

5.15.1 Detailed Description

Functions for PD communication.

Note:

Project: TCNOpen TRDP prototype stack

Author:

Bernd Loehr, NewTec GmbH

Remarks:

All rights reserved. Reproduction, modification, use or disclosure to third parties without express authority is forbidden, Copyright Bombardier Transportation GmbH, Germany, 2012.

Id

trdp_pdcom.c 53 2012-10-17 17:40:43Z 97025

5.15.2 Function Documentation

5.15.2.1 TRDP_ERR_T trdp_pdCheck (PD_HEADER_T * pPacket, INT32 packetSize)

Check if the PD header values and the CRCs are sane.


Parameters:

- \leftarrow *pPacket* pointer to the packet to check
- ← packetSize max size to check

Return values:

TRDP_NO_ERR
TRDP_CRC_ERR

Here is the call graph for this function:



5.15.2.2 void trdp_pdDataUpdate (PD_ELE_T * pPacket)

Add padding and update data CRC.

Here is the call graph for this function:




5.15.2.3 void trdp_pdInit (PD_ELE_T * pPacket, TRDP_MSG_T type, UINT32 topoCount, UINT16 subs, UINT16 offsetAddress, UINT32 replyComId, UINT32 replyIpAddress)

Initialize/construct the packet Set the header infos.

Parameters:

- \leftarrow *pPacket* pointer to the packet element to init
- \leftarrow *type* type the packet
- \leftarrow *topoCount* topocount to use for PD frame
- \leftarrow *subs* subsAndReserve
- \leftarrow offsetAddress ladder offset
- $\leftarrow replyComId$ Pull request comId
- ← replyIpAddress Pull request Ip

Here is the call graph for this function:



5.15.2.4 TRDP_ERR_T trdp_pdReceive (TRDP_SESSION_PT appHandle, INT32 sock)

Receiving PD messages Read the receive socket for arriving PDs, copy the packet to a new PD_ELE_T Check for protocol errors and compare the received data to the data in our receive queue.

If it is a new packet, check if it is a PD Request (PULL). If it is an update, exchange the existing entry with the new one Call user's callback if needed

Parameters:

- \leftarrow appHandle session pointer
- \leftarrow *sock* the socket to read from

Return values:

TRDP_NO_ERR no error


TRDP_PARAM_ERR parameter error

TRDP_WIRE_ERR protocol error (late packet, version mismatch)

TRDP_QUEUE_ERR not in queue

TRDP_CRC_ERR header checksum

TRDP_TOPOCOUNT_ERR invalid topocount

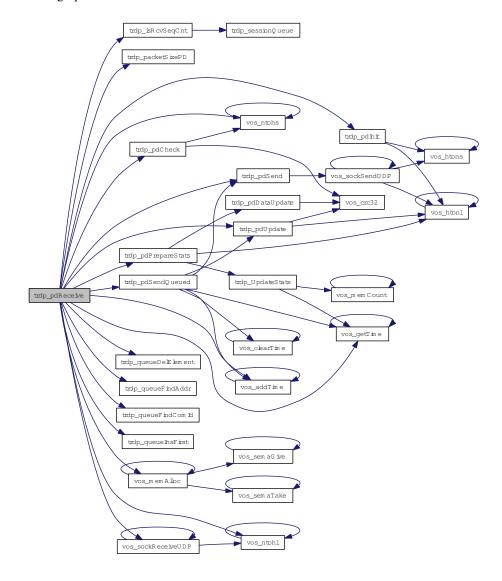

5.15.2.5 TRDP_ERR_T trdp_pdSend (INT32 pdSock, PD_ELE_T * pPacket)

Send one PD packet.

Parameters:

- $\leftarrow pdSock$ socket descriptor
- \leftarrow *pPacket* pointer to packet to be sent

Return values:

TRDP_NO_ERR
TRDP_IO_ERR

Here is the call graph for this function:



5.15.2.6 TRDP_ERR_T trdp_pdSendQueued (TRDP_SESSION_PT appHandle)


Send all due PD messages.

Parameters:

 \leftarrow appHandle session pointer

Return values:

TRDP_NO_ERR no error
TRDP_IO_ERR socket I/O error

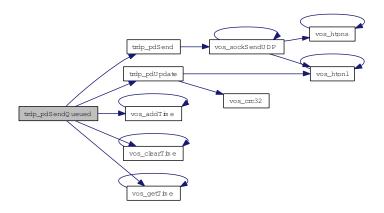


5.15.2.7 void trdp_pdUpdate (PD_ELE_T * pPacket)

Update the header values.

Parameters:

 \leftarrow *pPacket* pointer to the packet to update




5.16 trdp_pdcom.h File Reference


Functions for PD communication.

```
#include "trdp_private.h"
```

Include dependency graph for trdp_pdcom.h:



This graph shows which files directly or indirectly include this file:



Functions

 void trdp_pdInit (PD_ELE_T *, TRDP_MSG_T, UINT32 topCount, UINT16 subs, UINT16 offsetAddress, UINT32 replyComId, UINT32 replyIpAddress)

Initialize/construct the packet Set the header infos.

• void trdp_pdUpdate (PD_ELE_T *)

Update the header values.

• TRDP_ERR_T trdp_pdPut (PD_ELE_T *, TRDP_MARSHALL_T func, void *refCon, const UINT8 *pData, UINT32 dataSize)

Copy data Set the header infos.

• void trdp_pdDataUpdate (PD_ELE_T *pPacket)

Add padding and update data CRC.

• TRDP_ERR_T trdp_pdCheck (PD_HEADER_T *pPacket, INT32 packetSize)

Check if the PD header values and the CRCs are sane.

• TRDP_ERR_T trdp_pdSend (INT32 sock, PD_ELE_T *)

Send one PD packet.

• TRDP_ERR_T trdp_pdGet (PD_ELE_T *pPacket, TRDP_UNMARSHALL_T unmarshall, void *refCon, const UINT8 *pData, UINT32 dataSize)

Copy data Set the header infos.

• TRDP_ERR_T trdp_pdSendQueued (TRDP_SESSION_PT appHandle) Send all due PD messages.

• TRDP_ERR_T trdp_pdReceive (TRDP_SESSION_PT pSessionHandle, INT32 sock)

Receiving PD messages Read the receive socket for arriving PDs, copy the packet to a new PD_ELE_T Check for protocol errors and compare the received data to the data in our receive queue.

5.16.1 Detailed Description

Functions for PD communication.

Note:

Project: TCNOpen TRDP prototype stack

Author:

Bernd Loehr, NewTec GmbH

Remarks:

All rights reserved. Reproduction, modification, use or disclosure to third parties without express authority is forbidden, Copyright Bombardier Transportation GmbH, Germany, 2012.

Id

trdp_pdcom.h 53 2012-10-17 17:40:43Z 97025

5.16.2 Function Documentation

5.16.2.1 TRDP_ERR_T trdp_pdCheck (PD_HEADER_T * pPacket, INT32 packetSize)


Check if the PD header values and the CRCs are sane.

Parameters:

- \leftarrow *pPacket* pointer to the packet to check
- \leftarrow *packetSize* max size to check

Return values:

TRDP_NO_ERR
TRDP_CRC_ERR



5.16.2.2 void trdp_pdDataUpdate (PD_ELE_T * pPacket)

Add padding and update data CRC.

Here is the call graph for this function:




5.16.2.3 void trdp_pdInit (PD_ELE_T * pPacket, TRDP_MSG_T type, UINT32 topoCount, UINT16 subs, UINT16 offsetAddress, UINT32 replyComId, UINT32 replyIpAddress)

Initialize/construct the packet Set the header infos.

Parameters:

- \leftarrow *pPacket* pointer to the packet element to init
- \leftarrow *type* type the packet
- \leftarrow *topoCount* topocount to use for PD frame
- \leftarrow *subs* subsAndReserve
- \leftarrow offsetAddress ladder offset
- ← *replyComId* Pull request comId
- ← replyIpAddress Pull request Ip

Here is the call graph for this function:



5.16.2.4 TRDP_ERR_T trdp_pdReceive (TRDP_SESSION_PT appHandle, INT32 sock)

Receiving PD messages Read the receive socket for arriving PDs, copy the packet to a new PD_ELE_T Check for protocol errors and compare the received data to the data in our receive queue.

If it is a new packet, check if it is a PD Request (PULL). If it is an update, exchange the existing entry with the new one Call user's callback if needed

Parameters:

- \leftarrow appHandle session pointer
- \leftarrow *sock* the socket to read from

Return values:

TRDP_NO_ERR no error

TRDP_PARAM_ERR parameter error


TRDP_WIRE_ERR protocol error (late packet, version mismatch)

TRDP_QUEUE_ERR not in queue

TRDP_CRC_ERR header checksum

TRDP_TOPOCOUNT_ERR invalid topocount

Here is the call graph for this function:

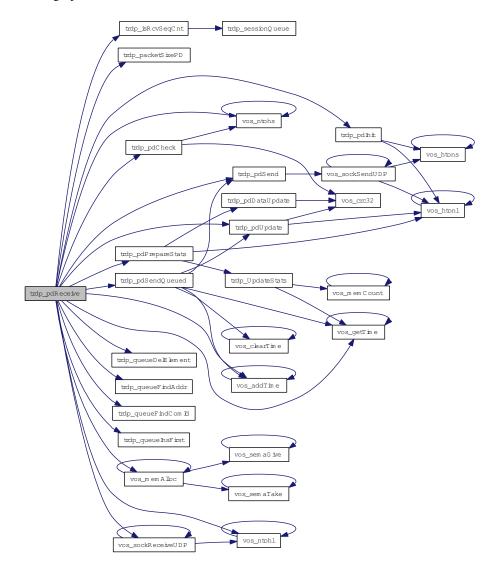

$\textbf{5.16.2.5} \quad \textbf{TRDP_ERR_T trdp_pdSend} \; (\textbf{INT32} \; \textit{pdSock}, \; \textbf{PD_ELE_T} * \textit{pPacket})$

Send one PD packet.

Parameters:

 $\leftarrow pdSock$ socket descriptor

 \leftarrow *pPacket* pointer to packet to be sent

Return values:

TRDP_NO_ERR TRDP_IO_ERR

Here is the call graph for this function:



5.16.2.6 TRDP_ERR_T trdp_pdSendQueued (TRDP_SESSION_PT appHandle)

Send all due PD messages.


Parameters:

 \leftarrow *appHandle* session pointer

Return values:

TRDP_NO_ERR no error
TRDP_IO_ERR socket I/O error

Here is the call graph for this function:

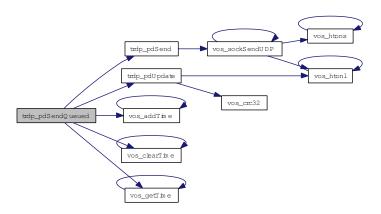


$\mathbf{5.16.2.7} \quad void\ trdp_pdUpdate\ (PD_ELE_T*pPacket)$

Update the header values.

Parameters:

 \leftarrow *pPacket* pointer to the packet to update




5.17 trdp_private.h File Reference


Typedefs for TRDP communication.

```
#include "trdp_types.h"
#include "vos_thread.h"
#include "vos_sock.h"
```

Include dependency graph for trdp_private.h:



This graph shows which files directly or indirectly include this file:



Data Structures

• struct TRDP_HANDLE

Hidden handle definition, used as unique addressing item.

• struct TRDP_SOCKETS

• struct GNU_PACKED

Socket item.

TRDP process data header - network order and alignment.

• struct GNU_PACKED

TRDP process data header - network order and alignment.

• struct PD_ELE

Queue element for PD packets to send or receive.

• struct MD_ELE

Queue element for MD packets to send or receive or acknowledge.

• struct TRDP_SESSION

Session/application variables store.

Defines

- #define IP_PD_UDP_PORT 20548
 process data UDP port
- #define IP_MD_UDP_PORT 20550

 message data UDP port
- #define IP_MD_TCP_PORT 20550
 message data TCP port
- #define IP_PD_PROTO_VER 0x0100 Protocol version.
- #define ECHO_COMID 10

 MD comid used for echo.
- #define GSTAT_REQUEST_COMID 11
 PD pull/MD request telegram to retrieve TRDP global statistics.
- #define GSTAT_REPLY_COMID 12
 PD pull/MD reply telegram with TRDP global statistics.
- #define DSTAT_REQUEST_COMID 13
 MD request telegram to retrieve TRDP detailed statistics.
- #define DSTAT_REPLY_COMID 14
 MD reply telegram with TRDP detailed statistics.
- #define TIMER_GRANULARITY 10000 granularity in us
- #define MD_DEFAULT_REPLY_TIMEOUT 100000000 default reply time out 10s
- #define MD_DEFAULT_CONFIRM_TIMEOUT 10000000 default reply time out 10s
- #define MIN_PD_HEADER_SIZE sizeof(PD_HEADER_T)

 PD header size with FCS.
- #define ACK_TIME_OUT_VAL_DEF 500
 Default value in milliseconds for waiting on acknowledge message.

Typedefs

```
• typedef struct TRDP_HANDLE TRDP_ADDRESSES

Hidden handle definition, used as unique addressing item.
```

- typedef struct TRDP_SOCKETS_T Socket item.
- typedef struct PD_ELE PD_ELE_T

 Queue element for PD packets to send or receive.
- typedef struct MD_ELE MD_ELE_T

 Queue element for MD packets to send or receive or acknowledge.
- typedef struct TRDP_SESSION TRDP_SESSION_T Session/application variables store.

Enumerations

```
    enum TRDP_PRIV_FLAGS_T { ,
        TRDP_TIMED_OUT = 0x2,
        TRDP_REQ_2B_SENT = 0x4,
        TRDP_PULL_SUB = 0x8 }
        Internal flags for packets.
    enum TRDP_SOCK_TYPE_T {
        TRDP_SOCK_PD = 0,
        TRDP_SOCK_MD_UDP = 1,
        TRDP_SOCK_MD_TCP = 2 }
        Socket usage.
```

5.17.1 Detailed Description

Typedefs for TRDP communication.

TRDP internal type definitions

Note:

Project: TCNOpen TRDP prototype stack

Author:

Bernd Loehr, NewTec GmbH

Remarks:

All rights reserved. Reproduction, modification, use or disclosure to third parties without express authority is forbidden, Copyright Bombardier Transportation GmbH, Germany, 2012.

Id

trdp_private.h 53 2012-10-17 17:40:43Z 97025

5.17.2 Enumeration Type Documentation

5.17.2.1 enum TRDP_PRIV_FLAGS_T

Internal flags for packets.

Enumerator:

```
TRDP_TIMED_OUT if set, informed the userTRDP_REQ_2B_SENT if set, the request needs to be sentTRDP_PULL_SUB if set, its a PULL subscription
```

5.17.2.2 enum TRDP_SOCK_TYPE_T

Socket usage.

Enumerator:


```
TRDP_SOCK_PD Socket is used for UDP process data.TRDP_SOCK_MD_UDP Socket is used for UDP message data.TRDP_SOCK_MD_TCP Socket is used for TCP message data.
```

5.18 trdp_stats.c File Reference

Statistics functions for TRDP communication.

```
#include <stdio.h>
#include <string.h>
#include "trdp_stats.h"
#include "trdp_if_light.h"
#include "trdp_if.h"
#include "trdp_pdcom.h"
```

Include dependency graph for trdp_stats.c:

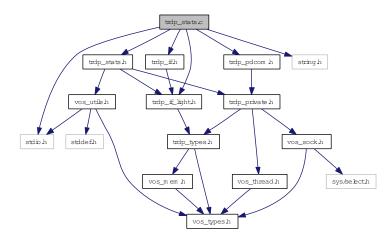

Functions

- void trdp_UpdateStats (TRDP_APP_SESSION_T appHandle) Update the statistics.
- void trdp_initStats (TRDP_APP_SESSION_T appHandle)

 Init statistics.
- EXT_DECL TRDP_ERR_T tlc_getStatistics (TRDP_APP_SESSION_T appHandle, TRDP_STATISTICS_T *pStatistics)

Return statistics.

• EXT_DECL TRDP_ERR_T tlc_getSubsStatistics (TRDP_APP_SESSION_T appHandle, UINT16 *pNumSubs, TRDP_SUBS_STATISTICS_T *pStatistics)

Return PD subscription statistics.

- EXT_DECL TRDP_ERR_T tlc_getPubStatistics (TRDP_APP_SESSION_T appHandle, UINT16 *pNumPub, TRDP_PUB_STATISTICS_T *pStatistics)

 Return PD publish statistics.
- EXT_DECL TRDP_ERR_T tlc_getListStatistics (TRDP_APP_SESSION_T appHandle, UINT16 *pNumList, TRDP_LIST_STATISTICS_T *pStatistics)

Return MD listener statistics.

• EXT_DECL TRDP_ERR_T tlc_getRedStatistics (TRDP_APP_SESSION_T appHandle, UINT16 *pNumRed, TRDP_RED_STATISTICS_T *pStatistics)

Return redundancy group statistics.

• EXT_DECL TRDP_ERR_T tlc_getJoinStatistics (TRDP_APP_SESSION_T appHandle, UINT16 *pNumJoin, UINT32 *pIpAddr)

Return join statistics.

- EXT_DECL TRDP_ERR_T tlc_resetStatistics (TRDP_APP_SESSION_T appHandle)
 Reset statistics.
- void trdp_pdPrepareStats (TRDP_APP_SESSION_T appHandle, PD_ELE_T *pPacket) Fill the statistics packet.

5.18.1 Detailed Description

Statistics functions for TRDP communication.

Note:

Project: TCNOpen TRDP prototype stack

Author:

Bernd Loehr, NewTec GmbH

Remarks:

All rights reserved. Reproduction, modification, use or disclosure to third parties without express authority is forbidden, Copyright Bombardier Transportation GmbH, Germany, 2012.

Id

trdp_stats.c 53 2012-10-17 17:40:43Z 97025

5.18.2 Function Documentation

5.18.2.1 EXT_DECL TRDP_ERR_T tlc_getJoinStatistics (TRDP_APP_SESSION_T appHandle, UINT16 * pNumJoin, UINT32 * pIpAddr)

Return join statistics.

Memory for statistics information must be provided by the user.

Parameters:

- \leftarrow *appHandle* the handle returned by tlc_openSession
- \leftrightarrow *pNumJoin* Pointer to the number of joined IP Adresses
- \rightarrow *pIpAddr* Pointer to a list with the joined IP addresses

Return values:

TRDP_NO_ERR no error
TRDP_NOINIT_ERR handle invalid
TRDP_PARAM_ERR parameter error

TRDP_NODATA_ERR there are more items than requested

Here is the call graph for this function:



5.18.2.2 EXT_DECL TRDP_ERR_T tlc_getListStatistics (TRDP_APP_SESSION_T appHandle, UINT16 * pNumList, TRDP_LIST_STATISTICS_T * pStatistics)

Return MD listener statistics.

Memory for statistics information must be provided by the user.

Parameters:

- ← *appHandle* the handle returned by tlc_openSession
- \leftrightarrow *pNumList* Pointer to the number of listeners
- \rightarrow pStatistics Pointer to a list with the listener statistics information

Return values:

TRDP_NO_ERR no error

TRDP_NOINIT_ERR handle invalid

TRDP_PARAM_ERR parameter error

TRDP_NODATA_ERR there are more subscriptions than requested

Here is the call graph for this function:



5.18.2.3 EXT_DECL TRDP_ERR_T tlc_getPubStatistics (TRDP_APP_SESSION_T appHandle, UINT16 * pNumPub, TRDP_PUB_STATISTICS_T * pStatistics)

Return PD publish statistics.

Memory for statistics information must be provided by the user.

Parameters:

- ← *appHandle* the handle returned by tlc_openSession
- \leftrightarrow *pNumPub* Pointer to the number of publishers
- \rightarrow *pStatistics* Pointer to a list with the publish statistics information

Return values:


TRDP_NO_ERR no error

TRDP NOINIT ERR handle invalid

TRDP_PARAM_ERR parameter error

TRDP_NODATA_ERR there are more subscriptions than requested

Here is the call graph for this function:



5.18.2.4 EXT_DECL TRDP_ERR_T tlc_getRedStatistics (TRDP_APP_SESSION_T appHandle, UINT16 * pNumRed, TRDP_RED_STATISTICS_T * pStatistics)

Return redundancy group statistics.

Memory for statistics information must be provided by the user.

Parameters:

- \leftarrow appHandle the handle returned by tlc_openSession
- \leftrightarrow *pNumRed* Pointer to the number of redundancy groups
- \rightarrow *pStatistics* Pointer to a list with the redundancy group information


Return values:

TRDP_NO_ERR no error

TRDP_NOINIT_ERR handle invalid

TRDP_PARAM_ERR parameter error

TRDP_NODATA_ERR there are more subscriptions than requested



5.18.2.5 EXT_DECL TRDP_ERR_T tlc_getStatistics (TRDP_APP_SESSION_T appHandle, TRDP_STATISTICS_T * pStatistics)

Return statistics.

Memory for statistics information must be provided by the user.


Parameters:

- ← *appHandle* the handle returned by tlc_openSession
- \rightarrow *pStatistics* Pointer to statistics for this application session

Return values:

TRDP_NO_ERR no error
TRDP_NOINIT_ERR handle invalid
TRDP_PARAM_ERR parameter error

Here is the call graph for this function:

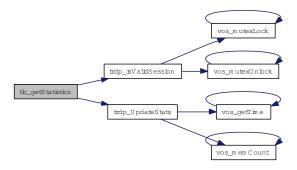

5.18.2.6 EXT_DECL TRDP_ERR_T tlc_getSubsStatistics (TRDP_APP_SESSION_T appHandle, UINT16 * pNumSubs, TRDP_SUBS_STATISTICS_T * pStatistics)

Return PD subscription statistics.

Memory for statistics information must be provided by the user.

Parameters:

- ← *appHandle* the handle returned by tlc_openSession
- \leftrightarrow pNumSubs In: The number of subscriptions requested Out: Number of subscriptions returned
- \leftrightarrow **pStatistics** Pointer to an array with the subscription statistics information

Return values:

TRDP_NO_ERR no error

TRDP_NOINIT_ERR handle invalid

TRDP_PARAM_ERR parameter error

TRDP_NODATA_ERR there are more subscriptions than requested

Here is the call graph for this function:



5.18.2.7 EXT_DECL TRDP_ERR_T tlc_resetStatistics (TRDP_APP_SESSION_T appHandle)

Reset statistics.


Parameters:

← *appHandle* the handle returned by tlc_openSession

Return values:

TRDP_NO_ERR no error
TRDP_NOINIT_ERR handle invalid
TRDP_PARAM_ERR parameter error

Here is the call graph for this function:



5.18.2.8 void trdp_initStats (TRDP_APP_SESSION_T appHandle)

Init statistics.

Clear the stats structure for a session.

Parameters:

← *appHandle* the handle returned by tlc_openSession




5.18.2.9 void trdp_pdPrepareStats (TRDP_APP_SESSION_T appHandle, PD_ELE_T * pPacket)

Fill the statistics packet.

Parameters:

- ← *appHandle* the handle returned by tlc_openSession
- \leftrightarrow *pPacket* pointer to the packet to fill

Here is the call graph for this function:




${\bf 5.18.2.10} \quad void \ trdp_UpdateStats \ (TRDP_APP_SESSION_T \ appHandle)$

Update the statistics.

Parameters:

← *appHandle* the handle returned by tlc_openSession




5.19 trdp_stats.h File Reference


Statistics for TRDP communication.

```
#include "trdp_if_light.h"
#include "trdp_private.h"
#include "vos_utils.h"
```

Include dependency graph for trdp_stats.h:

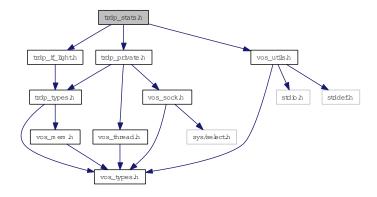

This graph shows which files directly or indirectly include this file:



Functions

- void trdp_initStats (TRDP_APP_SESSION_T appHandle)

 Init statistics.
- void trdp_pdPrepareStats (TRDP_APP_SESSION_T appHandle, PD_ELE_T *pPacket) Fill the statistics packet.

5.19.1 Detailed Description

Statistics for TRDP communication.

Note:

Project: TCNOpen TRDP prototype stack

Author:

Bernd Loehr, NewTec GmbH

Remarks:

All rights reserved. Reproduction, modification, use or disclosure to third parties without express authority is forbidden, Copyright Bombardier Transportation GmbH, Germany, 2012.

Id

trdp_stats.h 53 2012-10-17 17:40:43Z 97025

5.19.2 Function Documentation

5.19.2.1 void trdp_initStats (TRDP_APP_SESSION_T appHandle)

Init statistics.

Clear the stats structure for a session.

Parameters:

← *appHandle* the handle returned by tlc_openSession

Here is the call graph for this function:




5.19.2.2 void trdp_pdPrepareStats (TRDP_APP_SESSION_T appHandle, PD_ELE_T * pPacket)

Fill the statistics packet.

Parameters:

- ← *appHandle* the handle returned by tlc_openSession
- \leftrightarrow *pPacket* pointer to the packet to fill

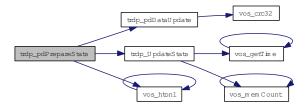


5.20 trdp_types.h File Reference


Typedefs for TRDP communication.

```
#include "vos_types.h"
#include "vos_mem.h"
```

Include dependency graph for trdp_types.h:



This graph shows which files directly or indirectly include this file:



Data Structures

• struct TRDP_PD_INFO_T

Process data info from received telegram; allows the application to generate responses.

• struct TRDP_MD_INFO_T

Message data info from received telegram; allows the application to generate responses.

• struct TRDP_SEND_PARAM_T

Quality/type of service and time to live.

• struct TRDP_DATASET_ELEMENT_T

Dataset element definition.

• struct TRDP_DATASET_T

Dataset definition.

• struct TRDP_MEM_STATISTICS_T

TRDP statistics type definitions.

• struct TRDP_PD_STATISTICS_T

 ${\it Structure\ containing\ all\ general\ PD\ statistics\ information}.$

• struct TRDP_MD_STATISTICS_T

Structure containing all general MD statistics information.

• struct TRDP_STATISTICS_T

Structure containing all general memory, PD and MD statistics information.

• struct TRDP_SUBS_STATISTICS_T

Table containing particular PD subscription information.

• struct TRDP_PUB_STATISTICS_T

Table containing particular PD publishing information.

• struct TRDP_LIST_STATISTICS_T

Information about a particular MD listener.

• struct TRDP_RED_STATISTICS_T

A table containing PD redundant group information.

• struct TRDP_MARSHALL_CONFIG_T

Marshaling/unmarshalling configuration.

• struct TRDP_PD_CONFIG_T

Default PD configuration.

• struct TRDP_MD_CONFIG_T

Default MD configuration.

• struct TRDP_MEM_CONFIG_T

Structure describing memory (and its pre-fragmentation).

Defines

#define TRDP_MAX_LABEL_LEN 16
 Maximum values.

• #define TRDP_MAX_URI_USER_LEN (2 * TRDP_MAX_LABEL_LEN)

URI user part incl.#define TRDP_MAX_URI_HOST_LEN (4 * TRDP_MAX_LABEL_LEN)

URI host part length incl.

• #define TRDP_MAX_URI_LEN ((6 * TRDP_MAX_LABEL_LEN) + 8)

URI length incl.

• #define TRDP_MAX_FILE_NAME_LEN 128 path and file name length incl.

• #define TDRP_VAR_SIZE 0

Variable size dataset.

• #define USE_HEAP 0

If this is set, we can allocate dynamically memory.

Typedefs

 typedef UINT32 TRDP_IP_ADDR_T TRDP general type definitions.

• typedef VOS_TIME_T TRDP_TIME_T

Timer value compatible with timeval / select.

• typedef struct fd_set TRDP_FDS_T

 $File\ descriptor\ set\ compatible\ with\ fd_set\ /\ select.$

• typedef VOS_UUID_T TRDP_UUID_T

UUID definition reuses the VOS definition.

• typedef VOS_PRINT_DBG_T TRDP_PRINT_DBG_T

TRDP configuration type definitions.

• typedef VOS_LOG_T TRDP_LOG_T

Categories for logging, reuse of the VOS definition.

• typedef TRDP_ERR_T(* TRDP_MARSHALL_T)(void *pRefCon, UINT32 comId, const UINT8 *pSrc, UINT8 *pDst, UINT32 *pDstSize)

Function type for marshalling.

• typedef TRDP_ERR_T(* TRDP_UNMARSHALL_T)(void *pRefCon, UINT32 comId, const UINT8 *pSrc, UINT8 *pDst, UINT32 *pDstSize)

Function type for unmarshalling.

• typedef void(* TRDP_PD_CALLBACK_T)(void *pRefCon, const TRDP_PD_INFO_T *pMsg, UINT8 *pData, UINT32 dataSize)

Callback for receiving indications, timeouts, releases, responses.

• typedef void(* TRDP_MD_CALLBACK_T)(void *pRefCon, const TRDP_MD_INFO_T *pMsg, UINT8 *pData, UINT32 dataSize)

Callback for receiving indications, timeouts, releases, responses.

typedef VOS_MEM_BLK_T TRDP_MEM_BLK_T

Enumeration type for memory pre-fragmentation, reuse of VOS definition.

Enumerations

```
• enum TRDP_ERR_T {
 TRDP_NO_ERR = 0,
 TRDP\_PARAM\_ERR = -1,
 TRDP_INIT_ERR = -2,
 TRDP_NOINIT_ERR = -3,
 TRDP\_TIMEOUT\_ERR = -4,
 TRDP_NODATA_ERR = -5,
 TRDP\_SOCK\_ERR = -6,
 TRDP IO ERR = -7,
 TRDP\_MEM\_ERR = -8,
 TRDP\_SEMA\_ERR = -9,
 TRDP_QUEUE_ERR = -10,
 TRDP_QUEUE_FULL_ERR = -11,
 TRDP\_MUTEX\_ERR = -12,
 TRDP_NOSESSION_ERR = -13,
 TRDP_SESSION_ABORT_ERR = -14,
 TRDP_NOSUB_ERR = -15,
 TRDP_NOPUB_ERR = -16,
 TRDP_NOLIST_ERR = -17,
 TRDP\_CRC\_ERR = -18,
 TRDP\_TOPO\_ERR = -20,
 TRDP\_COMID\_ERR = -21,
 TRDP\_STATE\_ERR = -22,
 TRDP_UNKNOWN_ERR = -99 }
    Return codes for all API functions.
enum TRDP_MSG_T {
 TRDP\_MSG\_PD = 0x5064,
 TRDP\_MSG\_PR = 0x5072,
 TRDP\_MSG\_PE = 0x5065,
 TRDP_MSG_MN = 0x4D6E,
 TRDP_MSG_MR = 0x4D72,
 TRDP\_MSG\_MP = 0x4D70,
 TRDP_MSG_MQ = 0x4D71,
 TRDP_MSG_MC = 0x4D63,
 TRDP\_MSG\_ME = 0x4D65 
    TRDP data transfer type definitions.
• enum TRDP_REPLY_STATUS_T
```

Reply status messages.

```
• enum TRDP_FLAGS_T { ,
 TRDP_FLAGS_REDUNDANT = 0x1,
 TRDP_FLAGS_MARSHALL = 0x2,
 TRDP_FLAGS_CALLBACK = 0x4,
 TRDP_FLAGS_TCP = 0x8 }
    Various flags for PD and MD packets.
• enum TRDP_RED_STATE_T {
 TRDP_RED_FOLLOWER = 0,
 TRDP_RED_LEADER = 1 }
    Redundancy states.
enum TRDP_TO_BEHAVIOR_T {
 TRDP\_TO\_SET\_TO\_ZERO = 1,
 TRDP_TO_KEEP_LAST_VALUE = 2 }
    How invalid PD shall be handled.
• enum TRDP_DATA_TYPE_T {
 TRDP_BOOLEAN = 1,
 TRDP\_CHAR8 = 2,
 TRDP_UTF16 = 3,
 TRDP_INT8 = 4,
 TRDP_INT16 = 5,
 TRDP_INT32 = 6,
 TRDP INT64 = 7,
 TRDP_UINT8 = 8,
 TRDP UINT16 = 9,
 TRDP_UINT32 = 10,
 TRDP_UINT64 = 11,
 TRDP_REAL32 = 12,
 TRDP_REAL64 = 13,
 TRDP\_STRING = 14,
 TRDP\_TIMEDATE32 = 15,
 TRDP\_TIMEDATE48 = 16,
 TRDP_TIMEDATE64 = 17 }
    TRDP dataset description definitions.
• enum TRDP_OPTION_T { ,
 TRDP_OPTION_BLOCK = 0x01,
 TRDP_OPTION_TRAFFIC_SHAPING = 0x02 }
```

Various flags/general TRDP options for library initialization.

5.20.1 Detailed Description

Typedefs for TRDP communication.

Note:

Project: TCNOpen TRDP prototype stack

Author:

Bernd Loehr, NewTec GmbH

Remarks:

All rights reserved. Reproduction, modification, use or disclosure to third parties without express authority is forbidden, Copyright Bombardier Transportation GmbH, Germany, 2012.

Id

trdp_types.h 53 2012-10-17 17:40:43Z 97025

5.20.2 Define Documentation

5.20.2.1 #define TRDP_MAX_FILE_NAME_LEN 128

path and file name length incl.

terminating '0'

5.20.2.2 #define TRDP_MAX_LABEL_LEN 16

Maximum values.

A uri is a string of the following form: trdp://[user part]@[host part] trdp://instLabel.funcLabel@devLabel.carLabel.cstLabel.trainLabel Hence the exact max. uri length is: 7 + (6 * 15) + 5 * (sizeof (separator)) + 1(terminating 0) to facilitate alignment the size will be increased by 1 byte label length incl. terminating '0'

5.20.2.3 #define TRDP_MAX_URI_HOST_LEN (4 * TRDP_MAX_LABEL_LEN)

URI host part length incl.

terminating '0'

5.20.2.4 #define TRDP_MAX_URI_LEN ((6 * TRDP_MAX_LABEL_LEN) + 8)

URI length incl.

terminating '0' and 1 padding byte

$\textbf{5.20.2.5} \quad \text{\#define TRDP_MAX_URI_USER_LEN} \ (2*\text{TRDP_MAX_LABEL_LEN})$

URI user part incl.

terminating '0'

5.20.3 Typedef Documentation

5.20.3.1 typedef UINT32 TRDP_IP_ADDR_T

TRDP general type definitions.

5.20.3.2 typedef TRDP_ERR_T(* TRDP_MARSHALL_T)(void *pRefCon, UINT32 comId, const UINT8 *pSrc, UINT8 *pDst, UINT32 *pDstSize)

Function type for marshalling.

The function must know about the dataset's alignment etc.

Parameters:

- $\leftarrow *pRefCon$ pointer to user context
- \leftarrow *comId* ComId to identify the structure out of a configuration
- ← *pSrc pointer to received original message
- $\leftarrow *pDst$ pointer to a buffer for the treated message
- $\leftrightarrow *pDstSize$ size of the provide buffer / size of the treated message

Return values:

```
TRDP_NO_ERR no error
TRDP_MEM_ERR provided buffer to small
TRDP_COMID_ERR comid not existing
```

5.20.3.3 typedef void(* TRDP_MD_CALLBACK_T)(void *pRefCon, const TRDP_MD_INFO_T *pMsg, UINT8 *pData, UINT32 dataSize)

Callback for receiving indications, timeouts, releases, responses.

Parameters:

- $\leftarrow *pRefCon$ pointer to user context
- ← *pMsg pointer to received message information
- ← *pData pointer to received data
- ← dataSize size of received data pointer to received data excl. padding and FCS !!!!

5.20.3.4 typedef void(* TRDP_PD_CALLBACK_T)(void *pRefCon, const TRDP_PD_INFO_T *pMsg, UINT8 *pData, UINT32 dataSize)

Callback for receiving indications, timeouts, releases, responses.

Parameters:

- $\leftarrow *pRefCon$ pointer to user context
- ← *pMsg pointer to received message information
- $\leftarrow *pData$ pointer to received data
- ← *dataSize* size of received data pointer to received data excl. padding and FCS !!!!

5.20.3.5 typedef VOS_PRINT_DBG_T TRDP_PRINT_DBG_T

TRDP configuration type definitions.

Callback function definition for error/debug output, reuse of the VOS defined function.

5.20.3.6 typedef VOS_TIME_T TRDP_TIME_T

Timer value compatible with timeval / select.

Relative or absolute date, depending on usage

5.20.3.7 typedef TRDP_ERR_T(* TRDP_UNMARSHALL_T)(void *pRefCon, UINT32 comId, const UINT8 *pSrc, UINT8 *pDst, UINT32 *pDstSize)

Function type for unmarshalling.

The function must know about the dataset's alignment etc.

Parameters:

- $\leftarrow *pRefCon$ pointer to user context
- \leftarrow *comId* ComId to identify the structure out of a configuration
- ← *pSrc pointer to received original message
- $\leftarrow *pDst$ pointer to a buffer for the treated message
- $\leftrightarrow *pDstSize$ size of the provide buffer / size of the treated message

Return values:

TRDP_NO_ERR no error
TRDP_MEM_ERR provide buffer to small
TRDP_COMID_ERR comid not existing

5.20.4 Enumeration Type Documentation

5.20.4.1 enum TRDP_DATA_TYPE_T

TRDP dataset description definitions.

Dataset element definition

Enumerator:

```
    TRDP_BOOLEAN = UINT8, 1 bit relevant (equal to zero = false, not equal to zero = true)
    TRDP_CHAR8 char, can be used also as UTF8
    TRDP_UTF16 Unicode UTF-16 character.
    TRDP_INT8 Signed integer, 8 bit.
    TRDP_INT16 Signed integer, 16 bit.
```

TRDP_INT32 Signed integer, 32 bit.

TRDP_INT64 Signed integer, 64 bit.

TRDP_UINT8 Unsigned integer, 8 bit.

TRDP_UINT16 Unsigned integer, 16 bit.

TRDP_UINT32 Unsigned integer, 32 bit.

TRDP_UINT64 Unsigned integer, 64 bit.

TRDP REAL32 Floating point real, 32 bit.

TRDP_REAL64 Floating point real, 64 bit.

TRDP_STRING Zero-terminated array of CHAR8, fixed size.

TRDP TIMEDATE32 32 bit UNIX time

TRDP TIMEDATE48 48 bit TCN time (32 bit UNIX time and 16 bit ticks)

TRDP_TIMEDATE64 32 bit UNIX time + 32 bit microseconds (== struct timeval)

5.20.4.2 enum TRDP_ERR_T

Return codes for all API functions.

Enumerator:

TRDP_NO_ERR No error.

TRDP_PARAM_ERR Parameter missing or out of range.

TRDP_INIT_ERR Call without valid initialization.

TRDP_NOINIT_ERR Call with invalid handle.

TRDP_TIMEOUT_ERR Timout.

TRDP_NODATA_ERR Non blocking mode: no data received.

TRDP_SOCK_ERR Socket error / option not supported.

TRDP_IO_ERR Socket IO error, data can't be received/sent.

TRDP_MEM_ERR No more memory available.

TRDP_SEMA_ERR Semaphore not available.

TRDP_QUEUE_ERR Queue empty.

TRDP_QUEUE_FULL_ERR Queue full.

TRDP_MUTEX_ERR Mutex not available.

TRDP NOSESSION ERR No such session.

TRDP_SESSION_ABORT_ERR Session aborted.

TRDP_NOSUB_ERR No subscriber.

TRDP_NOPUB_ERR No publisher.

TRDP_NOLIST_ERR No listener.

TRDP_CRC_ERR Wrong CRC.

TRDP_TOPO_ERR Invalid topo count.

TRDP_COMID_ERR Unknown ComId.

TRDP_STATE_ERR Call in wrong state.

TRDP_UNKNOWN_ERR Unspecified error.

5.20.4.3 enum TRDP_FLAGS_T

Various flags for PD and MD packets.

Enumerator:

```
TRDP_FLAGS_REDUNDANT Redundant.
TRDP_FLAGS_MARSHALL Optional marshalling/unmarshalling in TRDP stack.
TRDP_FLAGS_CALLBACK Use of callback function.
TRDP_FLAGS_TCP Use TCP for message data.
```

5.20.4.4 enum TRDP_MSG_T

TRDP data transfer type definitions.

Message Types

Enumerator:

```
TRDP_MSG_PD 'Pd' PD Data (Reply)
TRDP_MSG_PR 'Pr' PD Request
TRDP_MSG_PE 'Pe' PD Error
TRDP_MSG_MN 'Mn' MD Notification (Request without reply)
TRDP_MSG_MR 'Mr' MD Request with reply
TRDP_MSG_MP 'Mp' MD Reply without confirmation
TRDP_MSG_MQ 'Mq' MD Reply with confirmation
TRDP_MSG_MC 'Mc' MD Confirm
TRDP_MSG_ME 'Me' MD Error
```

5.20.4.5 enum TRDP_OPTION_T

Various flags/general TRDP options for library initialization.

Enumerator:

```
TRDP_OPTION_BLOCK Default: Use nonblocking I/O calls, polling necessary Set: Read calls will block, use select().
```

TRDP_OPTION_TRAFFIC_SHAPING Use traffic shaping - distribute packet sending.

5.20.4.6 enum TRDP_RED_STATE_T

Redundancy states.

Enumerator:

```
TRDP_RED_FOLLOWER Redundancy follower - redundant PD will be not sent out. TRDP_RED_LEADER Redundancy leader - redundant PD will be sent out.
```

5.20.4.7 enum TRDP_TO_BEHAVIOR_T

How invalid PD shall be handled.

Enumerator:


TRDP_TO_SET_TO_ZERO If set, data will be reset to zero on time out.TRDP_TO_KEEP_LAST_VALUE If not set, last received values will be returned.

5.21 trdp_utils.c File Reference

Helper functions for TRDP communication.

```
#include "trdp_utils.h"
#include "trdp_if.h"
```

Include dependency graph for trdp_utils.c:

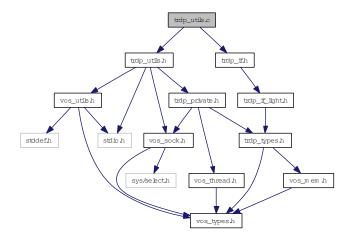

Functions

- int am_big_endian ()

 Determine if we are Big or Little endian.
- UINT32 trdp_packetSizePD (UINT32 dataSize)

 Get the packet size from the raw data size.
- PD_ELE_T * trdp_queueFindComId (PD_ELE_T *pHead, UINT32 comId)

 Return the element with same comId.
- PD_ELE_T * trdp_queueFindAddr (PD_ELE_T *pHead, TRDP_ADDRESSES *addr)

 Return the element with same comId and IP addresses.
- void trdp_queueDelElement (PD_ELE_T **ppHead, PD_ELE_T *pDelete)

 Delete an element.
- void trdp_queueAppLast (PD_ELE_T **ppHead, PD_ELE_T *pNew)

 Append an element at end of queue.
- void trdp_queueInsFirst (PD_ELE_T **ppHead, PD_ELE_T *pNew)

 *Insert an element at front of queue.
- void trdp_initSockets (TRDP_SOCKETS_T iface[])

 Handle the socket pool: Initialize it.

• TRDP_ERR_T trdp_requestSocket (TRDP_SOCKETS_T iface[], const TRDP_SEND_PARAM_T *params, TRDP_IP_ADDR_T srcIP, TRDP_SOCK_TYPE_T usage, TRDP_OPTION_T options, INT32 *pIndex)

Handle the socket pool: Request a socket from our socket pool.

• TRDP_ERR_T trdp_releaseSocket (TRDP_SOCKETS_T iface[], INT32 index)

Handle the socket pool: Release a socket from our socket pool.

UINT32 trdp_getSeqCnt (UINT32 comId, TRDP_MSG_T msgType, TRDP_IP_ADDR_T srcI-pAddr)

Get the initial sequence counter for the comID/message type and subnet (source IP).

BOOL trdp_isRcvSeqCnt (UINT32 seqCnt, UINT32 comId, TRDP_MSG_T msgType, TRDP_IP_ADDR_T srcIP)

Check if the sequence counter for the comID/message type and subnet (source IP) has already been received.

5.21.1 Detailed Description

Helper functions for TRDP communication.

Note:

Project: TCNOpen TRDP prototype stack

Author:

Bernd Loehr, NewTec GmbH

Remarks:

All rights reserved. Reproduction, modification, use or disclosure to third parties without express authority is forbidden, Copyright Bombardier Transportation GmbH, Germany, 2012.

Id

trdp_utils.c 53 2012-10-17 17:40:43Z 97025

5.21.2 Function Documentation

5.21.2.1 int am_big_endian ()

Determine if we are Big or Little endian.

Return values:

!= 0 we are big endian

0 we are little endian

5.21.2.2 UINT32 trdp_getSeqCnt (UINT32 comId, TRDP_MSG_T msgType, TRDP_IP_ADDR_T srcIpAddr)

Get the initial sequence counter for the comID/message type and subnet (source IP).

If the comID/srcIP is not found elsewhere, return 0 - else return its current sequence number (the redundant packet needs the same seqNo)

Note: The standard demands that sequenceCounter is managed per comID/msgType at each publisher, but shall be the same for redundant telegrams (subnet/srcIP).


Parameters:

- $\leftarrow comId$ comID to look for
- ← *msgType* PD/MD type
- \leftarrow *srcIpAddr* Source IP address

Return values:

return the sequence number

Here is the call graph for this function:



5.21.2.3 void trdp_initSockets (TRDP_SOCKETS_T iface[])

Handle the socket pool: Initialize it.

Parameters:

 \leftarrow *iface* pointer to the socket pool

5.21.2.4 BOOL trdp_isRcvSeqCnt (UINT32 seqCnt, UINT32 comId, TRDP_MSG_T msgType, TRDP_IP_ADDR_T srcIP)

Check if the sequence counter for the comID/message type and subnet (source IP) has already been received.

Note: The standard demands that sequenceCounter is managed per comID/msgType at each publisher, but shall be the same for redundant telegrams (subnet/srcIP).

Parameters:

- \leftarrow *seqCnt* sequence counter received
- $\leftarrow comId$ comID to look for
- ← *msgType* PD/MD type
- \leftarrow *srcIP* Source IP address

Return values:

return the sequence number

Here is the call graph for this function:



5.21.2.5 UINT32 trdp_packetSizePD (UINT32 dataSize)

Get the packet size from the raw data size.

Parameters:

← *dataSize* net data size (without padding or FCS)

Return values:

packet size the size of the complete packet to be sent or received

5.21.2.6 void trdp_queueAppLast (PD_ELE_T ** ppHead, PD_ELE_T * pNew)

Append an element at end of queue.

Parameters:

- \leftarrow *ppHead* pointer to pointer to head of queue
- $\leftarrow pNew$ pointer to element to append

5.21.2.7 void trdp_queueDelElement (PD_ELE_T ** ppHead, PD_ELE_T * pDelete)

Delete an element.

Parameters:

- ← *ppHead* pointer to pointer to head of queue
- \leftarrow *pDelete* pointer to element to delete

5.21.2.8 PD_ELE_T* trdp_queueFindAddr (PD_ELE_T * pHead, TRDP_ADDRESSES * addr)

Return the element with same comId and IP addresses.

Parameters:

- \leftarrow *pHead* pointer to head of queue
- ← addr Pub/Sub handle (Address, ComID, srcIP & dest IP) to search for

Return values:

!= NULL pointer to PD element

NULL No PD element found

5.21.2.9 PD_ELE_T* trdp_queueFindComId (PD_ELE_T* pHead, UINT32 comId)

Return the element with same comId.

Parameters:

- \leftarrow *pHead* pointer to head of queue
- \leftarrow *comId* ComID to search for

Return values:

!= NULL pointer to PD element

NULL No PD element found

5.21.2.10 void trdp_queueInsFirst (PD_ELE_T ** ppHead, PD_ELE_T * pNew)

Insert an element at front of queue.

Parameters:

- \leftarrow *ppHead* pointer to pointer to head of queue
- \leftarrow *pNew* pointer to element to insert

5.21.2.11 TRDP_ERR_T trdp_releaseSocket (TRDP_SOCKETS_T iface[], INT32 index)

Handle the socket pool: Release a socket from our socket pool.

Parameters:


- \leftrightarrow *iface* socket pool
- \leftarrow *index* index of socket to release

Return values:

TRDP_NO_ERR

TRDP_PARAM_ERR

Here is the call graph for this function:



5.21.2.12 TRDP_ERR_T trdp_requestSocket (TRDP_SOCKETS_T *iface*[], const TRDP_SEND_PARAM_T * *params*, TRDP_IP_ADDR_T *srcIP*, TRDP_SOCK_TYPE_T *usage*, TRDP_OPTION_T *options*, INT32 * *pIndex*)


Handle the socket pool: Request a socket from our socket pool.

Parameters:

- \leftrightarrow *iface* socket pool
- \leftarrow *params* parameters to use
- \leftarrow *srcIP* IP to bind to (0 = any address)
- \leftarrow *usage* type and port to bind to
- \leftarrow options blocking/nonblocking
- \rightarrow *pIndex* returned index of socket pool

Return values:

TRDP_NO_ERR
TRDP_PARAM_ERR

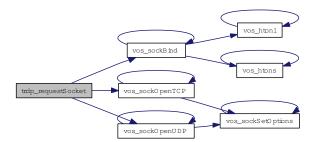


5.22 trdp_utils.h File Reference


Common utilities for TRDP communication.

```
#include <stdio.h>
#include "trdp_private.h"
#include "vos_utils.h"
#include "vos sock.h"
```

Include dependency graph for trdp_utils.h:



This graph shows which files directly or indirectly include this file:



Functions

- int am_big_endian ()

 Determine if we are Big or Little endian.
- PD_ELE_T * trdp_queueFindComId (PD_ELE_T *pHead, UINT32 comId)

 Return the element with same comId.
- PD_ELE_T * trdp_queueFindAddr (PD_ELE_T *pHead, TRDP_ADDRESSES *pAddr)

 Return the element with same comId and IP addresses.
- void trdp_queueDelElement (PD_ELE_T **pHead, PD_ELE_T *pDelete)

 Delete an element.
- void trdp_queueAppLast (PD_ELE_T **pHead, PD_ELE_T *pNew)

 Append an element at end of queue.
- void trdp_queueInsFirst (PD_ELE_T **pHead, PD_ELE_T *pNew)

Insert an element at front of queue.

void trdp_initSockets (TRDP_SOCKETS_T iface[])

Handle the socket pool: Initialize it.

• TRDP_ERR_T trdp_requestSocket (TRDP_SOCKETS_T iface[], const TRDP_SEND_PARAM_T *params, TRDP_IP_ADDR_T srcIP, TRDP_SOCK_TYPE_T usage, TRDP_OPTION_T options, INT32 *pIndex)

Handle the socket pool: Request a socket from our socket pool.

 $\bullet \ TRDP_ERR_T \ trdp_releaseSocket \ (TRDP_SOCKETS_T \ if ace[\], \ INT32 \ index)$

Handle the socket pool: Release a socket from our socket pool.UINT32 trdp_packetSizePD (UINT32 dataSize)

Get the packet size from the raw data size.

• UINT32 trdp_getSeqCnt (UINT32 comID, TRDP_MSG_T msgType, TRDP_IP_ADDR_T srcIP) Get the initial sequence counter for the comID/message type and subnet (source IP).

BOOL trdp_isRcvSeqCnt (UINT32 seqCnt, UINT32 comId, TRDP_MSG_T msgType, TRDP_IP_ADDR_T srcIP)

Check if the sequence counter for the comID/message type and subnet (source IP) has already been received.

5.22.1 Detailed Description

Common utilities for TRDP communication.

Note:

Project: TCNOpen TRDP prototype stack

Author:

Bernd Loehr, NewTec GmbH

Remarks:

All rights reserved. Reproduction, modification, use or disclosure to third parties without express authority is forbidden, Copyright Bombardier Transportation GmbH, Germany, 2012.

Id

trdp_utils.h 44 2012-10-10 16:34:21Z 97025

5.22.2 Function Documentation

5.22.2.1 int am_big_endian()

Determine if we are Big or Little endian.

Return values:

!= 0 we are big endian

0 we are little endian

5.22.2.2 UINT32 trdp_getSeqCnt (UINT32 comId, TRDP_MSG_T msgType, TRDP_IP_ADDR_T srcIpAddr)

Get the initial sequence counter for the comID/message type and subnet (source IP).

If the comID/srcIP is not found elsewhere, return 0 - else return its current sequence number (the redundant packet needs the same seqNo)

Note: The standard demands that sequenceCounter is managed per comID/msgType at each publisher, but shall be the same for redundant telegrams (subnet/srcIP).

Parameters:

- $\leftarrow comId$ comID to look for
- ← *msgType* PD/MD type
- \leftarrow *srcIpAddr* Source IP address

Return values:

return the sequence number

Here is the call graph for this function:



5.22.2.3 void trdp_initSockets (TRDP_SOCKETS_T iface[])

Handle the socket pool: Initialize it.

Parameters:

 \leftarrow *iface* pointer to the socket pool

5.22.2.4 BOOL trdp_isRcvSeqCnt (UINT32 seqCnt, UINT32 comId, TRDP_MSG_T msgType, TRDP_IP_ADDR_T srcIP)

Check if the sequence counter for the comID/message type and subnet (source IP) has already been received.

Note: The standard demands that sequenceCounter is managed per comID/msgType at each publisher, but shall be the same for redundant telegrams (subnet/srcIP).

Parameters:

- \leftarrow *seqCnt* sequence counter received
- $\leftarrow comId$ comID to look for
- ← *msgType* PD/MD type
- \leftarrow *srcIP* Source IP address

Return values:

return the sequence number

Here is the call graph for this function:



5.22.2.5 UINT32 trdp_packetSizePD (UINT32 dataSize)

Get the packet size from the raw data size.

Parameters:

← *dataSize* net data size (without padding or FCS)

Return values:

packet size the size of the complete packet to be sent or received

5.22.2.6 void trdp_queueAppLast (PD_ELE_T ** ppHead, PD_ELE_T * pNew)

Append an element at end of queue.

Parameters:

- \leftarrow *ppHead* pointer to pointer to head of queue
- $\leftarrow pNew$ pointer to element to append

5.22.2.7 void trdp_queueDelElement (PD_ELE_T ** ppHead, PD_ELE_T * pDelete)

Delete an element.

Parameters:

- ← *ppHead* pointer to pointer to head of queue
- \leftarrow *pDelete* pointer to element to delete

5.22.2.8 PD_ELE_T* trdp_queueFindAddr (PD_ELE_T * pHead, TRDP_ADDRESSES * addr)

Return the element with same comId and IP addresses.

Parameters:

- \leftarrow *pHead* pointer to head of queue
- ← addr Pub/Sub handle (Address, ComID, srcIP & dest IP) to search for

Return values:

!= NULL pointer to PD element

NULL No PD element found

5.22.2.9 PD_ELE_T* trdp_queueFindComId (PD_ELE_T* pHead, UINT32 comId)

Return the element with same comId.

Parameters:

- \leftarrow *pHead* pointer to head of queue
- \leftarrow *comId* ComID to search for

Return values:

!= NULL pointer to PD element

NULL No PD element found

5.22.2.10 void trdp_queueInsFirst (PD_ELE_T ** ppHead, PD_ELE_T * pNew)

Insert an element at front of queue.

Parameters:

- \leftarrow *ppHead* pointer to pointer to head of queue
- \leftarrow *pNew* pointer to element to insert

5.22.2.11 TRDP_ERR_T trdp_releaseSocket (TRDP_SOCKETS_T iface[], INT32 index)

Handle the socket pool: Release a socket from our socket pool.

Parameters:

- \leftrightarrow *iface* socket pool
- \leftarrow *index* index of socket to release

Return values:

TRDP_NO_ERR

TRDP_PARAM_ERR

Here is the call graph for this function:



5.22.2.12 TRDP_ERR_T trdp_requestSocket (TRDP_SOCKETS_T iface[], const TRDP_SEND_PARAM_T * params, TRDP_IP_ADDR_T srcIP, TRDP_SOCK_TYPE_T usage, TRDP_OPTION_T options, INT32 * pIndex)


Handle the socket pool: Request a socket from our socket pool.

Parameters:

- \leftrightarrow *iface* socket pool
- \leftarrow *params* parameters to use
- \leftarrow *srcIP* IP to bind to (0 = any address)
- \leftarrow *usage* type and port to bind to
- \leftarrow options blocking/nonblocking
- \rightarrow *pIndex* returned index of socket pool

Return values:

TRDP_NO_ERR
TRDP_PARAM_ERR

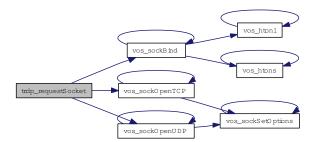

5.23 vos_mem.h File Reference


Memory and queue functions for OS abstraction.

```
#include "vos_types.h"
```

Include dependency graph for vos_mem.h:



This graph shows which files directly or indirectly include this file:

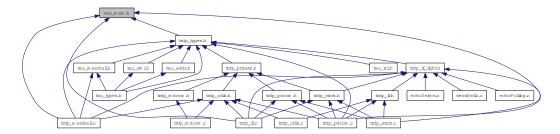

Defines

- #define VOS_MEM_BLOCKSIZES
 We internally allocate memory always by these block sizes.
- #define VOS_MEM_PREALLOCATE {0, 0, 0, 0, 0, 0, 0, 0, 0, 1, 1, 1, 4, 0, 0} Default pre-allocation of free memory blocks.

Typedefs

• typedef struct VOS_QUEUE_T * VOS_QUEUE_T Opaque queue define.

Enumerations

• enum VOS_MEM_BLK_T

enumeration for memory block sizes

Functions

• EXT_DECL VOS_ERR_T vos_memInit (UINT8 *pMemoryArea, UINT32 size, const UINT32 fragMem[VOS_MEM_NBLOCKSIZES])

Initialize the memory unit.

• EXT_DECL VOS_ERR_T vos_memDelete (UINT8 *pMemoryArea)

Delete the memory area.

• EXT_DECL UINT8 * vos_memAlloc (UINT32 size)

Allocate a block of memory (from memory area above).

• EXT_DECL VOS_ERR_T vos_memFree (void *pMemBlock)

Deallocate a block of memory (from memory area above).

EXT_DECL VOS_ERR_T vos_memCount (UINT32 *pAllocatedMemory, UINT32 *pFreeMemory, UINT32 *pMinFree, UINT32 *pNumAllocBlocks, UINT32 *pNumAllocErr, UINT32 *pNumFreeErr, UINT32 allocBlockSize[VOS_MEM_NBLOCKSIZES], UINT32 usedBlockSize[VOS_MEM_NBLOCKSIZES])

Return used and available memory (of memory area above).

• EXT_DECL VOS_ERR_T vos_queueCreate (const CHAR8 *pKey, VOS_QUEUE_T *pQueueId, UINT32 maxNoMsg, UINT32 maxLength)

Initialize a message queue.

• EXT_DECL VOS_ERR_T vos_queueDestroy (VOS_QUEUE_T queueID)

Destroy a message queue.

• EXT_DECL VOS_ERR_T vos_queueSend (VOS_QUEUE_T queueID, const UINT8 *pMsg, UINT32 size)

Send a message.

• EXT_DECL VOS_ERR_T vos_queueReceive (VOS_QUEUE_T queueID, UINT8 *pMsg, UINT32 *pSize, UINT32 usTimeout)

Get a message.

• EXT_DECL VOS_ERR_T vos_sharedOpen (const CHAR8 *pKey, VOS_SHRD_T *pHandle, UINT8 **ppMemoryArea, UINT32 *pSize)

Create a shared memory area or attach to existing one.

• EXT_DECL VOS_ERR_T vos_sharedClose (VOS_SHRD_T handle, const UINT8 *pMemoryArea)

Close connection to the shared memory area.

• EXT_DECL void vos_qsort (void *pBuf, UINT32 num, UINT32 size, int(*compare)(const void *, const void *))

Sort an array.

• EXT_DECL void * vos_bsearch (const void *pKey, const void *pBuf, UINT32 num, UINT32 size, int(*compare)(const void *, const void *))

Binary search in a sorted array.

5.23.1 Detailed Description

Memory and queue functions for OS abstraction.

This module provides three services: 1. A memory control supervison

- Private memory management with optimised fragmentation handling
- A message queue handler (system-wide on supported systems)
- Access to shared memory (on supported systems only) Within the prototype TRDP stack, only the memory management unit is currently in use.

Note:

Project: TCNOpen TRDP prototype stack

Author:

Bernd Loehr, NewTec GmbH Peter Brander (Memory scheme)

Remarks:

All rights reserved. Reproduction, modification, use or disclosure to third parties without express authority is forbidden, Copyright Bombardier Transportation GmbH, Germany, 2012.

Id

vos mem.h 53 2012-10-17 17:40:43Z 97025

5.23.2 Define Documentation

5.23.2.1 #define VOS_MEM_BLOCKSIZES

Value:

```
{32, 64, 128, 256, 512, 1024, 2048, 4096, 8192, \ 16384, 32768, 65536, 131072, 262144, 524288}
```

We internally allocate memory always by these block sizes.

The largest available block is 524288 Bytes, provided the overal size of the used memory allocation area is larger.

5.23.2.2 #define VOS_MEM_PREALLOCATE {0, 0, 0, 0, 0, 0, 0, 0, 0, 1, 1, 1, 4, 0, 0}

Default pre-allocation of free memory blocks.

To avoid problems with too many small blocks and no large one. Specify how many of each block size that should be pre-allocated (and freed!) to pre-segment the memory area.

5.23.3 Function Documentation

5.23.3.1 EXT_DECL void* vos_bsearch (const void * pKey, const void * pBuf, UINT32 num, UINT32 size, int(*)(const void *, const void *) compare)

Binary search in a sorted array.

This is just a wrapper for the standard qsort function.

Parameters:

- \leftarrow *pKey* Key to search for
- $\leftarrow pBuf$ Pointer to the array to sort
- \leftarrow *num* number of elements
- \leftarrow *size* size of one element
- ← *compare* Pointer to compare function

Return values:

This is just a wrapper for the standard bsearch function.

Parameters:

- \leftarrow *pKey* Key to search for
- $\leftarrow pBuf$ Pointer to the array to sort
- \leftarrow *num* number of elements
- \leftarrow *size* size of one element
- \leftarrow compare Pointer to compare function return -n if arg1 < arg2, return 0 if arg1 == arg2, return +n if arg1 > arg2 where n is an integer != 0

Return values:

Pointer to found element or NULL

This is just a wrapper for the standard qsort function.

Parameters:

- \leftarrow *pKey* Key to search for
- $\leftarrow pBuf$ Pointer to the array to sort
- \leftarrow *num* number of elements
- \leftarrow *size* size of one element
- \leftarrow compare Pointer to compare function return -n if arg1 < arg2, return 0 if arg1 == arg2, return +n if arg1 > arg2 where n is an integer != 0

Return values:

Pointer to found element or NULL



5.23.3.2 EXT_DECL UINT8* vos_memAlloc (UINT32 size)

Allocate a block of memory (from memory area above).

Parameters:

 \leftarrow size Size of requested block

Return values:

Pointer to memory area **NULL** if no memory available


Parameters:

← size Size of requested block

Return values:

Pointer to memory area **NULL** if no memory available

Here is the call graph for this function:



5.23.3.3 EXT_DECL VOS_ERR_T vos_memCount (UINT32 * pAllocatedMemory, UINT32 * pFreeMemory, UINT32 * pMinFree, UINT32 * pNumAllocBlocks, UINT32 * pNumAllocErr, UINT32 * pNumFreeErr, UINT32 allocBlockSize[VOS_MEM_-NBLOCKSIZES], UINT32 usedBlockSize[VOS_MEM_NBLOCKSIZES])

Return used and available memory (of memory area above).

Parameters:

- \rightarrow *pAllocatedMemory* Pointer to allocated memory size
- \rightarrow *pFreeMemory* Pointer to free memory size
- → *pMinFree* Pointer to minimal free memory size in statistics interval
- → *pNumAllocBlocks* Pointer to number of allocated memory blocks
- → pNumAllocErr Pointer to number of allocation errors
- \rightarrow *pNumFreeErr* Pointer to number of free errors
- → allocBlockSize Pointer to list of allocated memory blocks
- → usedBlockSize Pointer to list of used memoryblocks

Return values:

VOS_NO_ERR no error

VOS_INIT_ERR module not initialised
VOS_PARAM_ERR parameter out of range/invalid

Here is the call graph for this function:



5.23.3.4 EXT_DECL VOS_ERR_T vos_memDelete (UINT8 * pMemoryArea)

Delete the memory area.

This will eventually invalidate any previously allocated memory blocks! It should be called last before the application quits. No further access to the memory blocks is allowed after this call.

Parameters:

 \leftarrow *pMemoryArea* Pointer to memory area to use

Return values:

VOS_NO_ERR no error

VOS_INIT_ERR module not initialised

VOS_PARAM_ERR parameter out of range/invalid

This will eventually invalidate any previously allocated memory blocks! It should be called last before the application quits. No further access to the memory blocks is allowed after this call.

Parameters:

← *pMemoryArea* Pointer to memory area to use

Return values:

VOS_NO_ERR no error

VOS_INIT_ERR module not initialised

VOS_PARAM_ERR parameter out of range/invalid

Here is the call graph for this function:



5.23.3.5 EXT DECL VOS ERR T vos memFree (void * pMemBlock)

Deallocate a block of memory (from memory area above).

Parameters:

← *pMemBlock* Pointer to memory block to be freed

Return values:

VOS_NO_ERR no error
VOS_INIT_ERR module not initialised

VOS_PARAM_ERR parameter out of range/invalid


Parameters:

 $\leftarrow pMemBlock$ Pointer to memory block to be freed

Return values:

VOS_NO_ERR no error
VOS_INIT_ERR module not initialised
VOS_PARAM_ERR parameter out of range/invalid

Here is the call graph for this function:



5.23.3.6 EXT_DECL VOS_ERR_T vos_memInit (UINT8 * pMemoryArea, UINT32 size, const UINT32 fragMem[VOS_MEM_NBLOCKSIZES])

Initialize the memory unit.

Init a supplied block of memory and prepare it for use with vos_alloc and vos_dealloc. The used block sizes can be supplied and will be preallocated.

Parameters:

- ← *pMemoryArea* Pointer to memory area to use
- \leftarrow *size* Size of provided memory area
- ← fragMem Pointer to list of preallocate block sizes, used to fragment memory for large blocks

Return values:

VOS_NO_ERR no error

VOS_PARAM_ERR parameter out of range/invalid

VOS_MEM_ERR no memory available

Init a supplied block of memory and prepare it for use with vos_alloc and vos_dealloc. The used block sizes can be supplied and will be preallocated.

Parameters:

- ← *pMemoryArea* Pointer to memory area to use
- \leftarrow *size* Size of provided memory area
- ← fragMem Pointer to list of preallocated block sizes, used to fragment memory for large blocks

Return values:

VOS NO ERR no error

VOS_PARAM_ERR parameter out of range/invalid

VOS_MEM_ERR no memory available

Init a supplied block of memory and prepare it for use with vos_alloc and vos_dealloc. The used block sizes can be supplied and will be preallocated.

Parameters:

- ← *pMemoryArea* Pointer to memory area to use
- \leftarrow *size* Size of provided memory area
- ← fragMem Pointer to list of preallocated block sizes, used to fragment memory for large blocks


Return values:

VOS NO ERR no error

VOS_PARAM_ERR parameter out of range/invalid

VOS_MEM_ERR no memory available

Here is the call graph for this function:



5.23.3.7 EXT_DECL void vos_qsort (void * pBuf, UINT32 num, UINT32 size, int(*)(const void *, const void *) compare)

Sort an array.

This is just a wrapper for the standard qsort function.

Parameters:

- \leftrightarrow *pBuf* Pointer to the array to sort
- \leftarrow *num* number of elements
- \leftarrow *size* size of one element
- ← *compare* Pointer to compare function

Return values:

none This is just a wrapper for the standard qsort function.

Parameters:

- \leftrightarrow *pBuf* Pointer to the array to sort
- \leftarrow *num* number of elements
- \leftarrow *size* size of one element
- \leftarrow compare Pointer to compare function return -n if arg1 < arg2, return 0 if arg1 == arg2, return +n if arg1 > arg2 where n is an integer != 0

Return values:

none This is just a wrapper for the standard qsort function.

Parameters:

- \leftrightarrow **pBuf** Pointer to the array to sort
- \leftarrow *num* number of elements
- \leftarrow *size* size of one element
- \leftarrow compare Pointer to compare function return -n if arg1 < arg2, return 0 if arg1 == arg2, return +n if arg1 > arg2 where n is an integer != 0

Return values:

none

Here is the call graph for this function:



5.23.3.8 EXT_DECL VOS_ERR_T vos_queueCreate (const CHAR8 * pKey, VOS_QUEUE_T * pQueueID, UINT32 maxNoMsg, UINT32 maxLength)

Initialize a message queue.

Returns a handle for further calls

Parameters:

- ← *pKey* Unique identifier (file name)
- \rightarrow *pQueueID* Pointer to returned queue handle
- ← maxNoMsg maximum number of messages
- ← maxLength maximum size of one messages

Return values:

VOS_NO_ERR no error

VOS_INIT_ERR module not initialised

VOS_NOINIT_ERR invalid handle

VOS_PARAM_ERR parameter out of range/invalid

VOS_INIT_ERR not supported
VOS_QUEUE_ERR error creating queue

Returns a handle for further calls

Parameters:

- ← pKey Unique identifier (file name)
- \rightarrow *pQueueID* Pointer to returned queue handle
- ← maxNoMsg maximum number of messages
- ← maxLength maximum size of one messages

Return values:

VOS_NO_ERR no error

VOS_INIT_ERR module not initialised

VOS_NOINIT_ERR invalid handle

VOS_PARAM_ERR parameter out of range/invalid

VOS_INIT_ERR not supported

VOS_QUEUE_ERR error creating queue

Here is the call graph for this function:



5.23.3.9 EXT_DECL VOS_ERR_T vos_queueDestroy (VOS_QUEUE_T queueID)

Destroy a message queue.

Free all resources used by this queue

Parameters:

 \leftarrow *queueID* Queue handle

Return values:

VOS_NO_ERR no error

VOS_INIT_ERR module not initialised

VOS_NOINIT_ERR invalid handle

VOS_PARAM_ERR parameter out of range/invalid

Free all resources used by this queue

Parameters:

 \leftarrow *queueID* Queue handle

Return values:

VOS_NO_ERR no error

VOS INIT ERR module not initialised

VOS_NOINIT_ERR invalid handle

VOS_PARAM_ERR parameter out of range/invalid

Here is the call graph for this function:



5.23.3.10 EXT_DECL VOS_ERR_T vos_queueReceive (VOS_QUEUE_T queueID, UINT8 * pMsg, UINT32 * pSize, UINT32 usTimeout)

Get a message.

Parameters:

- \leftarrow *queueID* Queue handle
- \rightarrow *pMsg* Pointer to message to be received
- \leftrightarrow *pSize* Pointer to max. message size on entry, actual size on exit
- \leftarrow usTimeout Maximum time to wait for a message in usec

Return values:

VOS_NO_ERR no error

VOS_INIT_ERR module not initialised

VOS_NOINIT_ERR invalid handle

VOS_PARAM_ERR parameter out of range/invalid

VOS_QUEUE_ERR queue is empty

Parameters:

- \leftarrow *queueID* Queue handle
- \rightarrow *pMsg* Pointer to message to be received
- \leftrightarrow *pSize* Pointer to max. message size on entry, actual size on exit
- \leftarrow usTimeout Maximum time to wait for a message in usec

Return values:

VOS_NO_ERR no error

VOS_INIT_ERR module not initialised

VOS_NOINIT_ERR invalid handle

VOS_PARAM_ERR parameter out of range/invalid

VOS_QUEUE_ERR queue is empty

Here is the call graph for this function:



5.23.3.11 EXT_DECL VOS_ERR_T vos_queueSend (VOS_QUEUE_T queueID, const UINT8 * pMsg, UINT32 size)

Send a message.

Parameters:

- \leftarrow *queueID* Queue handle
- $\leftarrow pMsg$ Pointer to message to be sent
- ← *size* Message size

Return values:

VOS_NO_ERR no error

VOS_INIT_ERR module not initialised

VOS_NOINIT_ERR invalid handle

VOS_PARAM_ERR parameter out of range/invalid

VOS_QUEUE_FULL queue is full

Parameters:

- \leftarrow *queueID* Queue handle
- $\leftarrow pMsg$ Pointer to message to be sent
- *← size* Message size

Return values:

VOS_NO_ERR no error

VOS_INIT_ERR module not initialised

VOS_NOINIT_ERR invalid handle

VOS_PARAM_ERR parameter out of range/invalid

VOS_QUEUE_FULL queue is full



5.23.3.12 EXT_DECL VOS_ERR_T vos_sharedClose (VOS_SHRD_T handle, const UINT8 * pMemoryArea)

Close connection to the shared memory area.

If the area was created by the calling process, the area will be closed (freed). If the area was attached, it will be detached. This function is not available in each target implementation.

Parameters:

- ← *handle* Returned handle
- ← *pMemoryArea* Pointer to memory area

Return values:

VOS_NO_ERR no error

VOS_INIT_ERR module not initialised

VOS_NOINIT_ERR invalid handle

VOS_PARAM_ERR parameter out of range/invalid

If the area was created by the calling process, the area will be closed (freed). If the area was attached, it will be detached. This function is not available in each target implementation.

Parameters:

- ← *handle* Returned handle
- ← pMemoryArea Pointer to memory area

Return values:

VOS_NO_ERR no error

VOS INIT ERR module not initialised

VOS_NOINIT_ERR invalid handle

VOS_PARAM_ERR parameter out of range/invalid

Here is the call graph for this function:



5.23.3.13 EXT_DECL VOS_ERR_T vos_sharedOpen (const CHAR8 * pKey, VOS_SHRD_T * pHandle, UINT8 ** ppMemoryArea, UINT32 * pSize)

Create a shared memory area or attach to existing one.

The first call with the a specified key will create a shared memory area with the supplied size and will return a handle and a pointer to that area. If the area already exists, the area will be attached. This function is not available in each target implementation.

Parameters:

← *pKey* Unique identifier (file name)

- → *pHandle* Pointer to returned handle
- → *ppMemoryArea* Pointer to pointer to memory area
- \leftrightarrow pSize Pointer to size of area to allocate, on return actual size after attach

Return values:

VOS_NO_ERR no error

VOS_INIT_ERR module not initialised

VOS_NOINIT_ERR invalid handle

VOS_PARAM_ERR parameter out of range/invalid

VOS_MEM_ERR no memory available

The first call with the a specified key will create a shared memory area with the supplied size and will return a handle and a pointer to that area. If the area already exists, the area will be attached. This function is not available in each target implementation.

Parameters:

- ← *pKey* Unique identifier (file name)
- → *pHandle* Pointer to returned handle
- → *ppMemoryArea* Pointer to pointer to memory area
- \leftrightarrow *pSize* Pointer to size of area to allocate, on return actual size after attach

Return values:

VOS NO ERR no error

VOS_INIT_ERR module not initialised

VOS_NOINIT_ERR invalid handle

VOS_PARAM_ERR parameter out of range/invalid

VOS_MEM_ERR no memory available




5.24 vos_sock.h File Reference


Typedefs for OS abstraction.

```
#include "vos_types.h"
#include <sys/select.h>
```

Include dependency graph for vos_sock.h:



This graph shows which files directly or indirectly include this file:

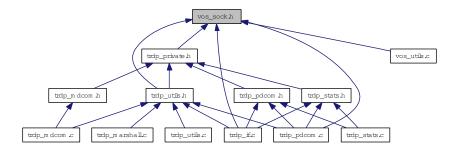

Data Structures

• struct VOS_SOCK_OPT_T Common socket options.

Defines

- #define VOS_MAX_SOCKET_CNT 80

 The maximum number of concurrent usable sockets.
- #define VOS_TTL_MULTICAST 64

 The maximum hops a multicast packet can go.

Functions

- EXT_DECL UINT16 vos_htons (UINT16 val)

 Byte swapping 2 Bytes.
- EXT_DECL UINT16 vos_ntohs (UINT16 val)

 Byte swapping 2 Bytes.

• EXT_DECL UINT32 vos_htonl (UINT32 val)

Byte swapping 4 Bytes.

• EXT_DECL UINT32 vos_ntohl (UINT32 val) Byte swapping 4 Bytes.

• EXT_DECL BOOL vos_isMulticast (UINT32 ipAddress)

Check if the supplied address is a multicast group address.

• EXT_DECL UINT32 vos_dottedIP (const CHAR8 *pDottedIP) Convert IP address from dotted dec.

EXT_DECL const CHAR8 * vos_ipDotted (UINT32 ipAddress)
 Convert IP address to dotted dec.

• EXT_DECL VOS_ERR_T vos_sockInit (void)

Initialize the socket library.

• EXT_DECL VOS_ERR_T vos_sockGetMAC (UINT8 pMAC[6])

Return the MAC address of the default adapter.

• EXT_DECL VOS_ERR_T vos_sockOpenUDP (INT32 *pSock, const VOS_SOCK_OPT_T *pOptions)

Create an UDP socket.

• EXT_DECL VOS_ERR_T vos_sockOpenTCP (INT32 *pSock, const VOS_SOCK_OPT_T *pOptions)

Create a TCP socket.

• EXT_DECL VOS_ERR_T vos_sockClose (INT32 sock) Close a socket.

• EXT_DECL VOS_ERR_T vos_sockSetOptions (INT32 sock, const VOS_SOCK_OPT_T *pOptions)

Set socket options.

EXT_DECL VOS_ERR_T vos_sockJoinMC (INT32 sock, UINT32 mcAddress, UINT32 ipAddress)

Join a multicast group.

• EXT_DECL VOS_ERR_T vos_sockLeaveMC (INT32 sock, UINT32 mcAddress, UINT32 ipAddress)

Leave a multicast group.

• EXT_DECL VOS_ERR_T vos_sockSendUDP (INT32 sock, const UINT8 *pBuffer, UINT32 size, UINT32 ipAddress, UINT16 port)

Send UDP data.

• EXT_DECL VOS_ERR_T vos_sockReceiveUDP (INT32 sock, UINT8 *pBuffer, INT32 *pSize, UINT32 *pIPAddr)

Receive UDP data.

- EXT_DECL VOS_ERR_T vos_sockBind (INT32 sock, UINT32 ipAddress, UINT16 port)
 Bind a socket to an address and port.
- EXT_DECL VOS_ERR_T vos_sockListen (INT32 sock, UINT32 backlog) Listen for incoming TCP connections.
- EXT_DECL VOS_ERR_T vos_sockAccept (INT32 sock, INT32 *pSock, UINT32 *pIPAddress, UINT16 *pPort)

Accept an incoming TCP connection.

- EXT_DECL VOS_ERR_T vos_sockConnect (INT32 sock, UINT32 ipAddress, UINT16 port) Open a TCP connection.
- EXT_DECL VOS_ERR_T vos_sockSendTCP (INT32 sock, const UINT8 *pBuffer, UINT32 size) Send TCP data.
- EXT_DECL VOS_ERR_T vos_sockReceiveTCP (INT32 sock, UINT8 *pBuffer, INT32 *pSize)

 **Receive TCP data.*

5.24.1 Detailed Description

Typedefs for OS abstraction.

This is the declaration for the OS independend socket interface

Note:

Project: TCNOpen TRDP prototype stack

Author:

Bernd Loehr, NewTec GmbH

Remarks:

All rights reserved. Reproduction, modification, use or disclosure to third parties without express authority is forbidden, Copyright Bombardier Transportation GmbH, Germany, 2012.

Id

vos_sock.h 53 2012-10-17 17:40:43Z 97025

5.24.2 Function Documentation

5.24.2.1 EXT_DECL UINT32 vos_dottedIP (const CHAR8 * pDottedIP)

Convert IP address from dotted dec.

to !host! endianess

Parameters:

 \leftarrow *pDottedIP* IP address as dotted decimal.

Return values:

address in UINT32 in host endianess

Convert IP address from dotted dec.


Parameters:

 \leftarrow *pDottedIP* IP address as dotted decimal.

Return values:

address in UINT32 in host endianess

Here is the call graph for this function:



5.24.2.2 EXT_DECL UINT32 vos_htonl (UINT32 val)

Byte swapping 4 Bytes.

Parameters:

 $\leftarrow val$ Initial value.

Return values:

swapped value

Here is the call graph for this function:



5.24.2.3 EXT_DECL UINT16 vos_htons (UINT16 val)

Byte swapping 2 Bytes.

Parameters:

 $\leftarrow val$ Initial value.

Return values:

swapped value

Byte swapping 2 Bytes.

Parameters:

 $\leftarrow val$ Initial value.

Return values:

swapped value

Here is the call graph for this function:



5.24.2.4 EXT_DECL const CHAR8* vos_ipDotted (UINT32 ipAddress)

Convert IP address to dotted dec.

from !host! endianess

Parameters:

 \leftarrow *ipAddress* IP address as dotted decimal.

Return values:

address in UINT32 in host endianess

Parameters:

 \leftarrow *ipAddress* IP address as dotted decimal.

Return values:

address in UINT32 in host endianess

Here is the call graph for this function:



5.24.2.5 EXT_DECL BOOL vos_isMulticast (UINT32 ipAddress)

Check if the supplied address is a multicast group address.

Parameters:

 \leftarrow *ipAddress* IP address to check.

Return values:

TRUE address is multicast

FALSE address is not a multicast address

Here is the call graph for this function:



5.24.2.6 EXT_DECL UINT32 vos_ntohl (UINT32 val)

Byte swapping 4 Bytes.

Parameters:

 $\leftarrow val$ Initial value.

Return values:

swapped value

Here is the call graph for this function:



5.24.2.7 EXT_DECL UINT16 vos_ntohs (UINT16 val)

Byte swapping 2 Bytes.

Parameters:

 $\leftarrow val$ Initial value.

Return values:

swapped value



5.24.2.8 EXT_DECL VOS_ERR_T vos_sockAccept (INT32 sock, INT32 * pSock, UINT32 * pIPAddress, UINT16 * pPort)

Accept an incoming TCP connection.

Accept incoming connections on the provided socket. May block and will return a new socket descriptor when accepting a connection. The original socket *pSock, remains open.

Parameters:


- \leftarrow *sock* Socket descriptor
- \rightarrow **pSock** Pointer to socket descriptor, on exit new socket
- \rightarrow *pIPAddress* source IP to receive on, 0 for any
- \rightarrow **pPort** port to receive on, 20548 for PD

Return values:

VOS_NO_ERR no error
VOS_PARAM_ERR NULL parameter, parameter error

VOS_UNKNOWN_ERR sock descriptor unknown error

Here is the call graph for this function:



5.24.2.9 EXT_DECL VOS_ERR_T vos_sockBind (INT32 sock, UINT32 ipAddress, UINT16 port)

Bind a socket to an address and port.

Parameters:

- \leftarrow *sock* socket descriptor
- ← *ipAddress* source IP to receive from, 0 for any
- \leftarrow *port* port to receive from

Return values:

VOS_NO_ERR no error

VOS_INIT_ERR module not initialised

VOS_NOINIT_ERR invalid handle

VOS_PARAM_ERR parameter out of range/invalid

VOS_IO_ERR Input/Output error

VOS MEM ERR resource error

Parameters:


 \leftarrow *sock* socket descriptor

- \leftarrow *ipAddress* source IP to receive on, 0 for any
- \leftarrow *port* port to receive on, 20548 for PD

Return values:

VOS_NO_ERR no error
VOS_PARAM_ERR sock descriptor unknown, parameter error
VOS_IO_ERR Input/Output error
VOS_MEM_ERR resource error

Here is the call graph for this function:



5.24.2.10 EXT_DECL VOS_ERR_T vos_sockClose (INT32 sock)

Close a socket.

Release any resources aquired by this socket

Parameters:

 \leftarrow *sock* socket descriptor

Return values:

VOS_NO_ERR no error
VOS_INIT_ERR module not initialised
VOS_NOINIT_ERR invalid handle

Release any resources aquired by this socket

Parameters:

 \leftarrow *sock* socket descriptor

Return values:

VOS_NO_ERR no error
VOS_PARAM_ERR sock descriptor unknown



5.24.2.11 EXT_DECL VOS_ERR_T vos_sockConnect (INT32 sock, UINT32 ipAddress, UINT16 port)

Open a TCP connection.

Parameters:

- \leftarrow *sock* socket descriptor
- \leftarrow *ipAddress* destination IP
- \leftarrow *port* destination port

Return values:

VOS_NO_ERR no error

VOS_INIT_ERR module not initialised

VOS_NOINIT_ERR invalid handle

VOS_PARAM_ERR parameter out of range/invalid

VOS_IO_ERR Input/Output error

VOS_MEM_ERR resource error

Parameters:

- \leftarrow *sock* socket descriptor
- \leftarrow *ipAddress* destination IP
- $\leftarrow port$ destination port

Return values:


VOS_NO_ERR no error

VOS_PARAM_ERR sock descriptor unknown, parameter error

VOS_IO_ERR Input/Output error

VOS_MEM_ERR resource error

Here is the call graph for this function:



5.24.2.12 EXT_DECL VOS_ERR_T vos_sockGetMAC (UINT8 pMAC[6])

Return the MAC address of the default adapter.

Parameters:

 \rightarrow *pMAC* return MAC address.

Return values:

VOS_NO_ERR no error

VOS_PARAM_ERR pMAC == NULL

VOS_SOCK_ERR socket not available or option not supported

Here is the call graph for this function:



5.24.2.13 EXT_DECL VOS_ERR_T vos_sockInit (void)

Initialize the socket library.

Must be called once before any other call

Return values:

VOS_NO_ERR no error
VOS_SOCK_ERR sockets not supported

Here is the call graph for this function:



5.24.2.14 EXT_DECL VOS_ERR_T vos_sockJoinMC (INT32 sock, UINT32 mcAddress, UINT32 ipAddress)

Join a multicast group.

Note: Some target systems might not support this option.

Parameters:

- \leftarrow *sock* socket descriptor
- ← mcAddress multicast group to join
- \leftarrow *ipAddress* depicts interface on which to join, default 0 for any

Return values:

VOS_NO_ERR no error

VOS INIT ERR module not initialised

VOS_NOINIT_ERR invalid handle

VOS_PARAM_ERR parameter out of range/invalid

VOS_SOCK_ERR option not supported

Note: Some targeted systems might not support this option.

Parameters:

- \leftarrow *sock* socket descriptor
- ← mcAddress multicast group to join
- ← *ipAddress* depicts interface on which to join, default 0 for any


Return values:

VOS_NO_ERR no error

VOS_PARAM_ERR sock descriptor unknown, parameter error

VOS_SOCK_ERR option not supported

Here is the call graph for this function:



5.24.2.15 EXT_DECL VOS_ERR_T vos_sockLeaveMC (INT32 sock, UINT32 mcAddress, UINT32 ipAddress)

Leave a multicast group.

Note: Some target systems might not support this option.

Parameters:

- \leftarrow *sock* socket descriptor
- ← mcAddress multicast group to join
- ← *ipAddress* depicts interface on which to leave, default 0 for any

Return values:

VOS_NO_ERR no error

VOS_INIT_ERR module not initialised

VOS_NOINIT_ERR invalid handle

VOS_PARAM_ERR parameter out of range/invalid

VOS_SOCK_ERR option not supported

Note: Some targeted systems might not support this option.


Parameters:

- \leftarrow *sock* socket descriptor
- ← mcAddress multicast group to join
- ← *ipAddress* depicts interface on which to leave, default 0 for any

Return values:

VOS_NO_ERR no error
VOS_PARAM_ERR sock descriptor unknown, parameter error
VOS_SOCK_ERR option not supported

Here is the call graph for this function:



5.24.2.16 EXT_DECL VOS_ERR_T vos_sockListen (INT32 sock, UINT32 backlog)

Listen for incoming TCP connections.

Parameters:

- \leftarrow *sock* socket descriptor
- \leftarrow *backlog* maximum connection attempts if system is busy

Return values:

VOS_NO_ERR no error

VOS_INIT_ERR module not initialised

VOS_NOINIT_ERR invalid handle

VOS_PARAM_ERR parameter out of range/invalid

VOS_IO_ERR Input/Output error

VOS_MEM_ERR resource error

Listen for incoming TCP connections.

Parameters:

- \leftarrow *sock* socket descriptor
- \leftarrow *backlog* maximum connection attempts if system is busy

Return values:

VOS_NO_ERR no error

VOS_PARAM_ERR sock descriptor unknown, parameter error

VOS_IO_ERR Input/Output error

VOS_MEM_ERR resource error



5.24.2.17 EXT_DECL VOS_ERR_T vos_sockOpenTCP (INT32 * pSock, const VOS_SOCK_OPT_T * pOptions)

Create a TCP socket.

Return a socket descriptor for further calls. The socket options are optional and can be applied later.

Parameters:

- \rightarrow *pSock* pointer to socket descriptor returned
- ← *pOptions* pointer to socket options (optional)

Return values:

VOS NO ERR no error

VOS_INIT_ERR module not initialised

VOS_PARAM_ERR pSock == NULL

VOS_SOCK_ERR socket not available or option not supported

Return a socket descriptor for further calls. The socket options are optional and can be applied later.

Parameters:

- \rightarrow **pSock** pointer to socket descriptor returned
- \leftarrow *pOptions* pointer to socket options (optional)


Return values:

VOS_NO_ERR no error

VOS_PARAM_ERR pSock == NULL

VOS_SOCK_ERR socket not available or option not supported

Here is the call graph for this function:



5.24.2.18 EXT_DECL VOS_ERR_T vos_sockOpenUDP (INT32 * pSock, const VOS_SOCK_OPT_T * pOptions)

Create an UDP socket.

Return a socket descriptor for further calls. The socket options are optional and can be applied later. Note: Some target systems might not support every option.

Parameters:

- \rightarrow *pSock* pointer to socket descriptor returned
- \leftarrow *pOptions* pointer to socket options (optional)

Return values:

VOS_NO_ERR no error

VOS PARAM ERR pSock == NULL

VOS_SOCK_ERR socket not available or option not supported

Return a socket descriptor for further calls. The socket options are optional and can be applied later. Note: Some targeted systems might not support every option.

Parameters:

- \rightarrow *pSock* pointer to socket descriptor returned
- \leftarrow *pOptions* pointer to socket options (optional)


Return values:

VOS_NO_ERR no error

VOS_PARAM_ERR pSock == NULL

VOS_SOCK_ERR socket not available or option not supported

Here is the call graph for this function:



5.24.2.19 EXT_DECL VOS_ERR_T vos_sockReceiveTCP (INT32 sock, UINT8 * pBuffer, INT32 * pSize)

Receive TCP data.

The caller must provide a sufficient sized buffer. If the supplied buffer is smaller than the bytes received, *pSize will reflect the number of copied bytes and the call should be repeated until *pSize is 0 (zero). If the socket was created in blocking-mode (default), then this call will block and will only return if data has been received or the socket was closed or an error occured. If called in non-blocking mode, and no data is available, VOS_NODATA_ERR will be returned.

Parameters:

- \leftarrow *sock* socket descriptor
- \rightarrow *pBuffer* pointer to applications data buffer
- \leftrightarrow *pSize* pointer to the received data size

Return values:

VOS_NO_ERR no error

VOS_INIT_ERR module not initialised

VOS_NOINIT_ERR invalid handle

VOS_PARAM_ERR parameter out of range/invalid

VOS_IO_ERR data could not be read

VOS_MEM_ERR resource error
VOS_NODATA_ERR no data in non-blocking

The caller must provide a sufficient sized buffer. If the supplied buffer is smaller than the bytes received, *pSize will reflect the number of copied bytes and the call should be repeated until *pSize is 0 (zero). If the socket was created in blocking-mode (default), then this call will block and will only return if data has been received or the socket was closed or an error occured. If called in non-blocking mode, and no data is available, VOS_NODATA_ERR will be returned.

Parameters:

- \leftarrow *sock* socket descriptor
- \rightarrow **pBuffer** pointer to applications data buffer
- \leftrightarrow *pSize* pointer to the received data size

Return values:

VOS_NO_ERR no error

VOS_PARAM_ERR sock descriptor unknown, parameter error

VOS_IO_ERR data could not be read

VOS_NODATA_ERR no data in non-blocking

Here is the call graph for this function:



5.24.2.20 EXT_DECL VOS_ERR_T vos_sockReceiveUDP (INT32 sock, UINT8 * pBuffer, INT32 * pSize, UINT32 * pIPAddr)

Receive UDP data.

The caller must provide a sufficient sized buffer. If the supplied buffer is smaller than the bytes received, *pSize will reflect the number of copied bytes and the call should be repeated until *pSize is 0 (zero). If the socket was created in blocking-mode (default), then this call will block and will only return if data has been received or the socket was closed or an error occured. If called in non-blocking mode, and no data is available, VOS_NODATA_ERR will be returned.

Parameters:

- \leftarrow *sock* socket descriptor
- \rightarrow *pBuffer* pointer to applications data buffer
- \leftrightarrow *pSize* pointer to the received data size
- \rightarrow *pIPAddr* source IP

Return values:

VOS_NO_ERR no error

VOS_INIT_ERR module not initialised

VOS_NOINIT_ERR invalid handle

VOS_PARAM_ERR parameter out of range/invalid

VOS_IO_ERR data could not be read

VOS_MEM_ERR resource error

VOS_NODATA_ERR no data in non-blocking

The caller must provide a sufficient sized buffer. If the supplied buffer is smaller than the bytes received, *pSize will reflect the number of copied bytes and the call should be repeated until *pSize is 0 (zero). If the socket was created in blocking-mode (default), then this call will block and will only return if data has been received or the socket was closed or an error occured. If called in non-blocking mode, and no data is available, VOS_NODATA_ERR will be returned.

Parameters:

- \leftarrow *sock* socket descriptor
- \rightarrow **pBuffer** pointer to applications data buffer
- \leftrightarrow *pSize* pointer to the received data size
- \rightarrow *pIPAddr* source IP

Return values:


VOS_NO_ERR no error

VOS_PARAM_ERR sock descriptor unknown, parameter error

VOS_IO_ERR data could not be read

VOS_NODATA_ERR no data in non-blocking

Here is the call graph for this function:



5.24.2.21 EXT_DECL VOS_ERR_T vos_sockSendTCP (INT32 sock, const UINT8 * pBuffer, UINT32 size)

Send TCP data.

Send data to the given socket.

Parameters:

- \leftarrow *sock* socket descriptor
- \leftarrow *pBuffer* pointer to data to send
- \leftarrow *size* size of the data to send

Return values:

VOS_NO_ERR no error

VOS_INIT_ERR module not initialised

VOS_NOINIT_ERR invalid handle
VOS_PARAM_ERR parameter out of range/invalid
VOS_IO_ERR data could not be sent
VOS_MEM_ERR resource error

Send data to the supplied address and port.

Parameters:

- \leftarrow *sock* socket descriptor
- \leftarrow *pBuffer* pointer to data to send
- \leftarrow size size of the data to send

Return values:

VOS_NO_ERR no errorVOS_PARAM_ERR sock descriptor unknown, parameter errorVOS_IO_ERR data could not be sent

Here is the call graph for this function:



5.24.2.22 EXT_DECL VOS_ERR_T vos_sockSendUDP (INT32 sock, const UINT8 * pBuffer, UINT32 size, UINT32 ipAddress, UINT16 port)

Send UDP data.

Send data to the given address and port.

Parameters:

- \leftarrow *sock* socket descriptor
- \leftarrow **pBuffer** pointer to data to send
- \leftarrow *size* size of the data to send
- \leftarrow *ipAddress* destination IP
- $\leftarrow port$ destination port

Return values:

VOS_NO_ERR no error

VOS_INIT_ERR module not initialised

VOS_NOINIT_ERR invalid handle

VOS_PARAM_ERR parameter out of range/invalid

VOS_IO_ERR data could not be sent

VOS_MEM_ERR resource error

Send data to the supplied address and port.

Parameters:

- \leftarrow *sock* socket descriptor
- $\leftarrow pBuffer$ pointer to data to send
- \leftarrow size size of the data to send
- \leftarrow *ipAddress* destination IP
- \leftarrow *port* destination port

Return values:


VOS_NO_ERR no error

VOS_PARAM_ERR sock descriptor unknown, parameter error

VOS_IO_ERR data could not be sent

VOS_MEM_ERR resource error

Here is the call graph for this function:



5.24.2.23 EXT_DECL VOS_ERR_T vos_sockSetOptions (INT32 sock, const VOS_SOCK_OPT_T * pOptions)

Set socket options.

Note: Some target systems might not support each option.

Parameters:

- \leftarrow *sock* socket descriptor
- ← *pOptions* pointer to socket options (optional)

Return values:

VOS_NO_ERR no error

VOS_INIT_ERR module not initialised

VOS_NOINIT_ERR invalid handle

VOS_PARAM_ERR parameter out of range/invalid

VOS_SOCK_ERR socket not available or option not supported

Note: Some targeted systems might not support every option.

Parameters:

 \leftarrow *sock* socket descriptor

 \leftarrow *pOptions* pointer to socket options (optional)

Return values:

VOS_NO_ERR no error
VOS_PARAM_ERR sock descriptor unknown

Here is the call graph for this function:



5.25 vos_thread.h File Reference


Threading functions for OS abstraction.

```
#include "vos_types.h"
```

Include dependency graph for vos_thread.h:



This graph shows which files directly or indirectly include this file:



Defines

• #define VOS_MAX_THREAD_CNT 100

The maximum number of concurrent usable threads.

Typedefs

- typedef UINT8 VOS_THREAD_PRIORITY_T

 Thread priority range from 1 (highest) to 255 (lowest), 0 default of the target system.
- typedef void(__cdecl * VOS_THREAD_FUNC_T)(void *pArg)

 Thread function definition.
- typedef struct VOS_MUTEX_T * VOS_MUTEX_T Hidden mutex handle definition.
- typedef struct VOS_SEMA_T * VOS_SEMA_T Hidden semaphore handle definition.
- typedef void * VOS_THREAD_T Hidden thread handle definition.

Enumerations

• enum VOS_THREAD_POLICY_T

Thread policy matching pthread/Posix defines.

• enum VOS_SEMA_STATE_T

State of the semaphore.

Functions

• EXT_DECL VOS_ERR_T vos_threadInit (void)

Initialize the thread library.

• EXT_DECL VOS_ERR_T vos_threadCreate (VOS_THREAD_T *pThread, const CHAR8 *pName, VOS_THREAD_POLICY_T policy, VOS_THREAD_PRIORITY_T priority, UINT32 interval, UINT32 stackSize, VOS_THREAD_FUNC_T pFunction, void *pArguments)

Create a thread.

• EXT_DECL VOS_ERR_T vos_threadTerminate (VOS_THREAD_T thread)

Terminate a thread.

• EXT_DECL VOS_ERR_T vos_threadIsActive (VOS_THREAD_T thread)

Is the thread still active? This call will return VOS_NO_ERR if the thread is still active, VOS_PARAM_ERR in case it ran out.

• EXT_DECL VOS_ERR_T vos_threadDelay (UINT32 delay)

Delay the execution of the current thread by the given delay in us.

• EXT_DECL VOS_ERR_T vos_getTime (VOS_TIME_T *pTime)

Return the current time in sec and us.

• EXT DECL const CHAR8 * vos getTimeStamp (void)

Get a time-stamp string.

• EXT_DECL VOS_ERR_T vos_clearTime (VOS_TIME_T *pTime)

Clear the time stamp.

• EXT_DECL VOS_ERR_T vos_addTime (VOS_TIME_T *pTime, const VOS_TIME_T *pAdd)

Add the second to the first time stamp, return sum in first.

• EXT_DECL VOS_ERR_T vos_subTime (VOS_TIME_T *pTime, const VOS_TIME_T *pSub) Subtract the second from the first time stamp, return diff in first.

• EXT_DECL INT32 vos_cmpTime (const VOS_TIME_T *pTime, const VOS_TIME_T *pCmp)

Compare the second from the first time stamp, return diff in first.

• EXT_DECL VOS_ERR_T vos_getUuid (VOS_UUID_T pUuID)

Get a universal unique identifier according to RFC 4122 time based version.

• EXT_DECL VOS_ERR_T vos_mutexCreate (VOS_MUTEX_T *pMutex)

Create a mutex.

• EXT_DECL VOS_ERR_T vos_mutexDelete (VOS_MUTEX_T mutex)

Delete a mutex.

• EXT_DECL VOS_ERR_T vos_mutexLock (VOS_MUTEX_T mutex)

Take a mutex.

• EXT_DECL VOS_ERR_T vos_mutexTryLock (VOS_MUTEX_T mutex)

Try to take a mutex.

• EXT_DECL VOS_ERR_T vos_mutexUnlock (VOS_MUTEX_T mutex)

Release a mutex.

• EXT_DECL VOS_ERR_T vos_semaCreate (VOS_SEMA_T *pSema, VOS_SEMA_STATE_T initialState)

Create a semaphore.

• EXT_DECL VOS_ERR_T vos_semaDelete (VOS_SEMA_T sema)

Delete a semaphore.

• EXT_DECL VOS_ERR_T vos_semaTake (VOS_SEMA_T sema, UINT32 timeout) Take a semaphore.

• EXT_DECL VOS_ERR_T vos_semaGive (VOS_SEMA_T sema)

Give a semaphore.

5.25.1 Detailed Description

Threading functions for OS abstraction.

Thread-, semaphore- and time-handling functions

Note:

Project: TCNOpen TRDP prototype stack

Author:

Bernd Loehr, NewTec GmbH

Remarks:

All rights reserved. Reproduction, modification, use or disclosure to third parties without express authority is forbidden, Copyright Bombardier Transportation GmbH, Germany, 2012.

Id

vos thread.h 23 2012-07-13 09:36:14Z 97031

5.25.2 Function Documentation

5.25.2.1 EXT_DECL VOS_ERR_T vos_addTime (VOS_TIME_T * pTime, const VOS_TIME_T * pAdd)

Add the second to the first time stamp, return sum in first.

Parameters:

- \leftrightarrow *pTime* Pointer to time value
- $\leftarrow pAdd$ Pointer to time value

Return values:

VOS_NO_ERR no error

VOS_PARAM_ERR parameter must not be NULL

Here is the call graph for this function:



5.25.2.2 EXT_DECL VOS_ERR_T vos_clearTime (VOS_TIME_T * pTime)

Clear the time stamp.

Parameters:

 \rightarrow *pTime* Pointer to time value

Return values:

VOS_NO_ERR no error

VOS_PARAM_ERR parameter must not be NULL

Here is the call graph for this function:



5.25.2.3 EXT_DECL INT32 vos_cmpTime (const VOS_TIME_T * pTime, const VOS_TIME_T * pCmp)

Compare the second from the first time stamp, return diff in first.

Parameters:

 \leftrightarrow *pTime* Pointer to time value

 $\leftarrow pCmp$ Pointer to time value to compare

Return values:

 θ pTime == pCmp

-1 pTime < pCmp

1 pTime > pCmp

Here is the call graph for this function:



5.25.2.4 EXT_DECL VOS_ERR_T vos_getTime (VOS_TIME_T * pTime)

Return the current time in sec and us.

Parameters:

 \rightarrow *pTime* Pointer to time value

Return values:

VOS_NO_ERR no error
VOS_INIT_ERR module not initialised

Parameters:

 \rightarrow *pTime* Pointer to time value

Return values:

VOS_NO_ERR no error

VOS_PARAM_ERR parameter out of range/invalid

Here is the call graph for this function:



5.25.2.5 EXT_DECL const CHAR8* vos_getTimeStamp (void)

Get a time-stamp string.

Get a time-stamp string for debugging in the form "yyyymmdd-hh:mm:ss.ms" Depending on the used OS / hardware the time might not be a real-time stamp but relative from start of system.

Return values:

timestamp "yyyymmdd-hh:mm:ss.ms"

Here is the call graph for this function:



5.25.2.6 EXT_DECL VOS_ERR_T vos_getUuid (VOS_UUID_T pUuID)

Get a universal unique identifier according to RFC 4122 time based version.

Parameters:

 \rightarrow *pUuID* Pointer to a universal unique identifier

Return values:

VOS_NO_ERR no error
VOS_UNKNOWN_ERR Could not create UUID


Parameters:

 \rightarrow **pUuID** Pointer to a universal unique identifier

Return values:

VOS_NO_ERR no error
VOS_INIT_ERR module not initialised

Here is the call graph for this function:



5.25.2.7 EXT_DECL VOS_ERR_T vos_mutexCreate (VOS_MUTEX_T * pMutex)

Create a mutex.

Return a mutex handle. The mutex will be available at creation.

Parameters:

 \rightarrow *pMutex* Pointer to mutex handle

Return values:

VOS_NO_ERR no error

VOS_INIT_ERR module not initialised
VOS_PARAM_ERR pMutex == NULL
VOS_MUTEX_ERR no mutex available

Create a mutex.

Return a mutex handle. The mutex will be available at creation.


Parameters:

 \rightarrow *pMutex* Pointer to mutex handle

Return values:

VOS_NO_ERR no error
VOS_INIT_ERR module not initialised
VOS_PARAM_ERR pMutex == NULL
VOS_MUTEX_ERR no mutex available

Here is the call graph for this function:



5.25.2.8 EXT_DECL VOS_ERR_T vos_mutexDelete (VOS_MUTEX_T mutex)

Delete a mutex.

Release the resources taken by the mutex.

Parameters:

 \leftarrow *mutex* mutex handle

Return values:

VOS_NO_ERR no error
VOS_INIT_ERR module not initialised
VOS_NOINIT_ERR invalid handle
VOS_MUTEX_ERR no such mutex

Release the resources taken by the mutex.

Parameters:


 \leftarrow *mutex* mutex handle

Return values:

VOS_NO_ERR no error

VOS_PARAM_ERR pMutex == NULL or wrong type
VOS_MUTEX_ERR no such mutex

Here is the call graph for this function:



5.25.2.9 EXT_DECL VOS_ERR_T vos_mutexLock (VOS_MUTEX_T mutex)

Take a mutex.

Wait for the mutex to become available (lock).

Parameters:

 \leftarrow *mutex* mutex handle

Return values:

VOS_NO_ERR no error
VOS_INIT_ERR module not initialised
VOS_NOINIT_ERR invalid handle

Wait for the mutex to become available (lock).

Parameters:

 \leftarrow *mutex* mutex handle

Return values:

VOS_NO_ERR no error
VOS_PARAM_ERR pMutex == NULL or wrong type
VOS_MUTEX_ERR no such mutex

Here is the call graph for this function:



5.25.2.10 EXT_DECL VOS_ERR_T vos_mutexTryLock (VOS_MUTEX_T mutex)

Try to take a mutex.

If mutex is can't be taken VOS_MUTEX_ERR is returned.

Parameters:

 \leftarrow *mutex* mutex handle

Return values:

VOS_NO_ERR no error
VOS_INIT_ERR module not initialised
VOS_NOINIT_ERR invalid handle
VOS_MUTEX_ERR no mutex available

If mutex is can't be taken VOS_MUTEX_ERR is returned.

Parameters:

 \leftarrow *mutex* mutex handle

Return values:

VOS_NO_ERR no error
VOS_PARAM_ERR pMutex == NULL or wrong type
VOS_MUTEX_ERR mutex not locked

Here is the call graph for this function:



5.25.2.11 EXT_DECL VOS_ERR_T vos_mutexUnlock (VOS_MUTEX_T mutex)

Release a mutex.

Unlock the mutex.

Parameters:

 \leftarrow *mutex* mutex handle

Return values:

VOS_NO_ERR no error
VOS_INIT_ERR module not initialised
VOS_NOINIT_ERR invalid handle

Unlock the mutex.

Parameters:

 \leftarrow *mutex* mutex handle

Return values:

VOS_NO_ERR no error

VOS_PARAM_ERR pMutex == NULL or wrong type
VOS_MUTEX_ERR no such mutex

Here is the call graph for this function:



5.25.2.12 EXT_DECL VOS_ERR_T vos_semaCreate (VOS_SEMA_T * pSema, VOS_SEMA_STATE_T initialState)

Create a semaphore.

Return a semaphore handle. Depending on the initial state the semaphore will be available on creation or not.

Parameters:

- \rightarrow *pSema* Pointer to semaphore handle
- \leftarrow *initialState* The initial state of the sempahore

Return values:

VOS_NO_ERR no error
VOS_INIT_ERR module not initialised
VOS_PARAM_ERR parameter out of range/invalid
VOS_SEMA_ERR no semaphore available

Here is the call graph for this function:



5.25.2.13 EXT_DECL VOS_ERR_T vos_semaDelete (VOS_SEMA_T sema)

Delete a semaphore.

This will eventually release any processes waiting for the semaphore.

Parameters:

 \leftarrow *sema* semaphore handle

Return values:

VOS_NO_ERR no error

VOS_INIT_ERR module not initialised

VOS_NOINIT_ERR invalid handle

Here is the call graph for this function:



5.25.2.14 EXT_DECL VOS_ERR_T vos_semaGive (VOS_SEMA_T sema)

Give a semaphore.

Release (increase) a semaphore.

Parameters:

 \leftarrow *sema* semaphore handle

Return values:

VOS_NO_ERR no error

VOS_INIT_ERR module not initialised

VOS_NOINIT_ERR invalid handle

VOS_SEM_ERR could not release semaphore

Here is the call graph for this function:



5.25.2.15 EXT_DECL VOS_ERR_T vos_semaTake (VOS_SEMA_T sema, UINT32 timeout)

Take a semaphore.

Try to get (decrease) a semaphore.

Parameters:

- ← *sema* semaphore handle
- \leftarrow *timeout* Max. time in us to wait, 0 means forever

Return values:

VOS_NO_ERR no error

VOS INIT ERR module not initialised

VOS_NOINIT_ERR invalid handle

VOS_PARAM_ERR parameter out of range/invalid

VOS_SEMA_ERR could not get semaphore in time

Here is the call graph for this function:



5.25.2.16 EXT_DECL VOS_ERR_T vos_subTime (VOS_TIME_T * pTime, const VOS_TIME_T * pSub)

Subtract the second from the first time stamp, return diff in first.

Parameters:

- \leftrightarrow *pTime* Pointer to time value
- $\leftarrow pSub$ Pointer to time value

Return values:

VOS_NO_ERR no error

VOS_PARAM_ERR parameter must not be NULL

Here is the call graph for this function:



5.25.2.17 EXT_DECL VOS_ERR_T vos_threadCreate (VOS_THREAD_T * pThread, const CHAR8 * pName, VOS_THREAD_POLICY_T policy, VOS_THREAD_PRIORITY_T priority, UINT32 interval, UINT32 stackSize, VOS_THREAD_FUNC_T pFunction, void * pArguments)

Create a thread.

Create a thread and return a thread handle for further requests. Not each parameter may be supported by all target systems!

Parameters:

- \rightarrow *pThread* Pointer to returned thread handle
- ← *pName* Pointer to name of the thread (optional)
- ← *policy* Scheduling policy (FIFO, Round Robin or other)
- ← *priority* Scheduling priority (1...255 (highest), default 0)
- \leftarrow *interval* Interval for cyclic threads in us (optional)
- ← stackSize Minimum stacksize, default 0: 16kB
- \leftarrow *pFunction* Pointer to the thread function
- \leftarrow *pArguments* Pointer to the thread function parameters

Return values:

VOS_NO_ERR no error
VOS_INIT_ERR module not initialised
VOS_NOINIT_ERR invalid handle
VOS_PARAM_ERR parameter out of range/invalid

Create a thread and return a thread handle for further requests. Not each parameter may be supported by all target systems!

Parameters:

- \rightarrow *pThread* Pointer to returned thread handle
- ← *pName* Pointer to name of the thread (optional)
- ← *policy* Scheduling policy (FIFO, Round Robin or other)
- ← *priority* Scheduling priority (1...255 (highest), default 0)
- ← *interval* Interval for cyclic threads in us (optional)
- ← stackSize Minimum stacksize, default 0: 16kB
- \leftarrow *pFunction* Pointer to the thread function
- \leftarrow *pArguments* Pointer to the thread function parameters

Return values:

VOS_NO_ERR no error

VOS_INIT_ERR module not initialised

VOS_NOINIT_ERR invalid handle

VOS_PARAM_ERR parameter out of range/invalid

VOS_THREAD_ERR thread creation error

Create a thread and return a thread handle for further requests. Not each parameter may be supported by all target systems!

Parameters:

- → *pThread* Pointer to returned thread handle
- ← *pName* Pointer to name of the thread (optional)
- ← *policy* Scheduling policy (FIFO, Round Robin or other)
- ← *priority* Scheduling priority (1...255 (highest), default 0)
- ← *interval* Interval for cyclic threads in us (optional)
- ← stackSize Minimum stacksize, default 0: 16kB
- \leftarrow *pFunction* Pointer to the thread function
- \leftarrow *pArguments* Pointer to the thread function parameters

Return values:

VOS_NO_ERR no error
VOS_INIT_ERR module not initialised
VOS_NOINIT_ERR invalid handle

VOS_PARAM_ERR parameter out of range/invalidVOS_THREAD_ERR thread creation errorVOS_INIT_ERR no threads available

Here is the call graph for this function:



5.25.2.18 EXT_DECL VOS_ERR_T vos_threadDelay (UINT32 delay)

Delay the execution of the current thread by the given delay in us.

Parameters:

 \leftarrow *delay* Delay in us

Return values:

VOS_NO_ERR no error
VOS_INIT_ERR module not initialised

Parameters:

← *delay* Delay in us

Return values:

VOS_NO_ERR no error
VOS_PARAM_ERR parameter out of range/invalid

Here is the call graph for this function:



5.25.2.19 EXT_DECL VOS_ERR_T vos_threadInit (void)

Initialize the thread library.

Must be called once before any other call

Return values:

VOS_NO_ERR no error

VOS_INIT_ERR threading not supported

Here is the call graph for this function:



5.25.2.20 EXT_DECL VOS_ERR_T vos_threadIsActive (VOS_THREAD_T thread)

Is the thread still active? This call will return VOS_NO_ERR if the thread is still active, VOS_PARAM_-ERR in case it ran out.

Parameters:

 \leftarrow *thread* Thread handle

Return values:

VOS_NO_ERR no error
VOS_INIT_ERR module not initialised
VOS_NOINIT_ERR invalid handle
VOS_PARAM_ERR parameter out of range/invalid

Parameters:

← thread Thread handle

Return values:

VOS_NO_ERR no error
VOS_PARAM_ERR parameter out of range/invalid

Here is the call graph for this function:



5.25.2.21 EXT_DECL VOS_ERR_T vos_threadTerminate (VOS_THREAD_T thread)

Terminate a thread.

This call will terminate the thread with the given threadId and release all resources. Depending on the underlying architectures, it may just block until the thread ran out.

Parameters:

← *thread* Thread handle (or NULL if current thread)

Return values:

VOS_NO_ERR no error

VOS_INIT_ERR module not initialisedVOS_NOINIT_ERR invalid handleVOS_PARAM_ERR parameter out of range/invalid

This call will terminate the thread with the given threadId and release all resources. Depending on the underlying architectures, it may just block until the thread ran out.

Parameters:

 \leftarrow *thread* Thread handle (or NULL if current thread)

Return values:

VOS_NO_ERR no error
VOS_THREAD_ERR cancel failed


Here is the call graph for this function:



5.26 vos_types.h File Reference

Typedefs for OS abstraction.

This graph shows which files directly or indirectly include this file:



Data Structures

• struct VOS_TIME_T

Timer value compatible with timeval / select.

Typedefs

- typedef UINT8 VOS_UUID_T [16]
 universal unique identifier according to RFC 4122, time based version
- typedef void(* VOS_PRINT_DBG_T)(void *pRefCon, VOS_LOG_T category, const CHAR8 *pTime, const CHAR8 *pFile, UINT16 LineNumber, const CHAR8 *pMsgStr)

 Function definition for error/debug output.

Enumerations

```
• enum VOS_ERR_T {
   VOS_NO_ERR = 0,
   VOS_PARAM_ERR = -1,
   VOS_INIT_ERR = -2,
   VOS_NOINIT_ERR = -3,
   VOS_TIMEOUT_ERR = -4,
   VOS_NODATA_ERR = -5,
   VOS_SOCK_ERR = -6,
   VOS_IO_ERR = -7,
   VOS_MEM_ERR = -8,
   VOS_SEMA_ERR = -9,
   VOS_QUEUE_ERR = -10,
   VOS_QUEUE_FULL_ERR = -11,
```

```
VOS_MUTEX_ERR = -12,

VOS_THREAD_ERR = -13,

VOS_UNKNOWN_ERR = -99 }

Return codes for all VOS API functions.

• enum VOS_LOG_T {

VOS_LOG_ERROR = 0,

VOS_LOG_WARNING = 1,

VOS_LOG_INFO = 2,

VOS_LOG_DBG = 3 }

Categories for logging.
```

Functions

• EXT_DECL VOS_ERR_T vos_init (void *pRefCon, VOS_PRINT_DBG_T pDebugOutput)

Initialize the vos library.

5.26.1 Detailed Description

Typedefs for OS abstraction.

Note:

Project: TCNOpen TRDP prototype stack

Author:

Bernd Loehr, NewTec GmbH

Remarks:

All rights reserved. Reproduction, modification, use or disclosure to third parties without express authority is forbidden, Copyright Bombardier Transportation GmbH, Germany, 2012.

Id

```
vos_types.h 33 2012-08-10 15:40:34Z 97025
```

5.26.2 Typedef Documentation

5.26.2.1 typedef void(* VOS_PRINT_DBG_T)(void *pRefCon, VOS_LOG_T category, const CHAR8 *pTime, const CHAR8 *pFile, UINT16 LineNumber, const CHAR8 *pMsgStr)

Function definition for error/debug output.

The function will be called for logging and error message output. The user can decide, what kind of info will be logged by filtering the category.

Parameters:

- $\leftarrow *pRefCon$ pointer to user context
- ← *category* Log category (Error, Warning, Info etc.)
- ← *pTime* pointer to NULL-terminated string of time stamp
- ← *pFile* pointer to NULL-terminated string of source module
- \leftarrow *LineNumber* Line number
- $\leftarrow pMsgStr$ pointer to NULL-terminated string

Return values:

none

5.26.3 Enumeration Type Documentation

5.26.3.1 enum VOS_ERR_T

Return codes for all VOS API functions.

Enumerator:

VOS NO ERR No error.

VOS_PARAM_ERR Necessary parameter missing or out of range.

VOS_INIT_ERR Call without valid initialization.

VOS_NOINIT_ERR The supplied handle/reference is not valid.

VOS_TIMEOUT_ERR Timout.

VOS_NODATA_ERR Non blocking mode: no data received.

VOS_SOCK_ERR Socket option not supported.

VOS_IO_ERR Socket IO error, data can't be received/sent.

VOS_MEM_ERR No more memory available.

VOS_SEMA_ERR Semaphore not available.

VOS_QUEUE_ERR Queue empty.

VOS_QUEUE_FULL_ERR Queue full.

VOS_MUTEX_ERR Mutex not available.

VOS_THREAD_ERR Thread creation error.

VOS_UNKNOWN_ERR Unknown error.

5.26.3.2 enum VOS_LOG_T

Categories for logging.

Enumerator:

VOS_LOG_ERROR This is a critical error.

VOS_LOG_WARNING This is a warning.

VOS_LOG_INFO This is an info.

VOS_LOG_DBG This is a debug info.

5.26.4 Function Documentation

5.26.4.1 EXT_DECL VOS_ERR_T vos_init (void * pRefCon, VOS_PRINT_DBG_T pDebugOutput)

Initialize the vos library.

This is used to set the output function for all VOS error and debug output.

Parameters:

- $\leftarrow *pRefCon$ user context
- $\leftarrow *pDebugOutput$ pointer to debug output function

Return values:

VOS_NO_ERR no error
VOS_INIT_ERR unsupported

Here is the call graph for this function:




5.27 vos_utils.c File Reference

Common functions for VOS.

```
#include "vos_utils.h"
#include "vos_sock.h"
```

Include dependency graph for vos_utils.c:



Functions

- VOS_ERR_T vos_init (void *pRefCon, VOS_PRINT_DBG_T pDebugOutput)

 Initialize the vos library.
- UINT32 vos_crc32 (UINT32 crc, const UINT8 *pData, UINT32 dataLen) Compute crc32 according to IEEE802.3.

5.27.1 Detailed Description

Common functions for VOS.

Common functions of the abstraction layer. Mainly debugging support.

Note:

Project: TCNOpen TRDP prototype stack

Author:

Bernd Loehr, NewTec GmbH

Remarks:

All rights reserved. Reproduction, modification, use or disclosure to third parties without express authority is forbidden, Copyright Bombardier Transportation GmbH, Germany, 2012.

Id

vos_utils.c 2 2012-06-04 11:25:16Z 97025

5.27.2 Function Documentation

5.27.2.1 UINT32 vos_crc32 (UINT32 crc, const UINT8 * pData, UINT32 dataLen)

Compute crc32 according to IEEE802.3.

Calculate CRC for the given buffer and length.

Parameters:

- \leftarrow *crc* Initial value.
- \leftrightarrow *pData* Pointer to data.
- \leftarrow *dataLen* length in bytes of data.

Return values:

crc32 according to IEEE802.3

5.27.2.2 VOS_ERR_T vos_init (void * pRefCon, VOS_PRINT_DBG_T pDebugOutput)

Initialize the vos library.

This is used to set the output function for all VOS error and debug output.

Parameters:

- $\leftarrow *pRefCon$ user context
- $\leftarrow *pDebugOutput$ pointer to debug output function

Return values:

VOS_NO_ERR no error VOS_INIT_ERR unsupported

Here is the call graph for this function:




5.28 vos_utils.h File Reference


Typedefs for OS abstraction.

```
#include <stdio.h>
#include <stddef.h>
#include "vos_types.h"
```

Include dependency graph for vos_utils.h:



This graph shows which files directly or indirectly include this file:



Defines

- #define VOS_MAX_PRNT_STR_SIZE 256
 String size definitions for the debug output functions.
- #define VOS_MAX_FRMT_SIZE 64
 Max.
- #define VOS_MAX_ERR_STR_SIZE (VOS_MAX_PRNT_STR_SIZE VOS_MAX_FRMT_-SIZE)

Max.

• #define vos_print(level, string)

Debug output macro without formatting options.

- #define vos_printf(level, format, args...)

 Debug output macro with formatting options.
- #define ALIGNOF(type) offsetof(struct { char c; type member; }, member)

 Alignment macros.

Functions

• EXT_DECL UINT32 vos_crc32 (UINT32 crc, const UINT8 *pData, UINT32 dataLen) Calculate CRC for the given buffer and length.

5.28.1 Detailed Description

Typedefs for OS abstraction.

Note:

Project: TCNOpen TRDP prototype stack

Author:

Bernd Loehr, NewTec GmbH

Remarks:

All rights reserved. Reproduction, modification, use or disclosure to third parties without express authority is forbidden, Copyright Bombardier Transportation GmbH, Germany, 2012.

Id

vos_utils.h 34 2012-08-10 15:42:59Z 97025

5.28.2 Define Documentation

5.28.2.1 #define VOS_MAX_ERR_STR_SIZE (VOS_MAX_PRNT_STR_SIZE - VOS_MAX_FRMT_SIZE)

Max.

size of the error part

5.28.2.2 #define VOS_MAX_FRMT_SIZE 64

Max.

size of the 'format' part

5.28.2.3 #define VOS_MAX_PRNT_STR_SIZE 256

String size definitions for the debug output functions.

Max. size of the debug/error string of debug function

5.28.3 Function Documentation

5.28.3.1 EXT_DECL UINT32 vos_crc32 (UINT32 crc, const UINT8 * pData, UINT32 dataLen)

Calculate CRC for the given buffer and length.

For TRDP FCS CRC calculation the CRC32 according to IEEE802.3 with start value 0xffffffff is used.

Parameters:

- $\leftarrow crc$ Initial value.
- \leftrightarrow *pData* Pointer to data.
- \leftarrow dataLen length in bytes of data.

Return values:

```
crc32 according to IEEE802.3
```

Calculate CRC for the given buffer and length.

Parameters:

- $\leftarrow crc$ Initial value.
- \leftrightarrow **pData** Pointer to data.
- \leftarrow dataLen length in bytes of data.

Return values:

crc32 according to IEEE802.3

Index

am_big_endian	TRDP_CAR_INFO_T, 17
trdp_utils.c, 200	TRDP_CST_INFO_T, 19
trdp_utils.h, 206	TRDP_DEVICE_INFO_T, 25
	owner
datasetLength	TRDP_CST_INFO_T, 19
GNU_PACKED, 10	
dbgOut	pCarInfo
echoPolling.c, 60	TRDP_CST_INFO_T, 19
echoSelect.c, 64	pCstInfo
destAddr	TRDP_TRAIN_INFO_T, 55
TRDP_PUB_STATISTICS_T, 44	PD_ELE, 13
	pDevInfo
echoPolling.c, 59	TRDP_CAR_INFO_T, 17
dbgOut, 60	pFctInfo
main, 60	TRDP_CST_INFO_T, 19
echoSelect.c, 63	protocolVersion
dbgOut, 64	GNU_PACKED, 10
main, 64	
myPDcallBack, 66	qos
	VOS_SOCK_OPT_T, 56
filterAddr	canditalla a 67
TRDP_SUBS_STATISTICS_T, 52	sendHello.c, 67
	main, 68
GNU_PACKED, 9	tau_tci.h
datasetLength, 10	TRDP_FCT_CAR, 87
msgType, 10	TRDP_FCT_CST, 87
protocolVersion, 10	TRDP_FCT_INVALID, 87
	TRDP_FCT_TRAIN, 87
main	TRDP_INAUG_INVALID, 88
echoPolling.c, 60	TRDP_INAUG_LEAD_CONF, 88
echoSelect.c, 64	TRDP_INAUG_LEAD_UNCONF, 88
sendHello.c, 68	TRDP_INAUG_NOLEAD_UNCONF, 88
MD_ELE, 12	tau_xml.h
msgType	TRDP_DBG_CAT, 96
GNU_PACKED, 10	TRDP_DBG_DBG, 96
TRDP_MD_INFO_T, 32	TRDP_DBG_DEFAULT, 95
TRDP_PD_INFO_T, 39	TRDP_DBG_ERR, 96
myPDcallBack	TRDI_DBG_ERR, 90 TRDP_DBG_INFO, 96
echoSelect.c, 66	TRDP_DBG_LOC, 96
D	TRDP_DBG_OFF, 95
numRecv	TRDP_DBG_TIME, 96
TRDP_SUBS_STATISTICS_T, 53	TRDP_DBG_TIME, 90 TRDP_DBG_WARN, 96
amanatan	— — <i>′</i>
operator TRDD TRAIN INFO T 55	tau_addr.h, 70
TRDP_TRAIN_INFO_T, 55	tau_addr2CarId, 72
orient	tau_addr2CarNo, 72

tau_addr2CstId, 73	tau_getEtbState
tau_addr2CstNo, 73	tau_tci.h, 91
tau_addr2IecCarNo, 73	tau_getIecCarOrient
tau_addr2IecCstNo, 74	tau_tci.h, 91
tau_addr2Uri, 74	tau_getOwnAddr
tau_carNo2Ids, 74	tau_addr.h, 75
tau_cstNo2CstId, 75	tau_getOwnIds
tau_getOwnAddr, 75	tau_addr.h, 75
tau_getOwnIds, 75	tau_getTrnCarCnt
tau_iecCarNo2Ids, 76	tau_tci.h, 92
tau_iecCstNo2CstId, 76	tau_getTrnCstCnt
tau_label2CarId, 76	tau_tci.h, 92
tau_label2CarNo, 77	tau_getTrnInfo
tau_label2CstId, 77	tau_tci.h, 92
tau_label2CstNo, 77	tau_iecCarNo2Ids
tau_label2IecCarNo, 78	tau_addr.h, 76
tau_label2IecCstNo, 78	tau_iecCstNo2CstId
tau_uri2Addr, 78	tau_addr.h, 76
tau_addr2CarId	tau_initMarshall
tau_addr.h, 72	tau_marshall.h, 82
tau_addr2CarNo	tau_label2CarId
tau_addr.h, 72	tau_addr.h, 76
tau_addr2CstId	tau_label2CarNo
tau_addr.h, 73	tau_addr.h, 77
tau_addr2CstNo	tau_label2CstId
tau_addr.h, 73	tau_addr.h, 77
tau_addr2IecCarNo	tau_label2CstNo
tau_addr.h, 73	tau_addr.h, 77
tau_addr2IecCstNo	tau_label2IecCarNo
tau_addr.h, 74	tau_addr.h, 78
tau_addr2Uri	tau_label2IecCstNo
tau_addr.h, 74	tau_addr.h, 78
tau_calcDatasetSize	tau_marshall
tau_marshall.h, 81	tau_marshall.h, 83
tau_carNo2Ids	tau_marshall.h, 80
tau_addr.h, 74	tau_calcDatasetSize, 81
tau_cstNo2CstId	tau_initMarshall, 82
tau_addr.h, 75	tau_marshall, 83
tau_getCarDevCnt	tau_marshallDs, 81
tau_tci.h, 88	tau_unmarshall, 83
tau_getCarInfo	tau_unmarshallDs, 82
tau_tci.h, 88	TAU_MARSHALL_INFO_T, 15
tau_getCarOrient	tau_marshallDs
tau_tci.h, 89	tau_marshall.h, 81
tau_getCstCarCnt	tau_readXmlConfig
tau_tci.h, 89	tau_xml.h, 96
tau_getCstFctCnt	tau_readXmlDatasetConfig
tau_tci.h, 89	tau_xml.h, 96
tau_tet.ii, 89 tau_getCstFctInfo	tau_tci.h, 85
tau_getesir etinio tau_tei.h, 90	tau_getCarDevCnt, 88
tau_getCstInfo	tau_getCarInfo, 88
tau_getestinio tau_tei.h, 90	tau_getCarOrient, 89
tau_getDevInfo	tau_getCstCarCnt, 89
tau_tei.h, 90	tau_getCstCatCnt, 89
tau_tc1.11, 70	iau_geiesifeieni, 69

tau_getCstFctInfo, 90	trdp_if_light.h, 132
tau_getCstInfo, 90	tlc_openSession
tau_getDevInfo, 90	trdp_if.c, 103
tau_getEtbState, 91	trdp_if_light.h, 132
tau_getIecCarOrient, 91	tlc_process
tau_getTrnCarCnt, 92	trdp_if.c, 104
tau_getTrnCstCnt, 92	trdp_if_light.h, 133
tau_getTrnInfo, 92	tlc_reinitSession
TRDP_FCT_T, 87	trdp_if.c, 105
TRDP_INAUG_STATE_T, 87	trdp_if_light.h, 135
tau_types.h, 93	tlc_resetStatistics
tau_unmarshall	trdp_if_light.h, 136
tau_marshall.h, 83	trdp_stats.c, 184
tau_unmarshallDs	tlc_setTopoCount
tau_marshall.h, 82	trdp_if.c, 106
tau_uri2Addr	trdp_if_light.h, 137
tau_addr.h, 78	tlc_terminate
tau_xml.h, 94	trdp_if.c, 106
tau_readXmlConfig, 96	trdp_if_light.h, 137
tau_readXmlDatasetConfig, 96	tlm_abortSession
TRDP_DBG_OPTION_T, 95	trdp_if_light.h, 138
timeout	tlm_addListener
TRDP_SUBS_STATISTICS_T, 52	trdp_if_light.h, 138
tlc_closeSession	tlm_confirm
trdp_if.c, 100	trdp_if_light.h, 139
trdp_if_light.h, 125	tlm_delListener
tlc_freeBuf	trdp_if_light.h, 139
trdp_if_light.h, 125	tlm_notify
tlc_getInterval	trdp_if_light.h, 140
trdp_if.c, 101	tlm_reply
trdp_if_light.h, 126	trdp_if_light.h, 140
tlc_getJoinStatistics	tlm_replyErr
trdp_if_light.h, 127	trdp_if_light.h, 141
trdp_stats.c, 180	tlm_replyQuery
tlc_getListStatistics	trdp_if_light.h, 142
trdp_if_light.h, 128	tlm_request
trdp_stats.c, 181	trdp_if_light.h, 143
tlc_getPubStatistics	tlp_get
trdp_if_light.h, 128	trdp_if.c, 107
trdp_stats.c, 181	trdp_if_light.h, 143
tlc_getRedStatistics	tlp_getRedundant
trdp_if_light.h, 129	trdp_if.c, 108
trdp_stats.c, 182	trdp_if_light.h, 145
tlc_getStatistics	tlp_publish
trdp_if_light.h, 130	trdp_if.c, 109
trdp_stats.c, 182	trdp_if_light.h, 146
tlc_getSubsStatistics	tlp_put
trdp_if_light.h, 131	trdp_if.c, 110
trdp_stats.c, 183	trdp_if_light.h, 148
tlc_getVersion	tlp_request
trdp_if.c, 102	trdp_if.c, 111
trdp_if_light.h, 132	trdp_if_light.h, 149
tlc_init	tlp_setRedundant
trdp_if.c, 102	trdp_if.c, 113

TRDP_FLAGS_TCP
trdp_types.h, 197
TRDP_INAUG_INVALID
tau_tci.h, 88
TRDP_INAUG_LEAD_CONF
tau_tci.h, 88
TRDP_INAUG_LEAD_UNCONF
tau_tci.h, 88
TRDP_INAUG_NOLEAD_UNCONF
tau_tci.h, 88
TRDP_INIT_ERR
trdp_types.h, 196
TRDP_INT16
trdp_types.h, 195
TRDP_INT32
trdp_types.h, 195
TRDP_INT64
trdp_types.h, 195
TRDP_INT8
trdp_types.h, 195
TRDP_IO_ERR
trdp_types.h, 196
TRDP_MEM_ERR
trdp_types.h, 196
TRDP_MSG_MC
trdp_types.h, 197
TRDP_MSG_ME
trdp_types.h, 197
TRDP_MSG_MN
trdp_types.h, 197
TRDP_MSG_MP
trdp_types.h, 197
TRDP MSG MQ
trdp_types.h, 197
TRDP_MSG_MR
trdp_types.h, 197
TRDP_MSG_PD
trdp_types.h, 197
TRDP_MSG_PE
trdp_types.h, 197
TRDP_MSG_PR
trdp_types.h, 197 TRDP MUTEX ERR
trdp_types.h, 196
TRDP_NO_ERR
trdp_types.h, 196
TRDP_NODATA_ERR
trdp_types.h, 196
TRDP_NOINIT_ERR
trdp_types.h, 196
TRDP_NOLIST_ERR
trdp_types.h, 196
TRDP_NOPUB_ERR
trdp_types.h, 196

TRDP_NOSESSION_ERR	trdp_types.h, 196
trdp_types.h, 196	TRDP_TIMEDATE64
TRDP_NOSUB_ERR	trdp_types.h, 196
trdp_types.h, 196	TRDP_TIMEOUT_ERR
TRDP_OPTION_BLOCK	trdp_types.h, 196
trdp_types.h, 197	TRDP_TO_KEEP_LAST_VALUE
TRDP_OPTION_TRAFFIC_SHAPING	trdp_types.h, 198
trdp_types.h, 197	TRDP_TO_SET_TO_ZERO
TRDP_PARAM_ERR	trdp_types.h, 198
trdp_types.h, 196	TRDP_TOPO_ERR
trdp_private.h	trdp_types.h, 196
TRDP_PULL_SUB, 178	trdp_types.h
TRDP_REQ_2B_SENT, 178	TRDP_BOOLEAN, 195
TRDP_SOCK_MD_TCP, 178	TRDP_CHAR8, 195
TRDP_SOCK_MD_UDP, 178	TRDP_COMID_ERR, 196
TRDP_SOCK_PD, 178	TRDP_CRC_ERR, 196
TRDP_TIMED_OUT, 178	TRDP_FLAGS_CALLBACK, 197
TRDP_PULL_SUB	TRDP_FLAGS_MARSHALL, 197
trdp_private.h, 178	TRDP_FLAGS_REDUNDANT, 197
TRDP_QUEUE_ERR	TRDP_FLAGS_TCP, 197
trdp_types.h, 196	TRDP_INIT_ERR, 196
TRDP_QUEUE_FULL_ERR	TRDP_INT16, 195
trdp_types.h, 196	TRDP_INT32, 195
TRDP_REAL32	TRDP_INT64, 195
trdp_types.h, 196	TRDP_INT8, 195
TRDP_REAL64	TRDP_IO_ERR, 196
trdp_types.h, 196	TRDP_MEM_ERR, 196
TRDP_RED_FOLLOWER	TRDP_MSG_MC, 197
trdp_types.h, 197	TRDP_MSG_ME, 197 TRDP_MSG_ME, 197
TRDP_RED_LEADER	
	TRDP_MSG_MN, 197
trdp_types.h, 197	TRDP_MSG_MP, 197
TRDP_REQ_2B_SENT	TRDP_MSG_MQ, 197
trdp_private.h, 178	TRDP_MSG_MR, 197
TRDP_SEMA_ERR	TRDP_MSG_PD, 197
trdp_types.h, 196	TRDP_MSG_PE, 197
TRDP_SESSION_ABORT_ERR	TRDP_MSG_PR, 197
trdp_types.h, 196	TRDP_MUTEX_ERR, 196
TRDP_SOCK_ERR	TRDP_NO_ERR, 196
trdp_types.h, 196	TRDP_NODATA_ERR, 196
TRDP_SOCK_MD_TCP	TRDP_NOINIT_ERR, 196
trdp_private.h, 178	TRDP_NOLIST_ERR, 196
TRDP_SOCK_MD_UDP	TRDP_NOPUB_ERR, 196
trdp_private.h, 178	TRDP_NOSESSION_ERR, 196
TRDP_SOCK_PD	TRDP_NOSUB_ERR, 196
trdp_private.h, 178	TRDP_OPTION_BLOCK, 197
TRDP_STATE_ERR	TRDP_OPTION_TRAFFIC_SHAPING, 197
trdp_types.h, 196	TRDP_PARAM_ERR, 196
TRDP_STRING	TRDP_QUEUE_ERR, 196
trdp_types.h, 196	TRDP_QUEUE_FULL_ERR, 196
TRDP_TIMED_OUT	TRDP_REAL32, 196
trdp_private.h, 178	TRDP_REAL64, 196
TRDP_TIMEDATE32	TRDP_RED_FOLLOWER, 197
trdp_types.h, 196	TRDP_RED_LEADER, 197
TRDP_TIMEDATE48	TRDP_SEMA_ERR, 196
_	/

TRDP_SESSION_ABORT_ERR, 196	trdp_types.h, 196
TRDP_SOCK_ERR, 196	trdp_getSeqCnt
TRDP_STATE_ERR, 196	trdp_utils.c, 200
TRDP_STRING, 196	trdp_utils.h, 206
TRDP_TIMEDATE32, 196	trdp_getTopoCount
TRDP_TIMEDATE48, 196	trdp_if.c, 116
TRDP_TIMEDATE64, 196	trdp_if.h, 119
TRDP_TIMEOUT_ERR, 196	TRDP_HANDLE, 27
TRDP_TO_KEEP_LAST_VALUE, 198	trdp_if.c, 98
TRDP_TO_SET_TO_ZERO, 198	tlc_closeSession, 100
TRDP_TOPO_ERR, 196	tlc_getInterval, 101
TRDP_UINT16, 195	tlc_getVersion, 102
TRDP_UINT32, 196	tlc_init, 102
TRDP_UINT64, 196	tlc_openSession, 103
TRDP_UINT8, 195	tlc_process, 104
TRDP_UNKNOWN_ERR, 196	tlc_reinitSession, 105
TRDP_UTF16, 195	tlc_setTopoCount, 106
TRDP_UINT16	tlc_terminate, 106
trdp_types.h, 195	tlp_get, 107
TRDP_UINT32	tlp_getRedundant, 108
trdp_types.h, 196	tlp_publish, 109
TRDP_UINT64	tlp_put, 110
trdp_types.h, 196	tlp_request, 111
TRDP_UINT8	tlp_setRedundant, 113
trdp_types.h, 195	tlp_subscribe, 114
TRDP_UNKNOWN_ERR	tlp_unpublish, 115
trdp_types.h, 196	tlp_unsubscribe, 116
TRDP_UTF16	trdp_getTopoCount, 116
trdp_types.h, 195	trdp_isValidSession, 117
TRDP_CAR_INFO_T, 16	trdp_sessionQueue, 117
orient, 17	trdp_if.h, 118
pDevInfo, 17	trdp_getTopoCount, 119
TRDP_CST_INFO_T, 18	trdp_isValidSession, 119
orient, 19	trdp_sessionQueue, 119
owner, 19	trdp_if_light.h, 121
pCarInfo, 19	tlc_closeSession, 125
pFctInfo, 19	tlc_freeBuf, 125
TRDP_DATA_TYPE_T	tlc_getInterval, 126
trdp_types.h, 195	tlc_getJoinStatistics, 127
TRDP_DATASET_ELEMENT_T, 20	tlc_getListStatistics, 128
type, 20	tlc_getPubStatistics, 128
TRDP_DATASET_OFFSET_T, 21	tlc_getRedStatistics, 129
TRDP_DATASET_T, 22	tlc_getStatistics, 130
TRDP_DBG_CONFIG_T, 23	tlc_getSubsStatistics, 131
TRDP_DBG_OPTION_T	tlc_getVersion, 132
tau_xml.h, 95	tlc_init, 132
TRDP_DEVICE_INFO_T, 24	tlc_openSession, 132
orient, 25	tlc_process, 133
TRDP_ERR_T	tlc_reinitSession, 135
trdp_types.h, 196	tlc_resetStatistics, 136
TRDP_FCT_INFO_T, 26	tlc_setTopoCount, 137
TRDP_FCT_T	tlc_terminate, 137
tau_tci.h, 87	tlm_abortSession, 138
TRDP_FLAGS_T	tlm_addListener, 138

tlm_confirm, 139	trdp_rcvMD, 160
tlm_delListener, 139	trdp_sendMD, 160
tlm_notify, 140	trdp_mdcom.h, 161
tlm_reply, 140	trdp_rcvMD, 162
tlm_replyErr, 141	trdp_sendMD, 162
tlm_replyQuery, 142	TRDP_MEM_CONFIG_T, 35
tlm_request, 143	TRDP_MEM_STATISTICS_T, 36
tlp_get, 143	TRDP_MSG_T
tlp_getRedundant, 145	trdp_types.h, 197
tlp_publish, 146	TRDP_OPTION_T
tlp_put, 148	trdp_types.h, 197
tlp_request, 149	trdp_packetSizePD
tlp_setRedundant, 151	trdp_utils.c, 202
tlp_subscribe, 152	trdp_utils.h, 208
tlp_unpublish, 154	TRDP_PD_CALLBACK_T
tlp_unsubscribe, 155	trdp_types.h, 194
TRDP_INAUG_STATE_T	TRDP_PD_CONFIG_T, 37
tau_tci.h, 87	TRDP_PD_INFO_T, 38
trdp_initSockets	msgType, 39
trdp_utils.c, 201	TRDP_PD_STATISTICS_T, 40
trdp_utils.h, 207	trdp_pdCheck
trdp_initStats	trdp_pdcom.c, 164
trdp_stats.c, 184	trdp_pdcom.h, 170
trdp_stats.h, 187	trdp_pdcom.c, 163
TRDP_IP_ADDR_T	trdp_pdCheck, 164
trdp_types.h, 194	trdp_pdDataUpdate, 165
trdp_isRcvSeqCnt	trdp_pdInit, 165
trdp_utils.c, 201	trdp_pdReceive, 165
trdp_utils.h, 207	trdp_pdSend, 166
trdp_isValidSession	trdp_pdSendQueued, 167
trdp_if.c, 117	trdp_pdUpdate, 167
trdp_if.h, 119	trdp_pdcom.h, 169
TRDP_LIST_STATISTICS_T, 28	trdp_pdCheck, 170
trdp_marshall.c, 157	trdp_pdDataUpdate, 170
TRDP_MARSHALL_CONFIG_T, 29	trdp_pdInit, 171
TRDP_MARSHALL_T	trdp_pdReceive, 171
trdp_types.h, 194	trdp_pdSend, 172
TRDP_MAX_FILE_NAME_LEN	trdp_pdSendQueued, 173
trdp_types.h, 193	trdp_pdUpdate, 173
TRDP_MAX_LABEL_LEN	trdp_pdDataUpdate
trdp_types.h, 193	trdp_pdcom.c, 165
TRDP_MAX_URI_HOST_LEN	trdp_pdcom.h, 170
trdp_types.h, 193	trdp_pdInit
TRDP_MAX_URI_LEN	trdp_pdcom.c, 165
trdp_types.h, 193	trdp_pdcom.h, 171
TRDP_MAX_URI_USER_LEN	trdp_pdPrepareStats
trdp_types.h, 193	trdp_stats.c, 184
TRDP_MD_CALLBACK_T	trdp_stats.h, 187
trdp_types.h, 194	trdp_pdReceive
TRDP_MD_CONFIG_T, 30	trdp_pdcom.c, 165
TRDP_MD_INFO_T, 31	trdp_pdcom.h, 171
msgType, 32	trdp_pdSend
TRDP_MD_STATISTICS_T, 33	trdp_pdcom.c, 166
trdp_mdcom.c, 159	trdp_pdcom.h, 172
110P_1110V0111.0, 107	uup_pucoiii.ii, 1/2

trdp_pdSendQueued	TRDP_SOCKETS, 49
trdp_pdcom.c, 167	usage, 49
trdp_pdcom.h, 173	TRDP_STATISTICS_T, 50
trdp_pdUpdate	trdp_stats.c, 179
trdp_pdcom.c, 167	tlc_getJoinStatistics, 180
trdp_pdcom.h, 173	tlc_getListStatistics, 181
TRDP_PRINT_DBG_T	tlc_getPubStatistics, 181
trdp_types.h, 194	tlc_getRedStatistics, 182
TRDP_PRIV_FLAGS_T	tlc_getStatistics, 182
trdp_private.h, 178	tlc_getSubsStatistics, 183
trdp_private.h, 175	tlc resetStatistics, 184
TRDP_PRIV_FLAGS_T, 178	trdp_initStats, 184
TRDP_SOCK_TYPE_T, 178	trdp_pdPrepareStats, 184
TRDP_PROCESS_CONFIG_T, 42	trdp_UpdateStats, 185
TRDP_PROP_INFO_T, 43	trdp_stats.h, 186
TRDP_PUB_STATISTICS_T, 44	trdp_initStats, 187
destAddr, 44	trdp_pdPrepareStats, 187
	TRDP_SUBS_STATISTICS_T, 52
trdp_queueAppLast	
trdp_utils.c, 202	filterAddr, 52
trdp_utils.h, 208	numRecv, 53
trdp_queueDelElement	timeout, 52
trdp_utils.c, 202	toBehav, 52
trdp_utils.h, 208	TRDP_TIME_T
trdp_queueFindAddr	trdp_types.h, 195
trdp_utils.c, 202	TRDP_TO_BEHAVIOR_T
trdp_utils.h, 208	trdp_types.h, 197
trdp_queueFindComId	TRDP_TRAIN_INFO_T, 54
trdp_utils.c, 202	operator, 55
trdp_utils.h, 208	pCstInfo, 55
trdp_queueInsFirst	topoCnt, 55
trdp_utils.c, 203	trdp_types.h, 188
trdp_utils.h, 209	TRDP_DATA_TYPE_T, 195
trdp_rcvMD	TRDP_ERR_T, 196
trdp_mdcom.c, 160	TRDP_FLAGS_T, 196
trdp_mdcom.h, 162	TRDP_IP_ADDR_T, 194
TRDP_RED_STATE_T	TRDP_MARSHALL_T, 194
trdp_types.h, 197	TRDP_MAX_FILE_NAME_LEN, 193
TRDP_RED_STATISTICS_T, 45	TRDP_MAX_LABEL_LEN, 193
trdp_releaseSocket	TRDP_MAX_URI_HOST_LEN, 193
trdp_utils.c, 203	TRDP_MAX_URI_LEN, 193
trdp_utils.h, 209	TRDP_MAX_URI_USER_LEN, 193
trdp_requestSocket	TRDP_MD_CALLBACK_T, 194
trdp_utils.c, 203	TRDP_MSG_T, 197
trdp_utils.h, 209	TRDP_OPTION_T, 197
TRDP_SEND_PARAM_T, 46	TRDP_PD_CALLBACK_T, 194
trdp_sendMD	TRDP_PRINT_DBG_T, 194
trdp_mdcom.c, 160	TRDP_RED_STATE_T, 197
trdp_mdcom.h, 162	TRDP_TIME_T, 195
TRDP_SESSION, 47	TRDP_TO_BEHAVIOR_T, 197
trdp_sessionQueue	TRDP_UNMARSHALL_T, 195
trdp_if.c, 117	TRDP_UNMARSHALL_T
trdp_if.h, 119	trdp_types.h, 195
TRDP_SOCK_TYPE_T	trdp_UpdateStats
trdp_private.h, 178	trdp_stats.c, 185
1 —1	1 — ,

trdp_utils.c, 199	VOS_NOINIT_ERR
am_big_endian, 200	vos_types.h, 262
trdp_getSeqCnt, 200	VOS_PARAM_ERR
trdp_initSockets, 201	vos_types.h, 262
trdp_isRcvSeqCnt, 201	VOS_QUEUE_ERR
trdp_packetSizePD, 202	vos_types.h, 262
trdp_queueAppLast, 202	VOS_QUEUE_FULL_ERR
trdp_queueDelElement, 202	vos_types.h, 262
trdp_queueFindAddr, 202	VOS_SEMA_ERR
trdp_queueFindComId, 202	vos_types.h, 262
trdp_queueInsFirst, 203	VOS_SOCK_ERR
trdp_releaseSocket, 203	vos_types.h, 262
trdp_requestSocket, 203	VOS_THREAD_ERR
trdp_utils.h, 205	vos_types.h, 262
am_big_endian, 206	VOS_TIMEOUT_ERR
trdp_getSeqCnt, 206	vos_types.h, 262
trdp_initSockets, 207	vos_types.h
trdp_isRcvSeqCnt, 207	VOS_INIT_ERR, 262
trdp_packetSizePD, 208	VOS_IO_ERR, 262
trdp_queueAppLast, 208	VOS LOG DBG, 262
trdp_queueDelElement, 208	VOS_LOG_ERROR, 262
trdp_queueFindAddr, 208	VOS_LOG_INFO, 262
trdp_queueFindComId, 208	VOS_LOG_WARNING, 262
trdp_queueInsFirst, 209	VOS_MEM_ERR, 262
<u>. </u>	VOS_MUTEX_ERR, 262
trdp_releaseSocket, 209	VOS_MOTEA_ERR, 202 VOS_NO_ERR, 262
trdp_requestSocket, 209	VOS_NODATA_ERR, 262
tv_usec	
VOS_TIME_T, 57	VOS_NOINIT_ERR, 262
type	VOS_PARAM_ERR, 262
TRDP_DATASET_ELEMENT_T, 20	VOS_QUEUE_ERR, 262
	VOS_QUEUE_FULL_ERR, 262
usage	VOS_SEMA_ERR, 262
TRDP_SOCKETS, 49	VOS_SOCK_ERR, 262
VOC DUE EDD	VOS_THREAD_ERR, 262
VOS_INIT_ERR	VOS_TIMEOUT_ERR, 262
vos_types.h, 262	VOS_UNKNOWN_ERR, 262
VOS_IO_ERR	VOS_UNKNOWN_ERR
vos_types.h, 262	vos_types.h, 262
VOS_LOG_DBG	vos_addTime
vos_types.h, 262	vos_thread.h, 247
VOS_LOG_ERROR	vos_bsearch
vos_types.h, 262	vos_mem.h, 213
VOS_LOG_INFO	vos_clearTime
vos_types.h, 262	vos_thread.h, 247
VOS_LOG_WARNING	vos_cmpTime
vos_types.h, 262	vos_thread.h, 247
VOS_MEM_ERR	vos_crc32
vos_types.h, 262	vos_utils.c, 264
VOS_MUTEX_ERR	vos_utils.h, 267
vos_types.h, 262	vos_dottedIP
VOS_NO_ERR	vos_sock.h, 227
vos_types.h, 262	VOS_ERR_T
VOS_NODATA_ERR	vos_types.h, 262
vos_types.h, 262	vos_getTime
. 35_t) positi, 202	. 55_50111110

	_
vos_thread.h, 248	vos_mutexCreate
vos_getTimeStamp	vos_thread.h, 249
vos_thread.h, 248	vos_mutexDelete
vos_getUuid	vos_thread.h, 250
vos_thread.h, 249	vos_mutexLock
vos_htonl	vos_thread.h, 251
vos_sock.h, 228	vos_mutexTryLock
vos_htons	vos_thread.h, 251
vos_sock.h, 228	vos_mutexUnlock
vos_init	vos_thread.h, 252
vos_types.h, 263	vos_ntohl
vos_utils.c, 265	vos_sock.h, 230
vos_ipDotted	vos_ntohs
vos_sock.h, 229	vos_sock.h, 230
vos_isMulticast	VOS_PRINT_DBG_T
vos_sock.h, 229	vos_types.h, 261
VOS_LOG_T	vos_qsort
vos_types.h, 262	vos_mem.h, 218
VOS_MAX_ERR_STR_SIZE	vos_queueCreate
vos_utils.h, 267	vos_mem.h, 219
VOS_MAX_FRMT_SIZE	vos_queueDestroy
vos_utils.h, 267	vos_mem.h, 220
VOS_MAX_PRNT_STR_SIZE	vos_queueReceive
vos_utils.h, 267	vos_mem.h, 221
vos_mem.h, 211	vos_queueSend
vos_bsearch, 213	vos_mem.h, 222
VOS_MEM_BLOCKSIZES, 213	vos_semaCreate
VOS_MEM_PREALLOCATE, 213	vos_thread.h, 253
vos_memAlloc, 214	vos_semaDelete
vos_memCount, 215	vos_thread.h, 253
vos_memDelete, 216	vos_semaGive
vos_memFree, 216	vos_thread.h, 254
vos_memInit, 217	vos_semaTake
vos_qsort, 218	vos_thread.h, 254
vos_queueCreate, 219	vos_sharedClose
vos_queueDestroy, 220	vos_mem.h, 222
vos_queueReceive, 221	vos_sharedOpen
vos_queueSend, 222	vos_mem.h, 223
vos_sharedClose, 222	vos_sock.h, 225
vos_sharedOpen, 223	vos_dottedIP, 227
VOS_MEM_BLOCKSIZES	vos_htonl, 228
vos_mem.h, 213	vos_htons, 228
VOS_MEM_PREALLOCATE	vos_ipDotted, 229
vos_mem.h, 213	vos_isMulticast, 229
vos_memAlloc	vos_ntohl, 230
vos_mem.h, 214	vos_ntohs, 230
vos_memCount	vos_sockAccept, 230
vos_mem.h, 215	vos_sockBind, 231
vos_memDelete	vos_sockClose, 232
vos_mem.h, 216	vos_sockConnect, 232
vos_memFree	vos_sockGetMAC, 233
vos_mem.h, 216	vos_sockInit, 234
vos_memInit	vos_sockJoinMC, 234
vos_mem.h, 217	vos_sockLeaveMC, 235

17.1	, m r 1 071
vos_sockListen, 236	vos_mutexTryLock, 251
vos_sockOpenTCP, 236	vos_mutexUnlock, 252
vos_sockOpenUDP, 237	vos_semaCreate, 253
vos_sockReceiveTCP, 238	vos_semaDelete, 253
vos_sockReceiveUDP, 239	vos_semaGive, 254
vos_sockSendTCP, 240	vos_semaTake, 254
vos_sockSendUDP, 241	vos_subTime, 255
vos_sockSetOptions, 242	vos_threadCreate, 255
VOS_SOCK_OPT_T, 56	vos_threadDelay, 257
qos, 56	vos_threadInit, 257
vos_sockAccept	vos_threadIsActive, 258
vos_sock.h, 230	vos_threadTerminate, 258
vos_sockBind	vos_threadCreate
vos_sock.h, 231	vos_thread.h, 255
vos_sockClose	vos_threadDelay
vos_sock.h, 232	vos_thread.h, 257
vos_sockConnect	vos_threadInit
vos_sock.h, 232	vos_thread.h, 257
vos sockGetMAC	vos_threadIsActive
vos_sock.h, 233	vos_thread.h, 258
vos_sockInit	vos_threadTerminate
vos_sock.h, 234	vos_thread.h, 258
vos_sockJoinMC	VOS_TIME_T, 57
vos_sock.h, 234	tv_usec, 57
vos_sockLeaveMC	vos_types.h, 260
vos_sock.h, 235	VOS_ERR_T, 262
vos_sockListen	vos_ERR_1, 202 vos_init, 263
	VOS_LOG_T, 262
vos_sock.h, 236	
vos_sockOpenTCP	VOS_PRINT_DBG_T, 261
vos_sock.h, 236	vos_utils.c, 264
vos_sockOpenUDP	vos_crc32, 264
vos_sock.h, 237	vos_init, 265
vos_sockReceiveTCP	vos_utils.h, 266
vos_sock.h, 238	vos_crc32, 267
vos_sockReceiveUDP	VOS_MAX_ERR_STR_SIZE, 267
vos_sock.h, 239	VOS_MAX_FRMT_SIZE, 267
vos_sockSendTCP	VOS_MAX_PRNT_STR_SIZE, 267
vos_sock.h, 240	
vos_sockSendUDP	
vos_sock.h, 241	
vos_sockSetOptions	
vos_sock.h, 242	
vos_subTime	
vos_thread.h, 255	
vos_thread.h, 244	
vos_addTime, 247	
vos_clearTime, 247	
vos_cmpTime, 247	
vos_getTime, 248	
vos_getTimeStamp, 248	
vos_getUuid, 249	
vos_mutexCreate, 249	
vos_mutexDelete, 250	
vos_mutexLock, 251	
100_1110toALOOK, 201	