

# Starcraft Environment Manual

3<sup>rd</sup> June, 2017

# Contents

|          |                                                |           |
|----------|------------------------------------------------|-----------|
| <b>1</b> | <b>Environment</b>                             | <b>5</b>  |
| 1.1      | Installation . . . . .                         | 5         |
| 1.2      | Chaoslauncher . . . . .                        | 5         |
| 1.3      | The Mas2g . . . . .                            | 6         |
| 1.3.1    | Map . . . . .                                  | 6         |
| 1.3.2    | Own Race . . . . .                             | 6         |
| 1.3.3    | StarCraft Location . . . . .                   | 6         |
| 1.3.4    | Debug . . . . .                                | 7         |
| 1.3.5    | Auto Menu . . . . .                            | 7         |
| 1.3.6    | Enemy Race . . . . .                           | 7         |
| 1.3.7    | Game Speed . . . . .                           | 8         |
| 1.3.8    | Invulnerable . . . . .                         | 8         |
| 1.3.9    | Entity Types . . . . .                         | 8         |
| 1.4      | The Development Tool . . . . .                 | 9         |
| 1.4.1    | Game Speed . . . . .                           | 9         |
| 1.4.2    | Cheat Actions . . . . .                        | 9         |
| 1.4.3    | Map Drawing . . . . .                          | 10        |
| <b>2</b> | <b>Percepts</b>                                | <b>11</b> |
| 2.1      | Percepts for All Units and Buildings . . . . . | 12        |
| 2.1.1    | Available Resources . . . . .                  | 12        |
| 2.1.2    | Unit Information . . . . .                     | 13        |
| 2.1.3    | Player Percepts . . . . .                      | 15        |
| 2.1.4    | Map Percepts . . . . .                         | 16        |
| 2.1.5    | Unit Percepts . . . . .                        | 19        |
| 2.2      | Building Percepts . . . . .                    | 21        |
| 2.2.1    | Research and Upgrade Percepts . . . . .        | 21        |
| 2.2.2    | Production Buildings . . . . .                 | 22        |
| 2.2.3    | Loadable Buildings . . . . .                   | 23        |

|          |                                          |           |
|----------|------------------------------------------|-----------|
| 2.3      | Worker percepts . . . . .                | 24        |
| 2.3.1    | Worker Management . . . . .              | 24        |
| 2.3.2    | Builder Percepts . . . . .               | 24        |
| 2.4      | Conditions . . . . .                     | 26        |
| 2.4.1    | Worker Units . . . . .                   | 26        |
| 2.4.2    | Buildings . . . . .                      | 26        |
| 2.4.3    | All . . . . .                            | 27        |
| 2.4.4    | Zerg . . . . .                           | 27        |
| 2.4.5    | Terran . . . . .                         | 27        |
| 2.4.6    | Protoss . . . . .                        | 28        |
| <b>3</b> | <b>Actions</b>                           | <b>29</b> |
| 3.1      | Attack action . . . . .                  | 29        |
| 3.2      | Move action . . . . .                    | 29        |
| 3.3      | Attack move action . . . . .             | 30        |
| 3.4      | Upgrade action . . . . .                 | 30        |
| 3.5      | Build action . . . . .                   | 30        |
| 3.6      | Gather action . . . . .                  | 31        |
| 3.7      | Train action . . . . .                   | 31        |
| 3.8      | Stop action . . . . .                    | 31        |
| 3.9      | Ability action . . . . .                 | 31        |
| 3.10     | Ability on target action . . . . .       | 32        |
| 3.11     | Ability on location action . . . . .     | 32        |
| 3.12     | Research action . . . . .                | 32        |
| 3.13     | Set rally point action . . . . .         | 33        |
| 3.14     | Set rally point to unit action . . . . . | 33        |
| 3.15     | Lift action . . . . .                    | 33        |
| 3.16     | Land action . . . . .                    | 34        |
| 3.17     | Build addon action . . . . .             | 34        |
| 3.18     | Load action . . . . .                    | 34        |
| 3.19     | Unload action . . . . .                  | 35        |
| 3.20     | Unload all action . . . . .              | 35        |
| 3.21     | Cancel action . . . . .                  | 35        |
| 3.22     | Patrol action . . . . .                  | 36        |
| 3.23     | Morph action (Zerg only) . . . . .       | 36        |
| 3.24     | Follow action . . . . .                  | 36        |
| 3.25     | Repair action (Terran only) . . . . .    | 37        |
| <b>4</b> | <b>Tech Types</b>                        | <b>38</b> |
| 4.1      | Terran Units . . . . .                   | 38        |

|          |                                |           |
|----------|--------------------------------|-----------|
| 4.1.1    | Battle Cruisers . . . . .      | 38        |
| 4.1.2    | Command Centers . . . . .      | 38        |
| 4.1.3    | Ghosts . . . . .               | 38        |
| 4.1.4    | Marines and Firebats . . . . . | 38        |
| 4.1.5    | Medics . . . . .               | 38        |
| 4.1.6    | Science Vessels . . . . .      | 39        |
| 4.1.7    | Siege Tanks . . . . .          | 39        |
| 4.1.8    | Vultures . . . . .             | 39        |
| 4.1.9    | Wraith . . . . .               | 39        |
| 4.2      | Protoss Units . . . . .        | 39        |
| 4.2.1    | Arbiters . . . . .             | 39        |
| 4.2.2    | Corsairs . . . . .             | 39        |
| 4.2.3    | Dark Archons . . . . .         | 39        |
| 4.2.4    | Dark Templars . . . . .        | 39        |
| 4.2.5    | High Templars . . . . .        | 40        |
| 4.3      | Zerg Units . . . . .           | 40        |
| 4.3.1    | Generic . . . . .              | 40        |
| 4.3.2    | Defilers . . . . .             | 40        |
| 4.3.3    | Hydralisks . . . . .           | 40        |
| 4.3.4    | Lurkers . . . . .              | 40        |
| 4.3.5    | Queens . . . . .               | 40        |
| <b>5</b> | <b>Upgrade Types</b>           | <b>41</b> |
| 5.1      | Terran Units . . . . .         | 41        |
| 5.1.1    | Academy . . . . .              | 41        |
| 5.1.2    | Armory . . . . .               | 41        |
| 5.1.3    | Covert Ops . . . . .           | 41        |
| 5.1.4    | Engineering Bay . . . . .      | 41        |
| 5.1.5    | Machine Shop . . . . .         | 42        |
| 5.1.6    | Physics Lab . . . . .          | 42        |
| 5.1.7    | Science Facility . . . . .     | 42        |
| 5.1.8    | Control Tower . . . . .        | 42        |
| 5.2      | Protoss Units . . . . .        | 42        |
| 5.2.1    | Arbiter Tribunal . . . . .     | 42        |
| 5.2.2    | Citadel of Adun . . . . .      | 42        |
| 5.2.3    | Cybernetics Core . . . . .     | 42        |
| 5.2.4    | Fleet Beacon . . . . .         | 42        |
| 5.2.5    | Forge . . . . .                | 43        |
| 5.2.6    | Observatory . . . . .          | 43        |
| 5.2.7    | Robotics Support Bay . . . . . | 43        |

|          |                                  |           |
|----------|----------------------------------|-----------|
| 5.2.8    | Templar Archives . . . . .       | 43        |
| 5.3      | Zerg Units . . . . .             | 43        |
| 5.3.1    | Defiler Mound . . . . .          | 43        |
| 5.3.2    | Evolution Chamber . . . . .      | 43        |
| 5.3.3    | Hydralisk Den . . . . .          | 43        |
| 5.3.4    | Lair and Hive . . . . .          | 44        |
| 5.3.5    | Queen's Nest . . . . .           | 44        |
| 5.3.6    | Spawning Pool . . . . .          | 44        |
| 5.3.7    | (Greater) Spire . . . . .        | 44        |
| 5.3.8    | Ultralisk Cavern . . . . .       | 44        |
| <b>6</b> | <b>Unit Types</b>                | <b>45</b> |
| 6.1      | Terran Units . . . . .           | 45        |
| 6.1.1    | Terran Ground Units . . . . .    | 45        |
| 6.1.2    | Terran Air Units . . . . .       | 45        |
| 6.1.3    | Terran Building Units . . . . .  | 46        |
| 6.1.4    | Terran Addons . . . . .          | 46        |
| 6.2      | Protoss Units . . . . .          | 46        |
| 6.2.1    | Protoss Ground Units . . . . .   | 46        |
| 6.2.2    | Protoss Air Units . . . . .      | 47        |
| 6.2.3    | Protoss Building Units . . . . . | 47        |
| 6.3      | Zerg Units . . . . .             | 47        |
| 6.3.1    | Zerg Ground Units . . . . .      | 47        |
| 6.3.2    | Zerg Air Units . . . . .         | 48        |
| 6.3.3    | Zerg Building Units . . . . .    | 48        |

# Chapter 1

## Environment

This section will explain how to set up and start a bot with the StarCraft environment using the GOAL programming language.

### 1.1 Installation

For full installation instructions, see: <https://github.com/eishub/StarCraft/wiki/Install-Guide>

### 1.2 Chaoslauncher

In order to make use of all the StarCraft Brood War plugins, you can make use of the Chaoslauncher application. With this application, several plugins can be used like the *BWAPI Injector* which is necessary for using the BWAPI library. It is also recommended to make use of the *APMAlert* plugin, which shows the current actions per minute of all your units together. When the APM of your bot is suddenly very high, your agents might be executing too many actions in a row. It is also recommended to make use of the *W-Mode* plugin. This plugin automatically starts your StarCraft game in windowed mode which is easier for debugging. You can also make use of the *ChaosPlugin* to make use of its autoreplay function which automatically saves a replay at the end of each game. You can play these replays by first turning off the *BWAPI Injector*. You can then start StarCraft (in the launcher) and select *Single Player* with gametype *Expansion*. Press the ‘Ok’ button and then the ‘Load Replay’ button. If you then open the **Autoreplay** directory in that screen you should be able to see all the replays which are saved by the autoreplay function.

### 1.3 The Mas2g

The StarCraft environment offers multiple parameters to be set up in the mas2g. Within the mas2g you can specify which map you want to play, specify your own race, set the location of your StarCraft game, turn the development tool on or off, enable the automenu script, and specify which race you want to play against. When any of these parameters are updated, do not forget to close the Chaoslauncher before launching the mas2g, or else your changes will not be applied.

```
use "../../StarCraft Connector.jar" as environment with
  map="(2)Destination.scx",
  own_race="terran",
  StarCraft_location="C:\\StarCraft",
  debug="true",
  auto_menu="Single_Player",
  enemy_race="zerg",
  game_speed=50.
```

#### 1.3.1 Map

It is possible to specify which map the Chaoslauncher will automatically load when starting the game. This can be done by inserting the following line: *map = <filename>*, where *<filename>* is the exact filename of the map (with extension). Please note that the environment only supports maps in the directory: *StarCraft/maps/sscai*. Please note that the first time running the environment on a certain map will take some time (around 2 minutes) to generate the API data of the given map.

#### 1.3.2 Own Race

You may also specify the race of your bot in the mas2g. This will automatically launch the Chaoslauncher with the specified race. You can do this by inserting the following line: *own\_race = <RaceName>*, where *<RaceName>* can either be *zerg*, *protoss*, *terran* or *random*. The option *random* will choose one race with a 1/3 chance for each race.

#### 1.3.3 StarCraft Location

It is also possible to specify the location of the StarCraft game. When using the StarCraft game provided by the environment installer, this feature will

automatically start the Chaoslauncher when launching the GOAL MAS. When the Chaoslauncher is already running, it will not start again until you close it, but this is fine as long as you use the same init parameters. When the Chaoslauncher is automatically started by the environment, an automatic script will be written with all the necessary information to run the GOAL agents (so it is recommended to use this feature). You can use this feature by inserting the line: *StarCraft\_location* = *<FilePath>*, where *<FilePath>* is the absolute path to the StarCraft installation folder.

### 1.3.4 Debug

The environment also offers a development tool for debugging purposes. With this development tool, you can increase or decrease the game speed, enable cheats and draw unit and map details on the screen. More information about the development tool can be found at 1.4. In order to enable or disable launching the development tool, you can insert the following line: *debug*=*<Boolean>*.

### 1.3.5 Auto Menu

The auto menu parameter can be used to automatically go through the menus of the game when starting your agents. This can be used for single player games and multi player games. To use the auto menu function you can insert the following line: *auto\_menu*=*<MenuChoice>*, where *<MenuChoice>* can take the following values:

*Single\_Player*: for a single player game.

*Multi\_Player*: for a multiplayer game.

*LAN*: for a local multiplayer game.

### 1.3.6 Enemy Race

The enemy race parameter can be used for specifying which race you want to play against. When an actual enemy race is chosen like: *zerg*, *protoss* or *terran*, the *enemyRace* percept will indicate against which race you are playing. If you do not specify an enemy race, which is equal to the *random* option, the *enemyRace* percept will be *unknown* until the opponent is scouted for the first time. To use the enemy race parameter you can insert the following line: *enemy\_race*=*<RaceName>*, where *<RaceName>* can either be *zerg*, *protoss*, *terran* or *random*. The option *random* will choose one race with a 1/3 chance for each race.



### 1.3.7 Game Speed

The game speed parameter can be used to set the initial speed of the game when the StarCraft game is launched. StarCraft makes use of a logical frame rate, which means that the `game_speed` depends on the amount of frames per second (fps) used to update the game. So the higher the fps, the faster the game will go. For using the `game_speed` parameter you can insert the following line: `game_speed=<FPS>`, where `<FPS>` is a positive integer. If the integer 0 is used, there will be no limit on the amount of FPS used and the game will thus run as fast as it possibly can. **Please note that when integer 0 is used the gameSpeed/1 percept will not give accurate results.** The default (tournament-speed) FPS is 50.

### 1.3.8 Invulnerable

The invulnerable parameter can be used to make your units invulnerable from the start of the game. This can come in handy for testing purposes when you don't want to fight your opponent. To use the invulnerable function you can insert the following line: `invulnerable=<Boolean>`.

### 1.3.9 Entity Types

When defining a launch rule it is important that a correct entity type is used. This value has to be the same type of the StarCraft unit without spaces and where the first letter is uncapitalised. So when you for example want to connect an agent to a **terran SCV**, this can be done by using the entity type `terranSCV`. Note that each unit type starts with the race of the unit, followed by the exact name of the unit type.

```
define myAgent as agent {
  use MyAgentInit as init module.
  use MyAgent as main module.
  use MyAgentEvent as event module.
}

launchpolicy {
  when type = terranSCV launch myAgent.
}
```

## 1.4 The Development Tool

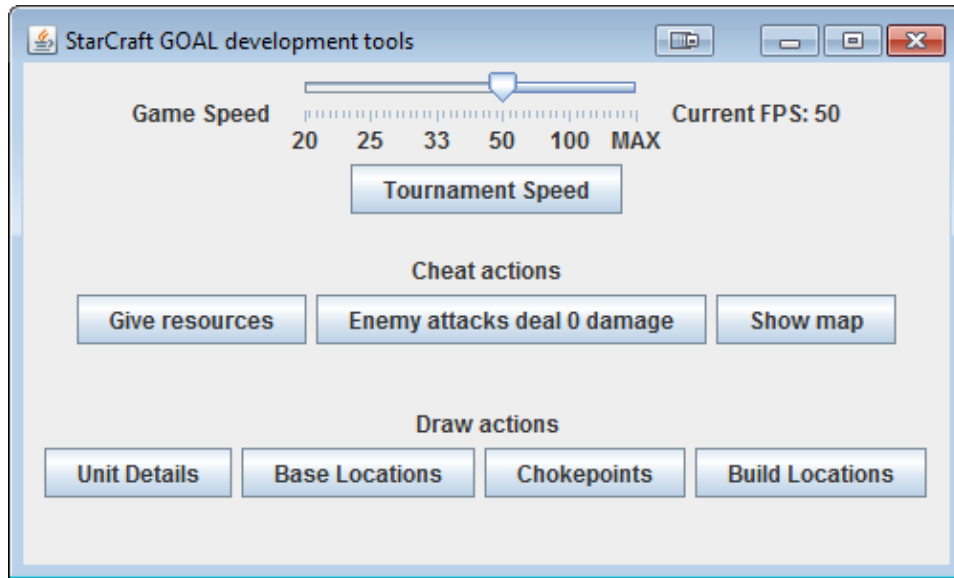


Figure 1.1: Example of the Development Tool

### 1.4.1 Game Speed

The Game Speed slider can be found at the top of the development tool window. This can be used to quickly change the speed of the game. The initial game speed is set to 50 fps (logical frames). The slowest speed is 20 fps and from there you can set it as fast as you want. Please note that the agent is supposed to play normally at 50 fps which is the default game speed for AI tournaments. When the speed is set to a 100 fps or higher, the agents can react slower than they would on the tournament gamespeed. Setting the game speed on 100 or higher should only be used for quick testing purposes.

### 1.4.2 Cheat Actions

The development tool offers 3 buttons which instantly enable StarCraft cheats. Note that these cheats should be used for testing purposes only. The first cheat is called: *Give resources* which gives the player 10000 minerals and 10000 gas. The second cheat is called: *Enemy attacks deal 0 damage*

which makes the units of the player immune for damage. The last cheat is called: *Show map* which makes the whole map visible for the player. Note that all your agents will then also perceive everything on the map.

### 1.4.3 Map Drawing

The development tool can also be used to show map or unit details. There are 4 buttons which can be used. First there is the *Unit Details* button which shows the health and *ID* of every unit. There is also the *Base Locations* button which shows all the starting locations of the map and also all the base locations on the map where players could be expanding to. There is also the *Chokepoints* button which shows all the chokepoints (which are the narrow points where not many units can go through at the same time) on the map. Finally there is the *Build Locations* button which shows all the non-obstructed and explored building locations of the map which the worker units perceive with the *constructionSite* percept.

## Chapter 2

# Percepts

This section will list all the percepts that are usable in the StarCraft environment. The percepts vary per unit, for example: an attacking unit will not perceive the amount of resources available to the player as he does not need them. For the implementation of these percepts in your GOAL code, please refer to the GOAL programming guide.

## 2.1 Percepts for All Units and Buildings

### 2.1.1 Available Resources

#### Resources percept

**Description** The amount of minerals, gas and supply available to the player (i.e. shared by all units). NOTE: supply is multiplied by 2 throughout this interface, so 10 supply in game corresponds with 20 supply in this environment.

**Type** Send on change

**Syntax** `resources(<M>, <G>, <CS>, <TS>)`

**Example** `resources(350, 100, 25, 41)`

|                   |                   |                                                                                                            |
|-------------------|-------------------|------------------------------------------------------------------------------------------------------------|
| <b>Parameters</b> | <b>&lt;M&gt;</b>  | The current amount of minerals available to the player.                                                    |
|                   | <b>Type</b>       | Positive Integer                                                                                           |
|                   | <b>Range</b>      | [0–∞]                                                                                                      |
|                   | <b>&lt;G&gt;</b>  | The current amount of gas available to the player.                                                         |
|                   | <b>Type</b>       | Positive Integer                                                                                           |
|                   | <b>Range</b>      | [0–∞]                                                                                                      |
|                   | <b>&lt;CS&gt;</b> | The supply of the player which is currently in use.                                                        |
|                   | <b>Type</b>       | Positive Integer                                                                                           |
|                   | <b>Range</b>      | [0–400]                                                                                                    |
|                   | <b>&lt;TS&gt;</b> | The total amount of supply the player can currently use. Note that <TS> is always greater or equal to <CS> |
|                   | <b>Type</b>       | Positive Integer                                                                                           |
|                   | <b>Range</b>      | [0–400]                                                                                                    |

### 2.1.2 Unit Information

#### Self percept

|             |                                                                                                                              |
|-------------|------------------------------------------------------------------------------------------------------------------------------|
| Description | The (unique) <i>ID</i> and type of the unit. Also gives information about the maximum health, shield and energy of the unit. |
| Type        | Send once                                                                                                                    |
| Syntax      | <code>self(&lt;ID&gt;, &lt;UnitType&gt;, &lt;MaxHealth&gt;, &lt;MaxShield&gt;, &lt;MaxEnergy&gt;)</code>                     |
| Example     | <code>self(21, Terran SCV, 60, 0, 0)</code>                                                                                  |

|            |                                                         |                                                                                                                                                                                                 |
|------------|---------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Parameters | <b>&lt;ID&gt;</b><br><b>Type</b><br><b>Range</b>        | The (unique) <i>ID</i> of the unit.<br>Positive Integer<br>[0–∞]                                                                                                                                |
|            | <b>&lt;UnitType&gt;</b><br><br><b>Type</b>              | The type of the unit. The type of a unit consists of a string with the race of the unit and the name of the unit parted by a space. See Section 6 for the list of all the unit types.<br>String |
|            | <b>&lt;MaxHealth&gt;</b><br><b>Type</b><br><b>Range</b> | The maximum amount of health of the unit.<br>Positive Integer<br>[0–2500]                                                                                                                       |
|            | <b>&lt;MaxShield&gt;</b><br><b>Type</b><br><b>Range</b> | The maximum amount of shield of the unit.<br>Positive Integer<br>[0–2500]                                                                                                                       |
|            | <b>&lt;MaxEnergy&gt;</b><br><b>Type</b><br><b>Range</b> | The maximum amount of energy of the unit.<br>Positive Integer<br>[0–2500]                                                                                                                       |

#### Defensive Matrix percept

|             |                                                                                                                                |
|-------------|--------------------------------------------------------------------------------------------------------------------------------|
| Description | Information about how much health the defensive matrix has left on the unit. Note: this only applies to specific Terran units. |
| Type        | Send on change                                                                                                                 |
| Syntax      | <code>defensiveMatrix(&lt;health&gt;)</code>                                                                                   |
| Example     | <code>defensiveMatrix(200)</code>                                                                                              |

|            |                             |                                                    |
|------------|-----------------------------|----------------------------------------------------|
| Parameters | <b>&lt;health&gt;</b>       | The amount of health left of the defensive matrix. |
|            | <b>Type</b><br><b>Range</b> | Positive Integer<br>[0–250]                        |

**Status percept**

Description The current amount of health, shield and energy of the unit.  
The **status** percept also shows the conditions of the unit and its current position.

Type Send on change

Syntax **status**(<Health>, <Shield>, <Energy>, <Cond>, <X>, <Y>)

Example **status**(250, 0, 0, [moving, carrying], 24, 36)

|            |                                                      |                                                                                                                                                                                             |
|------------|------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Parameters | <b>&lt;Health&gt;</b><br><b>Type</b><br><b>Range</b> | The current amount of health of the unit.<br>Positive Integer<br>[0–<MaxHealth>] where <MaxHealth> is the maximum health of the given unit.                                                 |
|            | <b>&lt;Shield&gt;</b><br><b>Type</b><br><b>Range</b> | The current amount of shields of the unit.<br>Positive Integer<br>[0–<MaxShield>] where <MaxShield> is the maximum shield of the given unit.                                                |
|            | <b>&lt;Energy&gt;</b><br><b>Type</b><br><b>Range</b> | The current amount of energy of the unit.<br>Positive Integer<br>[0–<MaxEnergy>] where <MaxEnergy> is the maximum energy of the given unit.                                                 |
|            | <b>&lt;Cond&gt;</b><br><b>Type</b>                   | The current condition of the unit. Each unit can have multiple or no conditions depending on the unit and situation. See Section 2.4 for the list of all the conditions.<br>List of Strings |
|            | <b>&lt;X&gt;</b><br><b>Type</b><br><b>Range</b>      | The x-coordinate of the unit in the map.<br>Positive Integer<br>[0–∞]                                                                                                                       |
|            | <b>&lt;Y&gt;</b><br><b>Type</b><br><b>Range</b>      | The y-coordinate of the unit in the map.<br>Positive Integer<br>[0–∞]                                                                                                                       |

**New Unit percept**

Description Indicates when a new unit is under construction.

Type Send on change

Syntax **newUnit**(<ID>, <X>, <Y>)

Example **newUnit**(44, 22, 37)

|            |                   |                                          |
|------------|-------------------|------------------------------------------|
| Parameters | <b>&lt;ID&gt;</b> | The (unique) <i>ID</i> of the unit.      |
|            | <b>Type</b>       | Positive Integer                         |
|            | <b>Range</b>      | [0–∞]                                    |
|            | <b>&lt;X&gt;</b>  | The x-coordinate of the unit in the map. |
|            | <b>Type</b>       | Positive Integer                         |
|            | <b>Range</b>      | [0–∞]                                    |
|            | <b>&lt;Y&gt;</b>  | The y-coordinate of the unit in the map. |
|            | <b>Type</b>       | Positive Integer                         |
|            | <b>Range</b>      | [0–∞]                                    |

### 2.1.3 Player Percepts

#### Enemy Race percept

Description The race of your opponent.  
Type Send once  
Syntax `enemyRace(<Race>)`  
Example `enemyRace(protooss)`  
Example When playing against a random race.

```
if bel(enemyRace(unknown), enemy(Type,_,_,_,_),
sub_string(Type, 0,1,_,Race)) then {
  if bel(Race = "Z") then delete(enemyRace(unknown))
  + insert(enemyRace(zerg)).
  if bel(Race = "P") then delete(enemyRace(unknown))
  + insert(enemyRace(protooss)).
  if bel(Race = "T") then delete(enemyRace(unknown))
  + insert(enemyRace(terran)).
}
```

|            |                     |                                                                                                           |
|------------|---------------------|-----------------------------------------------------------------------------------------------------------|
| Parameters | <b>&lt;Race&gt;</b> | The enemy race which can take the value: protooss, terran, zerg or unknown when the enemy race is random. |
|            | <b>Type</b>         | String                                                                                                    |

#### Game Speed percept

Description The current game speed in frames per seconds. For more information see Section 1.3.7.  
Type Send on change  
Syntax `gameSpeed(<FPS>)`  
Example `gameSpeed(50)`



|            |                    |                                                                 |
|------------|--------------------|-----------------------------------------------------------------|
| Parameters | <b>&lt;FPS&gt;</b> | The current amount of frames per second the game is updated by. |
|            | <b>Type</b>        | Positive Integer                                                |
|            | <b>Range</b>       | [0- $\infty$ ]                                                  |

**Winner percept**

Description At the end of the game all units will receive this depending whether they have won or not.

Type Send always

Syntax `winner(<hasWon>)`

Example `winner(true)`

|            |                       |                                                      |
|------------|-----------------------|------------------------------------------------------|
| Parameters | <b>&lt;hasWon&gt;</b> | Boolean which indicates whether you have won or not. |
|            | <b>Type</b>           | Boolean                                              |

**Nuke percept**

Description Indicates that a nuclear strike will land on the given position.

Type Send on change

Syntax `nuke(<X>,<Y>)`

Example `nuke(22, 37)`

|            |                  |                                         |
|------------|------------------|-----------------------------------------|
| Parameters | <b>&lt;X&gt;</b> | The x-coordinate of the nuclear strike. |
|            | <b>Type</b>      | Positive Integer                        |
|            | <b>Range</b>     | [0- $\infty$ ]                          |
|            | <b>&lt;Y&gt;</b> | The y-coordinate of the nuclear strike. |
|            | <b>Type</b>      | Positive Integer                        |
|            | <b>Range</b>     | [0- $\infty$ ]                          |

**2.1.4 Map Percepts****Map percept**

Description The width and the height of the map (no. of squares).

Type Send once

Syntax `map(<Width>,<Height>)`

Example `map(96, 128)`

|            |                             |                                  |
|------------|-----------------------------|----------------------------------|
| Parameters | <b>&lt;Width&gt;</b>        | The width of the map.            |
|            | <b>Type</b><br><b>Range</b> | <b>Positive Integer</b><br>[0–∞] |
|            | <b>&lt;Height&gt;</b>       | The height of the map.           |
|            | <b>Type</b><br><b>Range</b> | <b>Positive Integer</b><br>[0–∞] |

**Base percept**

Description All the base locations of the map. These are possible construction sites for bases.

Type Send once

Syntax `base(<X>,<Y>,<IsStart>,<RegionID>)`

Example `base(28, 32, true, 8)`

|            |                                |                                                                                                                                     |
|------------|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Parameters | <b>&lt;X&gt;</b>               | The x-coordinate of the base location.                                                                                              |
|            | <b>Type</b><br><b>Range</b>    | <b>Positive Integer</b><br>[0–∞]                                                                                                    |
|            | <b>&lt;Y&gt;</b>               | The y-coordinate of the base location.                                                                                              |
|            | <b>Type</b><br><b>Range</b>    | <b>Positive Integer</b><br>[0–∞]                                                                                                    |
|            | <b>&lt;IsStart&gt;</b>         | Indicates whether the location is a starting location or not.                                                                       |
|            | <b>Type</b>                    | <b>Boolean (true or false)</b>                                                                                                      |
|            | <b>&lt;ResourceGroupID&gt;</b> | The Resource Group that is closest to this base location. The vespene geyser and all mineral fields will share this Resource group. |
|            | <b>Type</b><br><b>Range</b>    | <b>Positive Integer</b><br>[0–∞]                                                                                                    |

**Chokepoint/3 percept**

Description All the chokepoints on the map. These are the narrow points on the map where only a limited amount of units can go through at the same time.

Type Send once

Syntax `chokepoint(<X>,<Y>,<W>)`

Example `chokepoint(12, 15, 50)`

|            |                  |                                         |
|------------|------------------|-----------------------------------------|
| Parameters | <b>&lt;X&gt;</b> | The x-coordinate of the chokepoint.     |
|            | <b>Type</b>      | Positive Integer                        |
|            | <b>Range</b>     | [0–∞]                                   |
|            | <b>&lt;Y&gt;</b> | The y-coordinate of the chokepoint.     |
|            | <b>Type</b>      | Positive Integer                        |
|            | <b>Range</b>     | [0–∞]                                   |
|            | <b>&lt;W&gt;</b> | The size of the chokepoint (in pixels). |
|            | <b>Type</b>      | Positive Integer                        |
|            | <b>Range</b>     | [0–∞]                                   |

**Chokepoint/4 percept**

Description All the chokepoints on the map. These are the narrow points on the map where only a limited amount of units can go through at the same time.

Type Send once

Syntax `chokepoint(<X1>,<Y1>,<X2>,<Y2>)`

Example `chokepoint(12, 15, 14, 17)`

|            |                   |                                                         |
|------------|-------------------|---------------------------------------------------------|
| Parameters | <b>&lt;X1&gt;</b> | The x-coordinate of the first side of the choke-point.  |
|            | <b>Type</b>       | Positive Integer                                        |
|            | <b>Range</b>      | [0–∞]                                                   |
|            | <b>&lt;Y1&gt;</b> | The y-coordinate of the first side of the choke-point.  |
|            | <b>Type</b>       | Positive Integer                                        |
|            | <b>Range</b>      | [0–∞]                                                   |
|            | <b>&lt;X2&gt;</b> | The x-coordinate of the second side of the choke-point. |
|            | <b>Type</b>       | Positive Integer                                        |
|            | <b>Range</b>      | [0–∞]                                                   |
|            | <b>&lt;Y2&gt;</b> | The y-coordinate of the second side of the choke-point. |
|            | <b>Type</b>       | Positive Integer                                        |
|            | <b>Range</b>      | [0–∞]                                                   |

### 2.1.5 Unit Percepts

#### Friendly percept

|             |                                                                  |                                                                                                                                                                                       |
|-------------|------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Information about all the other (alive) units of the player.     |                                                                                                                                                                                       |
| Type        | Send always                                                      |                                                                                                                                                                                       |
| Syntax      | <code>friendly(&lt;Type&gt;,&lt;ID&gt;,&lt;Condition&gt;)</code> |                                                                                                                                                                                       |
| Example     | <code>friendly(Protoss Gateway, 26, [beingConstructed])</code>   |                                                                                                                                                                                       |
| Parameters  | <b>&lt;Type&gt;</b>                                              | The type of the unit. The type of a unit consists of a string with the race of the unit and the name of the unit parted by a space. See Section 6 for the list of all the unit types. |
|             | <b>Type</b>                                                      | String                                                                                                                                                                                |
|             | <b>&lt;ID&gt;</b>                                                | The (unique) <i>ID</i> of the unit.                                                                                                                                                   |
|             | <b>Type</b>                                                      | Positive Integer                                                                                                                                                                      |
|             | <b>Range</b>                                                     | [0–∞]                                                                                                                                                                                 |
|             | <b>&lt;Cond&gt;</b>                                              | The current condition of the unit. Each unit can have multiple or no conditions depending on the unit and situation. See Section 2.4 for the list of all actual conditions.           |
|             | <b>Type</b>                                                      | List of Strings                                                                                                                                                                       |

**Enemy percept**

|             |                                                                                                                 |
|-------------|-----------------------------------------------------------------------------------------------------------------|
| Description | Information about all (alive) enemy units that are currently visible to the player.                             |
| Type        | Send always                                                                                                     |
| Syntax      | <code>enemy(&lt;Type&gt;,&lt;ID&gt;,&lt;Health&gt;,&lt;Shield&gt;,&lt;Condition&gt;,&lt;X&gt;,&lt;Y&gt;)</code> |
| Example     | <code>enemy(Zerg Overlord, 12, 200, 0, [flying], 120, 96)</code>                                                |

|            |                       |                                                                                                                                                                                                                                         |
|------------|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Parameters | <b>&lt;Type&gt;</b>   | The type of the unit. The type of a unit consists of a string with the race of the unit and the name of the unit parted by a space.                                                                                                     |
|            | <b>Type</b>           | <b>String</b>                                                                                                                                                                                                                           |
|            | <b>&lt;ID&gt;</b>     | The (unique) <i>ID</i> of the unit.                                                                                                                                                                                                     |
|            | <b>Type</b>           | <b>Positive Integer</b>                                                                                                                                                                                                                 |
|            | <b>Range</b>          | $[0-\infty]$                                                                                                                                                                                                                            |
|            | <b>&lt;Health&gt;</b> | The current amount of health of the unit.                                                                                                                                                                                               |
|            | <b>Type</b>           | <b>Positive Integer</b>                                                                                                                                                                                                                 |
|            | <b>Range</b>          | $[1-\text{<maxHealth>}]$ where <b>&lt;maxHealth&gt;</b> is the maximum health of the given unit.                                                                                                                                        |
|            | <b>&lt;Shield&gt;</b> | The current amount of shields of the unit.                                                                                                                                                                                              |
|            | <b>Type</b>           | <b>Positive Integer</b>                                                                                                                                                                                                                 |
|            | <b>Range</b>          | $[0-\text{<maxShield>}]$ where <b>&lt;maxShield&gt;</b> is the maximum shield of the given unit.                                                                                                                                        |
|            | <b>&lt;Cond&gt;</b>   | The current condition of the unit. Each unit can have multiple or no conditions depending on the unit and situation. Not all the conditions are available for the enemy percept. See Section 2.4 for the list of all actual conditions. |
|            | <b>Type</b>           | <b>List of Strings</b>                                                                                                                                                                                                                  |
|            | <b>&lt;X&gt;</b>      | The x-coordinate of the unit.                                                                                                                                                                                                           |
|            | <b>Type</b>           | <b>Positive Integer</b>                                                                                                                                                                                                                 |
|            | <b>Range</b>          | $[0-\infty]$                                                                                                                                                                                                                            |
|            | <b>&lt;Y&gt;</b>      | The y-coordinate of the unit.                                                                                                                                                                                                           |
|            | <b>Type</b>           | <b>Positive Integer</b>                                                                                                                                                                                                                 |
|            | <b>Range</b>          | $[0-\infty]$                                                                                                                                                                                                                            |

**Attacking percept**

Description Shows the enemy units which are attacking and which units they have targeted.

Type Send always

Syntax `attacking(<ID>,<TargetID>)`

Example `attacking(123, 177)`

|            |                             |                                                               |
|------------|-----------------------------|---------------------------------------------------------------|
| Parameters | <b>&lt;ID&gt;</b>           | The (unique) <i>ID</i> of the enemy unit which is attacking.  |
|            | <b>Type</b><br><b>Range</b> | <b>Positive Integer</b><br>[0–∞]                              |
|            | <b>&lt;TargetID&gt;</b>     | The (unique) ID of the targeted unit which is being attacked. |
|            | <b>Type</b><br><b>Range</b> | <b>Positive Integer</b><br>[0–∞]                              |

**2.2 Building Percepts****2.2.1 Research and Upgrade Percepts****Researching percept**

Description Indicates which *tech* is currently being researched. The research is done when this percept is no longer seen. See Section 4 for the list of tech types.

Type Send always

Syntax `researching(<TechType>)`

Example `researching(Stim Packs)`

|            |                         |                                                |
|------------|-------------------------|------------------------------------------------|
| Parameters | <b>&lt;TechType&gt;</b> | The <i>tech</i> which is currently researched. |
|            | <b>Type</b>             | <b>String</b>                                  |

**Upgrading percept**

Description Indicates which *upgrade* is currently being performed. The upgrade is done when this percept is no longer seen. See Section 5 for the list of all actual tech types.

Type Send always

Syntax `upgrading(<UpgradeType>)`

Example `upgrading(Ocular Implants)`

|            |                            |                                                 |
|------------|----------------------------|-------------------------------------------------|
| Parameters | <b>&lt;UpgradeType&gt;</b> | The <i>upgrade</i> which is currently upgraded. |
|            | <b>Type</b>                | <b>String</b>                                   |

### 2.2.2 Production Buildings

#### Queue Size percept

Description Shows how many units are in queue of the production building.  
Hatchery: Shows the amount of available larva units.

Type Send on change

Syntax `queueSize(<Size>)`

Example `queueSize(2)`

|            |                     |                                |
|------------|---------------------|--------------------------------|
| Parameters | <b>&lt;Size&gt;</b> | The size of the current queue. |
|            | <b>Type</b>         | Positive Integer               |
|            | <b>Range</b>        | [0–5]                          |

#### Rally Point percept

Description The position of the building's rallypoint in map coordinates.

Type Send on change

Syntax `rallyPoint(<X>,<Y>)`

Example `rallyPoint(76, 45)`

|            |                  |                                     |
|------------|------------------|-------------------------------------|
| Parameters | <b>&lt;X&gt;</b> | The x-coordinate of the rallypoint. |
|            | <b>Type</b>      | Positive Integer                    |
|            | <b>Range</b>     | [0–∞]                               |
|            | <b>&lt;Y&gt;</b> | The y-coordinate of the rallypoint. |
|            | <b>Type</b>      | Positive Integer                    |
|            | <b>Range</b>     | [0–∞]                               |

#### Rally Unit percept

Description Shows on which unit the building's rallypoint is set.

Type Send on change

Syntax `rallyUnit(<UnitID>)`

Example `rallyUnit(145)`

|            |                       |                                                  |
|------------|-----------------------|--------------------------------------------------|
| Parameters | <b>&lt;UnitID&gt;</b> | The (unique) <i>ID</i> the rallypoint points to. |
|            | <b>Type</b>           | Positive Integer                                 |
|            | <b>Range</b>          | [0–∞]                                            |

### 2.2.3 Loadable Buildings

#### Space Provided percept

|             |                                                                                                                                   |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------|
| Description | Shows how many units are currently loaded in the building and how the maximum amount of units that can be loaded in the building. |
| Type        | Send on change                                                                                                                    |
| Syntax      | <code>spaceProvided(&lt;CSize&gt;, &lt;MSize&gt;)</code>                                                                          |
| Example     | <code>spaceProvided(2, 4)</code>                                                                                                  |

|            |                             |                                                 |
|------------|-----------------------------|-------------------------------------------------|
| Parameters | <b>&lt;CSize&gt;</b>        | The amount of currently loaded units.           |
|            | <b>Type</b><br><b>Range</b> | Positive Integer<br>[0–∞]                       |
|            | <b>&lt;MSize&gt;</b>        | The maximum amount of units that can be loaded. |
|            | <b>Type</b><br><b>Range</b> | Positive Integer<br>[0–∞]                       |

#### Unit Loaded percept

|             |                                                            |
|-------------|------------------------------------------------------------|
| Description | Shows which unit is loaded inside the given loadable unit. |
| Type        | Send always                                                |
| Syntax      | <code>unitLoaded(&lt;ID&gt;, &lt;Type&gt;)</code>          |
| Example     | <code>unitLoaded(154, Terran Marine)</code>                |

|            |                             |                                            |
|------------|-----------------------------|--------------------------------------------|
| Parameters | <b>&lt;ID&gt;</b>           | The (unique) <i>ID</i> of the loaded unit. |
|            | <b>Type</b><br><b>Range</b> | Positive Integer<br>[0–∞]                  |
|            | <b>&lt;Type&gt;</b>         | The type of the loaded unit.               |
|            | <b>Type</b>                 | String                                     |



## 2.3 Worker percepts

### 2.3.1 Worker Management

#### Worker Activity Percept

Description Shows the current activity of the worker.

Type Send on change

Syntax `workerActivity(<Activity>)`

Example `workerActivity(gatheringGas)`

|            |                         |                                                                                                                    |
|------------|-------------------------|--------------------------------------------------------------------------------------------------------------------|
| Parameters | <b>&lt;Activity&gt;</b> | The current activity of the worker unit. Can take values: gatheringGas, gatheringMinerals, constructing or idling. |
|            | <b>Type</b>             | <b>String</b>                                                                                                      |

### 2.3.2 Builder Percepts

#### Vespene Geyser percept

Description Information about a visible (possibly empty) vespene geyser on the map.

Type Send always

Syntax `vespeneGeyser(<ID>, <Resources>, <ResourceGroup>, <X>, <Y>)`

Example `vespeneGeyser(57, 5000, 6, 22, 32)`

|            |                                                             |                                                                                     |
|------------|-------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Parameters | <b>&lt;ID&gt;</b><br><b>Type</b><br><b>Range</b>            | The (unique) <i>ID</i> of the vespene geyser.<br>Positive Integer<br>[0-∞]          |
|            | <b>&lt;Resources&gt;</b><br><b>Type</b><br><b>Range</b>     | The amount of resources left in the vespene geyser.<br>Positive Integer<br>[0-5000] |
|            | <b>&lt;ResourceGroup&gt;</b><br><b>Type</b><br><b>Range</b> | The resource group of the vespene geyser.<br>Positive Integer<br>[0-∞]              |
|            | <b>&lt;X&gt;</b><br><b>Type</b><br><b>Range</b>             | The x-coordinate of the vespene geyser.<br>Positive Integer<br>[0-∞]                |
|            | <b>&lt;Y&gt;</b><br><b>Type</b><br><b>Range</b>             | The y-coordinate of the vespene geyser.<br>Positive Integer<br>[0-∞]                |

**Mineral Field percept**

Description Information about a visible (non-empty) mineralfield on the map.

Type Send always

Syntax `mineralField(<ID>,<Resources>,<ResourceGroup>,<X>,<Y>)`

Example `mineralField(57, 5000, 6, 22, 32)`

|            |                                                             |                                                                                   |
|------------|-------------------------------------------------------------|-----------------------------------------------------------------------------------|
| Parameters | <b>&lt;ID&gt;</b><br><b>Type</b><br><b>Range</b>            | The (unique) <i>ID</i> of the mineralfield.<br>Positive Integer<br>[0-∞]          |
|            | <b>&lt;Resources&gt;</b><br><b>Type</b><br><b>Range</b>     | The amount of resources left in the mineralfield.<br>Positive Integer<br>[1-5000] |
|            | <b>&lt;ResourceGroup&gt;</b><br><b>Type</b><br><b>Range</b> | The resource group of the mineralfield.<br>Positive Integer<br>[0-∞]              |
|            | <b>&lt;X&gt;</b><br><b>Type</b><br><b>Range</b>             | The x-coordinate of the mineralfield.<br>Positive Integer<br>[0-∞]                |
|            | <b>&lt;Y&gt;</b><br><b>Type</b><br><b>Range</b>             | The y-coordinate of the mineralfield.<br>Positive Integer<br>[0-∞]                |

**Construction Site percept**

Description Shows all explored and non-obstructed construction sites where at least a Protoss Nexus, Terran Command Center or Zerg Hatchery can be placed.

Type Send always

Syntax (If Protoss) `constructionSite(<X>,<Y>,<InPylonRange>)`  
(If Zerg) `constructionSite(<X>,<Y>,<onCreep>)`  
(If Terran) `constructionSite(<X>,<Y>)`

Example `constructionSite(66, 98, false)`  
`constructionSite(66, 98)`

|            |                                                            |                                                                                                                             |
|------------|------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Parameters | <b>&lt;X&gt;</b><br><b>Type</b><br><b>Range</b>            | The x-coordinate of the construction site.<br><b>Positive Integer</b><br>[0-∞]                                              |
|            | <b>&lt;Y&gt;</b><br><b>Type</b><br><b>Range</b>            | The y-coordinate of the construction site.<br><b>Positive Integer</b><br>[0-∞]                                              |
|            | <b>&lt;InPylonRange&gt;</b><br><b>Type</b><br><b>Range</b> | Indicates whether the construction site is in range of a pylon (this is only for Protoss)<br><b>Boolean</b><br>[True-False] |
|            | <b>&lt;onCreep&gt;</b><br><b>Type</b><br><b>Range</b>      | Indicates whether the construction site is on creep (this is only for Zerg)<br><b>Boolean</b><br>[True-False]               |

## 2.4 Conditions

### 2.4.1 Worker Units

|                     |                                                                     |
|---------------------|---------------------------------------------------------------------|
| <b>carrying</b>     | Indicates when the worker unit is carrying minerals or vespene gas. |
| <b>constructing</b> | Shows that the worker unit is busy constructing a building.         |

### 2.4.2 Buildings

|                          |                                                                                |
|--------------------------|--------------------------------------------------------------------------------|
| <b>beingConstructed</b>  | Indicates when a building is being constructed.                                |
| <b>lifted</b>            | Indicates when the building is lifted.                                         |
| <b>&lt;addonName&gt;</b> | Indicates when an addon of the building is present, gives the exact addonname. |

### 2.4.3 All

|                 |                                                       |
|-----------------|-------------------------------------------------------|
| idle            | Indicates when the unit is idle (not doing anything). |
| cloaked         | Indicates when a unit is cloaked.                     |
| moving          | Shows that a unit is moving.                          |
| following       | Shows that a unit is following an other unit.         |
| loaded          | Indicates when a unit is loaded.                      |
| defenseMatrixed | Indicates when a unit has a defense matrix on it.     |
| flying          | Shows that a unit is flying.                          |
| patrolling      | Shows that a unit is patrolling between 2 positions.  |
| underAttack     | Indicates when the unit is under attack.              |
| attacking       | Indicates when a unit is attacking an other unit.     |

### 2.4.4 Zerg

|             |                                                                    |
|-------------|--------------------------------------------------------------------|
| burrowed    | Indicates when a zerg unit is burrowed.                            |
| ensnared    | Shows that the unit is ensnared by a Queen unit.                   |
| parasited   | Shows that the unit is parasited by a Queen unit.                  |
| plagued     | Indicates that the unit is plagued by a Defiler unit.              |
| darkSwarmed | Indicates that the unit is under a Dark Swarm from a Defiler unit. |
| morphing    | Indicates that a unit is morphing.                                 |

### 2.4.5 Terran

|             |                                                          |
|-------------|----------------------------------------------------------|
| stimmed     | Indicates when a firebat or marine is stimmed.           |
| sieged      | Indicates when a siegetank is in siegemode.              |
| blinded     | Shows when a unit is blinded by a medic.                 |
| lockDowned  | Indicates when a unit is under lockdown by a Ghost unit. |
| Irradiated  | Shows when a unit is irradiated by a Science Vessel.     |
| nukeReady   | Indicates when a unit is ready to use Nuclear Missile.   |
| beingHealed | Indicates when a unit is healed by an other unit.        |
| repairing   | Shows that a unit is repairing.                          |

### 2.4.6 Protoss

|                               |                                                              |
|-------------------------------|--------------------------------------------------------------|
| <code>underStorm</code>       | Shows when a unit is under a storm from a High Templar unit. |
| <code>inStasis</code>         | Indicates when a unit is stuck in stasis.                    |
| <code>maelstrommed</code>     | Indicates when a unit is maelstrommed by a Dark Archon.      |
| <code>disruptionWebbed</code> | Shows when a unit is in a disruption web from a Corsair.     |

## Chapter 3

# Actions

This section will list all the actions that are usable in the Starcraft environment.

### 3.1 Attack action

|             |                                                                                                 |
|-------------|-------------------------------------------------------------------------------------------------|
| Description | Attack the given enemy unit.                                                                    |
| Syntax      | <code>attack(&lt;TargetID&gt;)</code>                                                           |
| Parameters  | <code>&lt;TargetID&gt;</code> : The <i>ID</i> of the target that will be attacked.              |
| Pre         | The targeted unit is attack capable.                                                            |
| Post        | The targeted unit is being attacked by your unit.                                               |
| Note        | Medics that use this action on a friendly unit will heal them.<br>Medics cannot attack enemies. |

### 3.2 Move action

|             |                                                                                                                                      |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------|
| Description | Move to the chosen location.                                                                                                         |
| Syntax      | <code>move(&lt;X&gt;,&lt;Y&gt;)</code>                                                                                               |
| Parameters  | <code>&lt;X&gt;</code> : The x-coordinate of the chosen location<br><code>&lt;Y&gt;</code> : The y-coordinate of the chosen location |
| Pre         | The unit is capable of moving to the chosen location.                                                                                |
| Post        | The unit moves to the chosen location (ignoring any other unit it might pass by).                                                    |

### 3.3 Attack move action

|             |                                                                                                                                      |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------|
| Description | Go to the given location and attack everything you encounter.                                                                        |
| Syntax      | <code>attack(&lt;X&gt;,&lt;Y&gt;)</code>                                                                                             |
| Parameters  | <code>&lt;X&gt;</code> : The x-coordinate of the chosen location<br><code>&lt;Y&gt;</code> : The y-coordinate of the chosen location |
| Pre         | The unit is capable of moving to the chosen location.                                                                                |
| Post        | The unit moves to the chosen locations and attacks any attack capable enemy unit it encounters.                                      |

### 3.4 Upgrade action

|             |                                                                                 |
|-------------|---------------------------------------------------------------------------------|
| Description | Starts working on the chosen upgrade.                                           |
| Syntax      | <code>upgrade(&lt;UpgradeName&gt;)</code>                                       |
| Parameters  | <code>&lt;UpgradeName&gt;</code> : The name of the upgrade you want to upgrade. |
| Pre         | The unit is capable of upgrading and has sufficient resources to do so.         |
| Post        | The unit starts upgrading the chosen upgrade.                                   |

### 3.5 Build action

|             |                                                                                                                                                                                                                                |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Build a building on the given location.                                                                                                                                                                                        |
| Syntax      | <code>build(&lt;Type&gt;,&lt;X&gt;,&lt;Y&gt;)</code>                                                                                                                                                                           |
| Parameters  | <code>&lt;Type&gt;</code> : The Type of the building that has to be built.<br><code>&lt;X&gt;</code> : The x-coordinate of the chosen build location<br><code>&lt;Y&gt;</code> : The y-coordinate of the chosen build location |
| Pre         | The unit is capable of constructing the chosen building and the chosen location is not obstructed.                                                                                                                             |
| Post        | The unit starts constructing the chosen building at the chosen location.                                                                                                                                                       |

### 3.6 Gather action

|             |                                                                                            |
|-------------|--------------------------------------------------------------------------------------------|
| Description | Gather the chosen resource (minerals or vespene gas).                                      |
| Syntax      | <b>gather</b> (<ID>)                                                                       |
| Parameters  | <ID>: The <i>ID</i> of the chosen resource.                                                |
| Pre         | The unit is capable of performing the gather action and a valid resource unit is selected. |
| Post        | The unit starts gathering the chosen resource.                                             |

### 3.7 Train action

|             |                                                                                                        |
|-------------|--------------------------------------------------------------------------------------------------------|
| Description | Train the chosen unit.                                                                                 |
| Syntax      | <b>train</b> (<Type>)                                                                                  |
| Parameters  | <Type>: The type of unit to train.                                                                     |
| Pre         | The production facility is capable of producing the chosen unit and has sufficient resources to do so. |
| Post        | The production facility starts producing the chosen unit.                                              |

### 3.8 Stop action

|             |                                             |
|-------------|---------------------------------------------|
| Description | Stop performing the current action.         |
| Syntax      | <b>stop</b>                                 |
| Pre         | The unit is performing some kind of action. |
| Post        | The unit stops performing the action.       |

### 3.9 Ability action

|             |                                                                                                                    |
|-------------|--------------------------------------------------------------------------------------------------------------------|
| Description | Use an (researched) ability.                                                                                       |
| Syntax      | <b>ability</b> (<Type>)                                                                                            |
| Parameters  | <Type>: The type of technology to use.                                                                             |
| Pre         | The chosen tech type is researched and the unit is capable of performing the chosen tech type.                     |
| Post        | The unit performs the chosen tech ability.                                                                         |
| Note        | In game behaviour that can be toggled on and off such as Burrow/Cloak/Siege is also executed by using this action. |



### 3.10 Ability on target action

|             |                                                                                                                                     |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Description | Use an (researched) ability on a target.                                                                                            |
| Syntax      | <b>ability</b> (<Type>, <Target>)                                                                                                   |
| Parameters  | <Type>: The type of technology to use.<br><Target>: The target to use the technology on.                                            |
| Pre         | The chosen tech type is researched, the unit is capable of performing the chosen tech type and the chosen target is attack capable. |
| Post        | The unit performs the chosen tech ability on the chosen target.                                                                     |

### 3.11 Ability on location action

|             |                                                                                                                                                      |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | use an (researched) ability on a location.                                                                                                           |
| Syntax      | <b>ability</b> (<Type>, <X>, <Y>)                                                                                                                    |
| Parameters  | <Type>: The type of technology to use.<br><X>: The x-coordinate of the chosen location<br><Y>: The y-coordinate of the chosen location.              |
| Pre         | The chosen tech type is researched, the unit is capable of performing the chosen tech type and the chosen location is valid to perform an action on. |
| Post        | The unit performs the chosen tech ability on the chosen location.                                                                                    |

### 3.12 Research action

|             |                                                                                                    |
|-------------|----------------------------------------------------------------------------------------------------|
| Description | Research a chosen tech type.                                                                       |
| Syntax      | <b>research</b> (<Type>)                                                                           |
| Parameters  | <Type>: The type of tech to research.                                                              |
| Pre         | The building is capable of researching the chosen tech type and has sufficient resources to do so. |
| Post        | The building starts researching the chosen tech type.                                              |

### 3.13 Set rally point action

|             |                                                                                                                                                               |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Set the rally point on a specific location. When the rally point is set, produced units of this production facility will automatically move to this location. |
| Syntax      | <code>setRallyPoint(&lt;X&gt;, &lt;Y&gt;)</code>                                                                                                              |
| Parameters  | <code>&lt;X&gt;</code> : The x-coordinate of the chosen rally location<br><code>&lt;Y&gt;</code> : The y-coordinate of the chosen rally location.             |
| Pre         | The building is capable of setting up a rally point and the chosen location is a valid location where units can move to.                                      |
| Post        | The building sets the rally point on the chosen location.                                                                                                     |

### 3.14 Set rally point to unit action

|             |                                                                                                                                              |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Set the rally point on a unit. When the rally point is set, produced units of this production facility will automatically move to this unit. |
| Syntax      | <code>setRallyPoint(&lt;Unit&gt;)</code>                                                                                                     |
| Parameters  | <code>&lt;Unit&gt;</code> : The unit to set the rally point on.                                                                              |
| Pre         | The building is capable of setting up a rally point and the chosen unit is on a valid location where units can move to.                      |
| Post        | The building sets the rally point on the chosen unit.                                                                                        |

### 3.15 Lift action

|             |                                                                                |
|-------------|--------------------------------------------------------------------------------|
| Description | Lift into the air.                                                             |
| Syntax      | <code>lift</code>                                                              |
| Pre         | The building is capable of flying and is not busy performing any other action. |
| Post        | The building starts flying.                                                    |
| Note        | Only for Terran buildings.                                                     |

### 3.16 Land action

|             |                                                                                                                                                 |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Land on the given location.                                                                                                                     |
| Syntax      | <code>land(&lt;X&gt;, &lt;Y&gt;)</code>                                                                                                         |
| Parameters  | <code>&lt;X&gt;</code> : The x-coordinate of the chosen land location<br><code>&lt;Y&gt;</code> : The y-coordinate of the chosen land location. |
| Pre         | The unit is currently flying and is capable of landing on the chosen location.                                                                  |
| Post        | The unit lands on the chosen location.                                                                                                          |
| Note        | The location has to be visible.                                                                                                                 |

### 3.17 Build addon action

|             |                                                                                    |
|-------------|------------------------------------------------------------------------------------|
| Description | Build the chosen addon.                                                            |
| Syntax      | <code>buildAddon(&lt;Name&gt;)</code>                                              |
| Parameters  | <code>&lt;Name&gt;</code> : The name of the chosen addon.                          |
| Pre         | The building is capable of building the addon and does not already have the addon. |
| Post        | The building starts constructing the addon.                                        |
| Note        | Only for Terran buildings.                                                         |

### 3.18 Load action

|             |                                                                                                                 |
|-------------|-----------------------------------------------------------------------------------------------------------------|
| Description | Load a unit.                                                                                                    |
| Syntax      | <code>load(&lt;ID&gt;)</code>                                                                                   |
| Parameters  | <code>&lt;ID&gt;</code> : The <i>ID</i> of the unit to load into this (loadable) unit.                          |
| Pre         | The unit is capable of loading other units inside it and still has enough space provided for the targeted unit. |
| Post        | The targeted unit starts walking to the loadable unit and loads into it.                                        |

### 3.19 Unload action

|            |                                                                       |
|------------|-----------------------------------------------------------------------|
| Desription | Unload an unit.                                                       |
| Syntax     | <code>unload(&lt;ID&gt;)</code>                                       |
| Parameters | <ID>: The <i>ID</i> of the unit to unload from this (loadable) unit.  |
| Pre        | The unit is capable of loading other units inside it.                 |
| Post       | The targeted unit is unloaded and stands next to the (loadable) unit. |

### 3.20 Unload all action

|            |                                                               |
|------------|---------------------------------------------------------------|
| Desription | Unload all units.                                             |
| Syntax     | <code>unloadAll</code>                                        |
| Pre        | The unit is capable of loading other units inside it.         |
| Post       | All units are unloaded and stand next to the (loadable) unit. |

### 3.21 Cancel action

|            |                                                                    |
|------------|--------------------------------------------------------------------|
| Desription | Cancel the construction of the unit.                               |
| Syntax     | <code>cancel</code>                                                |
| Pre        | The unit is morphing, beingConstructed, researching or upgrading.  |
| Post       | The morphing, construction, upgrading or researching is cancelled. |

### 3.22 Patrol action

|             |                                                                                                                                      |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------|
| Description | Patrol an unit between the place it's standing and the given location.                                                               |
| Syntax      | <code>patrol(&lt;X&gt;, &lt;Y&gt;)</code>                                                                                            |
| Parameters  | <code>&lt;X&gt;</code> : The x-coordinate of the chosen location<br><code>&lt;Y&gt;</code> : The y-coordinate of the chosen location |
| Pre         | The unit is capable of moving to the chosen location.                                                                                |
| Post        | The unit patrols between the chosen location (ignoring any other unit it might pass by) and the location it was originally standing. |
| Note        | Medics that are patrolling will automatically heal allies in range.                                                                  |

### 3.23 Morph action (Zerg only)

|             |                                                                                        |
|-------------|----------------------------------------------------------------------------------------|
| Description | Morphs a zerg unit into the another unit.                                              |
| Syntax      | <code>morph(&lt;Type&gt;)</code>                                                       |
| Parameters  | <code>&lt;Type&gt;</code> : The type of unit to morph.                                 |
| Pre         | The unit is capable of morphing into another unit and does have to resources to do so. |
| Post        | The agent terminates and a new agent is created for the new unit.                      |

### 3.24 Follow action

|             |                                                         |
|-------------|---------------------------------------------------------|
| Description | Follows a unit.                                         |
| Syntax      | <code>follow(&lt;Id&gt;)</code>                         |
| Parameters  | <code>&lt;Id&gt;</code> : The Id of the unit to follow. |
| Pre         | The unit is capable of moving.                          |
| Post        | The unit follows the selected unit.                     |

### 3.25 Repair action (Terran only)

|             |                                                                                  |
|-------------|----------------------------------------------------------------------------------|
| Description | Repairs a unit with less than the max amount of health.                          |
| Syntax      | <code>repair(&lt;Id&gt;)</code>                                                  |
| Parameters  | <code>&lt;Id&gt;</code> : The Id of the unit to repair.                          |
| Pre         | The unit is a SCV, has the resources to repair and can reach the unit to repair. |
| Post        | The SCV starts repairing the selected unit.                                      |

# Chapter 4

## Tech Types

All the tech types that can be researched for each race.

### 4.1 Terran Units

#### 4.1.1 Battle Cruisers

Yamato Gun

#### 4.1.2 Command Centers

Scanner Sweep

#### 4.1.3 Ghosts

Lockdown

Personel Cloaking

Nuclear Strike

#### 4.1.4 Marines and Firebats

Stim Packs

#### 4.1.5 Medics

Healing

Restoration

Optical Flare

#### 4.1.6 Science Vessels

Defensive Matrix

EMP Shockwave

Irradiate

#### 4.1.7 Siege Tanks

Tank Siege Mode

#### 4.1.8 Vultures

Spider Mines

#### 4.1.9 Wraith

Cloaking Field

### 4.2 Protoss Units

#### 4.2.1 Arbiters

Cloaking Field

Recall

Stasis Field

#### 4.2.2 Corsairs

Disruption Web

#### 4.2.3 Dark Archons

Feedback

Maelstrom

Mind Control

#### 4.2.4 Dark Templars

Dark Archon Meld



#### **4.2.5 High Templars**

Archon Warp  
Psionic Storm  
Hallucination

### **4.3 Zerg Units**

#### **4.3.1 Generic**

Burrowing

#### **4.3.2 Defilers**

Dark Swarm  
Plague  
Consume

#### **4.3.3 Hydralisks**

Lurker Aspect

#### **4.3.4 Lurkers**

Burrowing (Can be used without having it researched)

#### **4.3.5 Queens**

Infestation  
Parasite  
Ensnare  
Spawn Broodlings

## Chapter 5

# Upgrade Types

All the upgrade types that can be used for each race.

### 5.1 Terran Units

#### 5.1.1 Academy

U 238 Shells  
Caduceus Reactor

#### 5.1.2 Armory

Terran Vehicle Weapons  
Terran Vehicle Plating  
Terran Ship Weapons  
Terran Ship Plating

#### 5.1.3 Covert Ops

Ocular Implants  
Moebius Reactor

#### 5.1.4 Engineering Bay

Terran Infantry Weapons  
Terran Infantry Armor

### **5.1.5 Machine Shop**

Ion Thrusters  
Charon Boosters

### **5.1.6 Physics Lab**

Colossus Reactor

### **5.1.7 Science Facility**

Titan Reactor

### **5.1.8 Control Tower**

Apollo Reactor

## **5.2 Protoss Units**

### **5.2.1 Arbiter Tribunal**

Khaydarin Core

### **5.2.2 Citadel of Adun**

Protoss Plasma Shields  
Leg Enhancements

### **5.2.3 Cybernetics Core**

Singularity Charge  
Protoss Air Weapons  
Protoss Air Armor

### **5.2.4 Fleet Beacon**

Apial Sensors  
Gravitic Thrusters  
Argus Jewel  
Carrier Capacity

### **5.2.5 Forge**

Protoss Plasma Shields

Protoss Ground Armor

Protoss Ground Weapons

### **5.2.6 Observatory**

Gravitic Boosters

Sensor Array

### **5.2.7 Robotics Support Bay**

Reaver Capacity

Scarab Damage

Gravitic Drive

### **5.2.8 Templar Archives**

Argus Talisman

Khaydarin Amulet

## **5.3 Zerg Units**

### **5.3.1 Defiler Mound**

Metasynaptic Node

### **5.3.2 Evolution Chamber**

Zerg Melee Attacks

Zerg Missile Attacks

Zerg Carapace

### **5.3.3 Hydralisk Den**

Muscular Augments

Grooved Spines

### 5.3.4 Lair and Hive

Ventral Sacs

Antennae

Pneumatized Carapace

### 5.3.5 Queen's Nest

Gamete Meiosis

### 5.3.6 Spawning Pool

Metabolic Boost

Adrenal Glands

### 5.3.7 (Greater) Spire

These are the upgrade type(s) the (Greater) Spire offers.

Zerg Flyer Carapace

Zerg Flyer Attacks

### 5.3.8 Ultralisk Cavern

These are the upgrade type(s) the Ultralisk Cavern offers.

Chitinous Plating

Anabolic Synthesis

# Chapter 6

## Unit Types

StarCraft's unit types.

### 6.1 Terran Units

#### 6.1.1 Terran Ground Units

Terran Firebat  
Terran Ghost  
Terran Goliath  
Terran Marine  
Terran Medic  
Terran SCV  
Terran Siege Tank  
Terran Vulture  
Terran Vulture Spider Mine

#### 6.1.2 Terran Air Units

Terran Battlecruiser  
Terran Dropship  
Terran Science Vessel  
Terran Valkyrie  
Terran Wraith

### **6.1.3 Terran Building Units**

Terran Academy  
Terran Armory  
Terran Barracks  
Terran Bunker  
Terran Command Center  
Terran Engineering Bay  
Terran Factory  
Terran Missile Turret  
Terran Refinery  
Terran Science Facility  
Terran Starport  
Terran Supply Depot

### **6.1.4 Terran Addons**

Terran Comsat Station  
Terran Control Tower  
Terran Covert Ops  
Terran Machine Shop  
Terran Nuclear Silo  
Terran Physics Lab

## **6.2 Protoss Units**

### **6.2.1 Protoss Ground Units**

Protoss Archon  
Protoss Dark Archon  
Protoss Dark Templar  
Protoss Dragoon  
Protoss High Templar  
Protoss Probe  
Protoss Reaver  
Protoss Scarab  
Protoss Zealot

### **6.2.2 Protoss Air Units**

Protoss Arbiter  
Protoss Carrier  
Protoss Corsair  
Protoss Interceptor  
Protoss Observer  
Protoss Scout  
Protoss Shuttle

### **6.2.3 Protoss Building Units**

Protoss Arbiter Tribunal  
Protoss Assimilator  
Protoss Citadel of Adun  
Protoss Cybernetics Core  
Protoss Fleet Beacon  
Protoss Forge  
Protoss Gateway  
Protoss Nexus  
Protoss Observatory  
Protoss Photon Cannon  
Protoss Pylon  
Protoss Robotics Facility  
Protoss Robotics Support Bay  
Protoss Shield Battery  
Protoss Stargate  
Protoss Templar Archives

## **6.3 Zerg Units**

### **6.3.1 Zerg Ground Units**

Zerg Broodling  
Zerg Defiler  
Zerg Drone  
Zerg Egg  
Zerg Hydralisk  
Zerg Infested Terran  
Zerg Larva



Zerg Lurker  
Zerg Lurker Egg  
Zerg Ultralisk  
Zerg Zergling

### 6.3.2 Zerg Air Units

Zerg Cocoon  
Zerg Devourer  
Zerg Guardian  
Zerg Mutalisk  
Zerg Overlord  
Zerg Queen  
Zerg Scourge

### 6.3.3 Zerg Building Units

Zerg Creep Colony  
Zerg Defiler Mound  
Zerg Evolution Chamber  
Zerg Extractor  
Zerg Greater Spire  
Zerg Hatchery  
Zerg Hive  
Zerg Hydralisk Den  
Zerg Infested Command Center  
Zerg Lair  
Zerg Nydus Canal  
Zerg Queens Nest  
Zerg Spawning Pool  
Zerg Spire  
Zerg Spore Colony  
Zerg Sunken Colony  
Zerg Ultralisk Cavern