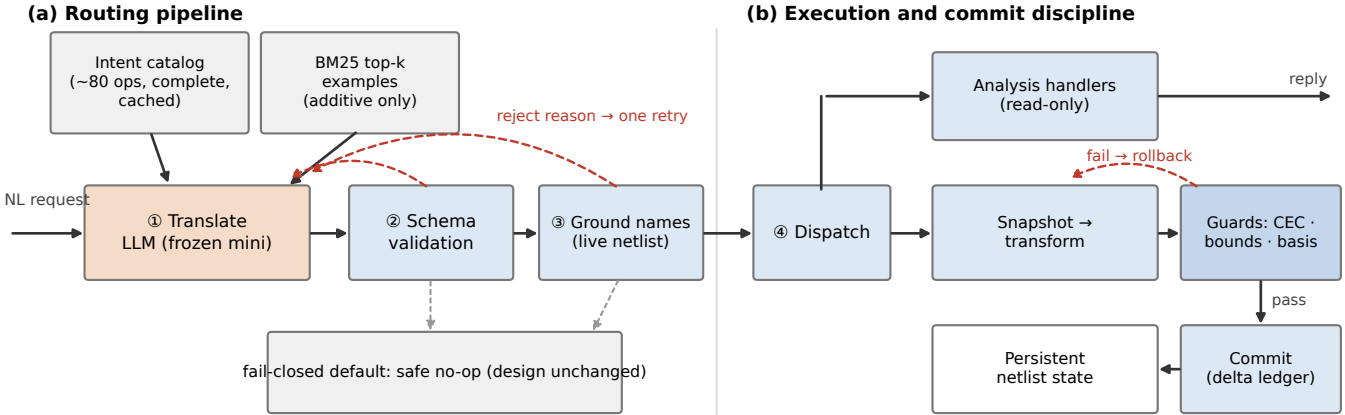
(a) Routing pipeline
Intent catalog (~80 ops, complete, cached)
BM25 top-k examples (additive only)
reject reason → one retry
NL request
① Translate LLM (frozen mini)
② Schema validation
③ Ground names (live netlist)
fail-closed default: safe no-op (design unchanged)
(b) Execution and commit discipline
④ Dispatch
Analysis handlers (read-only)
reply
fail → rollback
Snapshot → transform
Guards: CEC · bounds · basis
pass
Commit (delta ledger)
Persistent netlist state