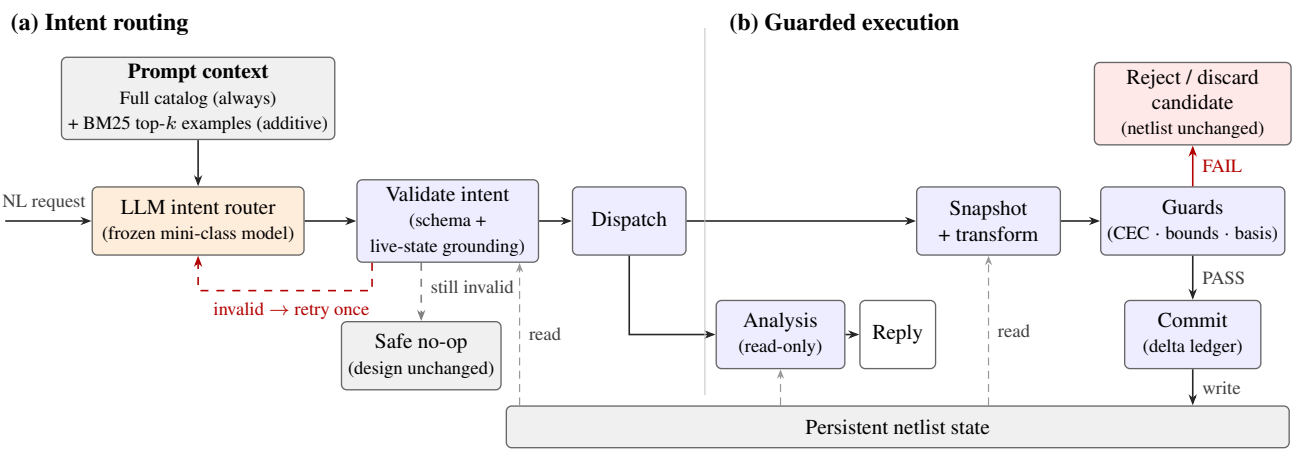
(a) Intent routing
(b) Guarded execution
Prompt context
Full catalog (always)
+ BM25 top-k examples (additive)
NL request
LLM intent router
(frozen mini-class model)
Validate intent
(schema +
live-state grounding)
Dispatch
invalid → retry once
still invalid
Safe no-op
(design unchanged)
read
Analysis
(read-only)
Reply
Snapshot
+ transform
read
Guards
(CEC · bounds · basis)
Reject / discard
candidate
(netlist unchanged)
FAIL
PASS
Commit
(delta ledger)
write
Persistent netlist state