

CPT204 2024

Final Exam Question

Short Answer Questions

1. A _____ variable stores the actual value, while a _____ variable stores the address of the variable.

2. _____ is a feature in Java where a method can call itself. _____ is a feature that allows a method to call another method, whereas _____ is a feature that allows a method to call another method having the same name, but with different parameters.

3. The outputs of the following code are _____.

```
public class Test {  
    public static void main(String[] args) {  
        Object o1 = new Object();  
        Object o2 = new Object();  
        System.out.print((o1 == o2) + "and" + (o1.equals(o2)));  
    }  
}
```

4. An _____ is a class-like construct that contains only constants, abstract methods, default methods, and static methods. In many ways, an interface is similar to an abstract class, but an abstract class can contain _____.

5. The output from the following code is _____.

```
public class Main {  
    public static void main(String[] args) {  
        ArrayList<String> list = new ArrayList<String>();  
        list.add("New York");  
        ArrayList<String> list1 = (ArrayList<String>) (list.clone());  
        list.add("Atlanta");  
        list1.add("Dallas");  
        System.out.println(list1);  
    }  
}
```

6. The program below would encounter a compilation error because the Fruit class does not implement the java.lang. Comparable interface and the Fruit objects are not comparable. This is due to the problem in Line _____.

```
1. public class Test {  
2.     public static void main(String[] args) {  
3.         Fruit[] fruits = {new Fruit(2), new Fruit(3), new Fruit(1)};
```

```
4.      Arrays.sort(fruits);
5.    }
6.}
```

```
class Fruit {
    private double weight;

    public Fruit(double weight) {
        this.weight = weight;
    }
}
```

7. A _____ class or method permits you to _____ that the class or method can work with. If you try to use it with an incompatible object, the _____ will cause a runtime error.

8. The method header is left blank in the _____ method header _____.

```
public class GenericMethodDemo {
    public static void main(String[] args ) {
        Integer[] integers = {1, 2, 3, 4, 5};
        String[] strings = {"London", "Paris", "New York", "Austin"};

        print(integers);
        print(strings);
    }
}
```

```
public static _____ {
    for (int i = 0; i < list.length; i++)
        System.out.print(list[i] + " ");
    System.out.println();
}
}
```

9. In Java collections, the _____ is efficient for retrieving elements and for adding and removing elements at the end of the list. On the other hand, a _____ is better suited for adding and removing elements at any position within the list, although locating specific elements for operations is not as efficient.

10. Suppose that list1 is a list that contains the strings red, yellow, and green, and that list2 is another list that contains the strings red, yellow, and blue. After executing list1.remove(list2), list1 contains _____.

11. _____ store objects that are processed in a last-in, first-out fashion. _____

store objects that are processed in a first-in,

12. The output from the following code is ____

```
public class Test {  
    public static void main(String[] args) {  
        PriorityQueue<Integer> queue =  
            new PriorityQueue<Integer>(  
                Arrays.asList(20, 40, 60, 10, 50, 30)  
            )  
        while (!queue.isEmpty())  
            System.out.print(queue.poll() + " ");  
    }  
}
```

13. Show the output of the following code ____

```
Set<String> set = new LinkedHashSet<>();  
set.add("ABC");  
set.add("FGH");  
System.out.println(set);
```

14. Complete the following code to create an empty hash set of integers:

Set<Integer> set = new _____;

15. In a library management system where you need to frequently check the availability and information of books with unique identifiers (e.g., the book ID), the most suitable data structure to store the books in the library would be a _____.

16. The _____ is a theoretical approach for analyzing the performance of an algorithm. It estimates how fast an algorithm's execution time increases as the input size increases, which enables you to compare two algorithms by examining their growth rates.

17. An algorithm with the _____ time complexity is called a linear time algorithm and an algorithm with the _____ time complexity is called a logarithmic algorithm.


18. Use the Big O notation to estimate the time complexity of the following method: _____

```
public static void mD(int[] m) {  
    for (int i = 0; i < m.length; i++) {  
        System.out.print(m[i] + " ");  
    }  
}
```

19. The worst-case time complexity for selection sort, and quick sort algorithms is _____ .

20. Suppose a list is [12, 9, 15, 4, 20, 11]. After insertion sort, the list becomes _____

21. Indicate the number of possible values that can be stored in a max heap to maintain the max heap _____



22. In a graph, if two vertices are connected by edges are called _____. A _____ is the set of all vertices and edges. A set of distinct vertices is connected by an edge.

23. There are two popular ways to traverse a graph, namely _____ and _____ .


24. In a network of cities connected by roads of varying lengths, if you want to connect all the cities in the most cost-effective way possible, you would use the _____ algorithm. However, if you want to find the shortest route from one specific city to another, you would use the _____ algorithm.

25. The time complexity for inserting and deleting an element into a binary search tree are _____ and _____ respectively, assuming that the tree is balanced.

26. In a binary tree, a _____ traversal visits the root node first, followed by the left subtree, and then the right subtree. Conversely, a _____ traversal visits the left subtree first, followed by the right subtree, and finally the root node..

27. In AVL tree, A node is said to be _____ if its balance factor is -1, and it is said to be _____ if its balance factor is +1.

28. Given the original AVL tree below, after adding element 42, the _____ rotation would be performed to rebalance the tree.

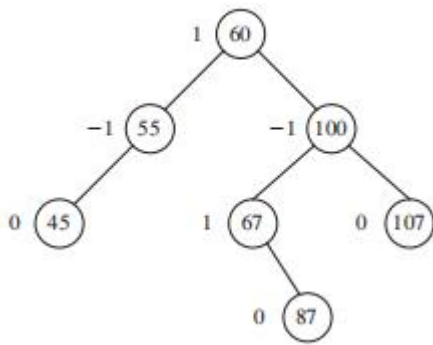

29. _____ and _____ methods are usually used in hash tables where two different keys are mapped to the same slot.

30. In hash tables, _____ probing resolves collisions by looking for the next available slots, while _____ probing resolves collisions by looking for slots at increasing squared distances from the initial slot.

Coding Questions

Q1. A real estate analyst is comparing the prices of recently sold luxury homes in a prestigious neighborhood. The prices of these homes are as follows: \$1,250,000.1, \$1,750,000.3, \$2,100,000.6, \$1,900,000.8, and \$2,300,000.2.

Complete the following method that find the maximum element in an ArrayList of generic elements, return null if the ArrayList is empty, and return the maximum value of the ArrayList that was passed to the function if it is not null.

```
public static <E extends Comparable<E>> E max(ArrayList<E> list)
```

Test cases:

```
ArrayList<Double> prices2 = new ArrayList<>();
System.out.println(maxPrice(prices2)); // -> null
```

```
ArrayList<Double> prices1 = new ArrayList<>(Arrays.asList(1250000.1,
1750000.3, 2100000.6, 1900000.8, 2300000.2));
System.out.println(maxPrice(prices1)); // -> 2300000.2
```

White board (where students code answers):

```
import java.util.ArrayList;
import java.util.Arrays;
```

```

public class RealEstateAnalyzer {

    public static void main(String[] args) {

        // Printing Test case with an empty

        // Printing Test case with highest price

    }

    public static <E extends Comparable<E>

        // Empty list case
        return null;

        // Highest price case
        return highestPrice;

    }
}

```

Q2. You are tasked with enhancing a flight boarding system for an airline. The airline categorizes passengers into three classes: "First Class," "Business Class," and "Economy Class." The following three priority queues represent the passengers waiting to board:

First Class Queue: {"Alice", "Bob", "Charlie", "Diana", "Ethan", "Fiona"}

Business Class Queue: {"Charlie", "Diana", "Grace", "Ian"}

Economy Class Queue: {"Alice", "Grace", "Ethan", "Hannah", "Ian"}

Your job is to find the exclusive First Class passengers who are only in "First Class" and not in "Business Class" or "Economy Class", by completing the 3 tasks indicated in the following white board.

White board (where students code answers):

```

import java.util.Arrays;
import java.util.HashSet;
import java.util.PriorityQueue;
import java.util.Set;

```

```
public class FlightBoardingSystem {

    public static void main(String[] args) {
        // Task 1: Create PriorityQueues for
        // Task 3: Call findExclusiveFirstClass
        // out the exclusive First Class passengers

    }

    public static Set<String> findExclusiveFirstClass(
        PriorityQueue<String> firstClass,
        PriorityQueue<String> business,
        PriorityQueue<String> economy) {

        // Task 2: Implement this method to return the exclusive
        // passengers

        return exclusiveFirstClass;
    }
}
```