

CPT204 Final Exam Sample Questions - AY2425

Part A. Gap-fill Questions

1. _____ allows different classes to define methods with the same name but behave differently, while _____ ensures that internal class data is not directly accessible from outside the class.

2. _____ store objects that are processed in a last-in, first-out fashion. _____ store objects that are processed in a first-in, first-out fashion.

3. Given the following method call:

```
public static void update(int num, int[] array) {  
    num = 100;  
    array[0] = 50;  
}
```

What is the printed value of x in the main method?

```
int x = 10;  
int[] arr = new int[1];  
update(x, arr);  
System.out.println("x = " + x);
```

4. What is the default value of myArray[2] after this declaration?

```
boolean[] myArray = new boolean[5];
```

5. What is the output of the following code:

```
String s1 = "Hello";  
String s2 = new String("Hello");
```

```
System.out.println(s1 == s2);
```

6. Given the Student class below:

```
public class Student {  
    private List<String> courses;  
  
    public List<String> getCourses() {  
        return courses;  
    }  
}
```

Although `courses` is private, the class is still not immutable because the getter returns a/an _____ to a mutable object.

```
7. public boolean equals(Object o) {  
    if (o instanceof Circle) {  
        return radius == ((Circle) o).radius;  
    }  
    return false;  
}
```

After _____, you can access the field. Equality must be based on comparing relevant fields.

```
8. class B {  
    public void p(double i){  
        System.out.println(i *2);  
    }  
}  
  
class A extends B {
```

```
public void p(int i) {  
    System.out.println(i);  
}
```

Given that method overloading is based on the reference type at compile time, what is printed by:

```
B a = new A();  
a.p(10);
```

9. In the code below:

```
interface T1 {  
    int K = 1;  
}  
  
System.out.println(T1.K);
```

What kind of static member — which is fixed and cannot be changed — is accessed using the interface name T1?

10. `House house1 = new House(1, 1750.50);`

`House house2 = (House)(house1.clone());`

`System.out.println(house1.getWhenBuilt() == house2.getWhenBuilt());`

The code above performs a/an _____ if `clone()` is not overridden.

11. If the key is the first element in the array, the linear search completes in _____ comparisons.

12. In our class, we introduced various methods for recording OOP learning, among which a _____ is a means of recording ideas, personal thoughts and experiences, as well as insights you gain in the learning process.

13. We have learned several different data structures in Java. Suppose you are asked to design a container that can support efficient and random access through an index, and efficient insertion and deletion from the end. The best data structure for the container is _____.

14. We have learned several different data structures in Java. Suppose you are asked to design a container that can support efficient and random access through an index; in addition, it supports insertion and deletion from the end by multiple threads concurrently. The best data structure for the container is _____.

15. What is the output of the following code segment

```
PriorityQueue<String> queue = new PriorityQueue<String>(  
Arrays.asList("Liverpool", "Suzhou", "London", "Beijing"));  
while (!queue.isEmpty())  
System.out.print(queue.poll() + " ");
```

16.

Suppose we are given a linked list CPTList and list node CPTListNode outlined below.

```
public class CPTListNode {  
    int data;  
    CPTListNode next;  
}  
  
public class CPTList {  
    private CPTListNode front;  
    // some methods  
}
```

A method called "method1" for the CPTList class is shown below. Assume there are two CPTList objects, list1 and list2. list1 contains 3 nodes of value 1, 2, and 3 (starting from the front). list2 contains another 3 nodes of value 4, 5, and 6 (starting from the front). What would be the

nodes in list1 after list1.method1(list2)? Place a comma between neighboring nodes in your answer, e.g. 1,3,2,4 (although comma is not a part of the linked list data structure).

```
public void method1(CPTList other){  
    CPTListNode l = other.front;  
    while (l.next != null){  
        l = l.next;  
    }  
    l.next = front;  
    front = other.front;  
}
```

17. A Map is a special type of Java container that stores a collection of key/value pairs. We have learned 3 types of built-in maps. They are: ____, ____, and TreeMap.

18. Suppose we have 3 containers below each containing the same set of students IDs at xjtlu. container1 is a LinkedHashSet.

container2 is a LinkedList.

container3 is an ArrayList.

The student IDs are stored in a random order in all 3 containers. Now We want to check if a given id, say 2209999, exists in the containers using the method "contains()". The code segment would be like

```
container1.contains(2209999)
```

```
container2.contains(2209999)
```

```
container3.contains(2209999)
```

Which container is likely to have the minimum time consumption?

19. In Big O notation, the term ____ is used to describe algorithms with complexity that grow at a linear rate with the input size.


20. The worst-case time complexity for selection sort, insertion sort, bubble sort, and quick sort algorithms is _____.

```
21. int count = 0;
    for (int i = 1; i < n; i *= 2) {
        count++;
    }
```

What is the time complexity of the code above?

22. In Merge Sort, the array is repeatedly divided into smaller sublists until each sublist contains only _____ element.

23. What value should best replace the '?' to maintain the max heap strictly?

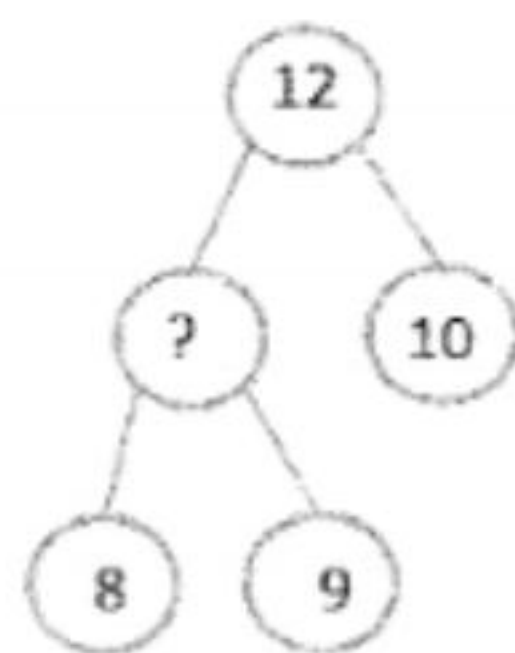

24. The time complexity for inserting an element into, and deleting an element from, a binary search tree are _____ and _____ respectively, assuming that the tree is balanced.

25. What does Dijkstra's algorithm compute?

26. In an AVL tree, a _____ imbalance occurs when a node is inserted into the right subtree of the right child of A, while a _____ imbalance occurs when a node is inserted into the left subtree of the left child of A.

27. The postorder traversal of the elements in an AVL tree after inserting 15, 10, 20, 25, 8, 12 in this order is _____.

28. The following code uses _____ probing to resolve collisions in a hash table.

```
int index = key % table.length;
while (table[index] != null) {
    index = (index + 1) % table.length; // linear probing
}
table[index] = key;
```

29. What EDI principle is demonstrated by using accessible color schemes in a Java Swing GUI, ensuring that users with visual impairments are not excluded?

30. What EDI principle is reflected when a Java app project is designed to accommodate both younger and older users, screen reader users, and speakers of different languages?

Part B. Coding Questions

Question 1

Scorable Quiz System

Given the following interface:

```
public interface Scorable {
    int getScore();
}
```

Complete the class QuizResult that implements Scorable. The getScore() method should return the percentage score as an integer (e.g., 80 for 8/10). If there are no questions, simply return 0. Use standard rounding (i.e., round to the nearest whole number).

Starter Code:

```
public class QuizResult implements Scorable {  
    private int correctAnswers;  
    private int totalQuestions;  
  
    public QuizResult(int correctAnswers, int totalQuestions) {  
        // TO DO  
    }  
  
    // TO DO  
}
```

Question 2

You are writing a Java program that implements an airplane ticket. The ticket can be compared by passenger name, ticket price, arrival time, and seat class in that order.

Moreover, the seat class is implemented using an enumeration with First Class, Business, and Economy, compared in that order.

Your task is to complete the TicketComparator class.

Date and Comparator have been imported. You are not allowed to import other classes.

The skeleton code is given below:

```
import java.util.Date;  
import java.util.Comparator;  
  
public class AirplaneTicket {  
    private String passengerName;  
    private int ticketPrice;  
    private String flightNumber;  
    private Date arrivalTime;
```



```
private SeatClass seatClass;

public enum SeatClass {

    FIRST_CLASS, BUSINESS, ECONOMY

}

public AirplaneTicket(String passengerName, int ticketPrice, String flightNumber, Date
arrivalTime, SeatClass seatClass) {

    this.passengerName = passengerName;
    this.ticketPrice = ticketPrice;
    this.flightNumber = flightNumber;
    this.arrivalTime = arrivalTime;
    this.seatClass = seatClass;
}

public String getPassengerName() {

    return passengerName;
}

public int getTicketPrice() {

    return ticketPrice;
}

public String getFlightNumber() {

    return flightNumber;
}

public Date getArrivalTime() {

    return arrivalTime;
}

public SeatClass getSeatClass() {
```

```
        return seatClass;
    }

    public static Comparator<AirplaneTicket> getTicketComparator() {
        return new TicketComparator();
    }

    // Complete the class TicketComparator
    private static class TicketComparator implements Comparator<AirplaneTicket> {

    }
}
}
```

----- END OF THE CPT 204 FINAL EXAM SAMPLE QUESTIONS -----

CPT204 2024-2025 F S2 - Searchable Transcript and Suggested Answers

This file provides a clean searchable transcript/answer page for the scanned paper. The original image pages are preserved in the combined PDF.

Part A Gap-fill Questions - Suggested Answers

1. Polymorphism; Encapsulation
2. Stacks; Queues
3. $x = 10$
4. false
5. false
6. reference
7. casting / downcasting
8. 20.0
9. constant / public static final constant
10. shallow copy
11. 1
12. reflective journal / reflective journal-log
13. ArrayList
14. Vector
15. Beijing Liverpool London Suzhou
16. 4,5,6,1,2,3
17. HashMap, LinkedHashMap, TreeMap
18. container1 / LinkedHashSet
19. $O(n)$
20. $O(n^2)$
21. $O(\log n)$
22. one
23. 11
24. $O(\log n)$; $O(\log n)$
25. Dijkstra's algorithm computes shortest paths from a source vertex to other vertices.
26. right-right; left-left
27. 8,12,10,25,20,15
28. linear
29. Inclusion
30. Diversity, or Inclusion if the expected wording focuses on not excluding all user groups.

Part B Question 1 - Scorable Quiz System

```
public class QuizResult implements Scorable {
    private int correctAnswers;
    private int totalQuestions;

    public QuizResult(int correctAnswers, int totalQuestions) {
        this.correctAnswers = correctAnswers;
        this.totalQuestions = totalQuestions;
    }

    @Override
    public int getScore() {
        if (totalQuestions == 0) {
            return 0;
        }
        return (int) Math.round((double) correctAnswers / totalQuestions * 100);
    }
}
```

Part B Question 2 - AirplaneTicket Comparator

```

private static class TicketComparator implements Comparator<AirplaneTicket> {
    @Override
    public int compare(AirplaneTicket t1, AirplaneTicket t2) {
        int result = t1.getPassengerName().compareTo(t2.getPassengerName());
        if (result != 0) return result;

        result = Integer.compare(t1.getTicketPrice(), t2.getTicketPrice());
        if (result != 0) return result;

        result = t1.getArrivalTime().compareTo(t2.getArrivalTime());
        if (result != 0) return result;

        return t1.getSeatClass().compareTo(t2.getSeatClass());
    }
}

```

Raw OCR Search Text

===== PAGE 1: page-01.png =====

Use

2361387

copyright

CPT204 Final Exam Sample Questions - AY2425

Part A. Gap-fill Questions

1.

differently, while

the class.

_ allows different classes to define methods with the same name but behave
ensures that internal class data is not directly accessible from outside

2..

store objects that are processed in a last-in, first-out fashion.

are processed in a first-in, first-out fashion.

Only by 23

3. Given the following method call:

expect Copyrig]

```
public static void update(int num, int[] array) {
```

```
num = 100;
```

```
array[0] = 50;
```

```
XJTLU
```

```
}
```

Use Respon

What is the printed value of x in the main method?

Use Only

```
int x = 10;
```

```
int[] arr = new int[1];
```

```
update(x, arr);
```

tern

```
System.out.println('x=
```

store objects that

4. What is the default value of myArray[2] after

this

```
boolean[] myArray = new boolean[5];
```

tuy

Use Res

5. What is the output of the following code:

```
String s1 = "Hello";
```

```
String s2 = new String("Hello");
```

===== PAGE 2: page-02.png =====

by 2361387

copyright
System.out.println(s1 == s2);

Use

Respe

XJTLU Acar

Jeo eospebic dius sudoent

6, Given the Student class below:

```
private List<String> courses;  
public List<String> getCourses() {  
    return courses;  
}
```

Only by 2361387

ect Copyright

Although courses is private, the class is still not immutable because the getter returns a/an

to a mutable object.

```
7. public boolean equals(Object o) {  
    if (o instanceof Circle) {  
        return radius == ((Circle) o).radius;  
    }  
    return false;  
}
```

}

After

ternal Use

Only by 2361387

ict Copyright

_, you can access the field. Equality must be based on comparing relevant fields

```
8. class B {  
    public void p(double i) {  
        System.out.println(i * 2);  
    }  
}  
XJTLU Academic  
Use Responsibly & F  
}  
}  
class A extends B
```

===== PAGE 3: page-03.png =====

by 2361387

```
public void p(int i) {
```

copyright

```
System.out.println(i);
```

XJTLU AS

Use R& Given that method overloading is based on the reference type at compile time, what is printed

```
B a = new A();
```

```
a.p(10);
```

9. In the code below:

```
interface T1 {
```

```
    int K = 1;
```

```
}
```

emic

Only by 2361387

Respect Copyright

```
System.out.println(T1.K);
```

What kind of static member -which is fixed and

cannot be changed - is accessed using the

interface name T1?

```
10. House house1 = new House(1, 1750.50);
```

```
System.out.println(house1.getWhenBuilt() == house2.getWhenBuilt());
```

Only by 2361387

The code above performs a/an

if cione() is not overridden.

& Respect Copyright

visibly

11. If the key is the first element in the array, the linear search completes in comparisons.

12. In our class, we introduced various methods for recording OOP learning, among which a

is a means of recording ideas, personal thoughts and experiences, as well as insights

you gain in the learning process.

===== PAGE 4: page-04.png =====

2361387

copyright

13. We have learned several different data structures in Java. Suppose you are asked to design

a container that can support efficient and random access through an index, and efficient

insertion and deletion from the end. The best data structure for the container is

Responsi

14. We have learned several different data structures in Java. Suppose you are asked to design

a container that can support efficient and random access through an index; in addition, it

supports insertion and deletion from the end by multiple threads concurrently. The best data

structure for the container is

361381

15. What is the output of the following code segment

```
PriorityQueue<String> queue = new PriorityQueue<String>(
```

```
Arrays.asList("Liverpool", "Suzhou", "London", "Beijing")
```

```
while (!queue.isEmpty())
```

```
Only
```

```
System.out.print(queue.poll()+"");
```

U5°

16.

Suppose we are given a linked list CPTList and list node CPTListNode outlined below

```
public class CPTListNode {
```

```
int data;
```

```
CPTListNode next;
```

```
tern
```

```
}
```

```
public class CPTList {
```

```
private CPTListNode front;
```

```
// some methods
```

```
XJTLU Academic Use Only by 236131
```

```
Use Responsibly & Respect Copyright
```

```
}
```

A method called "method1" for the CPTList class is shown below. Assume there are two CPTList

objects, list1 and list2. list1 contains 3 nodes of value 1, 2, and 3 (starting from the front). list2

contains another 3 nodes of value 4, 5, and 6 (starting from the front). What would be the

===== PAGE 5: page-05.png =====

answer, cce.g. 1,3,2,4 (although comma is not a part of the linked list data structure).

```
public void method1(CPTList other){
```

```
Use Respor
```

```
while (I.next != nullk
```

```

1= I.next;
}
i.next = front;
front = other.front;
}

```

Only by 2361387

J5

Respect Copyright

17. A Map is a special type of Java container that stores a collection of key/value pairs. We

have learned 3 types of built-in maps. They are:

, and TreeMap.

18. Suppose we have 3 containers below each containing the same set of students IDs at xjtlu.

container1 is a LinkedHashSet.

container2 is a LinkedList.

container3 is an ArrayList.

2361387

The student IDs are stored in a random order in all 3 containers. Now We want to check if a

given id, say 2209999, exists in the containers using the method "contains()". The code segment

would be like

```

container1.contains(2209999)

```

J5.

```

container2.contains(2209999)

```

```

container3.contains(2209999)

```

JTLU Academic

responsibly &

Which container is likely to have the minimum time consumption?

19. In Big O notation, the term

at a linear rate with the input size.

. is used to describe algorithms with complexity that grow

===== PAGE 6: page-06.png =====

by 2361387

copyright

20. The worst-case time complexity for selection sort, insertion sort, bubble sort, and quick

sort algorithms is

Use Respi

```

for (inti = 1;i<n;i*= 2) {

```

```

count++;
}

```

What is the time complexity of the code above?

contains only....

element.

G

Respec

23. What value should best replace the '?' to maintain the max heap strictly?

12

XJTLU

Use Respo

10

ternal

Only by 2361387

Copyright

24. The time complexity for inserting an element into, and deleting an element from, a binary

search tree are

and

_ respectively, assuming that the tree is balanced.

25. What does Dijkstra's algorithm compute?

XJTU Acad

Use Responsib

26. In an AVL tree, a

the right child of A, while a

subtree of the left child of A.

imbalance occurs when a node is inserted into the right subtree of

imbalance occurs when a node is inserted into the left

===== PAGE 7: page-07.png =====

2361387

copyright

27. The postorder traversal of the elements in an AVL tree after inserting 15, 1

0, 20, 25, 8, 12

in this order is

28. The following code uses

XJTU

Resint index = key % table.length;

while (table[index] != null) {

index = (index + 1) % table.length; // linear probing

probing to resolve collisions in a hash table.

}

table[index] = key;

lly by 2361387

Copyright

29. What EDI principle is demonstrated by using accessible color schemes in a Ja

va Swing GUI,

ensuring that users with visuai impairments are not exciuded?

30. What EDI principle is reflected when a Java app project is designed to accom

modate both

younger and older users, screen reader users, and speakers of different language

s?

Part B. Coding Questions

Question 1

Scorable Quiz System

nter

Given the following interface:

public interface Scorable {

361387

int getScore();

}

5°

Respect

XJTU Academic

Use Responsibly &

Complete the class QuizResult that implements Scorable. The getScore() method sh

ould return the

percentage score as an integer (e.g., 80 for 8/10). If there are no questions, s

imply return 0. Use

standard rounding (i.e., round to the nearest whole number).

===== PAGE 8: page-08.png =====

by 2361387

Starter Code:

Copyright

public class QuizResult implements Scorable {

Use Responsib,

private int totalQuestions;

public QuizResult(int correctAnswers, int totalQuestions) {

// TO DO

}

// TO DO

Only by 2361387
Respect Copyright
Question 2

Only

You are writing a Java program that implements an airplane ticket. The ticket can be compared

by passenger name, ticket price, arrival time, and seat class in that order.

Moreover, the seat class is implemented using an enumeration with First Class, Business, and

Economy, compared in that order.

Your task is to complete the TicketComparator class.

2361387

Date and Comparator have been imported. You are not allowed to import other classes.

The skeleton code is given below:

```
import java.util.Date;
import java.util.Comparator;
XJTU Academic Use
Use Responsibly & Respect
public class AirplaneTicket {
    private String passengerName;
    private int ticketPrice;
    private String flightNumber;
    private Date arrivalTime;
```

===== PAGE 9: page-09.png =====

2361381

right

```
private SeatClass seatClass;
```

```
public enum SeatClass {
    FIRST_CLASS, BUSINESS, ECONOMY
```

XJTU

Use Resp

```
public AirplaneTicket(String passengerName, int ticketPrice, String flightNumber,
    Date
```

```
arrivalTime, SeatClass seatClass) {
```

```
    this.passengerName = passengerName; 36
```

```
    this.ticketPrice = ticketPrice;
```

Only by

```
    this.flightNumber = flightNumber;
    this.arrivalTime = arrivalTime;
```

```
    this.seatClass = seatClass;
```

```
    public String getPassengerName() {
```

al Use Only

```
        return passengerName;
```

```
    }
```

```
    public int getTicketPrice() {
```

```
        return ticketPrice;
```

```
    }
```

```
    public String getFlightNumber() {
```

```
        return flightNumber;
```

```
    }
```

```
    public Date getArrivalTime() {
```

```
        return arrivalTime;
```

XJTU Academic Use Only by 2361387

Use Responsibly & Respect Copyright

```
    }
```

```
    public SeatClass getSeatClass() {
```

===== PAGE 10: page-10.png =====

by 2361387

copyright


```
return seatClass;
15°
XJTLU Academic
Respe
public static Comparator<AirplaneTicket> getTicketComparator() {
Use Responsibl
return new TicketComparator();
}
// Complete the class TicketComparator
private static class TicketComparator implements Comparator<AirplaneTicket> {
}
}
204 FINAL
EX
AM
Only
Internal USen
XJTLU Academic Use Only by 2361387
Use Responsibly & Respect Copyright
```