

SCALA

Part - I

Objectives

By the end of this module, you will be able to understand:

- What is Scala?
- Why Scala for Spark?
- Scala in other frameworks
- Introduction to Scala REPL
- Basic Scala operations
- Variable Types in Scala
- Control Structures in Scala
- Foreach loop
- Functions
- Procedures
- Collections in Scala - Array, ArrayBuffer, Map, Tuples, Lists
- Get a Tour of Edureka's VM



What is Scala?

- A general-purpose programming language
- Aimed to implement common programming patterns in a concise, elegant, and type-safe way
- Supports both object-oriented and functional programming styles, thus helping programmers to be more productive
- Publicly released in January 2004 on the JVM platform and a few months later on the .NET platform

Martin Odersky and his team started developing Scala in 2001



What is Scala? (Contd.)


- Scala is Statically Typed
 - Statically typed language binds the type to a variable for its entire scope
 - Dynamically typed languages bind the type to the actual value referenced by a variable
- Mixed Paradigm - OOP
 - Fully supports Object Oriented Programming
 - Everything is an object in Scala
 - Unlike Java, Scala does not have primitives
 - Supports “static” class members through Singleton Object Concept
 - Improved support for OOP through Traits, similar to Ruby Modules

What is Scala? (Contd.)

- Mixed Paradigm - Functional Programming
- Scala supports Functional Programming (FP)
- “Pure” functional languages don’t allow any mutable state, thereby avoiding the need for synchronization on shared access to mutable state
- Scala supports this model with its Actors library, but it allows for both mutable and immutable variables
- Functions are “first-class” citizens in FP, means they can be assigned to variables, passed to other functions, etc., just like other values
- In Scala everything is an object, functions are themselves objects in Scala
- Scala also offers closures, similar to Python and Ruby

Why Scala?

- Developers want more flexible languages to improve their productivity
- This resulted in evolution of scripting languages like Python, Ruby, Groovy, Clojure etc.
- The optimizations performed by today's JVM are extraordinary, allowing byte code to outperform natively compiled code in many cases

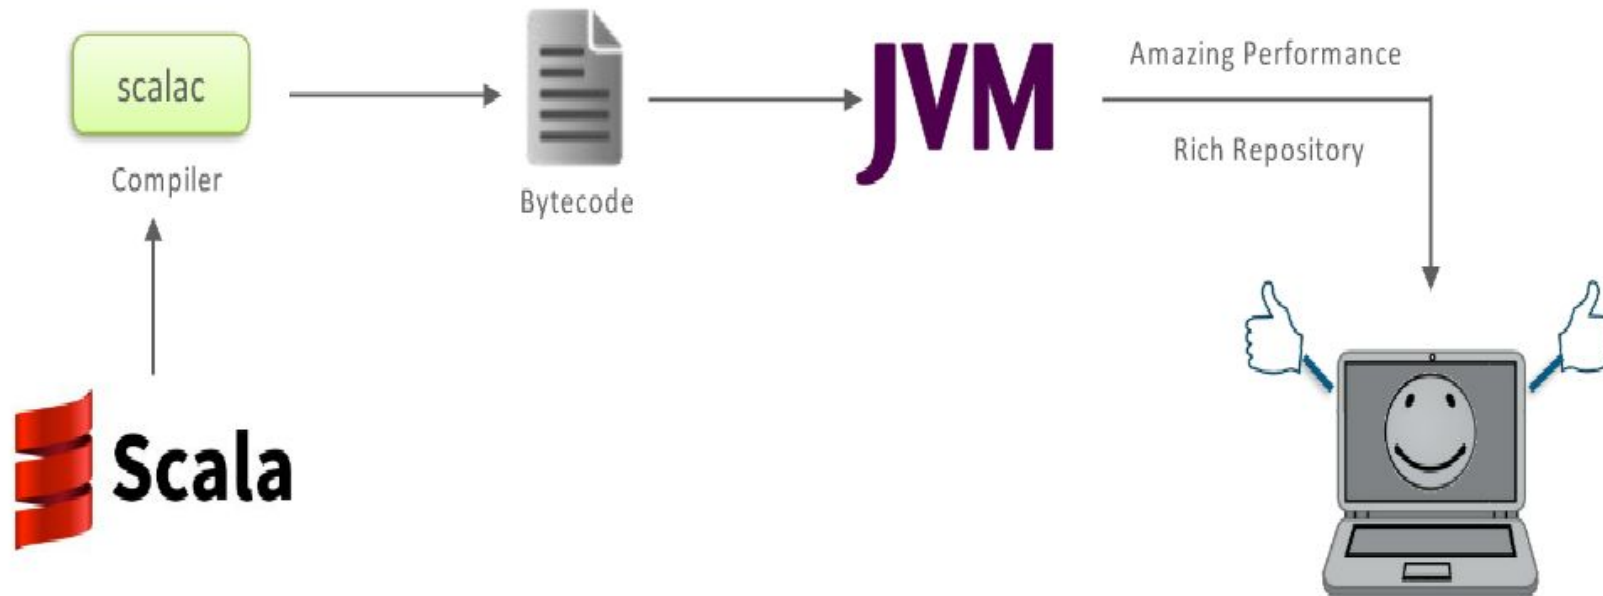

Why Scala For Spark?



is easier with



Scala

Scala in Other Frameworks

Play - For Web Development



Play is a high-productivity Java and Scala web application framework that integrates the components and APIs you need for modern web application development

Scalding - For Map/Reduce



Scalding is a Scala library that makes it easy to specify Hadoop MapReduce jobs. Scalding is built on top of [Cascading](#), a Java library that abstracts away low-level Hadoop details

Spark - In - memory Processing



Apache Spark is a general-purpose cluster in-memory computing system. It is used for fast data analytics and it abstracts APIs in Java, Scala and Python, and provides an optimized engine that supports general execution graphs

Neo4j – Graph Database



The Neo4j Scala wrapper library allows you the Neo4j open source graph database through a domain-specific simplified language. It is written in Scala and is intended to be used in other Scala projects.

Akka - Actors Based Framework



Akka is a toolkit and runtime for building highly concurrent, distributed, and fault tolerant applications on the JVM. Akka is written in Scala

Scala - James Gosling

“If I were to pick a language to use today other than Java, it would be Scala”



James Gosling

The father of the Java
programming language

Scala REPL

- REPL: Read - Evaluate - Print - Loop
- Easiest way to get started with Scala, acts as an interactive shell interpreter
- Even though it appears as interpreter, all typed code is converted to Bytecode and executed
- Invoked by typing Scala as shown below

```
$ scala
Welcome to Scala version 2.9.3
Type in expressions to have them evaluated.
Type :help for more information.
scala>
```



```
edureka@ubuntu:~$ cd scala-2.9.3/
edureka@ubuntu:~/scala-2.9.3$ ./bin/scala
Welcome to Scala version 2.9.3 (OpenJDK 64-Bit Server VM, Java 1.7.0_55).
Type in expressions to have them evaluated.
Type :help for more information.
```


Scala REPL Explained

- After you type an expression, such as `10 + 2`, and hit enter:

- `scala> 10 + 2`

- The interpreter will print:

- `res0: Int = 12`

A screenshot of a terminal window with a dark background. The prompt 'scala>' is followed by the expression '10+2' on the first line. The second line shows the output 'res0: Int = 12'.

- This line includes:
 - An automatically generated or user-defined name to refer to the computed value (`res0`, which means result 0),
 - A colon (`:`), followed by the type of the expression (`Int`),
 - An equals sign (`=`),
 - The value resulting from evaluating the expression (`12`)

Scala : Variable Types


- Scala allows one to decide whether a variable is immutable or mutable

- Immutable** - “**val**” (Read only)

- Similar to Java Final Variables
- Once initialized, Vals can't be reassigned

```
scala> val msg = "Hello World"
msg: String = Hello World
```

```
scala> msg = "Hello!"
<console>:8: error:
reassignment to val
    msg = "Hello!"
```

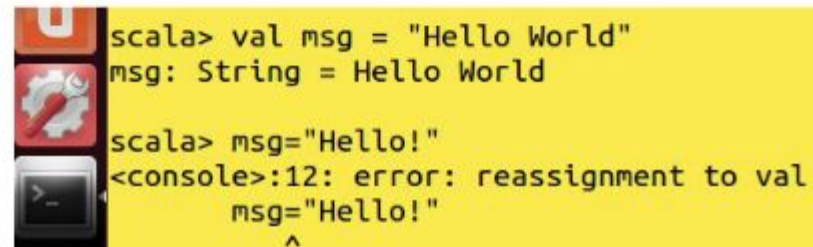


A screenshot of the Scala REPL interface. The first line shows the successful declaration of a `val` variable: `scala> val msg = "Hello World"`, followed by the type signature `msg: String = Hello World`. The second line shows an attempt to reassign the variable: `scala> msg="Hello!"`. This results in a red error message: `<console>:12: error: reassignment to val`. A red arrow points to the `val` in the error message. Below the error, the code `msg="Hello!"` is shown with a red caret under the `msg`.

- Mutable** - “**var**” (Read-write)

- Similar to non-final variables in Java

```
scala> var msg = "Hello World"
msg: String = Hello World
scala> msg = "Hello!"
msg: String = Hello!
```

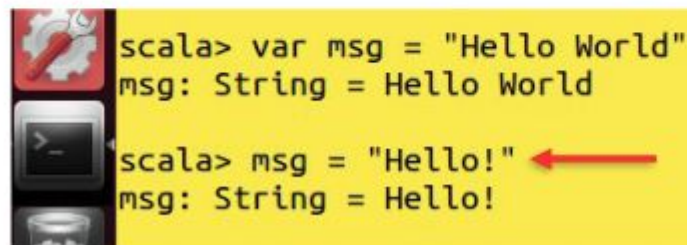


A screenshot of the Scala REPL interface. The first line shows the declaration of a `var` variable: `scala> var msg = "Hello World"`, followed by the type signature `msg: String = Hello World`. The second line shows the successful reassignment of the variable: `scala> msg = "Hello!"`, followed by the updated type signature `msg: String = Hello!`. A red arrow points to the `msg` in the second line of code.

Scala : Type Inference

- Even though we never declared variable type, Scala inferred it!
- This is called as **Type Inference** in Scala

```
scala> msg = 3
<console>:8: error: type mismatch;
  found   : Int(3)
  required: String
    msg = 3
         ^
```

```
scala> msg = 3
<console>:8: error: type mismatch;
found   : Int(3)
required: String
  msg = 3
       ^
```

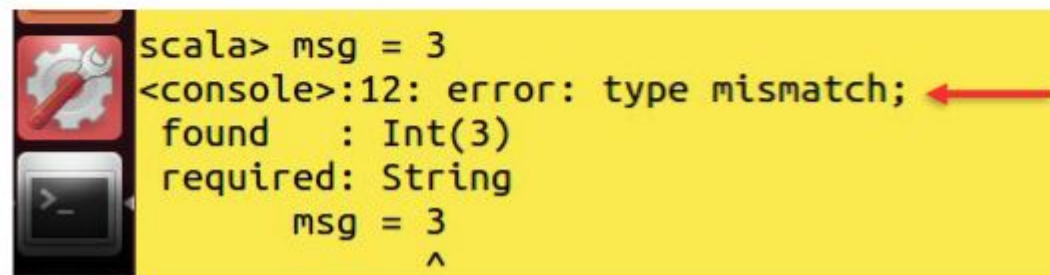

```
scala> msg = 3
<console>:12: error: type mismatch; ←
  found   : Int(3)
  required: String
    msg = 3
         ^
```


- Once a type is assigned to a variable, it remains same for entire scope
- Thus, Scala is **Statically Typed** language

Scala : Type Inference

- Even though we never declared variable type, Scala inferred it!
- This is called as **Type Inference** in Scala

```
scala> msg = 3
<console>:8: error: type mismatch;
  found   : Int(3)
  required: String
    msg = 3
         ^
```

```
scala> msg = 3
<console>:8: error: type mismatch;
found   : Int(3)
required: String
  msg = 3
       ^
```

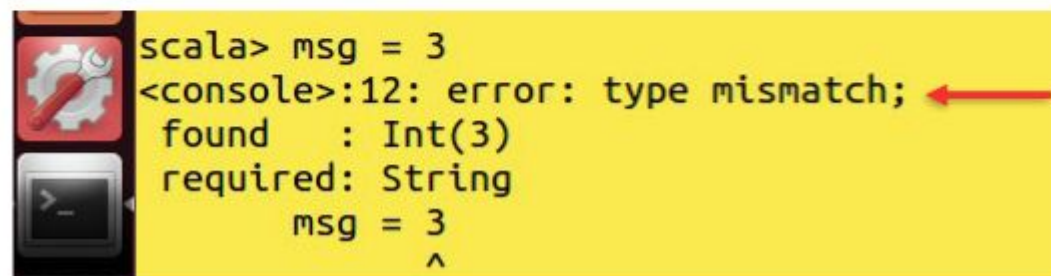


```
scala> msg = 3
<console>:12: error: type mismatch; ←
  found   : Int(3)
  required: String
    msg = 3
         ^
```

- Once a type is assigned to a variable, it remains same for entire scope
- Thus, Scala is **Statically Typed** language

Assigning Block Expression

- In Java or C++ a code block is a list of statements in curly braces { }
- In Scala, a { } block is a list of expressions, and result is also an expression
- The Value of a block is the value of the last expression of it

```
scala> val x = {val a =10; val  
b = 100; b - a}  
x: Int = 90
```

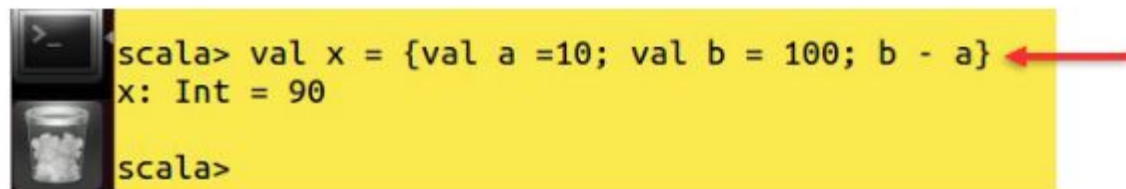A screenshot of the Scala REPL terminal. The first line shows the command 'scala> val x = {val a =10; val b = 100; b - a}' with a red arrow pointing to the closing brace of the block expression. The second line shows the result 'x: Int = 90'. The third line shows the prompt 'scala>'.

```
scala> val x = {val a =10; val b = 100; b - a}  
x: Int = 90  
scala>
```



Note: You can assign an anonymous function result to a variable/value in Scala

Lazy Values


- You can define a value as Lazy in Scala
- Lazy value initialization is deferred till it's accessed for first time

For example : If you want to read a file `vikas`, if the file is not existing or present, you will get `FileNotFoundException` exception.

But if you initialize the value as `Lazy`, you won't get this error, because it will delay the initialization till it accesses the file `vikas`

```
scala> val file =  
scala.io.Source.fromFile("vikas").mkString  
java.io.FileNotFoundException: vikas (The system  
cannot find the file specified
```

- at java.io.FileInputStream.open(Native Method)
- at java.io.FileInputStream.<init>(FileInputStream.java:138)
- at scala.io.Source\$.fromFile(Source.scala:90)
- at scala.io.Source\$.fromFile(Source.scala:75)
- at scala.io.Source\$.fromFile(Source.scala:53)
- at .<init>(<console>:7) ...

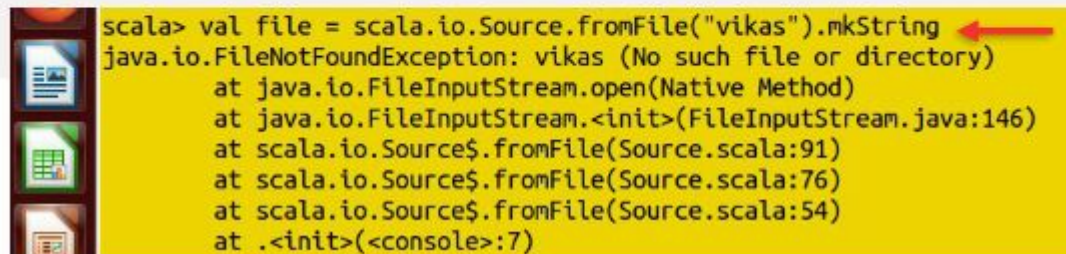

```
scala> val file = scala.io.Source.fromFile("vikas").mkString  
java.io.FileNotFoundException: vikas (No such file or directory)  
    at java.io.FileInputStream.open(Native Method)  
    at java.io.FileInputStream.<init>(FileInputStream.java:146)  
    at scala.io.Source$.fromFile(Source.scala:91)  
    at scala.io.Source$.fromFile(Source.scala:76)  
    at scala.io.Source$.fromFile(Source.scala:54)  
    at .<init>(<console>:7)
```

Lazy Values (Contd.)

- Lazy values are very useful for delaying costly initialization instructions
- Lazy values don't give error on initialization, whereas no lazy value do give error

```
scala> lazy val file =  
scala.io.Source.fromFile("vikas").mkString  
file: String = <lazy>
```




```
scala> lazy val file = scala.io.Source.fromFile("vikas").mkString  
file: String = <lazy>
```



Control Structures in Scala

- If-else syntax in Scala is same as Java or C++
- In Scala, if-else has a value, of the expression following it
- Semicolons are optional in Scala

```
scala> var x = 5
x: Int = 5
scala> val s = if (x > 0 && x < 6) 1 else 0
s: Int = 1
scala> val s = if (x > 0 && x < 6) "positive"
else 0
s: Any = positive
```

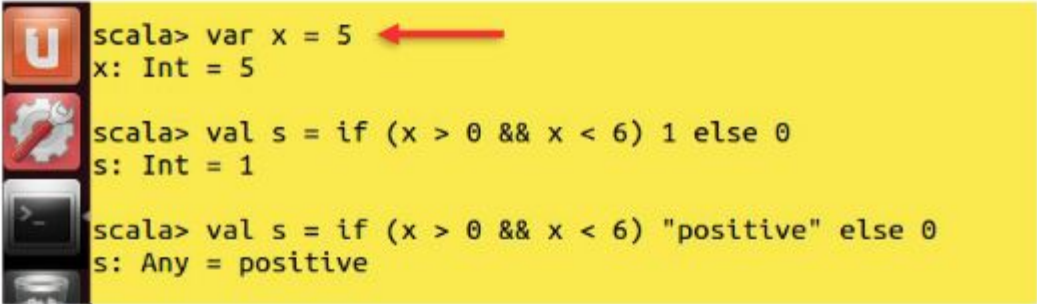

```
scala> var x = 5
x: Int = 5

scala> val s = if (x > 0 && x < 6) 1 else 0
s: Int = 1

scala> val s = if (x > 0 && x < 6) "positive" else 0
s: Any = positive
```

- Every expression in Scala has a type
- First If statement has a type Int
- Second statement has a type Any. Type of a mixed expression is supertype of both branches

Scala : Foreach Loop


- Looping with foreach:

```
var args = "Hello"  
  
args.foreach(arg => println(arg))  
  
args.foreach(println)
```



A screenshot of the Scala REPL interface with a yellow background. The first line of code is `scala> var args = "Hello"`, with a red arrow pointing to the string value. The second line is `args: java.lang.String = Hello`. The third line of code is `scala> args.foreach(arg => println(arg))`, with a red arrow pointing to the lambda expression. The output shows the word "Hello" printed on four separate lines.

```
scala> var args = "Hello"  
args: java.lang.String = Hello  
  
scala> args.foreach(arg => println(arg))  
H  
e  
l  
l  
o
```

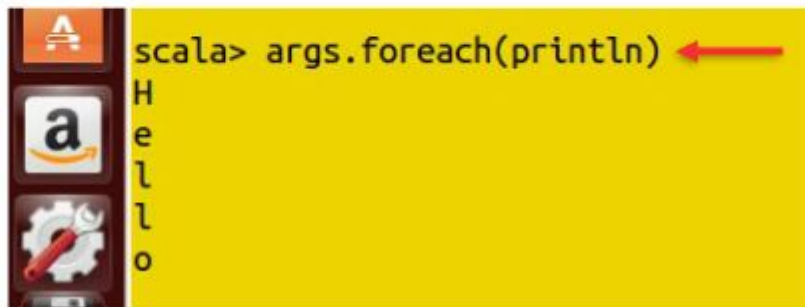


A screenshot of the Scala REPL interface with a yellow background. The third line of code is `scala> args.foreach(println)`, with a red arrow pointing to the `println` function. The output shows the word "Hello" printed on four separate lines.

```
scala> args.foreach(println)  
H  
e  
l  
l  
o
```

Scala : For Loop

- For Loop:
 - Scala doesn't have for (initialize; test; update) syntax
 - Either you'll use a while loop or a statement like below

```
for (i<- 1 to 5)  
  println(i)
```

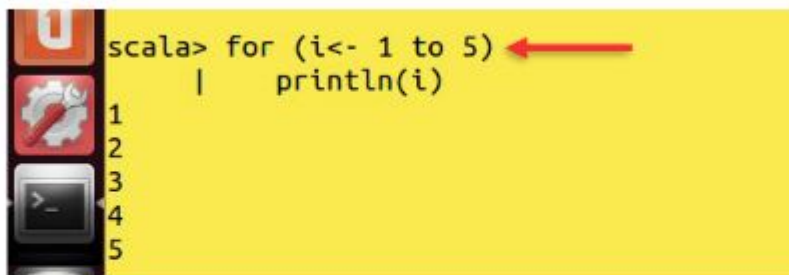
A screenshot of a Scala REPL (Read-Eval-Print Loop) window. The window has a yellow background and a dark sidebar on the left with icons for a file, a gear, and a terminal. The main area shows the command 'scala> for (i<- 1 to 5) println(i)' with a red arrow pointing to the '5' in the range. Below the command, the output '1', '2', '3', '4', and '5' is displayed on separate lines.

```
scala> for (i<- 1 to 5) println(i)  
1  
2  
3  
4  
5
```

Scala : For Loop (Contd.)

- While traversing an array, following could be applied:

```
val in = "Hello World"
var sum = 0
for (i<- 0 until in.length) sum +=i
print(sum)
```

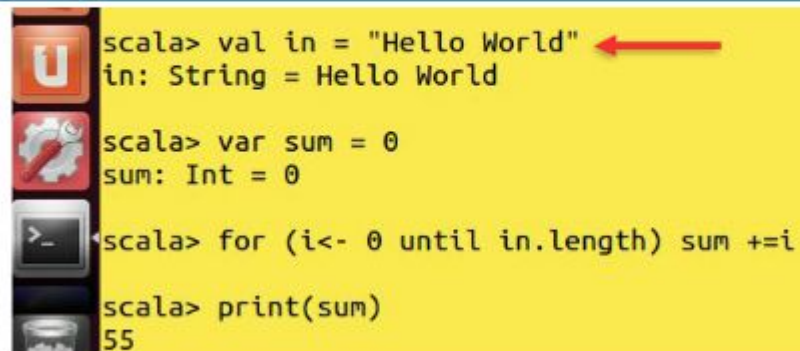A screenshot of the Scala REPL interface. The background is yellow. On the left, there is a vertical toolbar with icons: a red 'U' in a square, a gear with a red pencil, a terminal window icon, and a trash can icon. The REPL text shows the following commands and output:


```
scala> val in = "Hello World"
in: String = Hello World
scala> var sum = 0
sum: Int = 0
scala> for (i<- 0 until in.length) sum +=i
scala> print(sum)
55
```

A red arrow points to the first line of code: `scala> val in = "Hello World"`.

Advanced For Loop:

- We can have multiple generators in for loop

```
for(i<- 1 to 3; j<-1 to 3)
println(10*i + j)
```

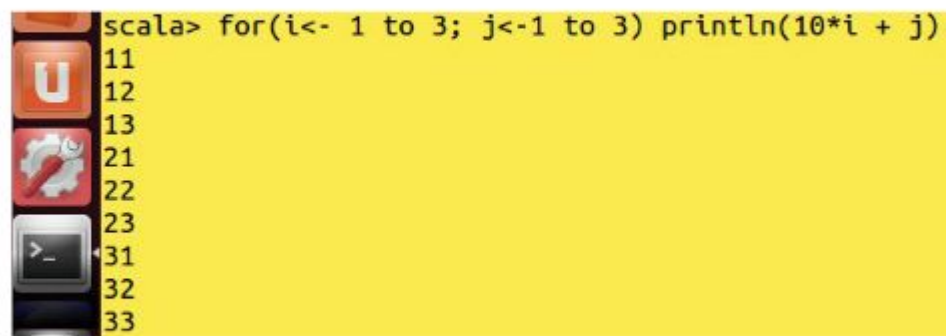A screenshot of the Scala REPL interface, similar to the one above. The background is yellow. The REPL text shows the following command and output:


```
scala> for(i<- 1 to 3; j<-1 to 3) println(10*i + j)
11
12
13
21
22
23
31
32
33
```

A red arrow points to the first line of code: `scala> for(i<- 1 to 3; j<-1 to 3) println(10*i + j)`.

Scala : For Loop (Contd.)

- We can put conditions in multi generators for loop


```
for(i<- 1 to 3; j<-1 to 3 if i ==j) println(10*i + j)
```

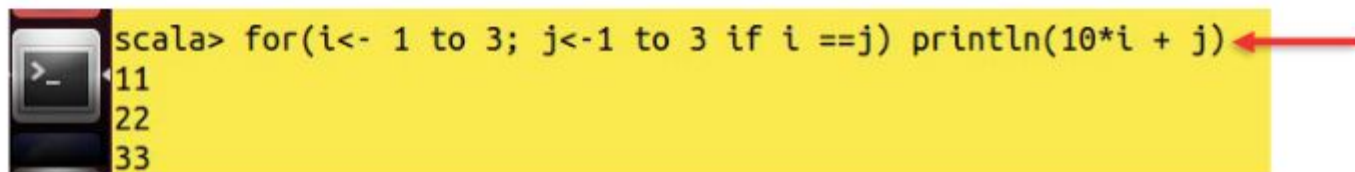A screenshot of a Scala REPL terminal window with a yellow background. The prompt 'scala>' is followed by the code 'for(i<- 1 to 3; j<-1 to 3 if i ==j) println(10*i + j)'. A red arrow points to the closing parenthesis of the for loop. The output shows three lines: '11', '22', and '33'.

```
scala> for(i<- 1 to 3; j<-1 to 3 if i ==j) println(10*i + j)  
11  
22  
33
```

- We can introduce variables in loop!

```
for(i<- 1 to 3; x = 4-i; j<- x to 3) println(10*i + j)
```

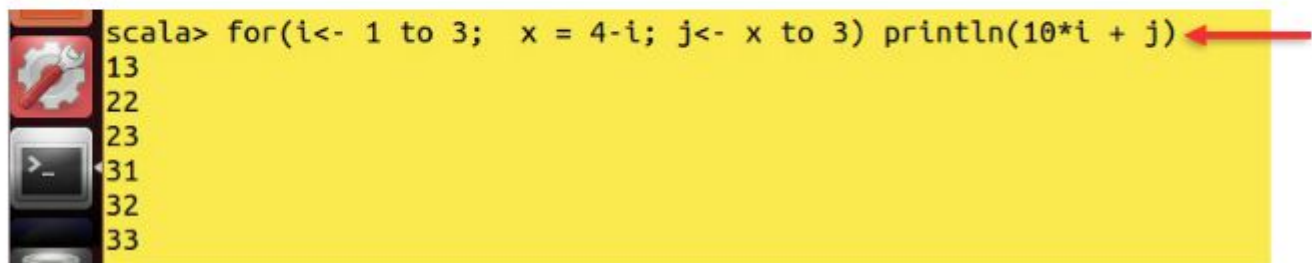
A screenshot of a Scala REPL terminal window with a yellow background. The prompt 'scala>' is followed by the code 'for(i<- 1 to 3; x = 4-i; j<- x to 3) println(10*i + j)'. A red arrow points to the closing parenthesis of the for loop. The output shows three lines: '13', '22', and '33'.

```
scala> for(i<- 1 to 3; x = 4-i; j<- x to 3) println(10*i + j)  
13  
22  
33
```

Scala : For Loop (Contd.)

- If the body of for loop starts with yield, it returns a collection of values

```
val x = for(i<- 1 to 20) yield i*2.5  
for (i<- x) println(i)
```

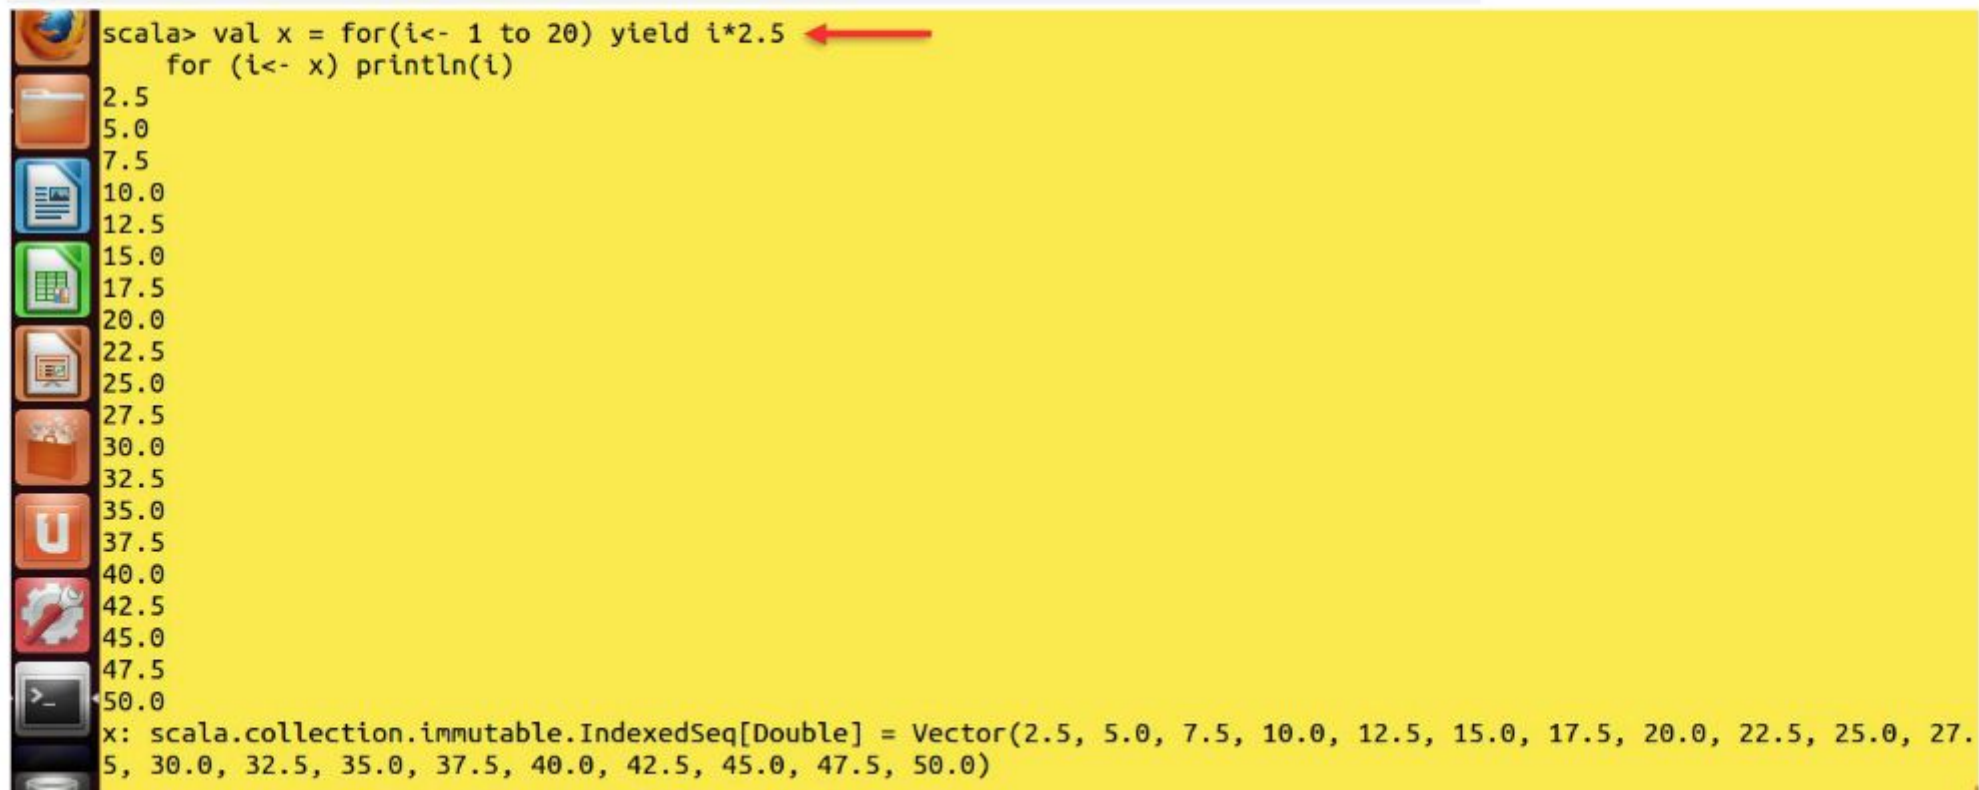

```
scala> val x = for(i<- 1 to 20) yield i*2.5  
for (i<- x) println(i)  
2.5  
5.0  
7.5  
10.0  
12.5  
15.0  
17.5  
20.0  
22.5  
25.0  
27.5  
30.0  
32.5  
35.0  
37.5  
40.0  
42.5  
45.0  
47.5  
50.0  
x: scala.collection.immutable.IndexedSeq[Double] = Vector(2.5, 5.0, 7.5, 10.0, 12.5, 15.0, 17.5, 20.0, 22.5, 25.0, 27.5, 30.0, 32.5, 35.0, 37.5, 40.0, 42.5, 45.0, 47.5, 50.0)
```

Scala : Functions

- In addition to methods, Scala has the concept of functions
- Methods are always invoked on objects, but functions are NOT
- In Java, this concept is very close to a static method


Example:

```
def area (radius: Int): Double = {3.14  
* radius * radius }
```

- There is no need of a Return Statement in Scala functions
- We need to specify the datatype for a recursive function:

Example:

```
def factorial(n:Int):Int = if (n==0) 1 else n * factorial(n-1)
```

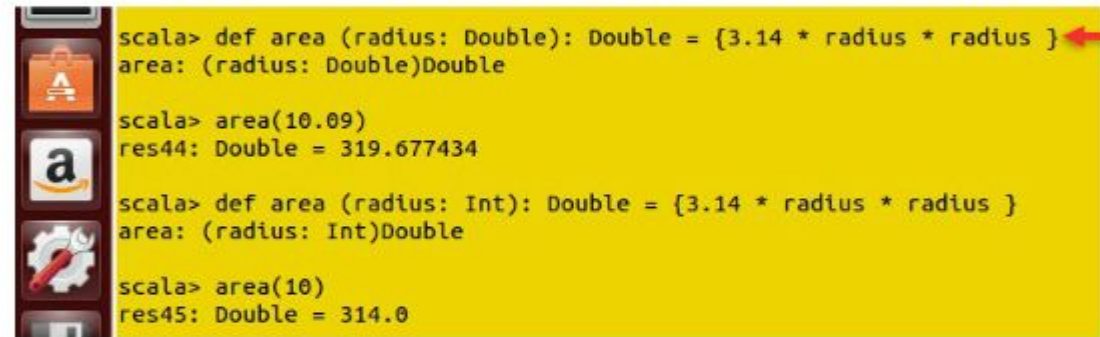


A screenshot of the Scala REPL interface. The background is yellow. On the left, there is a vertical toolbar with icons for a file explorer, a search icon, and a gear icon. The main area shows the following code:
scala> def area (radius: Double): Double = {3.14 * radius * radius }
area: (radius: Double)Double

scala> area(10.09)
res44: Double = 319.677434

scala> def area (radius: Int): Double = {3.14 * radius * radius }
area: (radius: Int)Double

scala> area(10)
res45: Double = 314.0
A red arrow points to the first line of code.

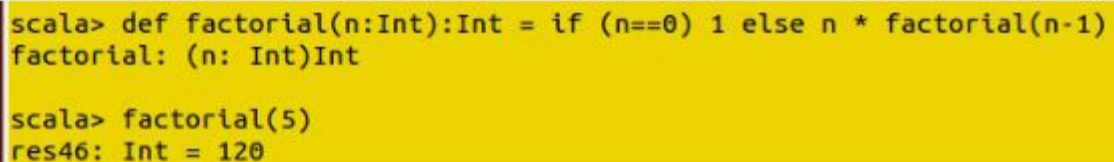

A screenshot of the Scala REPL interface. The background is yellow. On the left, there is a vertical toolbar with icons for a file explorer, a search icon, and a gear icon. The main area shows the following code:
scala> def factorial(n:Int):Int = if (n==0) 1 else n * factorial(n-1)
factorial: (n: Int)Int

scala> factorial(5)
res46: Int = 120
A red arrow points to the first line of code.

Arguments to Functions

Named and Default Arguments

- We can provide defaults to function arguments, which will be used in case no value is provided in function calls

```
def concatStr(arg1:String, arg2:String = "Vishal", arg3:String = " Kumar")  
    concatStr("Hi! ")
```

- We can specify argument names in function calls
- In named invocations the order of arguments is not necessary
- We can mix unnamed and named arguments, if the unnamed argument is the first one
- Variable Arguments
- Scala supports variable number of arguments to a function

Scala : Procedures

- Scala has special functions which don't return any value
- If there is a scala function without a preceding "=" symbol, then the return type of the function is Unit
- Such functions are called Procedures
- Procedures do not return any value in Scala

Example:

```
def rect_area(length:Float, breadth:Float) { val area = length*  
breadth; print(area)}
```

```
>_ scala> def rect_area(length:Float, breadth:Float) { val area = length* breadth; print(area)}  
rect_area: (length: Float, breadth: Float)Unit
```



- Same rules of default and named arguments apply on Procedures as well

Scala : Collections

- Scala has a rich library of Collections, they are:
 - Array
 - ArrayBuffers
 - Maps
 - Tuples
 - Lists

Scala Collections : Array

- Fixed Length Arrays:

Examples:

```
val n = new Array[Int](10)
val s = new Array[String](10)
val st = Array("Hello", "World")
```



```
scala> val n = new Array[Int](10) ←
n: Array[Int] = Array(0, 0, 0, 0, 0, 0, 0, 0, 0, 0)


scala> val s = new Array[String](10) ←
s: Array[String] = Array(null, null, null, null, null, null, null, null, null, null)

scala> val st = Array("Hello", "World") ←
st: Array[String] = Array>Hello, World)
```

Scala Collections : ArrayBuffer

- Variable Length Arrays (Array Buffers)
- Similar to Java ArrayLists

```
import scala.collection.mutable.ArrayBuffer
val a = ArrayBuffer[Int]()
a += 1
a += (2, 3, 5)
a ++= Array(6, 7, 8)
```

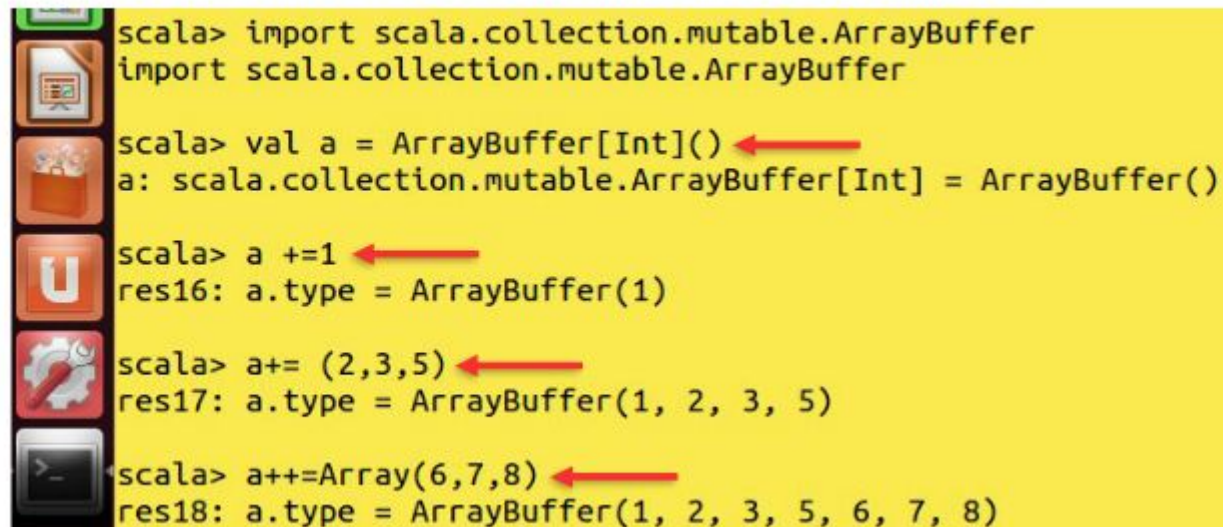

```
scala> import scala.collection.mutable.ArrayBuffer
import scala.collection.mutable.ArrayBuffer

scala> val a = ArrayBuffer[Int]() ←
a: scala.collection.mutable.ArrayBuffer[Int] = ArrayBuffer()

scala> a += 1 ←
res16: a.type = ArrayBuffer(1)

scala> a += (2, 3, 5) ←
res17: a.type = ArrayBuffer(1, 2, 3, 5)

scala> a ++= Array(6, 7, 8) ←
res18: a.type = ArrayBuffer(1, 2, 3, 5, 6, 7, 8)
```

Scala Collections : Arrays and ArrayBuffer


- Common Operations:

```
a.trimEnd(2)    //Removes last 2 elements
a.insert(2, 9)   // Adds element at 2nd index
a.insert(2,10,11,12) //Adds a list
a.remove(2)      //Removes an element
a.remove(2,3)    //Removes three elements from index 2
```

- Traversing and Transformation:

```
for (el <- a)
  println(el)

for (el <- a if el%2 == 0) yield (2*el)
```

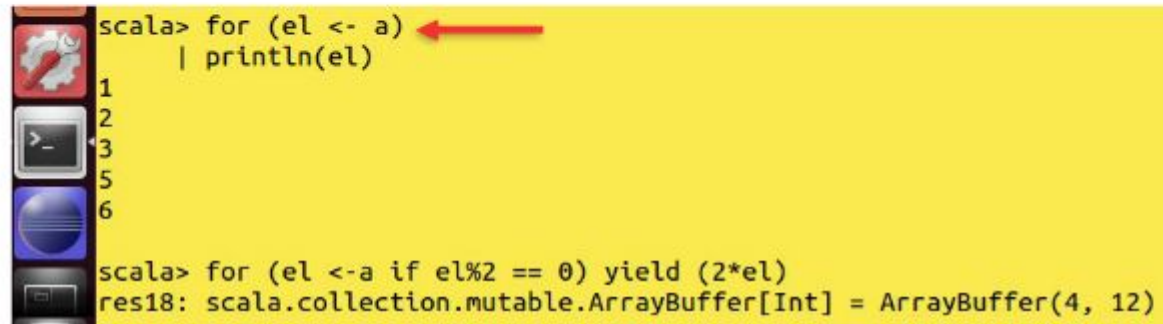


```
scala> for (el <- a)
| println(el)
1
2
3
5
6
scala> for (el <- a if el%2 == 0) yield (2*el)
res18: scala.collection.mutable.ArrayBuffer[Int] = ArrayBuffer(4, 12)
```

Scala Collections : Arrays and ArrayBuffers (Contd.)

- Common Operations:

```
Array(1,2,3,4).sum  
Array(1,5,9,8).max  
val a = Array(1,7,2,9)  
scala.util.Sorting.quickSort(a)  
a.mkString( " ** ")
```

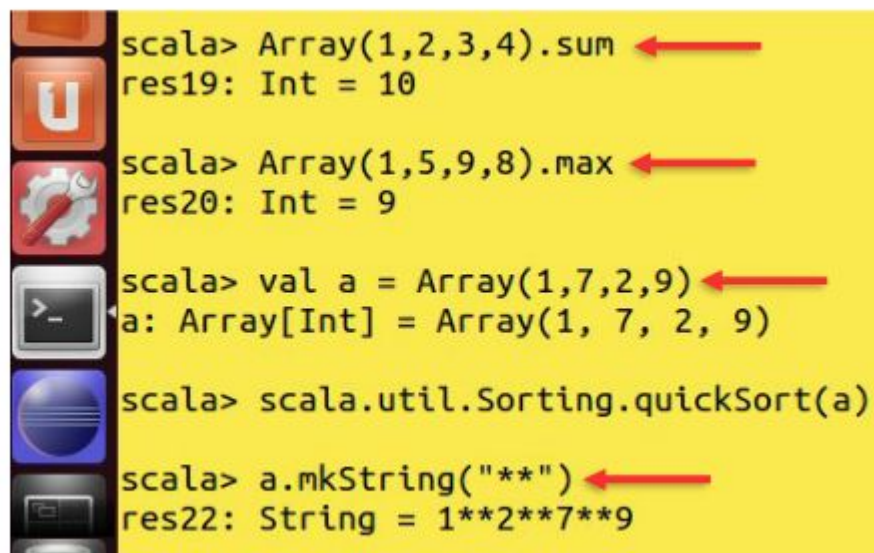

```
scala> Array(1,2,3,4).sum  
res19: Int = 10  
  
scala> Array(1,5,9,8).max  
res20: Int = 9  
  
scala> val a = Array(1,7,2,9)  
a: Array[Int] = Array(1, 7, 2, 9)  
  
scala> scala.util.Sorting.quickSort(a)  
  
scala> a.mkString("**")  
res22: String = 1**2**7**9
```

Scala Collections : Maps

- In Scala, a map is a collection of Pair
- A pair is a group of two values (Not necessarily of same type)

```
val mapping = Map("Vishal" -> "Kumar", "Vijay" -> "Verma")  
val mapping = scala.collection.mutable.Map("Vishal" -> "K",  
"Vijay" -> "V")
```




```
scala> val mapping = Map("Vishal" -> "Kumar", "Vijay" -> "Verma")  
mapping: scala.collection.immutable.Map[String,String] = Map(Vishal -> Kumar, Vijay -> Verma)  
  
scala> val mapping = scala.collection.mutable.Map("Vishal" -> "K", "Vijay" -> "v")  
mapping: scala.collection.mutable.Map[String,String] = Map(Vishal -> K, Vijay -> v)  
  
scala> val x = mapping("Vishal")  
x: String = K  
  
scala> val x = mapping.getOrElse("Vish", 0)  
x: Any = 0
```

Scala Collections : Maps (Contd.)

- Accessing Maps:

```
val x = mapping("Vishal")  
val x = mapping.getOrElse("Vish", 0)  
mapping -= "Vishal"  
mapping += ("Ajay" -> "Sharma")
```

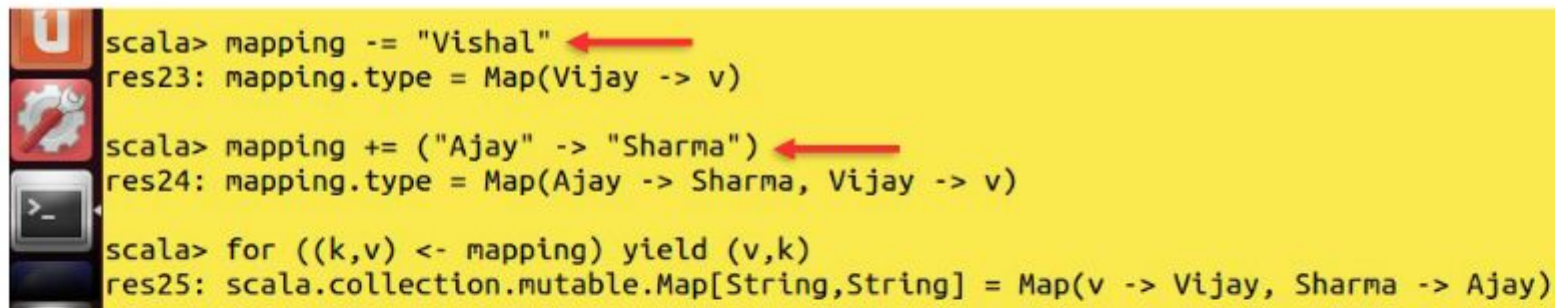

The screenshot shows a Scala REPL session with three commands and their results. Red arrows point to the map update operations. The first command updates the value for 'Vishal' to 'v'. The second command adds a new entry 'Ajay' -> 'Sharma'. The third command iterates over the map and yields the values and keys in reverse order.

```
scala> mapping -= "Vishal" ←  
res23: mapping.type = Map(Vijay -> v)  
  
scala> mapping += ("Ajay" -> "Sharma") ←  
res24: mapping.type = Map(Ajay -> Sharma, Vijay -> v)  
  
scala> for ((k,v) <- mapping) yield (v,k)  
res25: scala.collection.mutable.Map[String,String] = Map(v -> Vijay, Sharma -> Ajay)
```

- Iterating Maps:

```
for ((k,v) <- mapping) yield (v,k)
```


Scala Collections : Tuples

- Tuple is more generalized form of pair
- Tuple has more than two values of potentially different types

```
val a = (1, 4, "Bob", "Jack")
```

- Accessing the tuple elements:

```
a._2 or a._2 // Returns 4
```

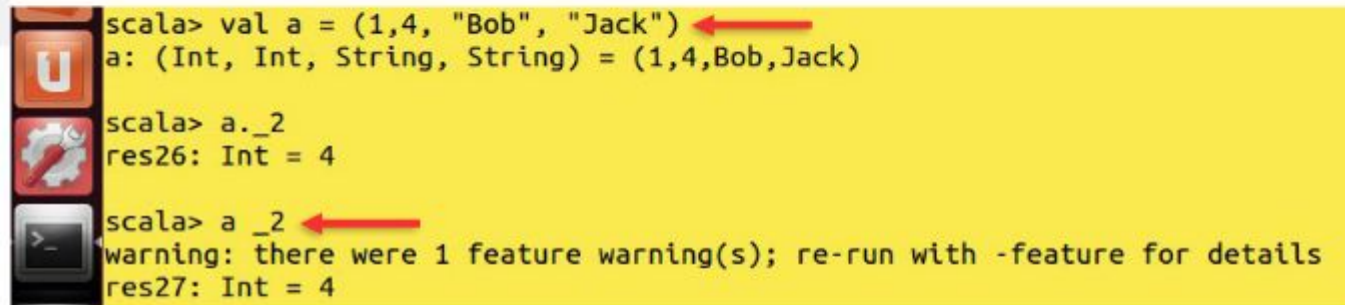


A screenshot of the Scala REPL interface. It shows three lines of code being executed. The first line creates a tuple 'a' with values (1, 4, "Bob", "Jack"). The second line accesses 'a._2' and returns the integer 4. The third line also accesses 'a._2' but includes a warning about a feature warning. Red arrows point to the tuple creation and the second access of 'a._2'.

```
scala> val a = (1, 4, "Bob", "Jack")  
a: (Int, Int, String, String) = (1, 4, Bob, Jack)  
  
scala> a._2  
res26: Int = 4  
  
scala> a._2  
warning: there were 1 feature warning(s); re-run with -feature for details  
res27: Int = 4
```

```
"New Delhi India".partition(_.isUpper)
```

- In tuples the offset starts with 1 and NOT from 0
- Tuples are typically used for the functions which return more than one value:

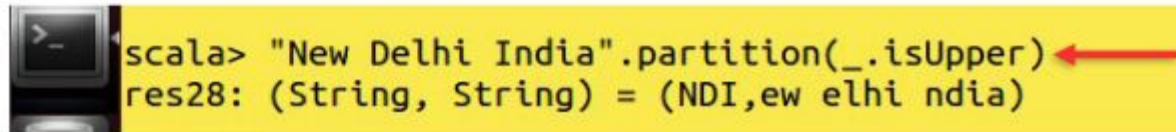

A screenshot of the Scala REPL interface showing a single line of code that partitions the string "New Delhi India" based on whether each character is uppercase. The result is a tuple of two strings: "NDI" and "ew elhi ndia". A red arrow points to the function call.


```
scala> "New Delhi India".partition(_.isUpper)  
res28: (String, String) = (NDI, ew elhi ndia)
```

Scala Collections : Lists

- List is either Nil or a combination of head and tail elements where tail is again a List

Example:

```
val lst = List(1,2)
lst.head = 1
lst.tail = List(2)
```

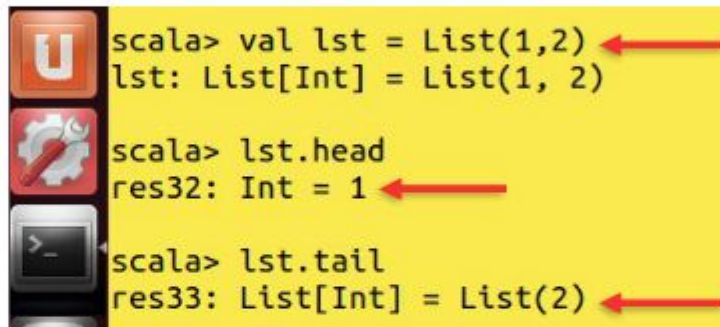A screenshot of the Scala REPL interface. It shows three commands and their results. The first command is 'scala> val lst = List(1,2)' with the result 'lst: List[Int] = List(1, 2)'. The second command is 'scala> lst.head' with the result 'res32: Int = 1'. The third command is 'scala> lst.tail' with the result 'res33: List[Int] = List(2)'. Red arrows point to the right-hand side of each line of code and its corresponding result.


```
scala> val lst = List(1,2)
lst: List[Int] = List(1, 2)

scala> lst.head
res32: Int = 1

scala> lst.tail
res33: List[Int] = List(2)
```

- operator adds a new List from given head and tail

```
2 :: List(4,5)
List[Int] = List(2, 4, 5)
```

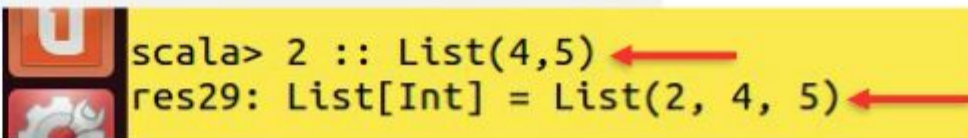A screenshot of the Scala REPL interface showing a single command and its result. The command is 'scala> 2 :: List(4,5)' and the result is 'res29: List[Int] = List(2, 4, 5)'. Red arrows point to the right-hand side of the command and its result.


```
scala> 2 :: List(4,5)
res29: List[Int] = List(2, 4, 5)
```

Scala Collections : Lists (Contd.)

- We can use iterator to iterate over a list, but recursion is a preferred practice in Scala

Example:

```
def sum(l :List[Int]):Int = {if (l == Nil) 0 else l.head + sum(l.tail)}  
val y = sum(lst)
```

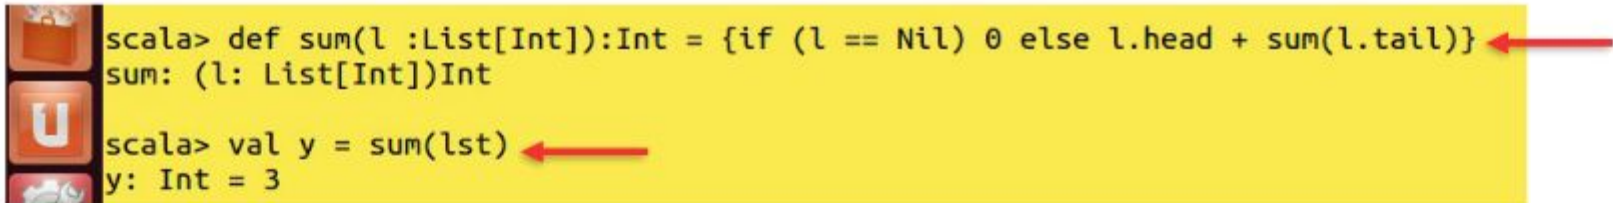

```
scala> def sum(l :List[Int]):Int = {if (l == Nil) 0 else l.head + sum(l.tail)}  
sum: (l: List[Int])Int  
scala> val y = sum(lst)  
y: Int = 3
```

The image shows a Scala REPL session on a yellow background. The first line defines the `sum` function, and the second line calls it with `lst`. Red arrows point to the function definition and the function call. On the left side of the REPL, there are three small icons: a red folder, a red 'U' logo, and a red cat logo.