

**Topic:** Mutable strings in Java: The StringBuffer Class.

**OOP concepts involved:** Classes, Objects, Static Methods, Polymorphism.

**Programming generic concepts involved:** Functions, Variables, Data Types, Arrays, Control Statements, Access Modifiers.

---

## ➤ Theoric introduction

### MUTABLE STRINGS IN JAVA

Java *StringBuffer* and *StringBuilder* classes are used to create mutable (modifiable) strings. The difference between *StringBuffer* and *StringBuilder* classes compared to the well known *String* class in Java is that the latter is immutable, and it means that can't be changed.

*StringBuffer* and *StringBuilder* classes are used when there is a necessity to make a lot of modifications to Strings of characters. Unlike a *String*, objects of type *StringBuffer* and *StringBuilder* can be modified over and over again without leaving behind a lot of new unused objects.

The *StringBuilder* class was introduced as of Java 5 and the main difference between the *StringBuffer* and *StringBuilder* is that *StringBuilders* methods are not thread safe (not synchronized).

It is recommended to use *StringBuilder* whenever possible because it is faster than *StringBuffer*. However, if the thread safety is necessary, the best option is *StringBuffer* objects.

### How does the *StringBuffer* class manage strings?

While the *String* class represents a string as an immutable character sequence with a fixed-length, the *StringBuffer* class represents a string as a growable and writable character sequence. *StringBuffer* may have characters and substrings inserted in the middle or appended to

the end. It will automatically grow to make room for such additions and often has more characters preallocated than are actually needed, to allow room for growth.

### CONSTRUCTORS OF THE STRINGBUFFER CLASS

Constructor Header	Description
<b>StringBuffer()</b>	Creates an empty string buffer with the initial capacity of 16.
<b>StringBuffer(String str)</b>	Creates a string buffer with the specified string.
<b>StringBuffer(int capacity)</b>	Creates an empty string buffer with the specified capacity as length.

### IMPORTANT METHODS OF STRINGBUFFER CLASS

Access modifier and Type	Method	Description
<b>public synchronized StringBuffer</b>	<i>append(String s)</i>  This method is overloaded using one only parameter but different data types as float, boolean, char, etc.	Append the specified string with this string.
<b>public synchronized StringBuffer</b>	<i>insert(int offset, String s)</i>  This method is overloaded like insert(int, char), insert(int, boolean), insert(int,int),etc.	Insert the specified string with this string at the specified position.
<b>public synchronized StringBuffer</b>	<i>replace(int startIndex, int endIndex, String str)</i>	Replace the string from specified startIndex and endIndex.
<b>public synchronized StringBuffer</b>	<i>delete(int startIndex, int endIndex)</i>	Delete the string from specified startIndex and endIndex.
<b>public synchronized StringBuffer</b>	<i>reverse()</i>	Reverse a string.

<b>public int</b>	<i>capacity()</i>	Return de current capacity
<b>public void</b>	<i>ensureCapacity(int minCapacity)</i>	Is used to ensure the capacity at least equal to the given minimum.
<b>public char</b>	<i>charAt(int index)</i>	Is used to return the character at the specified position.
<b>public int</b>	<i>length()</i>	Is used to return the length of the string i.e. the total number of characters.
<b>public String</b>	<ul style="list-style-type: none"> <li>- <i>substring(int beginIndex)</i></li> <li>- <i>substring(int beginIndex, int endIndex)</i></li> </ul>	<ul style="list-style-type: none"> <li>- Is used to return the substring from the specified beginIndex.</li> <li>- Is used to return the substring from the specified beginIndex and endIndex.</li> </ul>

### ➤ Statement

Using the **StringBuffer** class, create a program that captures a string by implementing the static *showInputDialog* method of the **JOptionPane** class, followed by this, capture another string that is a substring of it. Based on the substring and the original string, delete the substring if it is contained in the original string.

Print the final string through the console, once the substring has been removed.

### ➤ Program Code

DeleteSubstring.java

```
import javax.swing.JOptionPane;

public class DeleteSubstring {

    public static void main(String[] args) {
        String str = JOptionPane.showInputDialog(null, "Introduce your String of characters: ");
```

```

        String sequence = JOptionPane.showInputDialog(null, "Char sequence to
delete?");

        StringBuffer strBuffer = new StringBuffer(str); // Creating an
instance of a StringBuffer object using a String as a parameter
        int sizeSequence = sequence.length();
        int i = 0;


        while (i + sizeSequence - 1 < strBuffer.length()) {
            if (strBuffer.substring(i, i +
sizeSequence).compareTo(sequence) == 0)
                strBuffer.delete(i, i + sizeSequence);
            i++;
        }

        System.out.println(strBuffer);
    }
}


```

### ➤ Program execution

The user enters a string of their choice. The string that the user introduces, will be stored in a String variable.

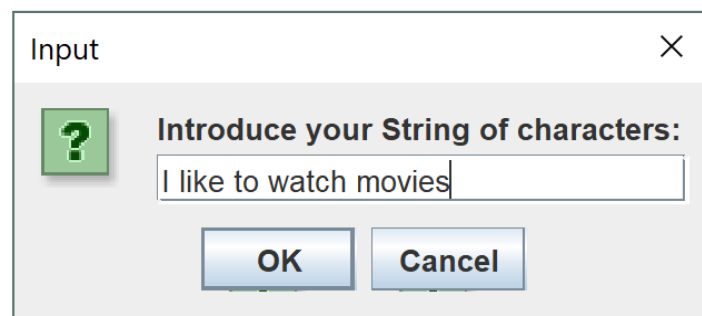

Then the user introduces a substring that is going to be removed from the original string.

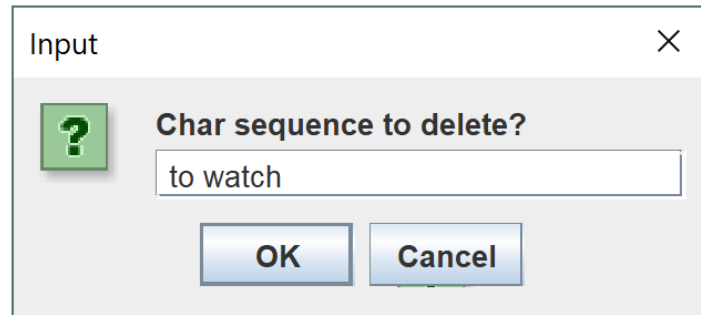

At the end of the program, the substring is deleted from the original String, and it leads to the following output through the console:

**I like movies**

### ➤ **Conclusions**

It is convenient to use the classes `StringBuffer` and `StringBuilder` when we want to modify and add characters to the same object without needing to create another. This is because these classes are immutable, therefore, unlike the `String` class, which is immutable, it needs to create a new object every time a change occurs in the string.

- ➔ It is recommended to use `String` when the value of a string is non-changeable.
- ➔ It is recommended to use `StringBuffer` when the value of a string is changeable and application is implemented in a multithreaded environment.
- ➔ It is recommended to use `StringBuilder` when the value of a string is changeable but the application is not using multiple threads.