

## Metasploit



### Subtask 1

Create a reverse shell using netcat using two Kali Linux machines. You should submit the following.

1. A screenshot showing your victim receiving commands from the attacker via a netcat reverse shell.

Attacker IP: 192.168.1.112

Victim IP: 192.168.1.113

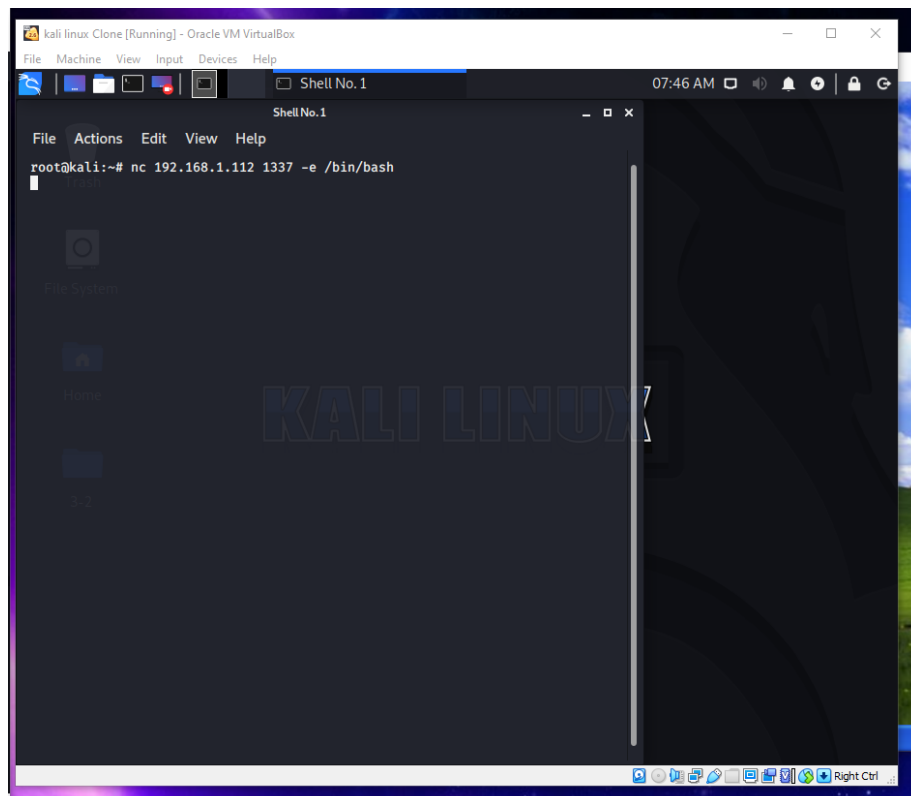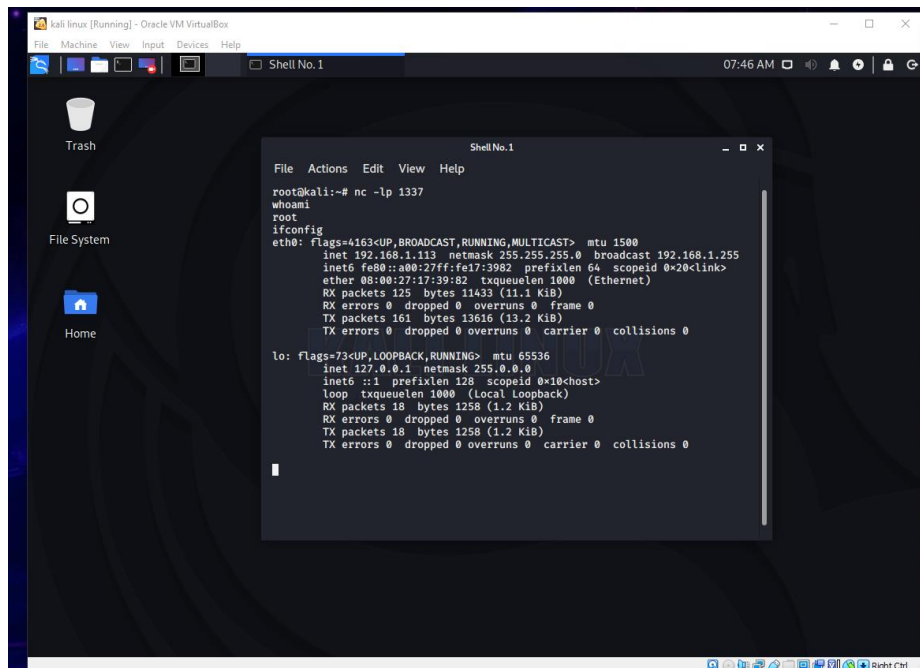


## Subtask 2

Use msfvenom to create a meterpreter exploit targeting XP. Create a listening post on Kali and then run the exploit on the XP machine. You should submit the following.

1. A screenshot showing your victim receiving commands from the attacker via a metasploit reverse shell.

Attacker IP: 192.168.1.112

Victim IP: 192.168.1.109

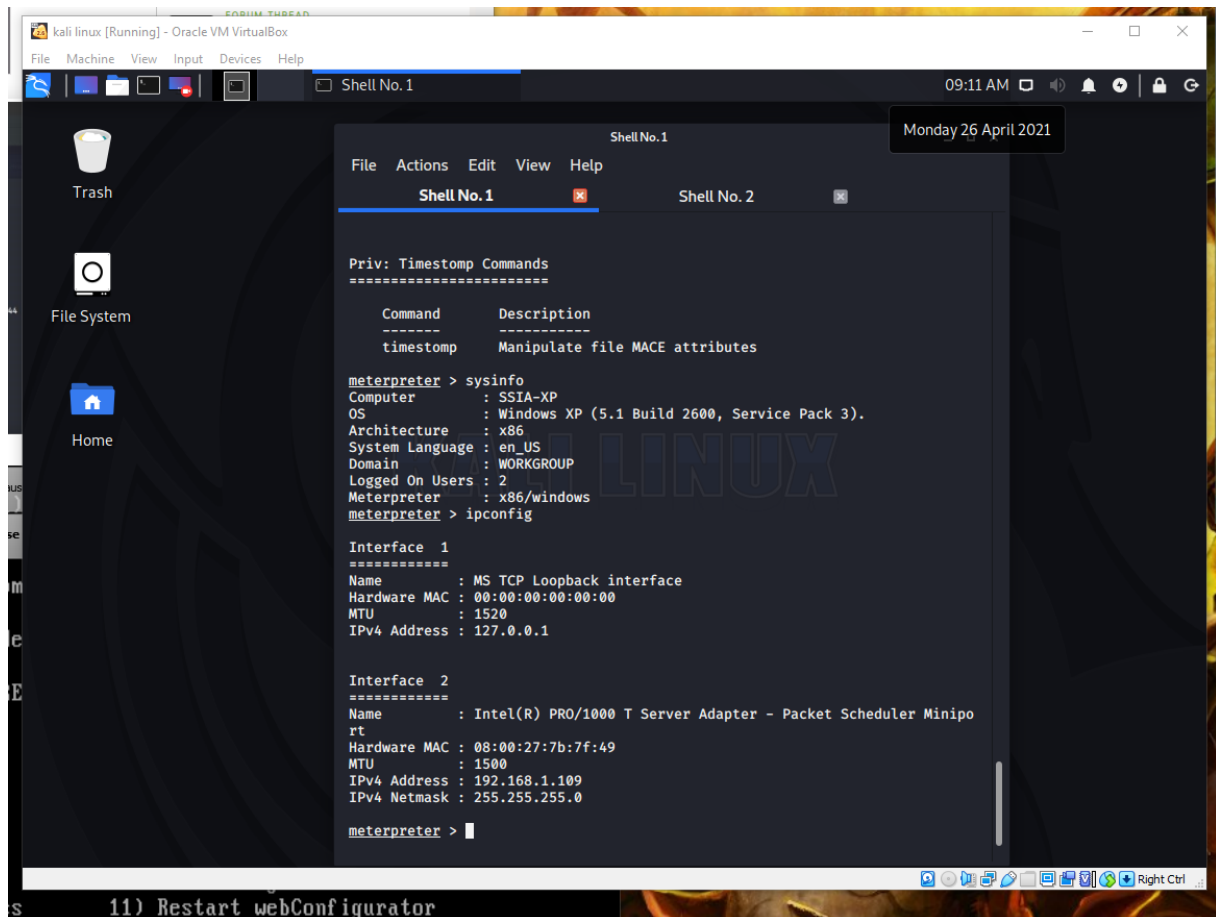

### Subtask 3

Use metasploit to attack windows XP using exploit ms08\_067\_netapi . Create a listening post on Kali and then run the exploit on the XP machine. You should submit the following.

1. A screenshot showing your victim receiving commands from the attacker via a metasploit reverse shell, as well as a screenshot configuring ms08\_067\_netapi.

Attacker IP: 192.168.1.112

Victim IP: 192.168.1.109

