


To view all of the *methods*, *read-only attributes*, and *attributes* of the object, open the window **Show Attributes and Methods**. The figure below illustrates the information using the example of the object *Station*.

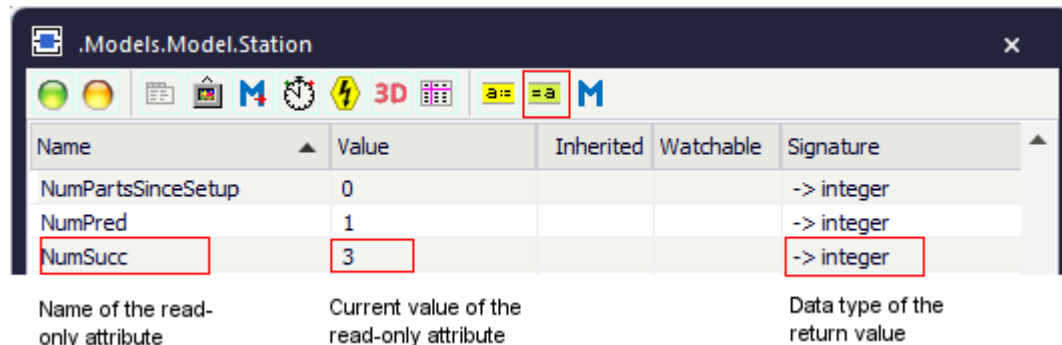

Name	Value	Inherited	Watchable	Signature
NumPartsSinceSetup	0			-> integer
NumPred	1			-> integer
NumSucc	3			-> integer

Name of the read-only attribute Current value of the read-only attribute Data type of the return value

- Select **Show Attributes and Methods** on the context menu of the **Class Library** to show the *methods*, *read-only attributes*, and *attributes* of the selected **Class** [general description].
- Press the **F8** key or click **Show Attributes and Methods** on the **Home** ribbon tab of the *Frame* into which you inserted an instance to show the *methods*, *read-only attributes*, and *attributes* of the selected **Instance** [general description].

To query the value of a *read-only attribute*, you might, for example, type:

```
print MyChart.UUID
```


Attributes of the Chart

_Attributes of the Chart

The *Chart* provides:

- The *attributes* listed in the table of contents to the left.
- The **Attributes of All Objects**.

To view all of the *methods*, *read-only attributes*, and *attributes* of the object, open the window **Show Attributes and Methods**. The figure below illustrates the information using the example of the object *Station*.

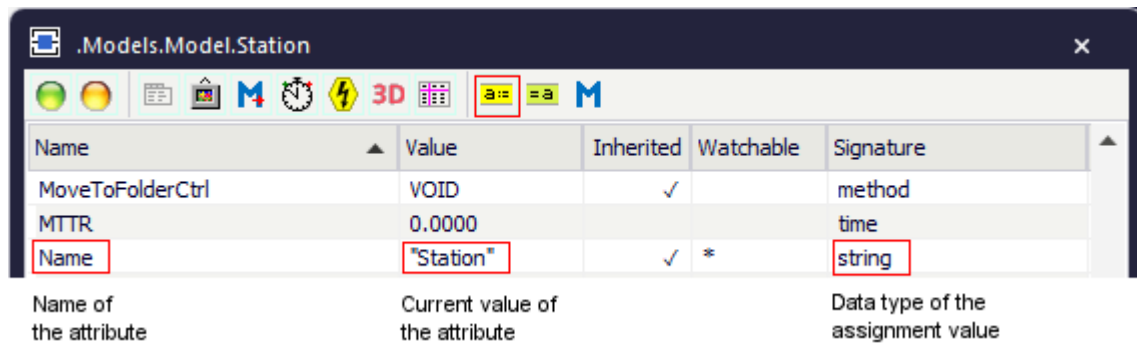

- Select **Show Attributes and Methods** on the context menu of the **Class Library** to show the *methods*, *read-only attributes*, and *attributes* of the selected [Class \[general description\]](#).
- Press the **F8** key or click **Show Attributes and Methods** on the **Home** ribbon tab of the *Frame* into which you inserted an instance to show the *methods*, *read-only attributes*, and *attributes* of the selected [Instance \[general description\]](#).

You can set the value of an attribute and you can get its value, either with the check boxes, the text boxes and drop-down lists in the dialog windows or by assigning values to the respective attributes.

- To **set the value** of an attribute, you might, for example, type:

```
MyChart.DataRange := "{0,0}..{2,4}"
```

- To **get the value** of an attribute, you might, for example, type:

```
print MyChart.DataRange
posit := Station.Cont.XPos
```

Accumulated [SimTalk]

Sets if the *Chart* designated by <Path> creates an accumulated histogram (*true*) or not (*false*).

Remarks

Applies to the setting **Category > Histogram**.

The accumulated histogram adds the sum of all previous values to each value. The last value thus is 100 percent.

Compare this example

X Value	1	2	3	4	5
Y Value, not accumulated	0	25	30	23	12
Y Value, accumulated	10	35	65	88	100

Type

Attribute

Syntax

```
<Path>.Accumulated: boolean
```

Assignment Value

You can assign a value of data type *boolean*.

Example

```
MyChart.Accumulated := true
```

See also

[Accumulated \[check box\] - Chart](#)

[Category \[drop-down list\]](#)

Category [SimTalk]

Sets the **Category** that the *Chart* designated by <Path> displays.

Type

Attribute

Syntax

```
<Path>.Category:string
```

Assignment Value

You can assign a value of data type *string*.

You can specify "Chart", "Histogram", "Plotter", "3D Chart", or "3D Histogram".

Example

```
MyChart.Category := "Plotter"
```

See also

[Category \[drop-down list\]](#)

ChartType [SimTalk]

Sets the **Chart Type** that the *Chart* designated by <Path> displays.

Remarks


For the **3D Chart Types** you can also set the *Height* and the *Rotation* of the *Chart*.

Syntax

```
<Path>.ChartType:string
```

Assignment Value

You can assign a value of data type *string*.

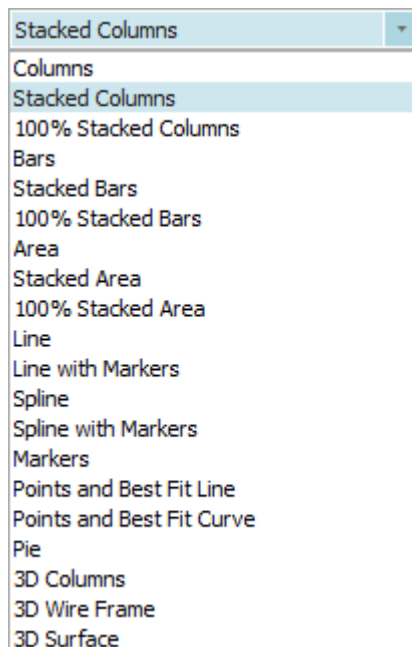

Example

```
MyChart.ChartType := "Stacked Bars"
```

See also

[Chart Type \[drop-down list\]](#)

[Rotation \[SimTalk\] - Chart](#)

CollectData [SimTalk] - Chart

Sets if the *Chart* designated by <Path> of type **Histogram** or **Plotter** collects data (**true**) or does not collect data (**false**).

Type

Attribute

Syntax

```
<Path>.CollectData:boolean
```

Assignment Value

You can assign a value of data type *boolean*.

Example

```
MyChart.CollectData := true
```

See also

[Collect Data \[check box\] - Chart](#)

DataInColumn [SimTalk]

Sets if the *Chart* designated by <Path> shows the data in **Columns** (true) or in **Rows** (false).

Type

Attribute

Syntax

```
<Path>.DataInColumn: boolean
```

Assignment Value

You can assign a value of data type *boolean*.

Example

```
MyChart.DataInColumn := true
```

See also

[Data \[Chart\]](#)

DataRange [SimTalk]

Sets the data range, which the objects table of the *Chart* designated by <Path> uses.

Remarks

The data range applies for these settings.

Property	Value	Icon
Data Source	Data Table	📄
Table	MyDataTable	...
Range	{1,1}..{*,*}	📏
Data	in Row	📄
Mode	Sample	📄
Interval	1:00	📏

Type

Attribute

Syntax

```
<Path>.DataRange:string
```

Assignment Value

You can assign a value of data type *string*.

Example


```
MyChart.DataRange := "{*,*}..{*,*}" // no limitations
MyChart.DataRange := "{1,1}..{1,4}" // designates the first four rows in
the first column
MyChart.DataRange := "{1,1}..{1,*}" // designates the entire first column
MyChart.DataRange := "{-2,*}..{-2,*}" // designates the one but last column
of the DataTable
MyChart.DataRange := "{-2,*}..{*,*}" // designates the two last columns of
the DataTable
```


See also

[Data Source \[Chart\]](#)

DataTable [SimTalk] - Chart

Sets the table containing the data, which the *Chart* designated by <Path> displays.

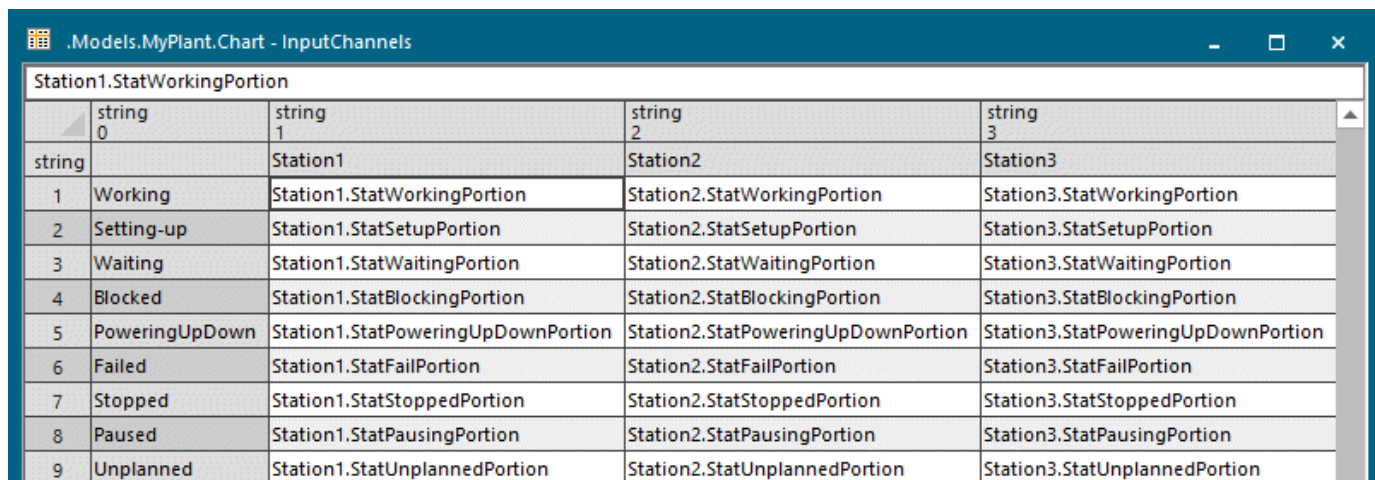

	string 0	string 1	string 2	string 3
string		Station1	Station2	Station3
1	Working	Station1.StatWorkingPortion	Station2.StatWorkingPortion	Station3.StatWorkingPortion
2	Setting-up	Station1.StatSetupPortion	Station2.StatSetupPortion	Station3.StatSetupPortion
3	Waiting	Station1.StatWaitingPortion	Station2.StatWaitingPortion	Station3.StatWaitingPortion
4	Blocked	Station1.StatBlockingPortion	Station2.StatBlockingPortion	Station3.StatBlockingPortion
5	PoweringUpDown	Station1.StatPoweringUpDownPortion	Station2.StatPoweringUpDownPortion	Station3.StatPoweringUpDownPortion
6	Failed	Station1.StatFailPortion	Station2.StatFailPortion	Station3.StatFailPortion
7	Stopped	Station1.StatStoppedPortion	Station2.StatStoppedPortion	Station3.StatStoppedPortion
8	Paused	Station1.StatPausingPortion	Station2.StatPausingPortion	Station3.StatPausingPortion
9	Unplanned	Station1.StatUnplannedPortion	Station2.StatUnplannedPortion	Station3.StatUnplannedPortion

Type

Attribute

Syntax

```
<Path>.DataTable:object
```

Assignment Value

You can assign a value of data type *object*.

Example

```
MyChart.DataTable := DataTable
```

See also

Data Source [Chart]

DisplayInFrame [SimTalk]

Displays the contents of the *Chart* designated by <Path> in the *Frame* itself when you insert it into a *Frame* (`true`) or in its icon (`false`).

Remarks

Note

If you set *DisplayInFrame* to `true`, you cannot freely combine **line styles** and **line weights** of the *Chart*.

Type

Attribute

Syntax

```
<Path>.DisplayInFrame: boolean
```

Assignment Value

You can assign a value of data type *boolean*.

Example

```
MyChart.DisplayInFrame := true
```

See also

[Display in Frame \[check box\] - Chart](#)

[Line Style](#)

[Line Weight](#)

Effect [SimTalk]

Sets the 3D effect for a number of **Chart Types** of the *Chart* designated by <Path>.

Type

Attribute

Syntax

```
<Path>.Effect:string
```

Assignment Value

You can assign a value of data type *string*.

You can specify "None", "Shadow", or "3D".

Example

```
MyChart.Effect := "3D"
```

See also

[Chart Type \[drop-down list\]](#)

[3D Effect](#)

FeedRate [SimTalk]

Sets the feed rate by which the *Chart* designated by <Path> scrolls, when it reached the right-hand side of the display.

Remarks

Applies for the setting **Category > Plotter**.

Type

Attribute

Syntax

```
<Path>.FeedRate: real
```

Assignment Value

You can assign a value of data type *real*.

Specify 0.1 for smooth scrolling.

Specify 12 to scroll the entire page.

Example

```
MyChart.ScrollBar := true  
MyChart.FeedRate := 4
```

SimTalk

[ScrollBar \[SimTalk\]](#)

See also

[Feed Rate \[text box\]](#)

[Scrollbar \[check box\]](#)

[Category \[drop-down list\]](#)

FirstInterval [SimTalk]

Sets the smallest value that the **Histogram** of the *Chart* designated by <Path> shows.

Remarks

The first interval is the value in the left text box.

Range	Y	0	...	102	
	X	0	...	∞	

Type

Attribute

Syntax

```
<Path>.FirstInterval:integer
```

Assignment Value

You can assign a value of data type *integer*.

Example

```
MyChart.FirstInterval := 2
```

See also

[Range X](#)

GapWhenNull [SimTalk]

Sets if the *Chart* designated by <Path> interrupts the line it draws for values that are not defined (*true*) or if it continues drawing the line (*false*).

Type

Attribute

Syntax

```
<Path>.GapWhenNull: boolean
```

Assignment Value

You can assign a value of data type *boolean*.

Example

```
MyChart.GapWhenNull := false
```

SimTalk

[NullValue \[SimTalk\]](#)

See also

[Gap When Null \[check box\]](#)

GraphTable [SimTalk]

Sets what the *Chart* designated by <Path> shows.

Type

Attribute

Syntax

```
<Path>.GraphTable:string
```

Assignment Value

You can assign a value of data type *string*.

You can specify "Graph", "Table", or "Graph and Table".

Example

```
MyChart.GraphTable := "Graph and Table"
```

See also

[Graph/table \[drop-down list\]](#)

Height [SimTalk] - 3D charts

Sets the height of the viewing angle for **3D Chart Types** of the *Chart* designated by <Path>.

Type

Attribute

Syntax

```
<Path>.Height:integer
```

Assignment Value

You can assign a value of data type *integer*.

You can specify a number between -50 and 50.

Example

```
MyChart.ChartType := "3D Columns"  
MyChart.Height := 45
```

See also

[Chart Type \[drop-down list\]](#)

ImageQuality3D [SimTalk]

Sets the image quality with which the image of the *Chart* designated by <Path> is shown in the *Frame*.

Remarks

ImageQuality3D applies if you assigned `true` to the attribute *DisplayInFrame*. Then you can select the **3D Image Quality** with which the *Chart* shows the image in 3D. The **3D Image Quality** is only active in a 3D model.

Type

Attribute

Syntax

```
<Path>.ImageQuality3D:string
```

Assignment Value

You can assign a value of data type *string*.

You can specify:

- "High quality" results in high resolution and improved image quality with bad performance.
- "Balanced" results in medium resolution, is a good compromise between image quality and performance.
- "High performance" results in low resolution and bad image quality with better performance.

Example

```
MyChart.ImageQuality3D := "Balanced"
```

SimTalk

[DisplayInFrame \[SimTalk\]](#)

See also

[3D Image Quality \[drop-down list\]](#)

[Display in Frame \[check box\] - Chart](#)

InputChannels [SimTalk]

Designates a table containing the definitions of all input channels of the *Chart* designated by <Path>.

Remarks

When you assign a table to *InputChannels* with the assignment operator `:=`, *Plant Simulation* deactivates inheritance.

Any other kind of writing access, as shown in the example above, does not deactivate inheritance. This means that one of these accesses changes the table which the input channels table shares with its origin.

Type

Attribute

Syntax

```
<Path>.InputChannels:table
```

Assignment Value

You can assign a value of data type *table*.

Example

```
MyChart.InputChannels.delete  
MyChart.InputChannels.insertList(1,1,table.copy)  
MyChart.InputChannels := MyDataTable.copy({0,0}..{*,*})  
print MyChart.InputChannels[1,1]
```

See also

[Data Source \[Chart\]](#)

IsShown [SimTalk] - Chart

Activates (*true*) or deactivates (*false*) the display of the *Chart* designated by <Path>.

Type

Attribute

Syntax

```
<Path>.IsShown: boolean
```

Watchable

The attribute is [watchable](#).

Assignment Value

You can assign a value of data type *boolean*.

Example

```
MyChart.IsShown := false
```

See also

[Show Chart \[button\] - Chart](#)

LabelFont [SimTalk]

LabelFont and its sub-attribute set the properties of the **Labels** of the axes in the *Chart* designated by `<Path>`.

Remarks

MS UI Gothic is intended for our **Japanese** users. The **English** or **German** version of Microsoft Windows might not provide this font by default.

Type

Attribute

Syntax

```
<Path>.LabelFont:string  
<Path>.LabelFont.Size:integer  
<Path>.LabelFont.Bold:boolean  
<Path>.LabelFont.Italic:boolean
```

Assignment Value

You can assign a value of data type *string*.

You can specify one of these fonts:

Arial
Arial Narrow
Comic Sans MS
Courier New
Haettenschweiler
Lucida Console
MS UI Gothic
Tahoma
Times New Roman
Trebuchet MS
Verdana

Example

```
MyChart.LabelFont := "Tahoma"
```

Size

The sub-attribute **Size**, of data type *integer*, sets the font **Size**. You can specify a number between 1 and 8.

Example

```
MyChart.LabelFont.Size := 4
```

Bold

The sub-attribute **Bold**, of data type *boolean*, sets if the *Chart* shows the labels in **bold** face (**true** or not (**false**)).

Example

```
MyChart.LabelFont.Bold := true
```

Italic

The sub-attribute **Italic**, of data type *boolean*, sets if the *Chart* shows the labels in *italics* (**true**) or not (**false**)).

Example

```
MyChart.LabelFont.Italic := false
```

See also

[Labels \[Chart\]](#)

LegendLocation [SimTalk]

Sets the type and the position of the **Legend** which the *Chart* designated by <Path> shows.

Type


Attribute

Syntax

```
<Path>.LegendLocation:string
```

Assignment Value

You can assign a value of data type *string*.

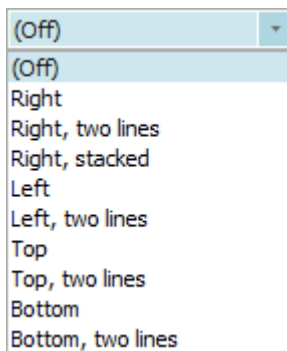

Example

```
MyChart.LegendLocation := "Left"
```

See also

[Legend](#), drop-down list

Mode [SimTalk] - Chart

Sets the mode with which the *Chart* designated by <Path> operates.

Remarks

Applies to the setting **Category > Histogram**.

Type

Attribute

Syntax

```
<Path>.Mode:string
```

Assignment Value

You can assign a value of data type *string*.

You can specify.

- "Sample" mode updates the *Chart* regularly within a predefined period.
- "Watch" mode updates the *Chart* when the values to be displayed change.
- "Plot" mode updates the *Chart* whenever a simulation event takes place.

Example

```
Mode.Sampler := "Plot"
```

See also

[Mode \[drop-down list\] - Chart](#)

[Category \[SimTalk\]](#)

NullValue [SimTalk]

Sets the value the *Chart* designated by <Path> takes to be as an undefined value.

Remarks

When a point takes this value, the *Chart* does not display it.

The default value is -999999.

Type

Attribute

Syntax

```
<Path>.NullValue:real
```

Assignment Value

You can assign a value of data type *real*.

Example

```
MyChart.NullValue := -1
```

See also

[GapWhenNull \[SimTalk\]](#)

NumIntervals [SimTalk]

Sets into how many intervals the *Chart* designated by <Path> divides the frequency distribution for a **Histogram**.

Type

Attribute

Syntax

```
<Path>.NumIntervals:integer
```

Assignment Value

You can assign a value of data type *integer*.

Example

```
MyChart.NumIntervals := 8
```

See also

[Range X](#)

NumValues [SimTalk]

Sets the number of values which the *Chart* designated by <Path> collects over time per channel.

Remarks

Applies to the setting **Category > Plotter**.

The more values the *Chart* collects, the more memory *Plant Simulation* uses.

Type

Attribute

Syntax

```
<Path>.NumValues:integer
```

Assignment Value

You can assign a value of data type *integer*.

Example

```
MyChart.NumValues := 5000
```

See also

[Number of Values \[text box\]](#)

[Category \[SimTalk\]](#)

Rotation [SimTalk] - Chart

Sets the angle of rotation for **3D Chart Types** of the *Chart* designated by <Path> in degrees.

Type

Attribute

Syntax

```
<Path>.Rotation:integer
```

Assignment Value

You can assign a value of data type *integer*.

Example

```
MyChart.ChartType := "3D Columns"  
MyChart.Rotation := 90
```

See also

[Chart Type \[drop-down list\]](#)

SampleInterval [SimTalk]

Sets the period of time between two successive sampling actions for the *Chart* designated by <Path> for **Sample** mode.

Type

Attribute

Syntax

```
<Path>.SampleInterval:time
```

Assignment Value

You can assign a value of data type *time*.

Example

```
MyChart.SampleInterval := 3600  
MyChart.sampleInterval := 0 // Prevents the Chart from being updated.  
                           // To update values, use the method 'update'.
```

See also

[Mode \[drop-down list\] - Chart](#)

ScrollBar [SimTalk]

Sets if the *Chart* designated by <Path> shows a scrollbar (**true**) or not (**false**).

Remarks

Applies to the setting **Category > Plotter**.

Type

Attribute

Syntax

```
<Path>.ScrollBar : boolean
```

Assignment Value

You can assign a value of data type *boolean*.

Example

```
MyChart.ScrollBar := true  
MyChart.FeedRate := 4
```

SimTalk

[FeedRate \[SimTalk\]](#)

See also

[Scrollbar \[check box\]](#)

[Feed Rate \[text box\]](#)

[Category \[SimTalk\]](#)

SizeInFrame [SimTalk]

Sets the **Width** and the **Height** of the *Chart* designated by <Path> in **length units** when it is shown in the *Frame*.

Type

Attribute

Syntax

```
<Path>.SizeInFrame:array[2]
```

Assignment Value

You can assign a value of data type *array* with two values of data types *integer*.

Example

```
MyChart.SizeInFrame := [6, 4.5]
```

See also

[Width \[text box\] - display in frame](#)

[Height \[text box\] - display in frame](#)

StepCurve [SimTalk]

Sets if the *Chart* designated by <Path> creates a step curve (`true`) or not (`false`).

Remarks

Applies to the **Category > Plotter**.

Type

Attribute

Syntax

```
<Path>.StepCurve: boolean
```

Assignment Value

You can assign a value of data type *boolean*.

Example

```
MyChart.StepCurve := true
```

See also

[Step Curve \[check box\]](#)

[Category \[drop-down list\]](#)

StepSize [SimTalk]

Sets the width of the intervals into which the *Chart* designated by <Path> divides the frequency distribution.

Remarks

Applies to the **Category > Histogram**.

Type

Attribute

Syntax

```
<Path>.StepSize:real
```

Assignment Value

You can assign a value of data type *real*.

Example

```
MyChart.StepSize := 5
```

See also

[Step Size \[text box\]](#)

[Category \[drop-down list\]](#)

SubTitle [SimTalk]

Sets the **Subtitle** which the *Chart* designated by <Path> displays in the *Chart* window.

Type

Attribute

Syntax

```
<Path>.SubTitle:string
```

Assignment Value

You can assign a value of data type *string*.

Example

```
MyChart.SubTitle := "line 1, block"
```

See also

[Subtitle \[font\] - Chart](#)

SubtitleFont [SimTalk]

SubtitleFont and its sub-attributes set the properties of the **Subtitle** in the *Chart* window of the *Chart* designated by <Path>.

Type

Attribute

Syntax

```
<Path>.SubtitleFont:string  
<Path>.SubtitleFont.Bold:boolean  
<Path>.SubtitleFont.Italic:boolean
```

Assignment Value

You can assign a value of data type *string*.

You can specify the name of one of these fonts:

Arial
Arial Narrow
Comic Sans MS
Courier New
Haettenschweiler
Lucida Console
MS UI Gothic
Tahoma
Times New Roman
Trebuchet MS
Verdana

Note

MS UI Gothic is intended for our **Japanese** users. The **English** or **German** version of Microsoft Windows might not provide this font by default.

Example

```
MyChart.SubtitleFont:= "Verdana"
```

Bold

The sub-attribute **Bold**, of data type *boolean*, sets if the *Chart* shows the subtitle in **bold** face (**true**) or not (**false**).

Example

```
MyChart.SubtitleFont.Bold := true
```

Italic

The sub-attribute **Italic**, of data type *boolean*, sets if the *Chart* shows the subtitle in *italics* (**true**) or not (**false**).

Example

```
MyChart.SubtitleFont.Italic := false
```

See also

[Subtitle \[font\] - Chart](#)

TableFont [SimTalk]

TableFont and its sub-attributes set the properties of the labels which the *Chart* designated by <Path> shows as a **Table** in the *Chart* window.

Remarks

MS UI Gothic is intended for our **Japanese** users. The **English** or **German** version of Microsoft Windows might not provide this font by default.

Type

Attribute

Syntax

```
<Path>.TableFont:string  
<Path>.TableFont.Size:integer
```

Example

```
MyChart.TableFont:= "Tahoma"
```

Size

The sub-attribute *Size*, of data type *integer*, sets the **font size**.

You can specify a number between 1 and 8.

Assignment Value

You can assign a value of data type *string*.

You can specify the name of one of these fonts:

Arial
Arial Narrow
Comic Sans MS
Courier New
Haettenschweiler
Lucida Console

MS UI Gothic
Tahoma
Times New Roman
Trebuchet MS
Verdana

Example

```
MyChart.TableFont.Size := 4
```

See also

[Table \[font\] - Chart](#)

[Labels \[Chart\]](#)

Title [SimTalk]

Sets the **Title** which the *Chart* designated by <Path> shows in the *Chart* window.

Type

Attribute

Syntax

```
<Path>.Title:string
```

Assignment Value

You can assign a value of data type *string*.

Example

```
MyChart.Title := "Engine assembly"
```

See also

[Title \[font\] - Chart](#)

TitleFont [SimTalk]

The attribute *TitleFont* and its sub-attributes set the properties of the **Title** in the *Chart* window of the *Chart* designated by <Path>.

Type

Attribute

Syntax

```
<Path>.TitleFont:string  
<Path>.TitleFont.Size:integer  
<Path>.TitleFont.Bold:boolean  
<Path>.TitleFont.Italic:boolean
```

Assignment Value

You can assign a value of data type *string*.

You can specify one of these fonts:

Arial
Arial Narrow
Comic Sans MS
Courier New
Haettenschweiler
Lucida Console
MS UI Gothic
Tahoma
Times New Roman
Trebuchet MS
Verdana

Note

MS UI Gothic is intended for our **Japanese** users. The **English** or **German** version of Microsoft Windows might not provide this font by default.

Example

```
MyChart.TitleFont:= "Trebuchet MS"
```

Size

The sub-attribute **Size**, of data type *integer*, sets the font [Size](#). You can specify a number between 1 and 8.

Example

```
MyChart.TitleFont.Size := 4
```

Bold

The sub-attribute **Bold**, of data type *boolean*, sets if the *Chart* shows the title in **bold** face (**true**) or not (**false**).

Example

```
MyChart.TitleFont.Bold := true
```

Italic

The sub-attribute **Italic**, of data type *boolean*, sets if the *Chart* shows the title in *italics* (**true**) or not (**false**).

Example

```
MyChart.TitleFont.Italic := false
```

See also

[Title \[font\] - Chart](#)

UseInputChannels [SimTalk]

Sets if the *Chart* designated by <Path> takes data it displays from input channels (`true`) or from a *DataTable* you defined (`false`).

Type

Attribute

Syntax

```
<Path>.UseInputChannels: boolean
```

Assignment Value

You can assign a value of data type *boolean*.

Example

```
MyChart.UseInputChannels := true
```

See also

[Data Source \[Chart\]](#)

UseMetricPrefix [SimTalk]

Sets if the *Chart* designated by <Path> shows a unit prefix on the y-axis for very great or very small values, for example 100K instead of 100000, (*true*) or not (*false*).

Remarks

The prefix	stands for
p	pico
n	nano
u	micro
m	milli
K	kilo
M	million
B	billion
T	trillion

Type

Attribute

Syntax

```
<Path>.UseMetricPrefix:boolean
```

Assignment Value

You can assign a value of data type *boolean*.

Example

```
MyChart.UseMetricPrefix := true
```

See also

[Use Metric Prefix \[command\]](#)

XGrid [SimTalk]

Sets if the *Chart* designated by <Path> shows the grid on the x-axis in the *Chart* window (*true*) or not (*false*).

Type

Attribute

Syntax

```
<Path>.XGrid:boolean
```

Assignment Value

You can assign a value of data type *boolean*.

Example

```
MyChart.XGrid := true
```

See also

[Grid Lines X-Axis](#)

XGridlines [SimTalk]

Sets the number of grid lines that the *Chart* designated by <Path> shows on the x-axis.

Remarks

The *Chart* also shows a label for each grid line on the x-axis. If you are displaying a large number of data sets, it makes sense to enter a smaller number so that the labels can be shown completely.

If the number of grid lines is greater than the number of data sets on the x-axis, the *Chart* only shows as many grid lines as there are data sets. If the number of grid lines is smaller than the number of data sets, the *Chart* reduces the number of grid lines and labels.

Note

If you select the **Category > XY-Graph**, the *Chart* only evaluates the **Number** if you also enter a fixed **Range X**, i.e., if you did not enter an asterisk *.

Type

Attribute

Syntax

```
<Path>.XGridlines:integer
```

Assignment Value

You can assign a value of data type *integer*.

Example

```
MyChart.XGridlines := 10
```

See also

[Number](#) of grid lines

[Category \[drop-down list\]](#)

[Range X](#)

XLabel [SimTalk]

Sets the label of the x-axis which the *Chart* designated by <Path> shows in the *Chart* window.

Remarks

Applies to the 3D chart types **3D Columns**, **3D Wire Frame**, and **3D Surface**.

Type

Attribute

Syntax

```
<Path>.XLabel:string
```

Assignment Value

You can assign a value of data type *string*.

Example

```
MyChart.XLabel := "Month"
```

SimTalk

[YLabel \[SimTalk\]](#)

See also

[X-Axis \[text box\] - Chart](#)

XLog [SimTalk]

Sets if the x-axis of the *Chart* designated by <Path> uses a logarithmic representation (`true`) or not (`false`).

Type

Attribute

Syntax

```
<Path>.XLog: boolean
```

Assignment Value

You can assign a value of data type *boolean*.

Example

```
MyChart.XLog := true
```

SimTalk

[YLog \[SimTalk\]](#)

See also

[Logarithmic X-Axis](#)

XRange [SimTalk]

Sets the time span, in seconds of simulation time, which the *Chart* designated by <Path> shows in the display.

Remarks

Applies to the **Category > Plotter**.

Type

Attribute

Syntax

```
<Path>.XRange : time
```

Assignment Value

You can assign a value of data type *time*.

Example

```
MyChart.XRange := 3600
```

See also

[Range X](#)

[Category \[drop-down list\]](#)

XScaleMax [SimTalk]

Sets the upper bound for scaling on the x-axis of the *Chart* designated by <Path>.

Type

Attribute

Syntax

```
<Path>.XScaleMax:integer
```

Assignment Value

You can assign a value of data type *integer*.

Example

```
MyChart.XScaleMax := 3
```

SimTalk

XScaleMin [SimTalk]

See also

[Range X](#)

XScaleMin [SimTalk]

Sets the lower bound for scaling on the x-axis of the *Chart* designated by <Path>.

Type

Attribute

Syntax

```
<Path>.XScaleMin:integer
```

Assignment Value

You can assign a value of data type *integer*.

Example

```
MyChart.XScaleMin := 2
```

SimTalk

[XScaleMax \[SimTalk\]](#)

See also

[Range X](#)

YGrid [SimTalk]

Sets if the *Chart* designated by <Path> shows the grid on the y-axis in the *Chart* (true) or not (false).

Type

Attribute

Syntax

```
<Path>.YGrid:boolean
```

Assignment Value

You can assign a value of data type *boolean*.

Example

```
MyChart.YGrid := false
```

SimTalk

[XGrid \[SimTalk\]](#)

See also

[Grid Lines Y-Axis](#)

YGridLineInterval [SimTalk]

Sets the interval between the grid lines on the y-axis of the *Chart* designated by <Path>.

Remarks

YGridLineInterval sets the distance of the horizontal grid lines and the labels on the y-axis.

Type

Attribute

Syntax

```
<Path>.YGridLineInterval:real
```

Assignment Value

You can assign a value of data type *real*.

Specify 0 to make *Plant Simulation* determine a meaningful interval based on the displayed values.

Example

```
MyChart.YGridLineInterval := 2
```

See also

Interval

YLabel [SimTalk]

Sets the label of the y-axis that the *Chart* designated by <Path> shows in the *Chart* window.

Remarks

Applies to the 3D chart types **3D Columns**, **3D Wire Frame**, and **3D Surface**.

Type

Attribute

Syntax

```
<Path>.YLabel:string
```

Assignment Value

You can assign a value of data type *string*.

Example

```
MyChart.YLabel := "Number of Trunks"
```

SimTalk

[XLabel \[SimTalk\]](#)

See also

[Y-Axis \[text box\] - Chart](#)

YLog [SimTalk]

Activates logarithmic representation (`true`) of the y-axis of the *Chart* designated by `<Path>` or deactivates it (`false`).

Remarks

If you activate *YLog*, you also have to enter a value greater than 0, for example `0.1`, for the *YScaleMin*, so that *Plant Simulation* can display the scale logarithmically.

Type

Attribute

Syntax

```
<Path>.YLog: boolean
```

Assignment Value

You can assign a value of data type *boolean*.

Example

```
MyChart.YLog := false
```

SimTalk

[XLog \[SimTalk\]](#)

See also

[Logarithmic Y-axis](#)

[YScaleMin \[SimTalk\]](#)

YScaleMax [SimTalk]

Sets the upper bound of the range on the y-axis of the *Chart* designated by <Path>.

Type

Attribute

Syntax

```
<Path>.YScaleMax:integer
```

Assignment Value

You can assign a value of data type *integer*.

Example

```
MyChart.YScaleMax := 1.5
```

SimTalk

[YScaleMin \[SimTalk\]](#)

See also

[Range Y](#)

YScaleMin [SimTalk]

Sets the lower bound of the range on the y-axis of the *Chart* designated by <Path>.

Remarks

If you activate **YLog**, you also have to enter a value greater than 0, for example 0.1, for the *YScaleMin*, so that *Plant Simulation* can display the scale logarithmically.

Type

Attribute

Syntax

```
<Path>.YScaleMin:integer
```

Assignment Value

You can assign a value of data type *integer*.

Example

```
MyChart.YScaleMin := 0.5
```

SimTalk

[YScaleMax \[SimTalk\]](#)

See also

[Range Y](#)

ZLabel [SimTalk]

Sets the label of the z-axis that the *Chart* designated by <Path> shows in the *Chart* window.

Remarks

Applies to the 3D chart types **3D Columns**, **3D Wire Frame**, and **3D Surface**.

Type

Attribute

Syntax

```
<Path>.ZLabel:string
```

Assignment Value

You can assign a value of data type *string*.

Example

```
MyChart.ZLabel := "Number of Stacked Rows"
```

See also

[Z-Axis \[text box\] - Chart](#)

GanttChart

GanttChart [object]

Use the object *GanttChart* for showing the chronological sequence of activities as bars on the time axis.

Image



Description

The *GanttChart* visualizes parts on resources. In this context resources are the **material flow objects**, not the **resource objects**.