

ShowStandardButtons [SimTalk]

Sets if the *Dialog* designated by <Path> shows the standard buttons **OK**, **Cancel** and **Apply** (`true`) or not (`false`).

Type

Attribute

Syntax

```
<Path>.ShowStandardButtons:boolean
```

Assignment Value

You can assign a value of data type *boolean*.

Example

```
Dialog.ShowStandardButtons := false
```

See also

[Show Default Buttons \[check box\]](#)

Checkbox

Checkbox [object]

Use the object *Checkbox* for toggling between the states on and off, for toggling operating modes, etc.



Image



Description

The *Checkbox* switches between the states *on* and *off*, it switches operating modes, it switches between runtime mode and debug mode, etc.

By default, the *Checkbox* looks like this:

**Note**

Plant Simulation only accepts the click the *Checkbox* if it occupies at least 10 pixels in each direction in the model window. If you zoom out very far, the picture of *Checkbox* might become too small, preventing *Plant Simulation* to recognize it reliably.


To change between the *on* and the *off* state of the *Checkbox*, click the picture.

To open the dialog of the object *Checkbox*, double-click the name **Checkbox** to the right of the icon



You can create any number of icons for the *Checkbox*. *Plant Simulation* automatically switches between the icons of the check box according to their name/state. Assign the icons pairs of names according to their state, for example **TrueIcon1** and **FalseIcon1**.

You can also click the *Checkbox* in a *sub-Frame* and switch the value. Compare the check box **Show Warehouse Content** in the *Factory51* model.

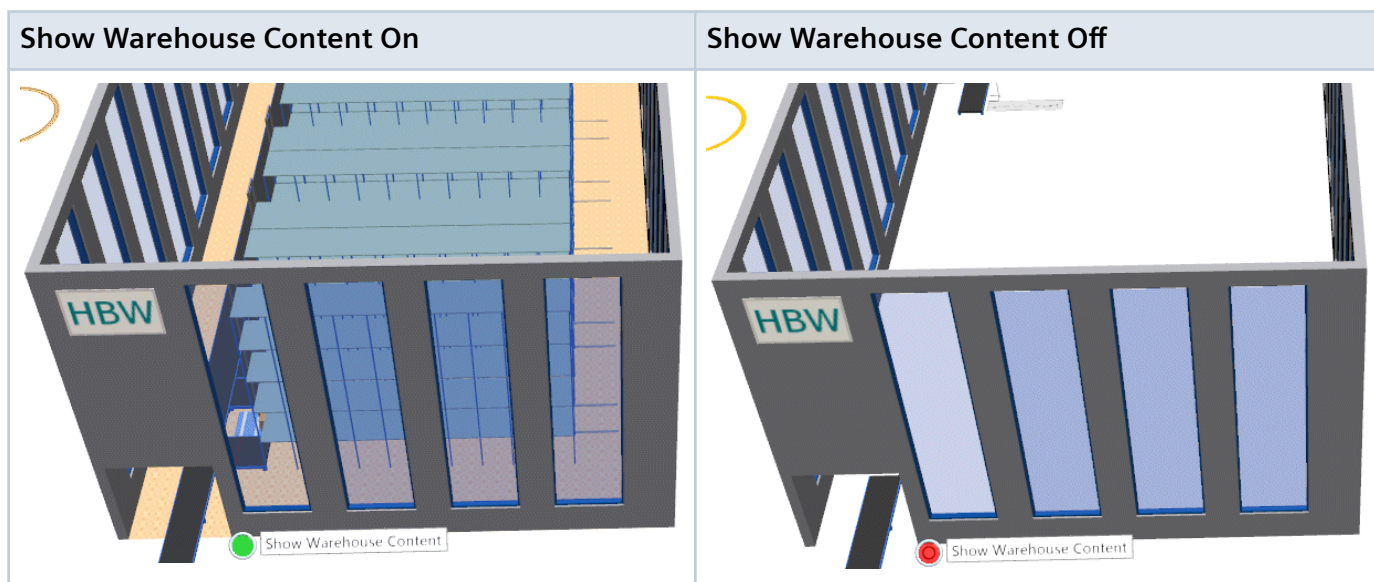

To show a **tooltip** with information about the *Checkbox*, hover with the mouse over it.

To change the length of the graphic and the anchor points of the *Checkbox*, click [Show Manipulators](#)



on the **Edit** ribbon tab or press **M** on the keyboard.

Add the Object to the Simulation Model

To add the object *Checkbox* to your simulation model, click  [Manage Class Library](#) > **Basic Objects** > **UserInterface** > **Checkbox** on the **Home** ribbon tab.

See also

[Switch States with the Checkbox](#)

[Select an Option from a Drop-down List](#)

[Configure the Check Box and the Drop-down List](#)

Dialog Box of the Checkbox

Dialog Box of the Checkbox



Double-click the name **Checkbox** to the right of the icon in the *Frame* to open its dialog box.

Edit Simulation Properties

In the dialog box you can change the **simulation properties** of the object. The shared properties are described under [Dialog Items of the Objects](#).

Edit Animation Properties

To edit the **3D properties** of the object in the dialog box [Edit 3D Properties](#):

- Click the button  **Edit 3D Properties** in the lower left corner of the simulation properties dialog box.
- Select the object in the model and press the **spacebar**.

To manipulate the graphic of the object, click [Show Manipulators](#) on the **Edit** ribbon tab or press **M** on the keyboard.

Tab Data

Tab Data [Checkbox]

The tab **Data** provides the settings listed in the table of contents to the left.


Value [drop-down list] - Checkbox

Select if the *Checkbox* is active (**true**) or not (**false**).

Value: 

Remarks

The *Checkbox* looks like this by default:



Plant Simulation automatically switches between the icons of the check box according to their name/state. Always create a set of two icons, one for *on* and one for *off*, and name them accordingly.


Assign names in pairs to the icons according to their state, for example **TrueIcon1** and **FalseIcon1**.

SimTalk

Value [SimTalk] - Checkbox

Control [Checkbox]

Modifies the built-in behavior of the object. The object calls the **Control** when the **Value** of the *Checkbox* changes when you click it. *Plant Simulation* only calls the **Control** of the object itself, not of instances of the object.



Select the Path to an Existing Method

Click the ellipsis button. Navigate to the location of the *Method* in the dialog [Select Object \[for controls\]](#) and click **OK**. This inserts the name of the *Method* into the text box of the **Control**.



Press **F2** in the text box to open the *Method*. Then type in the source code of the **Control**.

Instead of choosing **Select Object**, you can also select the *Method* in a *Frame*, drag it to the text box and drop it there.


Create a Control That is a Method of the Object

Proceed as follows to create a control as a *user-defined attribute* of data type *Method*:

- Type a meaningful name into the text box and select [Create Control \[context menu\]](#). *Plant Simulation* then inserts `self.Name_you_typed_in_for_the_control`, such as `self.A1Ctrl`.



- Select **Create Control** on the empty text box. *Plant Simulation* then inserts `self.OnBuilt_in_name_of_the_control`, such as `self.OnEntrance`.




Type the source code of this control into the *Method* that opens.

To edit the source code later on:

- Press **F2**.
- Or hold down **Shift** and double-click into the text box.
- Or select **Open Object** on the context menu.
- Or click the tab **User-defined** and double-click the name of the *Method* in the list.
- To delete this control, delete the *user-defined attribute*. If you only delete the name from the text box, the *user-defined attribute* is retained.

The **standard OnClicked control** as a *user-defined attribute* looks like this:

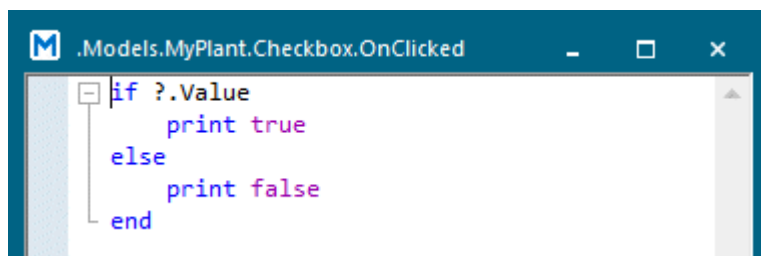

SimTalk

Control [SimTalk] - Checkbox

See also

Select Object [for controls]

Value [drop-down list] - Checkbox

Configure the Check Box and the Drop-down List

Tab User-defined

Define your own attributes as described under the [Tab User-defined](#).

Navigate Menu

The commands are described under the [Navigate Menu](#).

View Menu

The commands are described under the [View Menu](#).

SimTalk

[updateDialog \[SimTalk\]](#)

Tools Menu

The **Tools Menu** provides commands to access its functions.

[Edit Controls](#)

[Edit Observers](#)

See also

[Tools Menu \[general description\]](#)

Help Menu

The commands are described under the [Help Menu](#).

Methods of the Checkbox

Methods of the Checkbox

The *Checkbox* provides the [Methods of All Objects](#).

To view all of the *methods*, *read-only attributes*, and *attributes* of the object, open the window [Show Attributes and Methods](#). The figure below illustrates the information using the example of the object *Station*.

Name	Value	Inherited	Watchable	Signature
contentsList	[]			((Contents:table)) -> any
createAttr				(NameOfUserDefinedAttribute:string, DataType:string) -> boolean
createIcon				(IconName:string, Width:integer, Height:integer) -> integer
deleteAttr				(NameOfUserDefinedAttribute:string) -> boolean

Name of the method Identifier and data type of the parameter you enter Data type of the return value

Name	Value	Inherited	Watchable	Signature
moveToFolder				(Folder:object) -> object
MU	VOID			((Index:integer:=1)) -> object
MUPart	VOID			((Index:integer:=1)) -> object

Name of the method Identifier and data type of the parameter you enter Default value Data type of the return value

- Select **Show Attributes and Methods** on the context menu of the **Class Library** to show the *methods*, *read-only attributes*, and *attributes* of the selected [Class \[general description\]](#).
- Press the **F8** key or click **Show Attributes and Methods** on the **Home** ribbon tab of the *Frame* into which you inserted an instance to show the *methods*, *read-only attributes*, and *attributes* of the selected [Instance \[general description\]](#).

An example of the **Syntax** line of the individual methods might look like this:

```
<Path>.openDialog([CallOpenControl:boolean:=false]) → boolean
```