

- Press the **F8** key or click **Show Attributes and Methods** on the **Home** ribbon tab of the *Frame* into which you inserted an instance to show the *methods*, *read-only attributes*, and *attributes* of the selected [Instance \[general description\]](#).

To query the value of a *read-only attribute*, you might, for example, type:

```
print MyGanttChart.UUID
```


Attributes of the GanttChart

_Attributes of the GanttChart

The *GanttChart* provides:

- The *attributes* listed in the table of contents to the left.
- The [Attributes of All Objects](#).

To view all of the *methods*, *read-only attributes*, and *attributes* of the object, open the window [Show Attributes and Methods](#). The figure below illustrates the information using the example of the object *Station*.

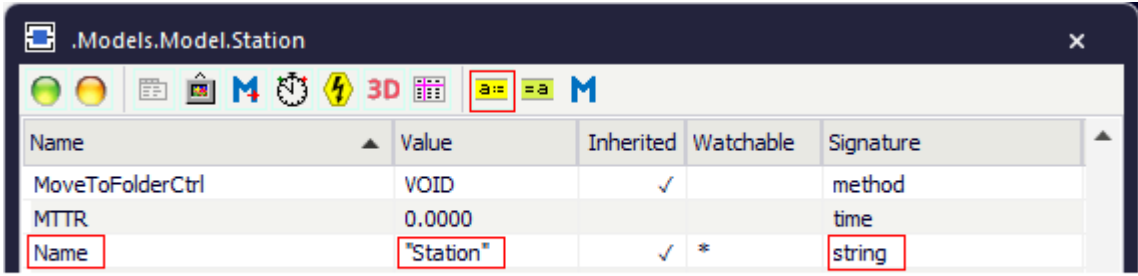

Name	Value	Inherited	Watchable	Signature
MoveToFolderCtrl	VOID	✓		method
MTTR	0.0000			time
Name	"Station"	✓	*	string

Name of the attribute Current value of the attribute Data type of the assignment value

- Select **Show Attributes and Methods** on the context menu of the **Class Library** to show the *methods*, *read-only attributes*, and *attributes* of the selected [Class \[general description\]](#).
- Press the **F8** key or click **Show Attributes and Methods** on the **Home** ribbon tab of the *Frame* into which you inserted an instance to show the *methods*, *read-only attributes*, and *attributes* of the selected [Instance \[general description\]](#).

You can set the value of an attribute and you can get its value, either with the check boxes, the text boxes and drop-down lists in the dialog windows or by assigning values to the respective attributes.

- To **set the value** of an attribute, you might, for example, type:

```
MyGanttChart.IsShown := true
```

- To **get the value** of an attribute, you might, for example, type:

```
print MyGanttChart.IsShown  
posit := Station.Cont.XPos
```

CollectData [SimTalk] - GanttChart

Sets if the *GanttChart* designated by <Path> collects data (`true`) or does not collect data (`false`).

Remarks

You cannot use *setData* and automatically collect the data simultaneously. When you assign `true` to *CollectData*, do not call the method *setData*.

Type

Attribute

Syntax

```
<Path>.CollectData: boolean
```

Assignment Value

You can assign a value of data type *boolean*.

Example

```
MyGanttChart.CollectData := true
```

SimTalk

[setData \[SimTalk\]](#)

See also

[Collect Data \[check box\] - GanttChart](#)

EnableVisualTracking [SimTalk]

Activates (`true`) or deactivates (`false`) visual tracking of parts or resources in the *GanttChart* designated by `<Path>`.

Type

Attribute

Syntax

```
<Path>.EnableVisualTracking:boolean
```

Assignment Value

You can assign a value of data type *boolean*.

Example

```
MyGanttChart.EnableVisualTracking := true
```

See also

[Show Chart \[button\] - GanttChart](#)

IsShown [SimTalk] - GanttChart

Activates (true) or deactivates (false) the display of the *GanttChart* designated by <Path>.

Type

Attribute

Syntax

```
<Path>.IsShown: boolean
```

Assignment Value

You can assign a value of data type *boolean*.

Example

```
MyGanttChart.IsShown := false
```

See also

[Show Chart \[button\] - GanttChart](#)

NumVisibleBars [SimTalk]

Sets the maximum number of visible bars in the *GanttChart* designated by <Path>.

Remarks

The default setting is 100000. If this number is exceeded, older bars will not be shown any more.

You can reduce this number if performance is impaired.

Type

Attribute

Syntax

```
<Path>.NumVisibleBars:integer
```

Assignment Value

You can assign a value of data type *integer*.

Example

```
MyGanttChart.NumVisibleBars := 8000
```

See also

[Show Chart \[button\] - GanttChart](#)

Parts [SimTalk]

Sets the parts, i.e., the *MUs* that the *GanttChart* designated by <Path> visualizes.

Remarks

You can watch classes of parts or you can watch individual instances of parts.

Type

Attribute

Syntax

```
<Path>.Parts:array
```

Assignment Value

You can assign a value of data type *array*.

Example

```
MyGanttChart.Parts := [*.MUs.Entity] // all parts of this class  
MyGanttChart.Parts := [*.MUs.Entity:1] // the part with the number 1
```

See also

[Tab Parts \[GanttChart\]](#)

Resources [SimTalk] - GanttChart

Sets the resources, i.e., the material flow objects that the *GanttChart* designated by <Path> visualizes.

Remarks

You can watch classes of resources or you can watch individual instances of resources.

Type

Attribute

Syntax

```
<Path>.Resources:array
```

Assignment Value

You can assign a value of data type *array*.

Example

```
MyGanttChart.Resources := [Source, Station, Station1, Drain]
```

See also

[Tab Resources \[GanttChart\]](#)

ShowBarText [SimTalk]

Sets if the *GanttChart* designated by <Path> shows the part name as text on the Gantt bar (**true**) or not (**false**).

Type

Attribute

Syntax

```
<Path>.ShowBarText : boolean
```

Assignment Value

You can assign a value of data type *boolean*.

Example

```
MyGanttChart.ShowBarText := true
```

See also

[Show Bar Text \[check box\]](#)

ShowPartView [SimTalk]

Sets if the *GanttChart* designated by <Path> shows the resources in the **Resource View** (*false*) or the parts in the **Part View** (*true*).

Type

Attribute

Syntax

```
<Path>.ShowPartView:boolean
```

Assignment Value

You can assign a value of data type *boolean*.

Example

```
MyGanttChart.ShowPartView := true
```

See also

[Show Chart \[button\] - GanttChart](#)

ShowResourceLabels [SimTalk]

Sets if the *GanttChart* designated by <Path> shows the labels of the resources (*true*) or their names (*false*).

Type

Attribute

Syntax

```
<Path>.ShowResourceLabels: boolean
```

Assignment Value

You can assign a value of data type *boolean*.

Example

```
MyGanttChart.ShowResourceLabels := true
```

See also

[Show Resource Labels \[check box\]](#)

ShowResourceStates [SimTalk]

Sets if the *GanttChart* designated by <Path> shows the states of the resources as color of the bars (**true**) or not (**false**).

Type

Attribute

Assignment Value

You can assign a value of data type *boolean*.

Example

```
MyGanttChart.setLanes(MyLanesTable)  
MyGanttChart.ShowResourceStates := true
```

See also

[Show Resource States \[check box\]](#)

[States of the Material Flow Objects](#)

TimeScale [SimTalk]

Sets the time scale of the *GanttChart* designated by <Path>. *Plant Simulation* applies this value when opening the *GanttChart*.

Remarks

The unit of the time scale is logical pixels per second. For a time scale of 0.5 *Plant Simulation* shows a Gantt event with a duration of 60 seconds with a bar of a length of 30 logical pixels.

Type

Attribute

Syntax

```
<Path>.TimeScale:integer
```

Assignment Value

You can assign a value of data type *real*.

Specify 0 to use the default time scaling.

Example

```
MyGanttChart.TimeScale := 2.5
```

See also

[Show Chart \[button\]](#) - *GanttChart*

SankeyDiagram

SankeyDiagram [object]

Use the object *SankeyDiagram* for visualizing the *Sankey flows* of parts, the *Sankey flows* of *Workers*, who walk freely within the area or walk on *FootPaths*, and the *Sankey flows* of *AGVs* driving freely within the area of the model.

Image

