

Help Menu

The commands are described under the [Help Menu](#).

Methods of the HtmlReport

_Methods of the HtmlReport

The *HtmlReport* provides:

- The *methods* listed in the table of contents to the left.
- The [Methods of All Objects](#).

To view all of the *methods*, *read-only attributes*, and *attributes* of the object, open the window [Show Attributes and Methods](#). The figure below illustrates the information using the example of the object *Station*.

Name	Value	Inherited	Watchable	Signature
contentsList	[]			([Contents:table]) -> any
createAttr				(NameOfUserDefinedAttribute:string, DataType:string) -> boolean
createIcon				(IconName:string, Width:integer, Height:integer) -> integer
deleteAttr				(NameOfUserDefinedAttribute:string) -> boolean

Name of the method Identifier and data type of the parameter you enter Data type of the return value

Name	Value	Inherited	Watchable	Signature
moveToFolder				(Folder:object) -> object
MU	VOID			([Index:integer:=1]) -> object
MUPart	VOID			([Index:integer:=1]) -> object

Name of the method Identifier and data type of the parameter you enter Default value Data type of the return value

- Select **Show Attributes and Methods** on the context menu of the **Class Library** to show the *methods*, *read-only attributes*, and *attributes* of the selected [Class \[general description\]](#).
- Press the **F8** key or click **Show Attributes and Methods** on the **Home** ribbon tab of the *Frame* into which you inserted an instance to show the *methods*, *read-only attributes*, and *attributes* of the selected [Instance \[general description\]](#).

An example of the **Syntax** line of the individual methods might look like this:

```
<Path>.openDialog([CallOpenControl:boolean:=false]) → boolean
```

- The expression *<Path>* designates the path of the object to which the *method* applies.
- The signature of the method, consisting of the identifier and the data type of the parameter, is listed in parentheses. The expression *(Parameter:string)*, for example, designates a parameter of data type *string*. Instead of a constant value, you can also use a variable of the required type or a *method* that returns the required data type.

Note

Make sure to enter the parentheses for expressions within parentheses (...). Not entering them may lead to unexpected results and open the *Debugger*.

Optional parameters are listed within brackets. The expression *[,Parameter:boolean]*, for example, means that you can, but do not have to enter the *boolean* parameter.

If a parameter has a default value, the signature shows the default value after the parameter, *:= false* in the example above.

If the *method* has a return value, the signature shows its data type after the arrow *->*, *→ boolean* in the example above.

append [SimTalk] - HtmlReport

Appends text to the **Content** of the *HtmlReport* designated by <Path>.

Type

Method

Syntax

```
<Path>.append(Text:string)
```

Parameter

The parameter *Text* of data type *string* designates the text that you want to append.

Example

```
MyReport.Content := "#Heading"  
  for var i := 1 to numNodes  
    MyReport.append(strChr(10))  
    MyReport.append("Name: ")  
    MyReport.append(object(i).name)  
  next
```

See also

[Tab Content \[HtmlReport\]](#)

appendLine [SimTalk]

Appends a line of text to the **Content** of the *HtmlReport* designated by <Path>.

Type

Method

Syntax

```
<Path>.appendLine(Text:string)
```

Parameter

The parameter *Text* of data type *string* designates the text of the line that you want to append.

Example

```
MyReport.Content := "#Heading" + strChr(10)
for var i := 1 to numNodes
    MyReport.appendLine(object(i).name)
next
```

See also

[Tab Content \[HtmlReport\]](#)

appendPlainText [SimTalk]

Appends a special character as plain text to the content of the *HtmlReport* designated by <Path>.

Type

Method

Syntax

```
<Path>.appendPlainText(PlainText:string)
```

Parameter

The parameter *PlainText* of data type *string* designates the special character that you want to append as plain text.

Example

```
MyReport.Content := "#Heading" + strChr(10)  
MyReport.appendPlainText("##**")
```

See also

[Tab Content \[HtmlReport\]](#)

close [SimTalk] - HtmlReport

Closes the window that you opened by clicking **Show Report** of the *HtmlReport* designated by <Path>.

Type

Method

Syntax

```
<Path>.close → boolean
```

Return Value

The return value has the data type *boolean*.

Example

```
MyReport.close
```

See also

[show \[SimTalk\]](#)

getHTMLCode [SimTalk] - HtmlReport

Returns the HTML code of the *HtmlReport* designated by <Path>.

Type


Method

Syntax

```
<Path>.getHTMLCode([WithButtonsAndLinks:boolean:=false]) → string
```

Parameter

The optional parameter *WithButtonsAndLinks* of data type *boolean* sets if the returned string contains HTML-code for the buttons in the top left corner of the display window and links for the objects, for example in statistics tables of the material flow objects.

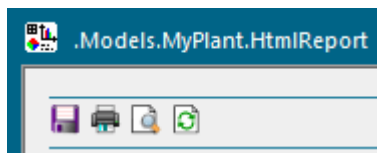

Drain Statistics								
Drain statistics shows detailed information about the parts that the shipping section removed from the plant.								
Name	Mean Life Time	Throughput	Throughput per Hour	Production	Transport	Storage	Value added	Portion
Part1	1:32:24.5055	135	5.62	47.00%	0.99%	52.01%	30.73%	
Part2	58:02.6334	45	1.88	54.44%	1.58%	43.98%	48.97%	

[.Models.MyCarAssembly.Shipping](#)

.Models.MyCarAssembly.Shipping

Default Value of the Parameter

The default value is false.

Return Value

The return value has the data type *string*.

Example

```
print MyHtmlReport.getHTMLCode
```

See also

[Display a HtmlReport](#)

refresh [SimTalk]

Force-updates the displayed *HtmlReport* designated by <Path> with the current values.

Type

Method

Syntax

```
<Path>.update -> boolean
```

Return Value

The return value has the data type *boolean*.

true if the *HtmlReport* was updated successfully.

false if it was not updated.

Example

```
MyHtmlReport.update
```

See also

[Structure Pane of the Display Window](#) > Refresh the report

save [SimTalk] - HtmlReport

Saves the *HtmlReport* designated by <Path> as an HTML file.

Remarks

You can also specify the location of the file on your hard drive.

Type

Method

Syntax

```
<Path>.save(FileName:string)
```

Parameter

The parameter *FileName* of data type *string* designates the path to and the name of the HTML file you want to save.

Example

```
MyReport.save("C:\temp\MyReport.html")
```

show [SimTalk]

Shows the *HtmlReport* designated by <Path> as an HTML page.

Type

Method

Syntax

```
<Path>.show([Anchor:string])
```

Parameter

The optional parameter *Anchor* of data type *string* designates the anchor to which *Plant Simulation* navigates when it opens the HTML page.

Example

```
MyHtmlReport.show("DrainStat")
// jumps to the anchor defined by:
// << <a id="DrainStat"> </a> >>
// on the tab Content
```

SimTalk

[close \[SimTalk\] - HtmlReport](#)

See also

[Show Report](#)

Read-Only Attributes of the HtmlReport

Read-Only Attributes of the HtmlReport

The *HtmlReport* provides the [_Read-Only Attributes of All Objects](#).

You can query the values of the *read-only attributes*, but you cannot set them as *Plant Simulation* computes the value for the point-in-time at which you query it. In most cases a *read-only attribute* corresponds to an unavailable dialog item on one of the tabs of the object, for example on the tab **Statistics**.