## 服务器信息

ip:101.37.21.248 端口: 3005 账号: root 密码: 6yhn7ujm8ik,9ol.

## 安装宝塔

yum install -y wget && wget -0 install.sh
https://download.bt.cn/install/install\_6.0.sh && sh install.sh 12f2c1d72

#### 宝塔相关信息

外网面板地址: https://101.37.21.248:15422/9e7f5b2a 内网面板地址:

https://10.0.98.198:15422/9e7f5b2a username: 5kvghysu password: yjh1102&


#### 安装软件

打开外网面板输入账号密码

注意mysql版本



安装完上面的之后安装PM2(版本选最新的就行)

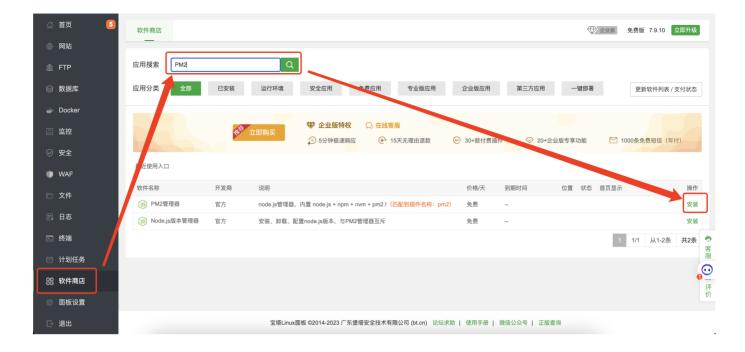

# 数据库

#### 添加数据库




导入数据







导入成功 sql 之后点管理进入数据库的可视化操作页面,可以看到这些表

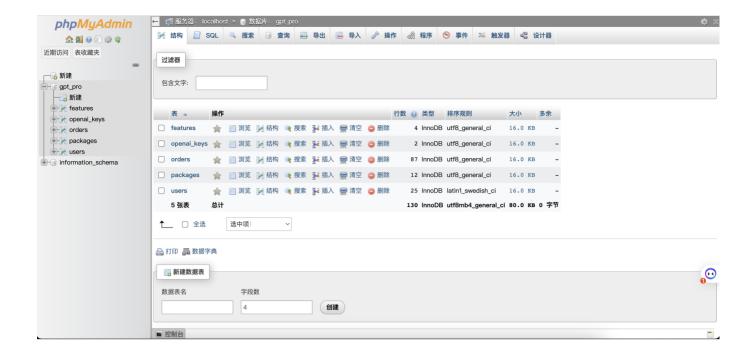

## 上传前后端代码

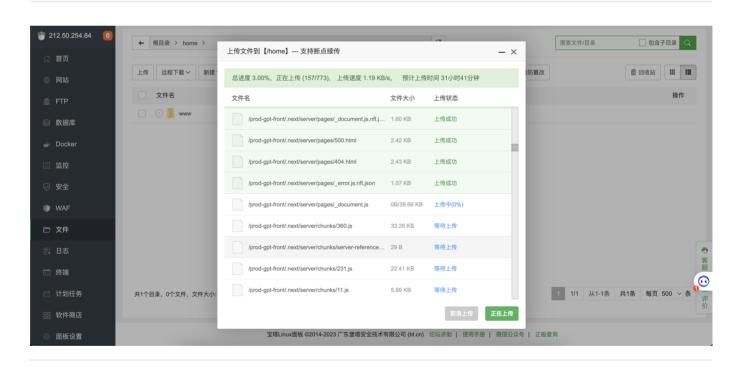

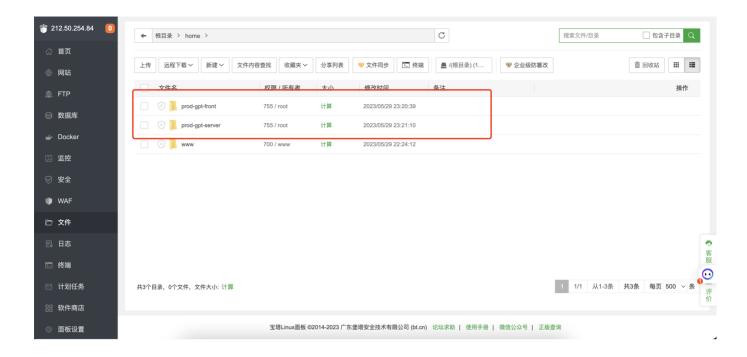

## 安装依赖

```
wget http://ftp.gnu.org/gnu/glibc/glibc-2.28.tar.gz
tar xf glibc-2.28.tar.gz
cd glibc-2.28/ && mkdir build && cd build
../configure --prefix=/usr --disable-profile --enable-add-ons --with-headers=/usr/include --with-binutils=/usr/bin

sudo yum install nodejs

sudo yum install -y epel-release
sudo yum install -y npm
```

#### yarn

```
npm install yarn -g

# 在前后端项目内执行
yarn install
```

```
| Meximum | Mex
```

#### pm2

```
npm install yarn -g
```

# 开放端口

3000

3001

# nginx 配置

```
server
   listen 80:
       listen 443 ssl http2;
   server_name ai.aivyds.net;
   index index.php index.html index.htm default.php default.html;
    root /www/wwwroot/ai.aiyyds.net;
   #SSL-START SSL相关配置,请勿删除或修改下一行带注释的404规则
   #error_page 404/404.html;
   ssl_certificate
/www/server/panel/vhost/cert/ai.aiyyds.net/fullchain.pem;
   ssl_certificate_kev
/www/server/panel/vhost/cert/ai.aiyyds.net/privkey.pem;
    ssl_protocols TLSv1.1 TLSv1.2 TLSv1.3;
   ssl_ciphers EECDH+CHACHA20:EECDH+CHACHA20-
draft:EECDH+AES128:RSA+AES128:EECDH+AES256:RSA+AES256:EECDH+3DES:RSA+3DES:!MD5;
    ssl_prefer_server_ciphers on:
   ssl_session_cache shared:SSL:10m;
   ssl_session_timeout 10m;
   add_header Strict-Transport-Security "max-age=31536000";
   error_page 497 https://$host$request_uri;
   location /pro_api {
     proxy_pass http://101.37.21.248:3000/pro_api;
     proxy_connect_timeout 6000;
                                  #链接超时设置
           proxy_read_timeout 6000;
                                         #访问接口超时设置
           proxy_set_header Host $http_host;
     proxy_set_header X-Real-IP $remote_addr;
     proxy_set_header X-Forwarded-For $proxy_add_x_forwarded_for;
     proxy_set_header X-Forwarded-Proto $scheme;
   }
   location / {
     proxy_pass http://101.37.21.248:3001;
   #SSL-END
   #ERROR-PAGE-START 错误页配置,可以注释、删除或修改
   #error_page 404 /404.html;
   #error_page 502 /502.html;
   #ERROR-PAGE-END
   #PHP-INFO-START PHP引用配置,可以注释或修改
   include enable-php-74.conf;
   #PHP-INFO-END
   #REWRITE-START URL重写规则引用,修改后将导致面板设置的伪静态规则失效
```

```
include /www/server/panel/vhost/rewrite/ai.aiyyds.net.conf;
   #REWRITE-END
   #禁止访问的文件或目录
   location ~
^/(\.user.ini|\.htaccess|\.git|\.env|\.svn|\.project|LICENSE|README.md)
       return 404;
   }
   #一键申请SSL证书验证目录相关设置
   location ~ \.well-known{
       allow all:
   }
   #禁止在证书验证目录放入敏感文件
   if ( $uri ~ "^/\.well-known/.*\.
(phpljsplpyljslcssllualtslgolzipltar\.gzlrarl7zlsqllbak)$" ) {
       return 403;
   }
   location ~ .*\.(gifljpgljpeglpnglbmplswf)$
       expires
                    30d:
       error_log /dev/null;
       access_log /dev/null;
   }
   access_log /www/wwwlogs/ai.aiyyds.net.log;
   error_log /www/wwwlogs/ai.aiyyds.net.error.log;
}
```

## 启动项目

前端项目

```
cd prod-gpt-front
yarn install
yarn prod
```

后端项目

cd prod-gpt-front
yarn install
yarn prod