


Adam Roe Software Engineering

CreateCodeLearn, 13 April 2018

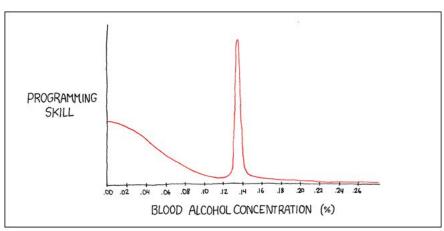



CALLED THE BALLMER PEAK, IT





https://xkcd.com/323

Software Engineering is the creative application of science, mathematical methods, and empirical evidence to the innovation, design, construction, operation and maintenance of software

[adapted from wikipedia]

```
Carousel.prototype.getItemForDirection = function (direction, active) {
                                                                                                                                                                                                                                                  Carousel, prototype, 850
      $results = $this model_extension_extension
                                                                                                                                                                                                                                                        var delta = direction == 'prev' ? -1
                                                                                                                                                                                                                                                       var itemIndex = (activeIndex + delta) % this.$items.length
                           ($results as $key >> $value) {
($results as $key | )) {
($sset($value('code'))) {
                                                                                                                                                                                                                                                                           this.$items.eg(itemIndex)
The subtle art of getting this steller computer (pos) {

to corousel.prototype.to = function (pos) {

corousel.prototype.to = function (pos) {

this this gettemIndex(this.$active = this.$element.find('.item.active'))

to corousel.prototype.to = function (pos) {

this this gettemIndex(this.$active = this.$element.find('.item.active'))

to corousel.prototype.to = function (pos) {

this gettemIndex(this.$active = this.$element.one('slid.bs.car list)) {

to corousel.prototype.to = function (pos) {

this gettemIndex(this.$active = this.$element.one('slid.bs.car list)) {

to corousel.prototype.to = function (pos) {

this gettemIndex(this.$active = this.$element.one('slid.bs.car list)) {

to corousel.prototype.to = function (pos) {

this gettemIndex(this.$active = this.$element.one('slid.bs.car list)) {

to corousel.prototype.to = function (pos) {

this gettemIndex(this.$active = this.$element.one('slid.bs.car list)) {

to corousel.prototype.to = function (pos) {

this gettemIndex(this.$active = this.$element.one('slid.bs.car list)) {

to corousel.prototype.to = function (pos) {

this gettemIndex(this.$active = this.$element.one('slid.bs.car list)) {

to corousel.prototype.to = function (pos) {

this gettemIndex(this.$active = this.$element.one('slid.bs.car list)) {

to corousel.prototype.to = function (pos) {

            Programming:
                               ($this->config->get($code . '_status')) (
                                 $this->load >model('extension/total/' . $code);
                                  ^{\prime\prime} We have to put the totals in an array so that they pass
                                  e || (this.paused = true)
                                          (|empty($totals[count($totals) - 1]) && |isset($totals[
                                                                                                                                                                                                                                                                this.$element.trigger($.support.transition.end)
                                              count($totals) - 1]['code'])) {
                                                     (isset($old taxes[$tax id])) {
```





Thanks! Q&A?