

Every level stays radial.

Copilot Reel visual identity v0.6 - official app identities, nested wheels, and pointer-led motion.

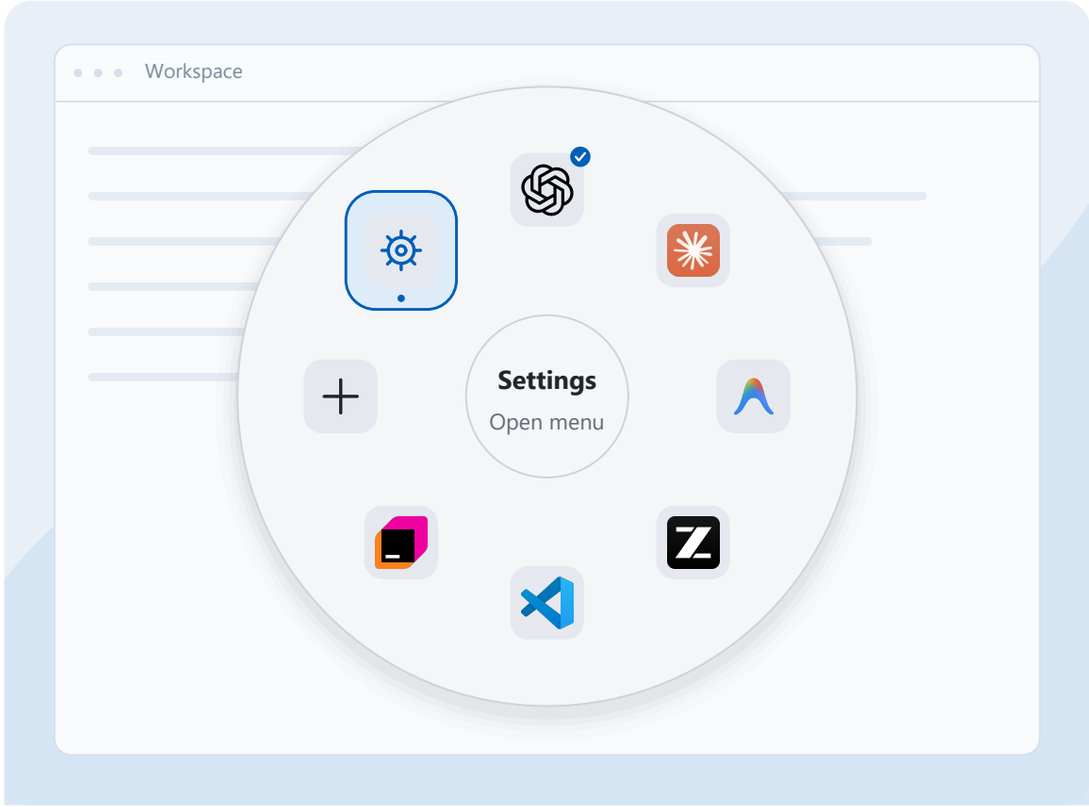

MAIN REEL

Apps, + management, and Settings in one wheel.

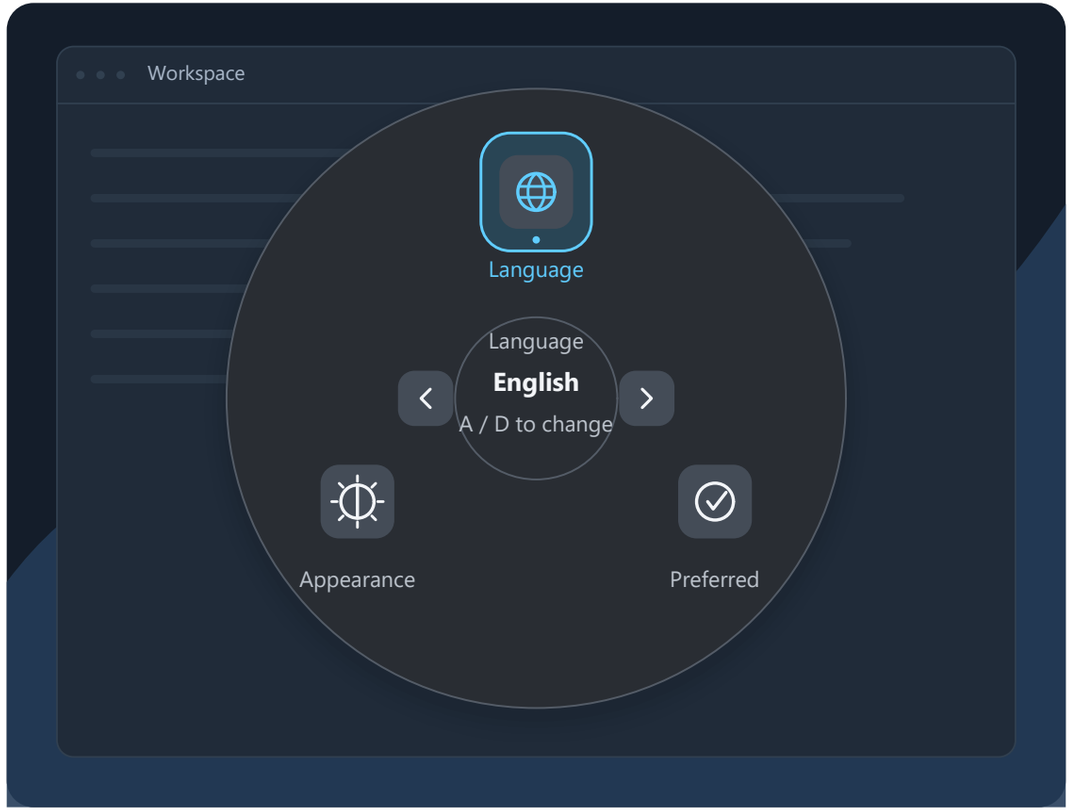

SETTINGS REEL

Same geometry. A deeper level, not another panel.

One wheel leads to the next.

Keep the center stable while navigating. Back or Esc restores the previous radial level.



Main → **Settings** → **Preferred agent**

MAIN +

Add or change applications

Open the manage reel; select an existing target to edit, or open the preset reel.

SETTINGS

Language, preferred agent, appearance

Language adjusts in place. The preferred-agent reel defines what a short Copilot tap opens.

Language changes inside the wheel.

English is the default. Clicking the two arrows or pressing A / D cycles the native interface language.



The adjustment stays local

Language is a setting in the second-level wheel. The current value lives in the center with small left/right chevrons. A and D offer the same action.

English < > Simplified Chinese


Persist immediately. Update wheel hints, tray text, and dialogs together. User-defined app names remain untouched.

44 x 44 DIP arrow hit regions; 30 x 30 DIP visible buttons.

After entering settings, the menu stays open for deliberate adjustment. Back returns one level.

Add and edit without leaving the radial hierarchy.


A focused native editor appears only when text or a launch target must be entered.

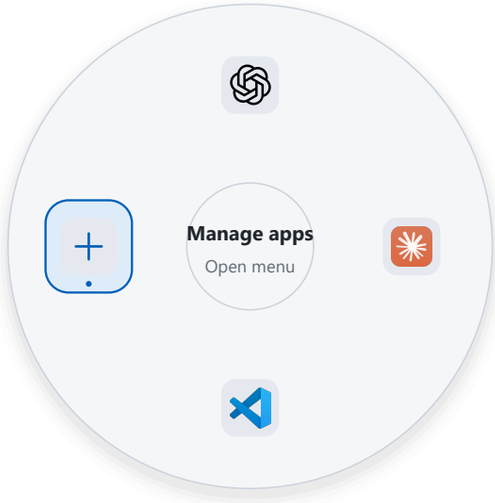

Manage apps



Agent presets

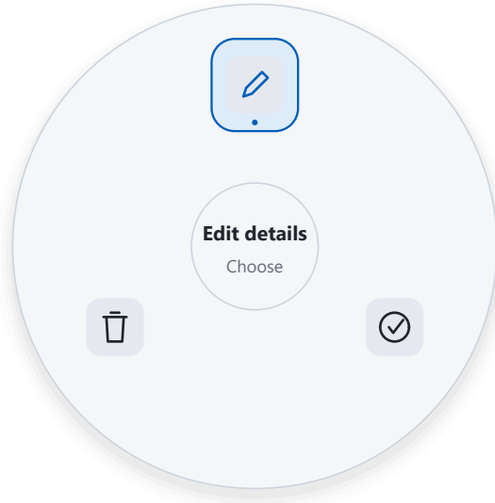

App actions

CONFIGURED APPS

Select an app to change it

The + entry opens presets or a custom target. Pagination preserves readable tile size.

MISSING INSTALLATION

Open a focused editor

Keep the preset identity and ask for the actual app, shortcut, or URI. Do not silently substitute an unrelated website.

Use the official mark. Unify the surrounding UI.

The initial collection covers the requested agents and the JetBrains family without redrawing their logos.



ChatGPT / Codex

Verified vendor artwork



Claude Desktop

Verified vendor artwork



Claude for Science

Verified vendor artwork




Antigravity

Verified vendor artwork



ZCode

Verified vendor artwork




DeepSeek Harness

Verified vendor artwork



VS Code

Verified vendor artwork



JetBrains

Verified vendor artwork



Junie

Verified vendor artwork




Air

Verified vendor artwork



Toolbox

Verified vendor artwork




IntelliJ IDEA


Verified vendor artwork


Claude for Science shares the Claude identity. The current installed OpenAI package supplies the ChatGPT / Codex mark. DeepSeek Harness is the dsh preset. Resolve actual launch targets before saving.

Consistency comes from the container.

Keep vendor proportions and recognizable color. Apply common optical bounds, spacing, selection, and focus.

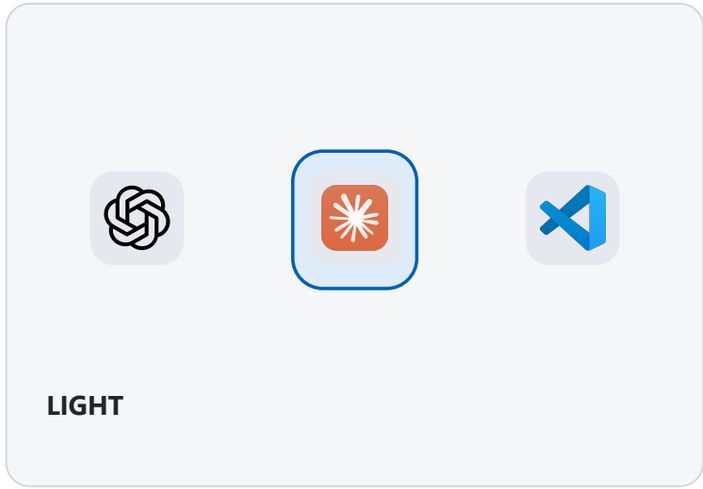

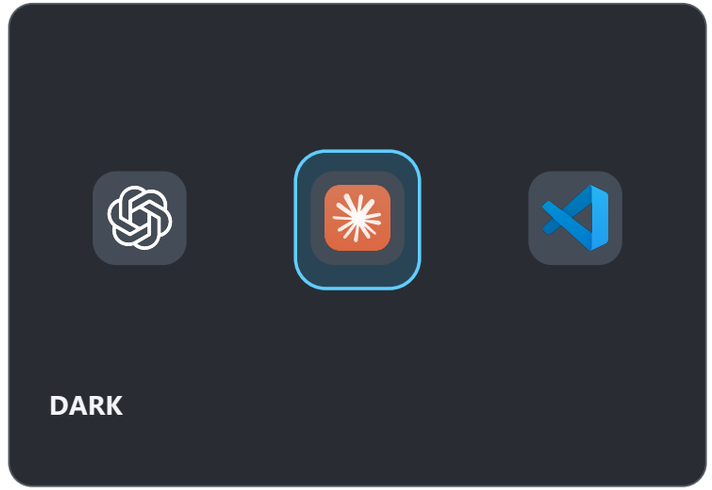

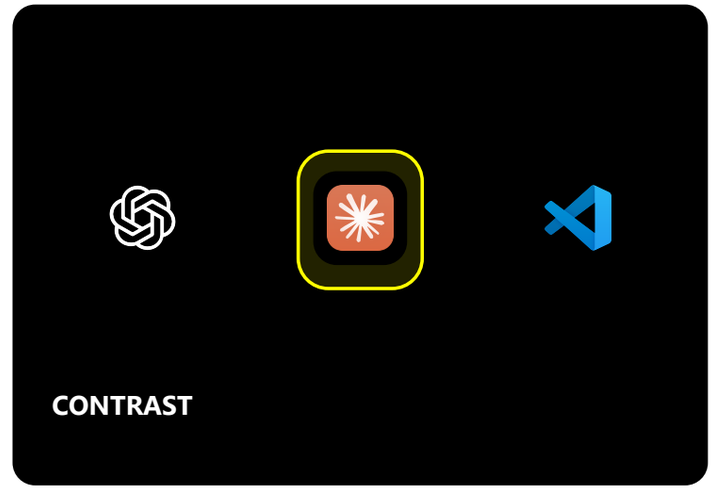

GEOMETRY

40 DIP tile / 28 DIP mark

Use a 10 DIP tile radius and 60 x 64 DIP selected seat. Do not recolor, distort, crop, or replace the official mark to force consistency.

NATIVE RENDERING


Vector UI with source-aware assets

Direct2D renders supported SVGs. Official PNGs cover sources without usable vector artwork or unsupported SVG masks. These are identity assets, not UI frames.

Source ownership, URLs, processing, and SHA-256 checksums: assets/brands/provenance.json.


The pointer starts the gesture. The whole reel stays visible.

The wheel is placed near the actual pointer on its monitor; it is never opened at a fixed screen center.

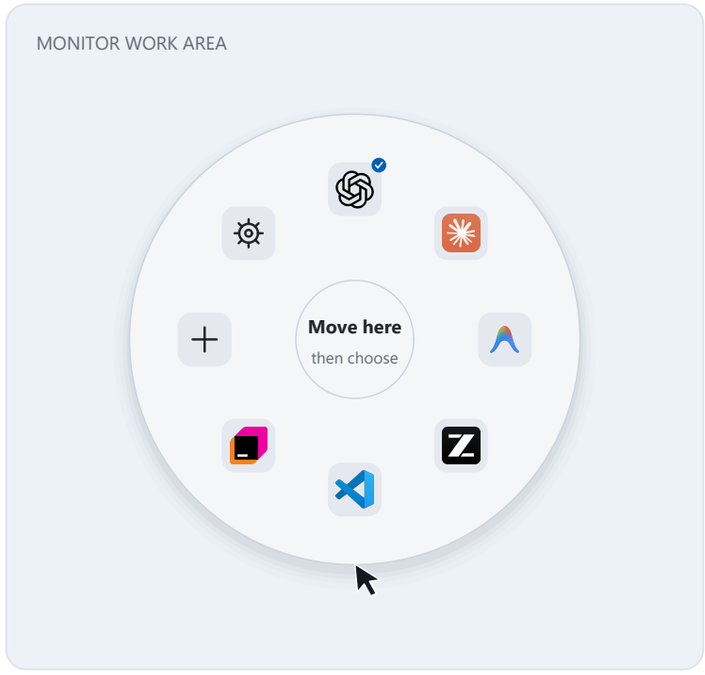


Interior

Nominal tether: 168 DIP.

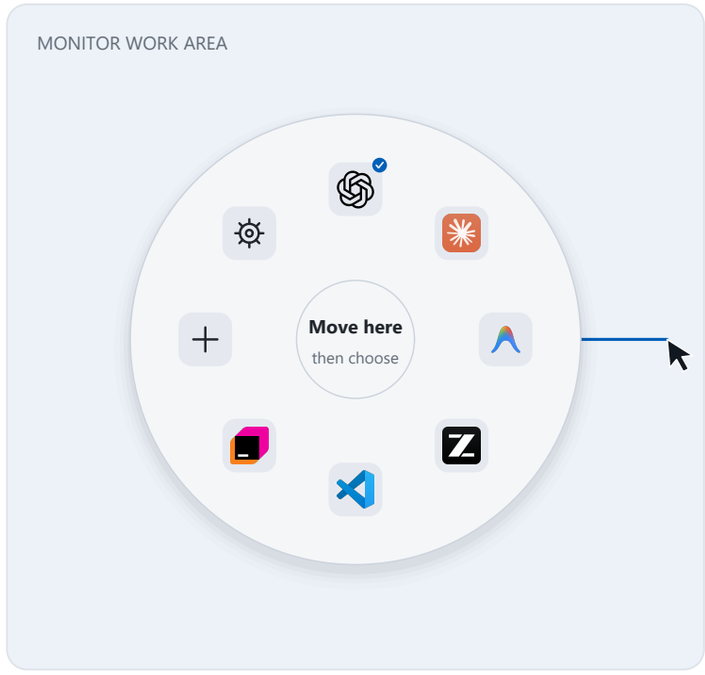

Screen edge

Clamp the full footprint; tether may be longer.

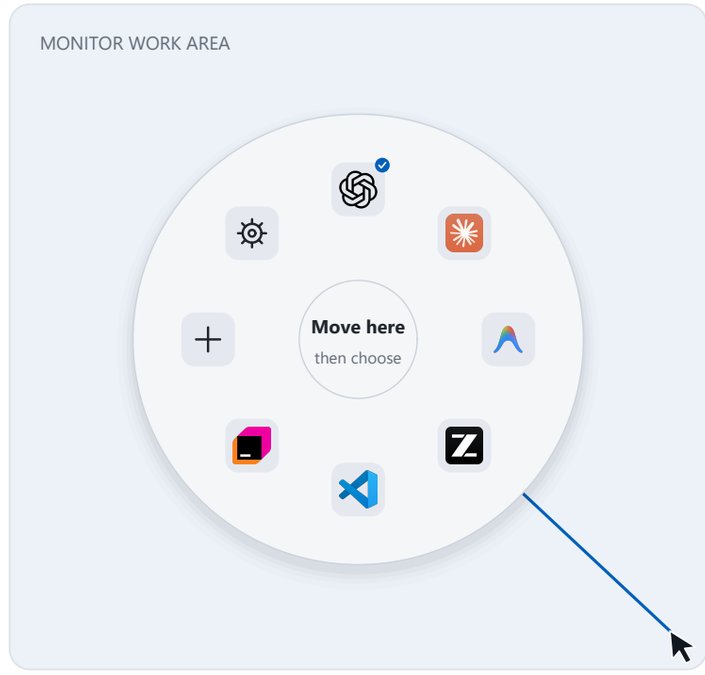

Screen corner


Clamp the full footprint; tether may be longer.

Never warp the system pointer. If it starts outside the final center zone, wait for center entry before allowing release-to-launch. The visible center is the only armed hit-test origin.

MOTION / POINTER-LED REVEAL


Extend. Sweep. Settle. Reverse to close.

Windows Composition evaluates the timeline. Icons stay upright and the application does not paint every frame.

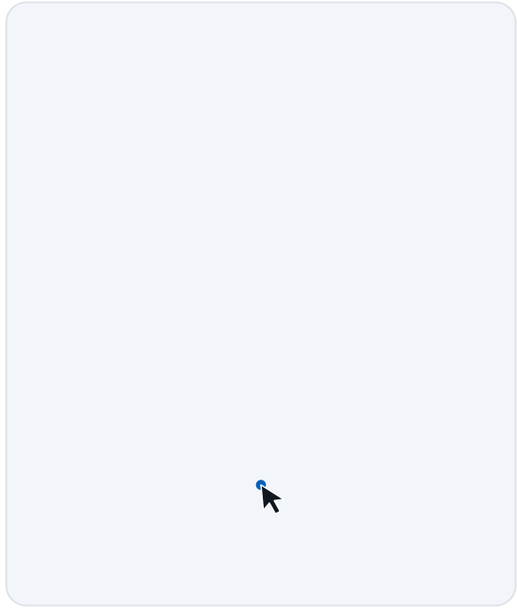


Origin

0 ms

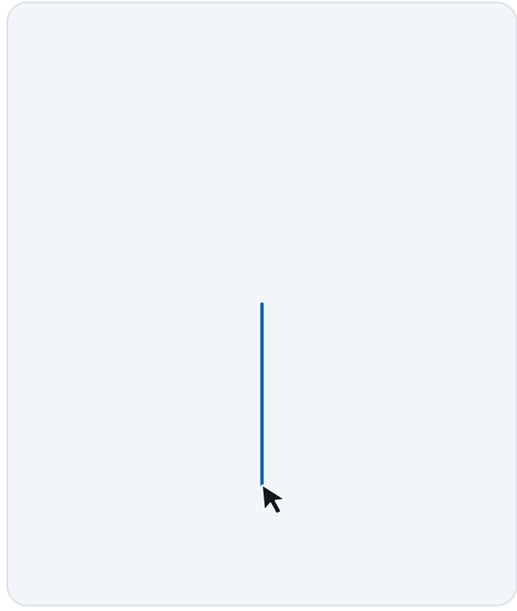


Tether reaches center

70 ms

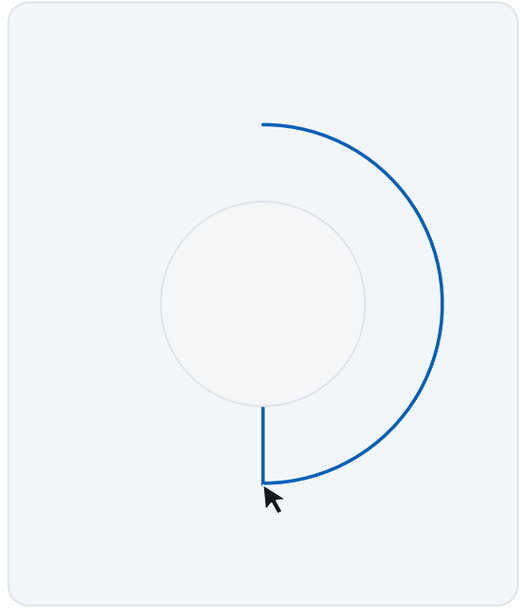

Circular reveal

70-230 ms

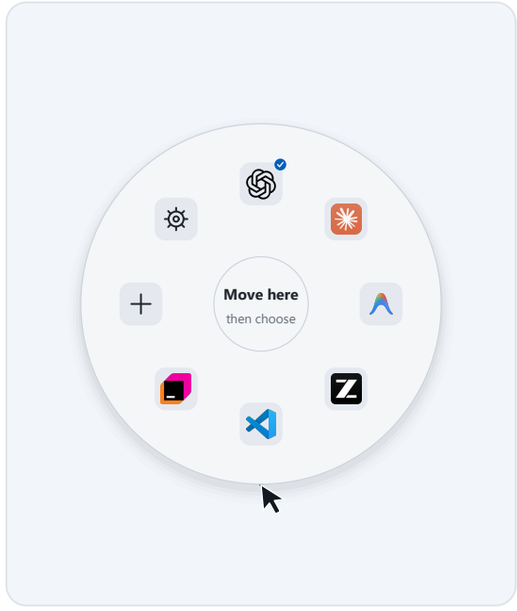

Ready to select

230 ms

OPEN / 230 MS

Tether 70 ms + reveal 160 ms

Clip radius, opacity, scale, and one full outline sweep run on the compositor.


CLOSE / 190 MS

Reverse, then detach


Reverse the reveal and retract the line. A new gesture interrupts closing; reduced motion is immediate.

Follow the Windows surface and effect preferences.


Neutral light/dark bases; system accent for selection. Frost is optional and never replaces readable content.

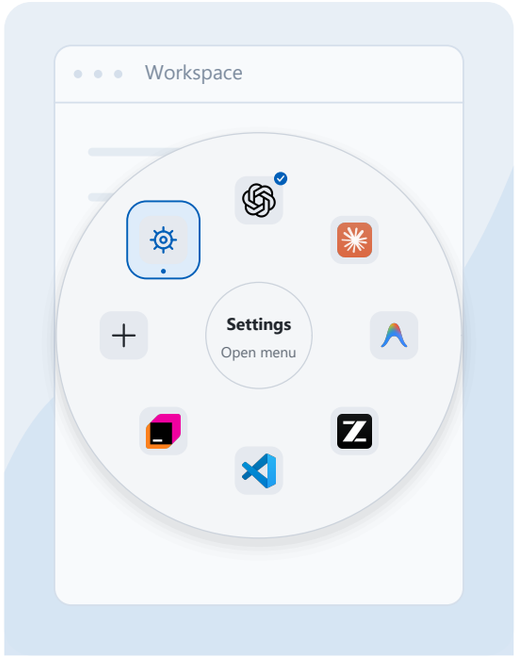


Light / Solid

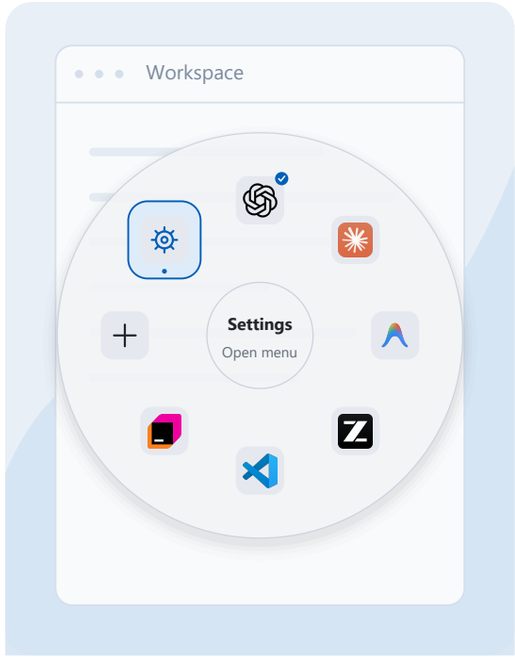

Light / Frosted

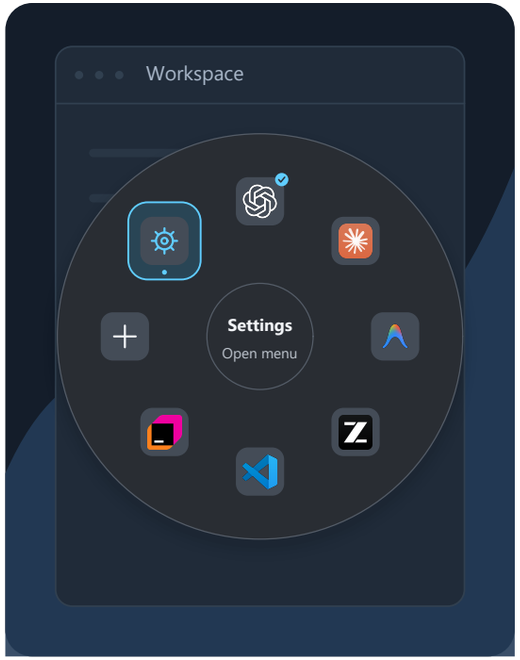

Dark / Solid

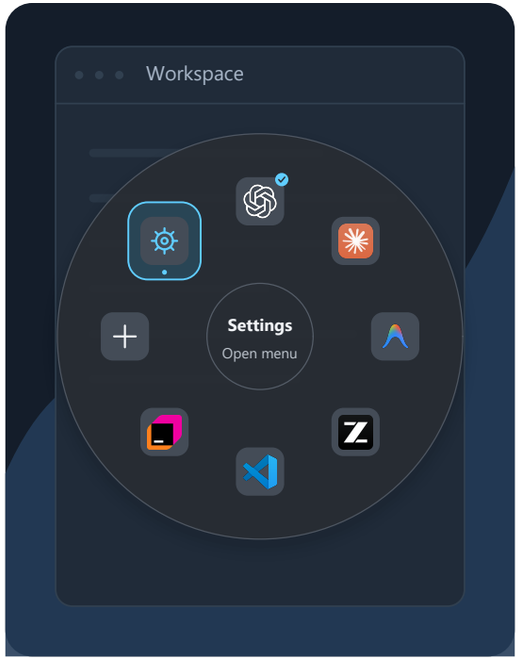

Dark / Frosted

Transparency off: opaque neutral base with no backdrop sampling. Transparency on: a frosted backdrop when available. High contrast, effects capability, and energy saver take precedence. Reduced motion skips decorative transitions.

Frost previews illustrate tone only. Actual host-backdrop blur requires native runtime validation.

Stable sizes. Different intent for tap and hold.

Native vector geometry is shared by layout, drawing, and hit testing at the active monitor DPI.

Reel diameter / icon orbit	**336 / 112 DIP**
Center cancellation zone	**88 DIP diameter**
Tile / artwork / corner	**40 / 28 / 10 DIP**
Selection seat	**60 x 64 DIP**
Language arrow hit / visible	**44 x 44 / 30 x 30 DIP**
Body / hints	**14 / 12 DIP**
Normal pointer-to-center distance	**168 DIP**
Entry / exit timeline	**230 / 190 ms**

COPILOT SHORT TAP

Open the preferred agent

A short tap launches the saved preferred target directly. It does not open a wheel preview.

COPILOT HOLD

Open the pointer-led reel

Windows supplies the hold threshold, approximately 300 ms. Release opens one selected agent or enters the chosen radial menu.

SETTINGS CONTEXT

Stay open to adjust

Secondary menus accept deliberate clicks and A / D language changes. Back or Esc returns one level.

No fixed frame budget hidden in the design.

Cached content and compositor timelines adapt to presentation cadence; measured behavior remains the acceptance test.

INPUT

Selection owns the action

Each release resolves at most once. Animation cannot change the selected target or repeat launch. Raw pointer traffic is coalesced into state changes.

DRAWING

Static content stays cached

Redraw for selection, menu, theme, DPI, or device changes. Decode official assets before the gesture. No permanent 60 Hz application loop.

ACCESS

Respect Windows preferences

High contrast uses system surfaces and clear target outlines. Disabled animations skip motion. Text uses Segoe UI Variable with system fallback.

DISPLAY

Keep validation separate

Test 60 / 144 / 240 Hz, mixed DPI, multiple monitors, energy saver, hidden wakeups, and rapid interruption. Renderer API success is not a performance result.

Small work areas and accessibility

If the complete canvas cannot fit, scale the whole circle uniformly instead of opening a different dashboard. Very small work areas reduce text and targets; accessibility and usability at those sizes require explicit validation.

A radial product surface, with explicit source boundaries.

The v0.6 specification replaces the rectangular primary OSD. Focused native editors remain for text entry only.

IMPLEMENTATION CONTRACT

Native wheel and nested navigation

Main: configured agents, + management, Settings. Settings: language adjustment, preferred agent, appearance. Manage: existing targets and preset collection. Missing targets open the editor.

ASSET CONTRACT

Official identity, common treatment

Keep source artwork and ownership records. Preserve vendor proportions. A neutral application glyph handles missing assets; do not invent brand approximations.

Windows motion

learn.microsoft.com/en-us/windows/apps/design/signature-experiences/motion

Composition animation

learn.microsoft.com/en-us/windows/uwp/composition/composition-animation

Windows materials

learn.microsoft.com/en-us/windows/apps/design/signature-experiences/materials

Radial precedent: Kando

kando.menu/config-files/#warpmouse

Radial precedent: Blender

docs.blender.org/manual/en/latest/editors/preferences/interface.html

Asset provenance

assets/brands/provenance.json

Specification date: 2026-10-19. Runtime test results and remaining limits belong in docs/validation.md.