
SELECTED DIRECTION / OSD EXTENSION

Soft Orbit. Less interface.

Copilot Reel visual identity v0.4 - native Windows styling, stable radial layouts.



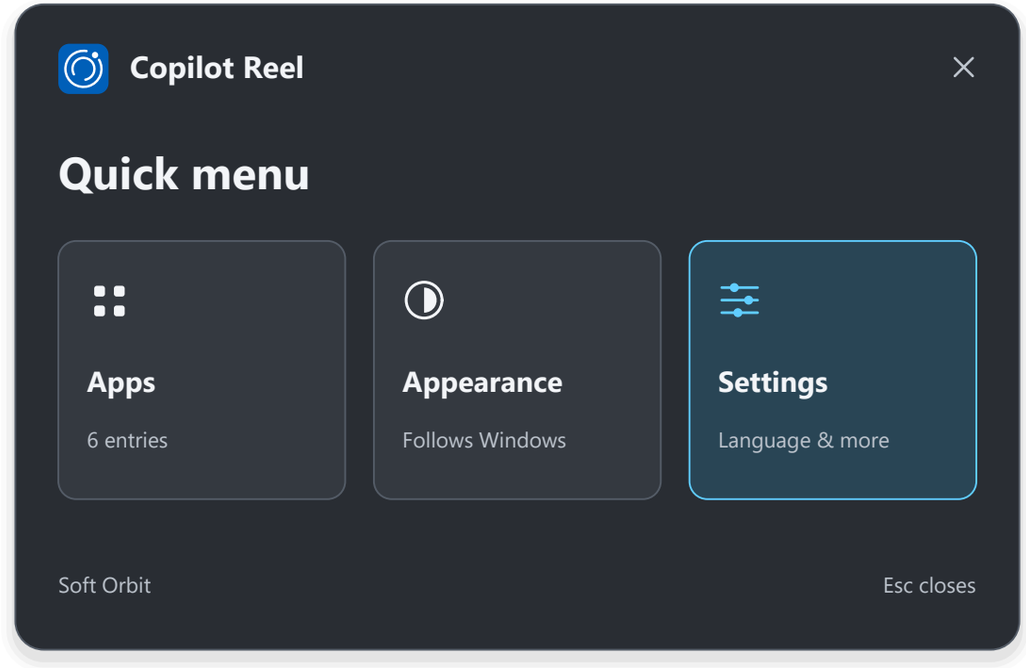

Hold to launch. Open the menu to configure.


Vector masters + bitmap previews. OSD screens are design specifications, not implemented screens.

NAVIGATION MODEL


Two levels. One clear way back.

The primary menu contains entry points. Language and preferences live one level deeper.

LEVEL 1 / QUICK MENU

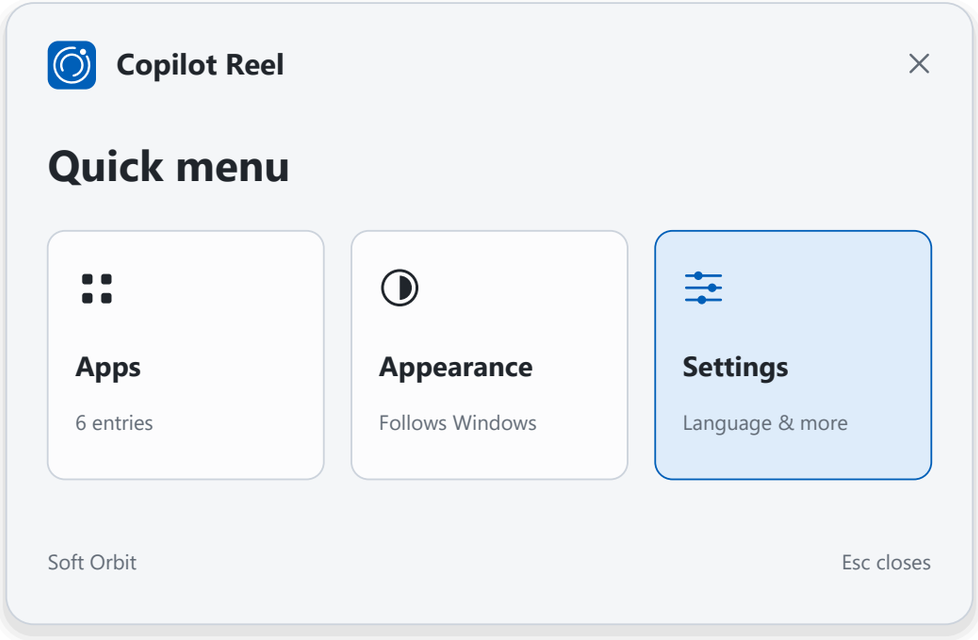

LEVEL 2 / SETTINGS

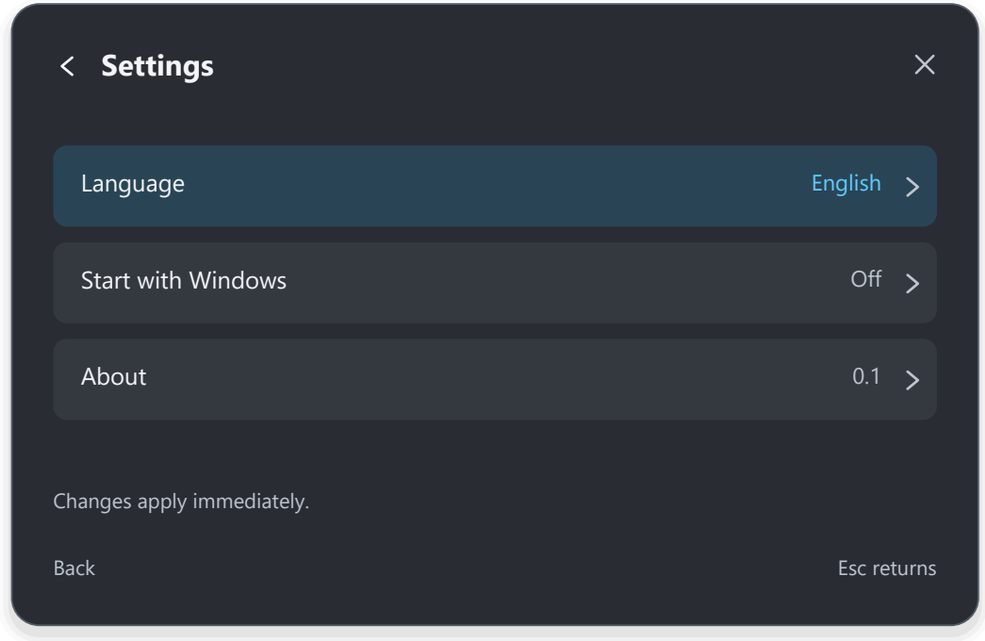

ENTRY

A deliberate settings action

Open the quick menu from the tray or a dedicated reel action. A hold gesture never opens an editor.

RETURN


Back restores context

Back or Esc returns to the primary menu. Closing the OSD preserves the selected app and order.


PRIMARY PANEL

A compact control surface.

A monitor OSD-inspired hierarchy, rendered with Windows typography and restrained depth.

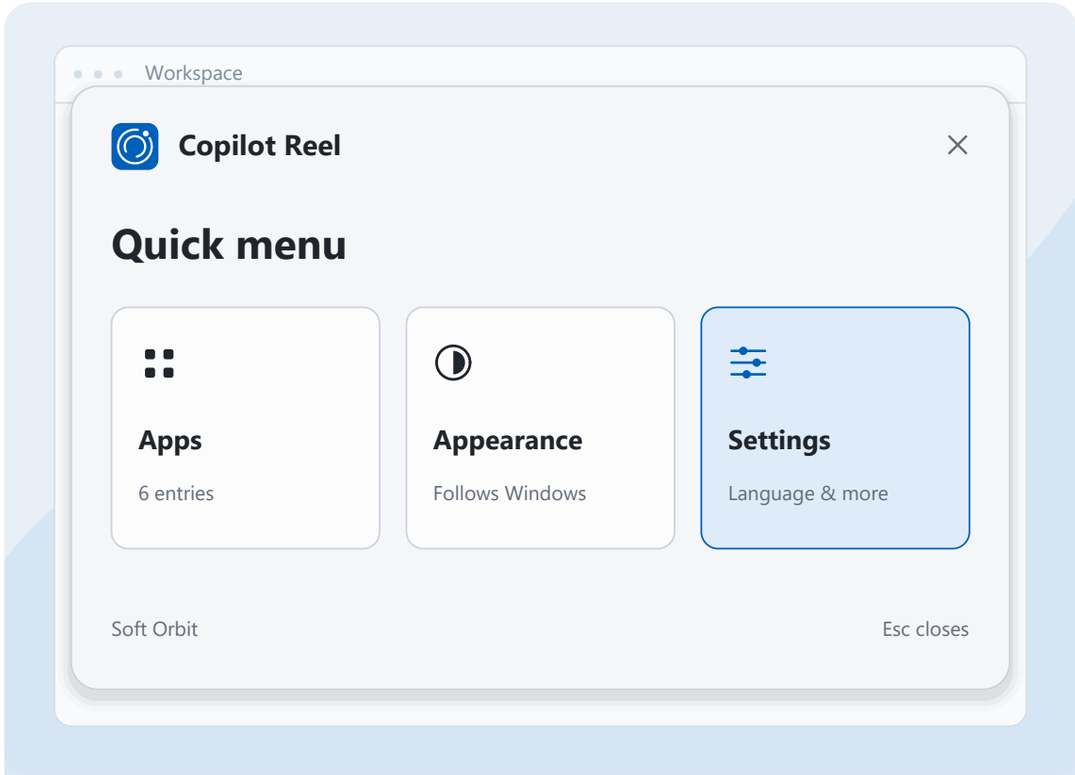

LIGHT

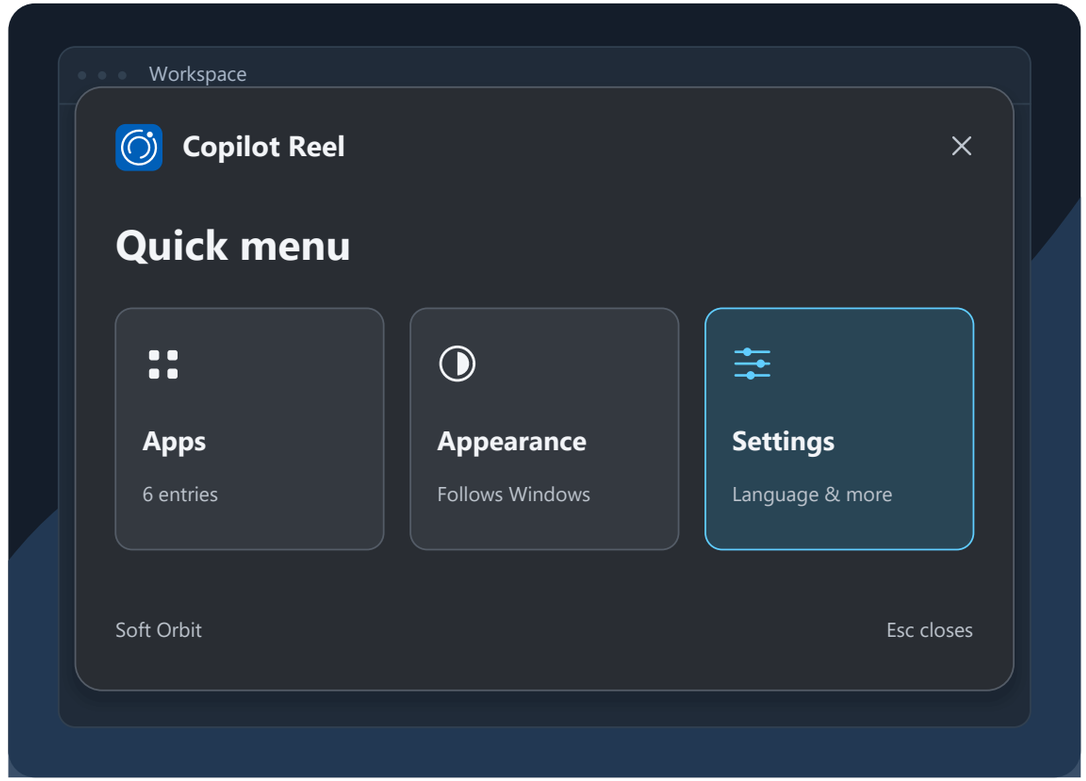


DARK

No permanent sidebar, full-window form, or technical launch fields on the home screen.

SECONDARY SETTINGS

Preferences belong behind an entry point.

English is the default. Language changes are immediate and remain local to the application.

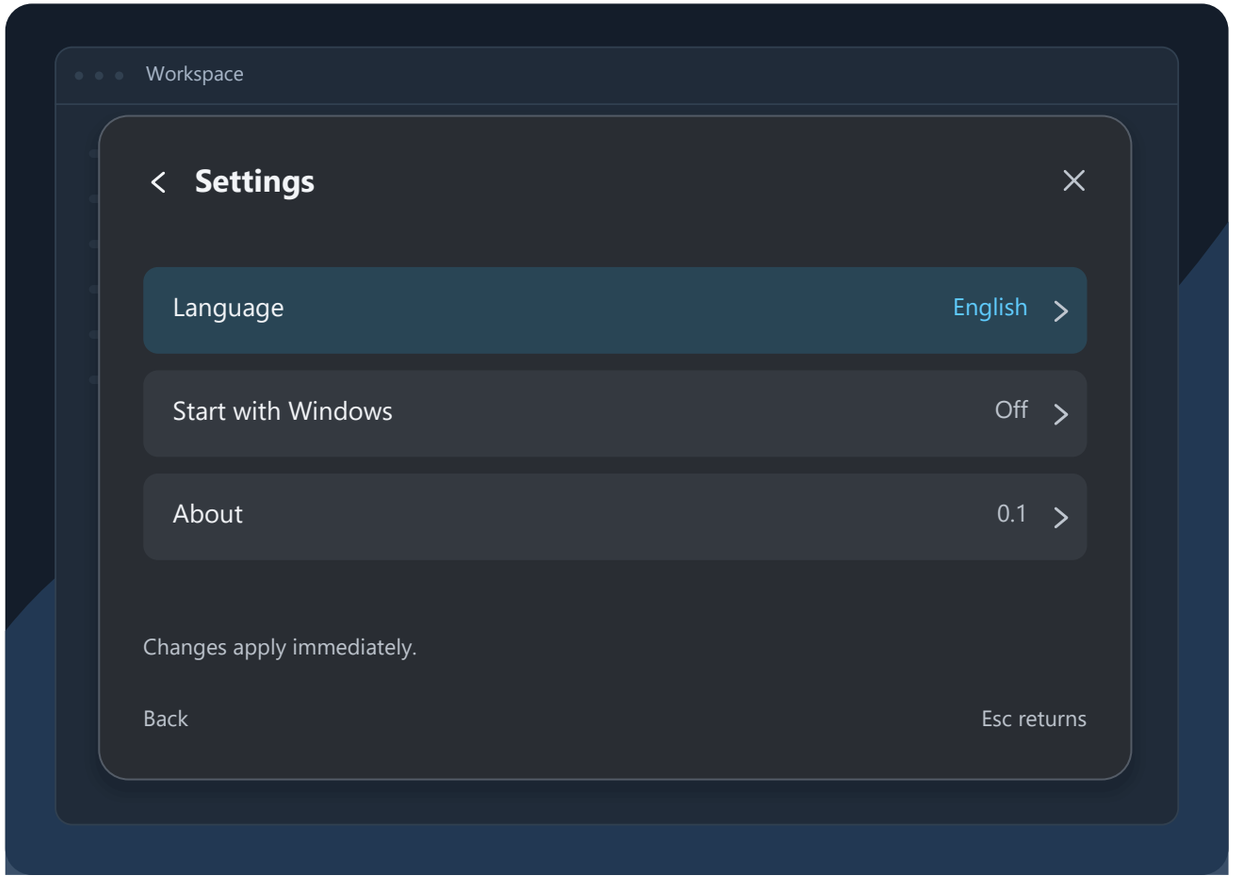

LANGUAGE

English / Simplified Chinese

Use one native selection control. Update the OSD, tray, wheel hints, and dialogs together; never rename user-defined apps.

SCOPE


Small, stable settings


Keep language, startup preference, and version information here. Per-app targets stay in the Apps workflow.

Startup preference is a proposed OSD control; enabling it requires an explicit user action.

Choose an app first. Edit only what matters.

App editing uses a focused task sheet; technical options remain collapsed under Advanced.

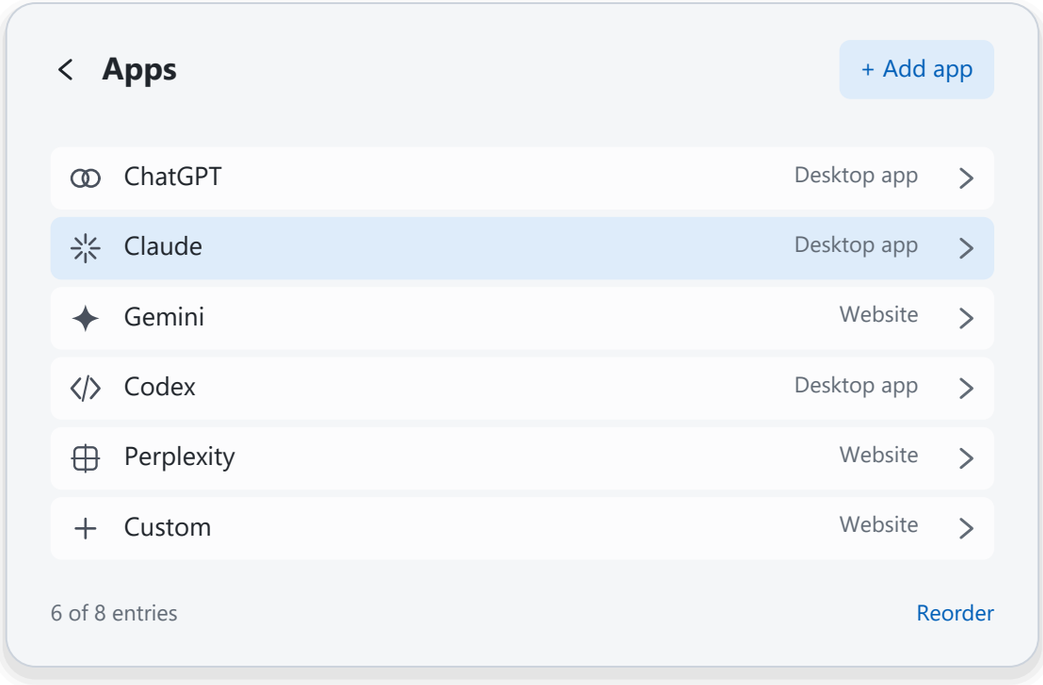

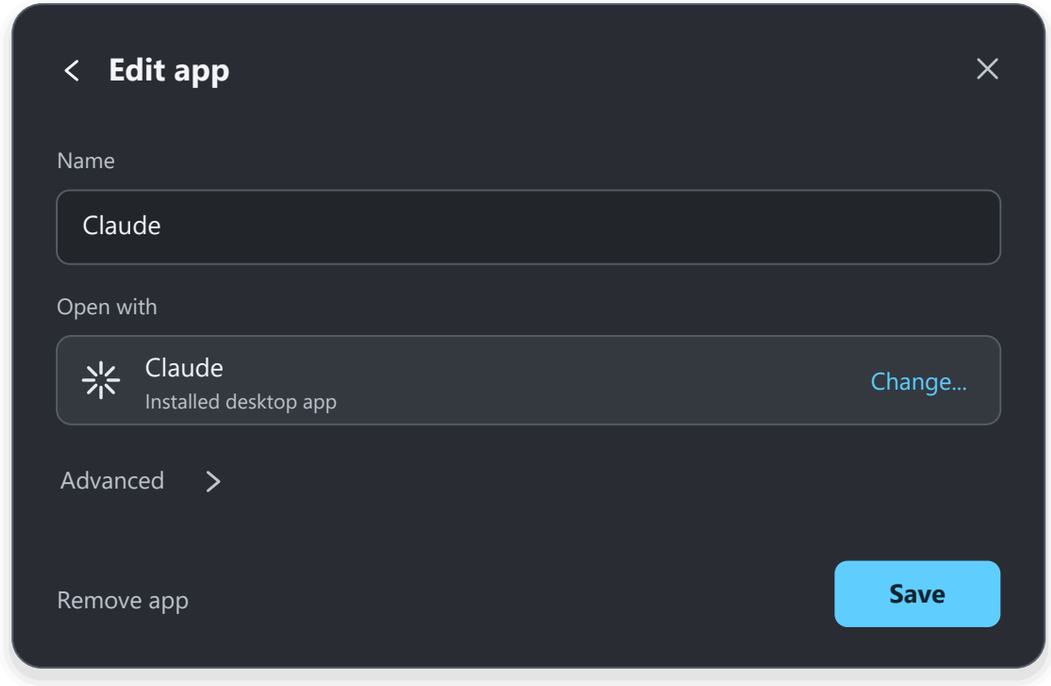

APPS


Show familiar names and original application icons. Add, reorder, and remove are contextual actions.

APP DETAILS


Change opens an installed-app or file picker. Arguments, working directory, and AUMID details are advanced fields.

Follow Windows without duplicating its controls.

The material policy and application language are separate decisions.

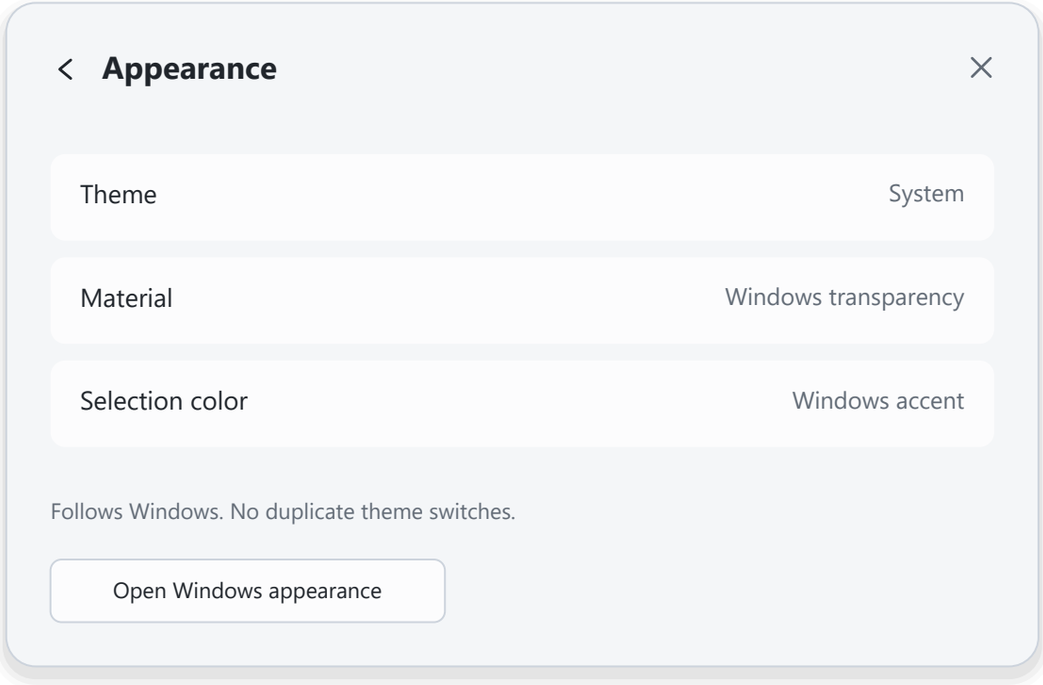


Light/dark controls the neutral surface. Transparency controls frost versus solid. Accent is reserved for selection.

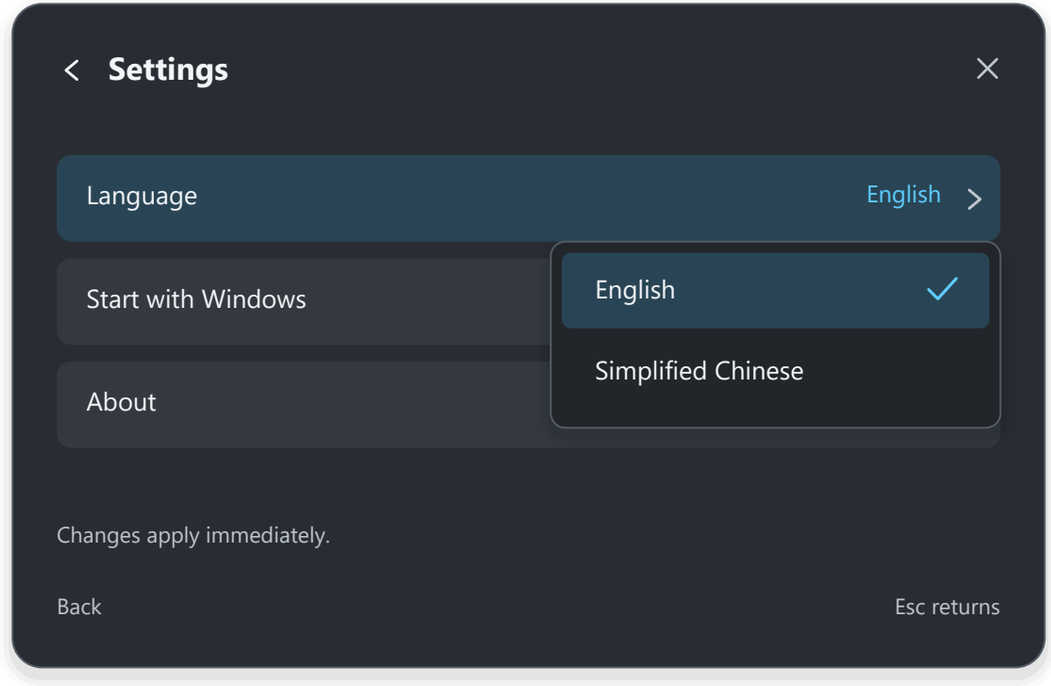

A small anchored language menu replaces an always-visible configuration field. Selection is persisted independently of app targets.

Keep the circle. Move only what must move.

Preserve every slot, angle, radius, and icon size. Shift the complete reel only enough to fit.

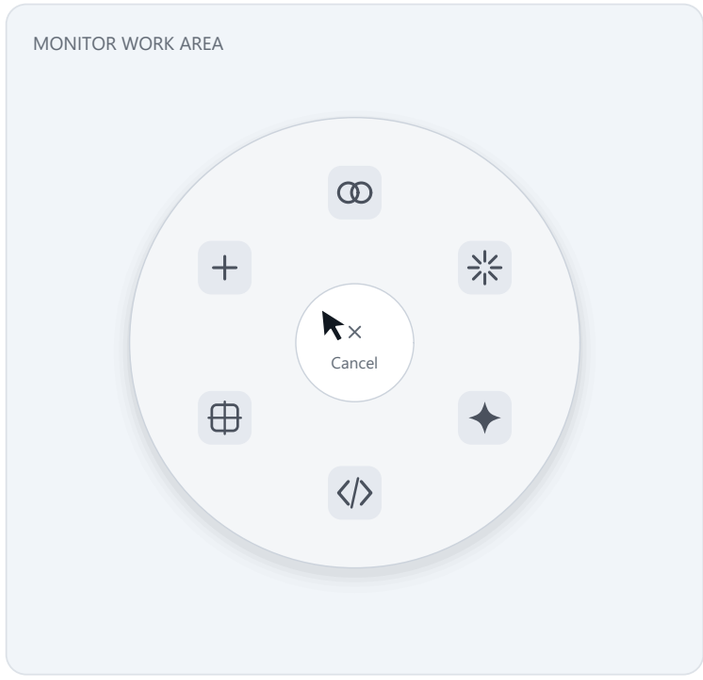


Interior

Open around the pointer.



Screen edge

Shift the whole circle inward.

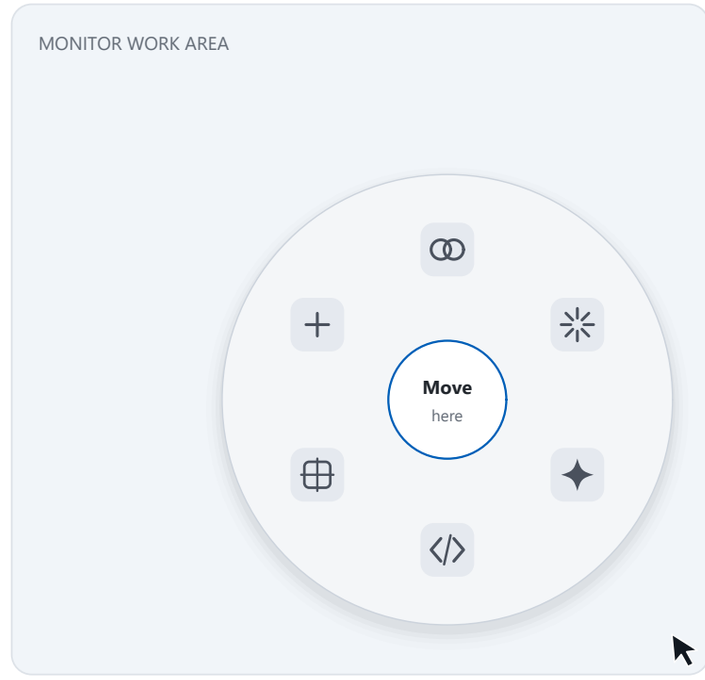

Screen corner

Shift the same circle on both axes.

If the pointer starts outside the relocated center zone, keep every item unselected until the pointer enters that zone. Releasing before entry cancels. No timer silently changes the hit-test origin.

One visual system across the reel and OSD.

All sizes are proposal values in DIP. They are not official Windows radial-menu specifications.



Copilot Reel

Segoe UI Variable

14 DIP body / 12 DIP hints / 17 DIP panel title


Surface	Text	Accent	Selected
#F4F6F8	#20252B	#005FB8	#DEECFA

Use the Windows accent at runtime. Preserve original app icons. The symbols in this study are illustrative placeholders.

Reel diameter	**336**
Cancel diameter	**88**
App icon	**40**
OSD panel	**560 × 360**
Outer radius	**16**
Control radius	**6-10**
Row height	**47**
Content inset	**24**

Cache content. Animate properties.

Native vector geometry and DirectWrite text remain independent of optional optical effects.

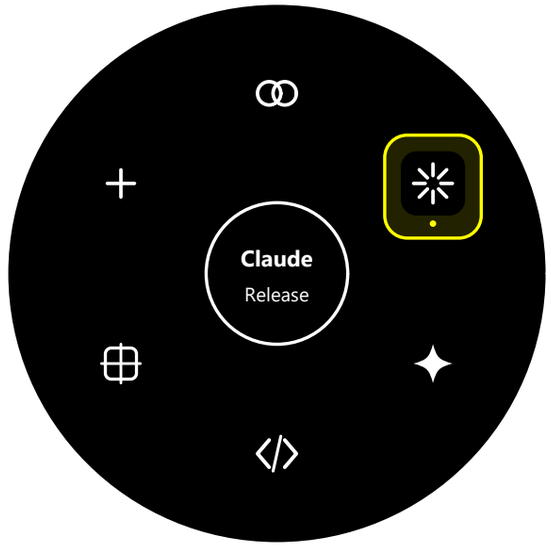

High-contrast illustration

Use actual Windows system colors.

MATERIAL POLICY

Respect the user setting

High contrast takes priority. Transparency off uses an opaque neutral surface. Transparency on enables frost only when the platform can supply it.

TIMING

Short and interruptible

Reel appearance: 100 ms. Selection: 80 ms. OSD page transition: 120 ms maximum. Reduced motion applies the final state immediately.

RENDERING

No animation image sequence

Reuse geometry, text layouts, and icons. Let the compositor animate opacity and transforms. Stop work while hidden; rebuild only affected resources.

A design extension, with explicit implementation boundaries.

The native reel prototype exists. These OSD screens and edge adaptations are the next UI specification.

Implemented prototype

Native Soft Orbit rendering; Windows appearance events; app launching and configuration; signed Copilot provider registration. Settings recognition has been verified on the development machine.

Specified in this revision

OSD quick menu; second-level Settings; app task sheets; compact language selection; stable full-circle edge placement with an explicit center-entry guard. These are specifications, not completed native screens.

Windows materials

learn.microsoft.com/en-us/windows/apps/design/signature-experiences/materials

Windows motion

learn.microsoft.com/en-us/windows/apps/design/signature-experiences/motion

Windows geometry

learn.microsoft.com/en-us/windows/apps/design/signature-experiences/geometry

Windows theme support

learn.microsoft.com/en-us/windows/apps/desktop/modernize/ui/apply-windows-themes

Windows typography

learn.microsoft.com/en-us/windows/apps/design/signature-experiences/typography

Apple materials

developer.apple.com/design/human-interface-guidelines/materials

Review date: 2026-10-19. Native UI supports English and Simplified Chinese; all development specifications use English.

Preserve the layout. Be explicit about the pointer.

Research favors a complete radial layout; the input-origin policy is a separate design decision.

Kando + Fly-Pie

Whole-menu repositioning

Both clamp the complete radial menu inside the display. Their implementations can move the system pointer by the same offset. This aligns the visible and logical centers, but the pointer moves.

Blender

Recenter timeout

Blender keeps the complete pie inside the window. A temporary original-center phase supports quick gestures before using the relocated center. A time-driven center change needs care for release-to-launch.

Maya

Direction memory

Autodesk documents fast selection through familiar item positions. This supports stable slots. It does not establish a specific screen-edge algorithm, so none is attributed here.

What we adopt

The full circle stays intact and receives the smallest translation needed to fit the current monitor work area. No half-circle, fan, rotation, or per-item radius change.

What we change


Default to no cursor warping. When needed, explicitly wait for center entry before arming direction selection. This guard is our proposal, not a claimed Kando or Blender feature.

References: kando.menu/config-files/#warpmouse | github.com/Schneegans/Fly-Pie

Blender Manual: Interface / Pie Menus / Recenter Timeout | Autodesk Maya: Marking Menus


No surprise selection after repositioning.

Only require center entry when the initial pointer falls outside the relocated cancellation zone.

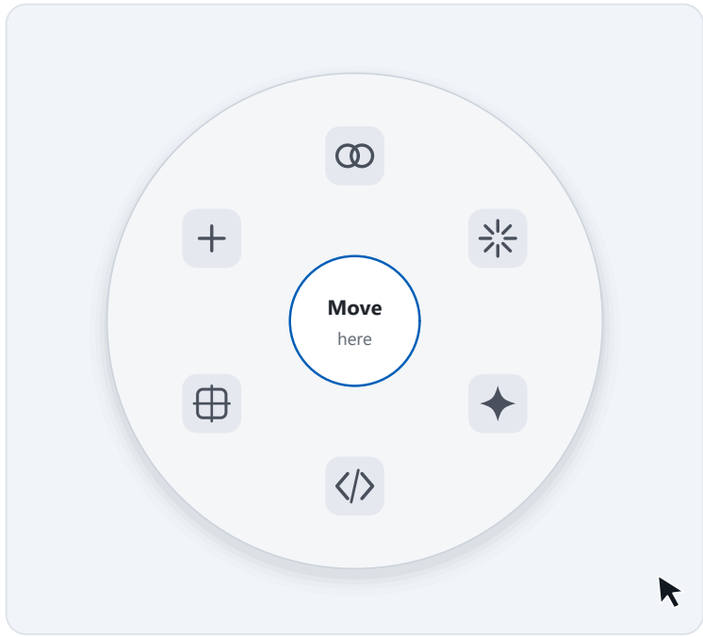


Await center

Release cancels. Nothing is selected.

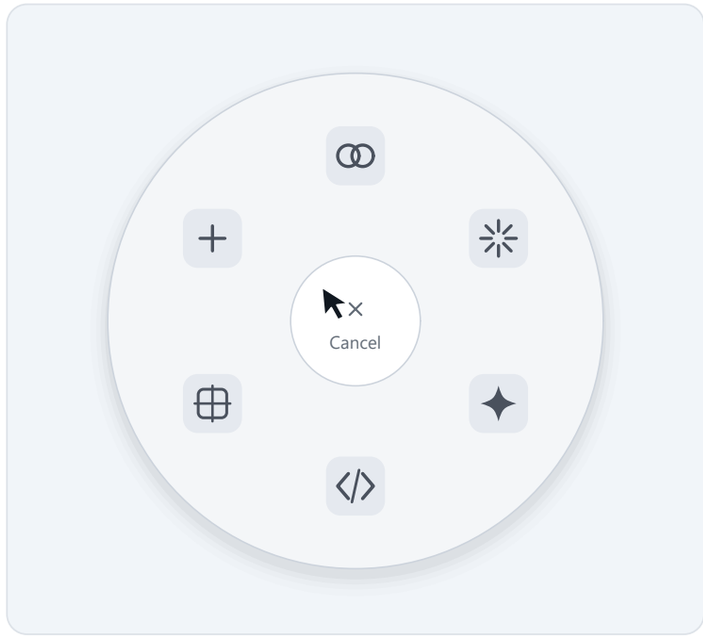

Armed at center

The center is still a cancellation zone.

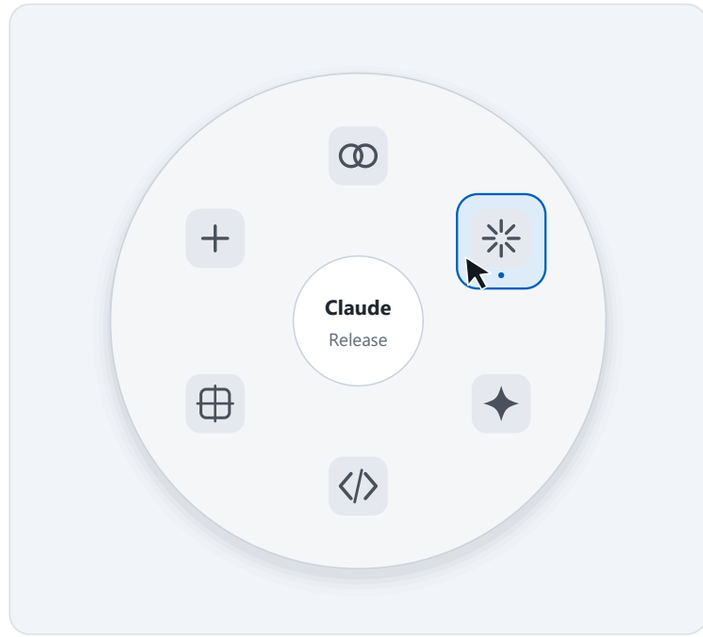

Choose a direction

Release opens the chosen application.

Trade-off: at a physical edge or corner, the user first moves inward to the center, then toward the target. This is more predictable than an invisible origin switch, but slower than a single blind flick.

Optional pointer recentering remains a separately disclosed alternative. This revision changes the specification only.