
Soft Orbit. One visual language.

Copilot Reel visual identity v0.5 - shared vector symbols and implemented OSD navigation.



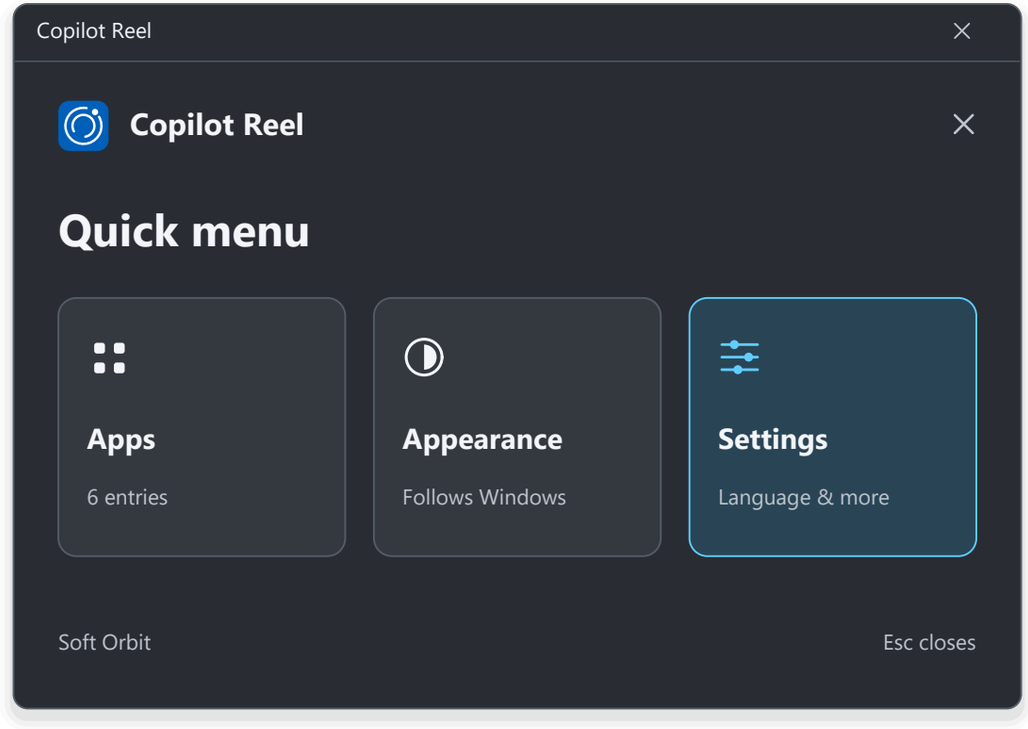

Hold to launch. Open the menu to configure.


Vector masters + bitmap previews. These scenes document v0.2.0; native Windows control details may vary.

NAVIGATION MODEL


Two levels. One clear way back.

The primary menu contains entry points. Language and preferences live one level deeper.

LEVEL 1 / QUICK MENU

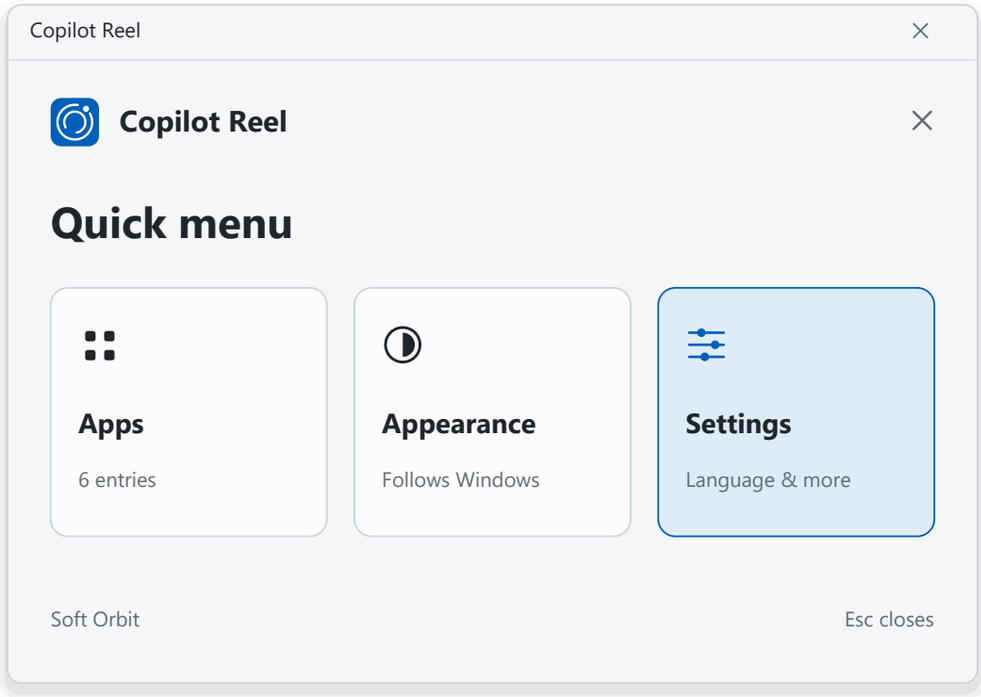

LEVEL 2 / SETTINGS

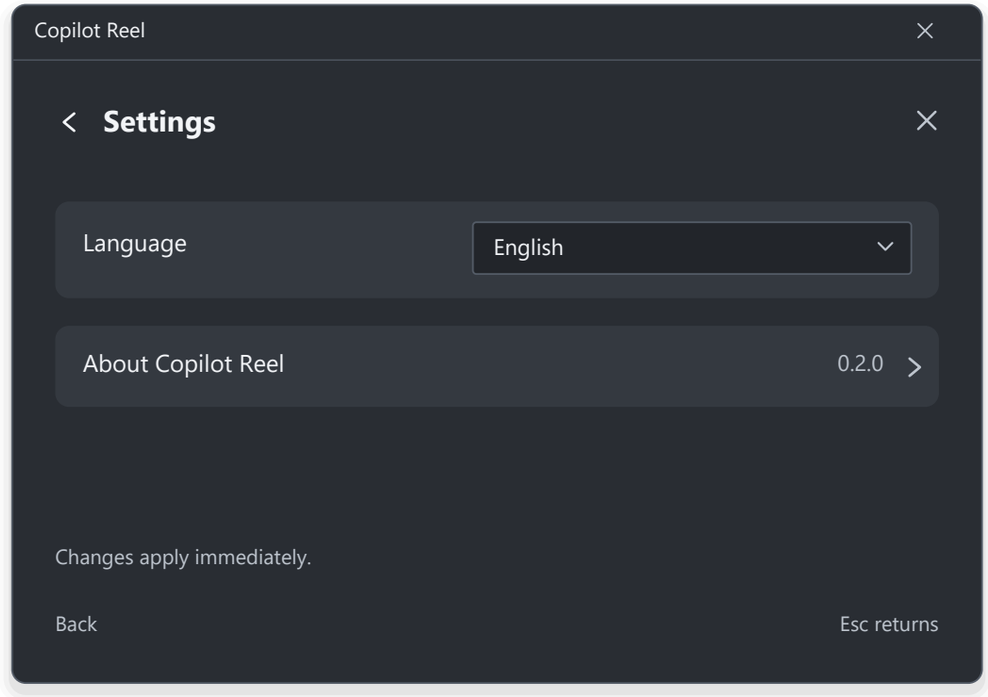

ENTRY

A deliberate settings action

Open the quick menu from the tray or --settings. A hold gesture never opens an editor.

RETURN


Back restores context

Back or Esc returns to the primary menu. Closing the OSD preserves the selected app and order.


PRIMARY PANEL

A compact control surface.

OSD hierarchy inside a native Windows caption; semantic controls preserve keyboard navigation.

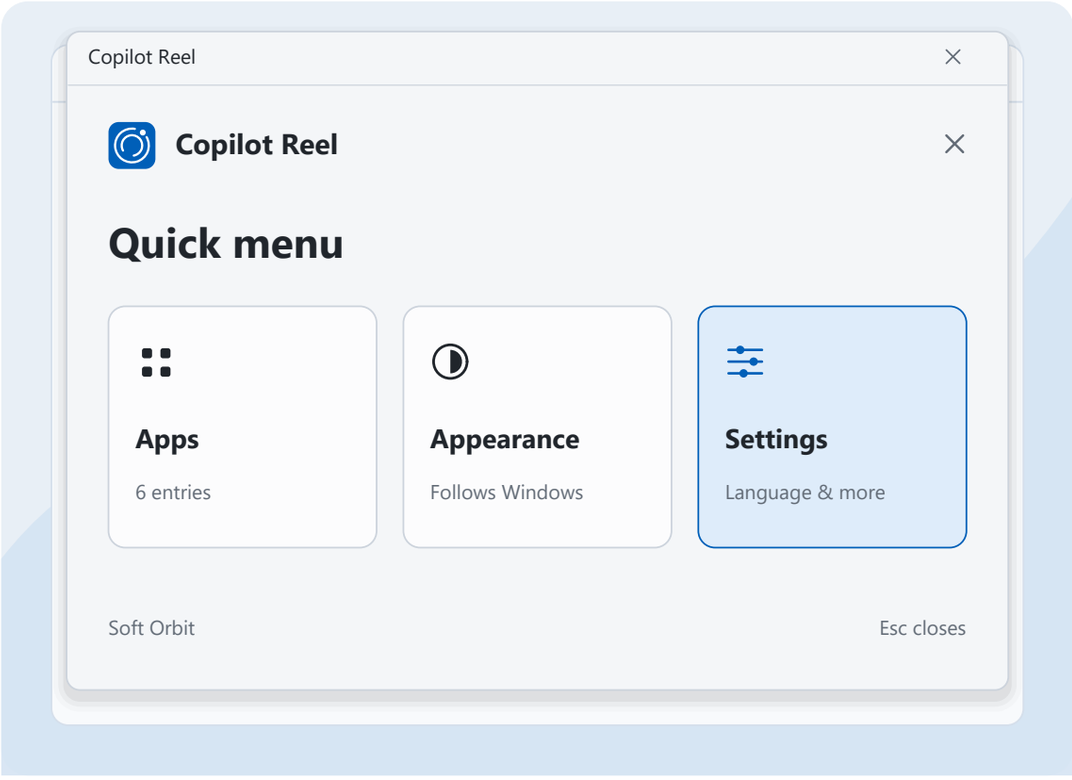

LIGHT

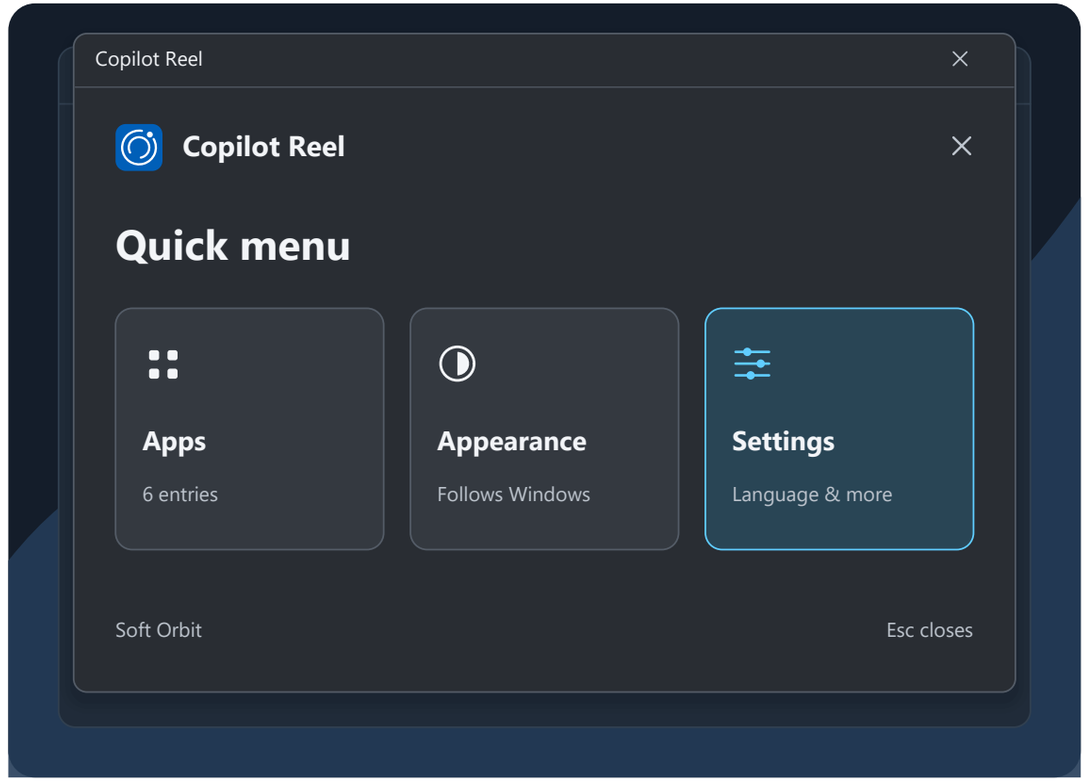


DARK

No permanent sidebar, full-window form, or technical launch fields on the home screen.

SECONDARY SETTINGS

Preferences belong behind an entry point.

English is the default. Language changes are immediate and remain local to the application.

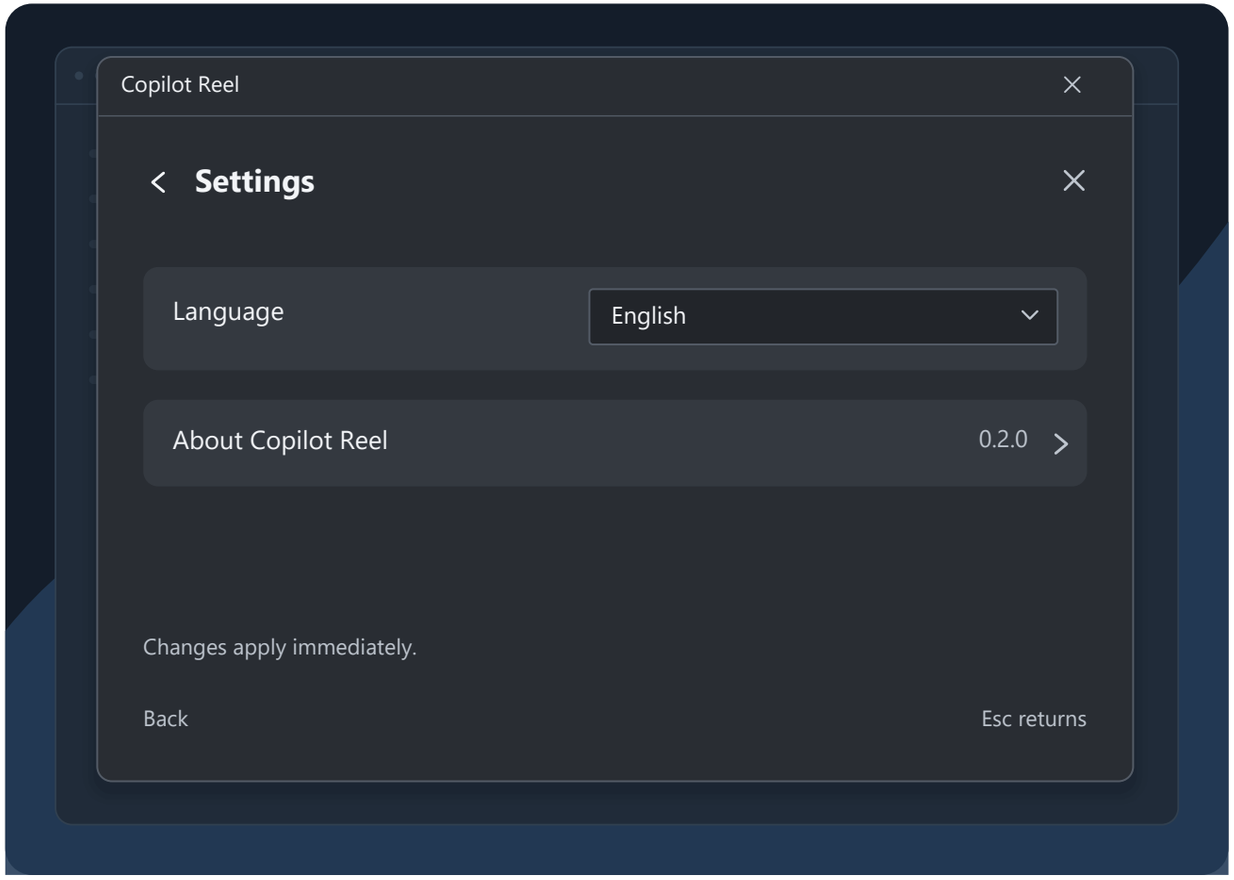

LANGUAGE

English / Simplified Chinese

Use one native selection control. Update the OSD, tray, wheel hints, and dialogs together; never rename user-defined apps.

SCOPE


Small, stable settings


Language and About live here. Per-app targets stay in the Apps workflow. This release has no autostart preference.

The language combo is a native control. About identifies application version 0.2.0.

Choose an app first. Edit only what matters.

Name and target stay together; Advanced opens a separate compact sheet with the same draft.

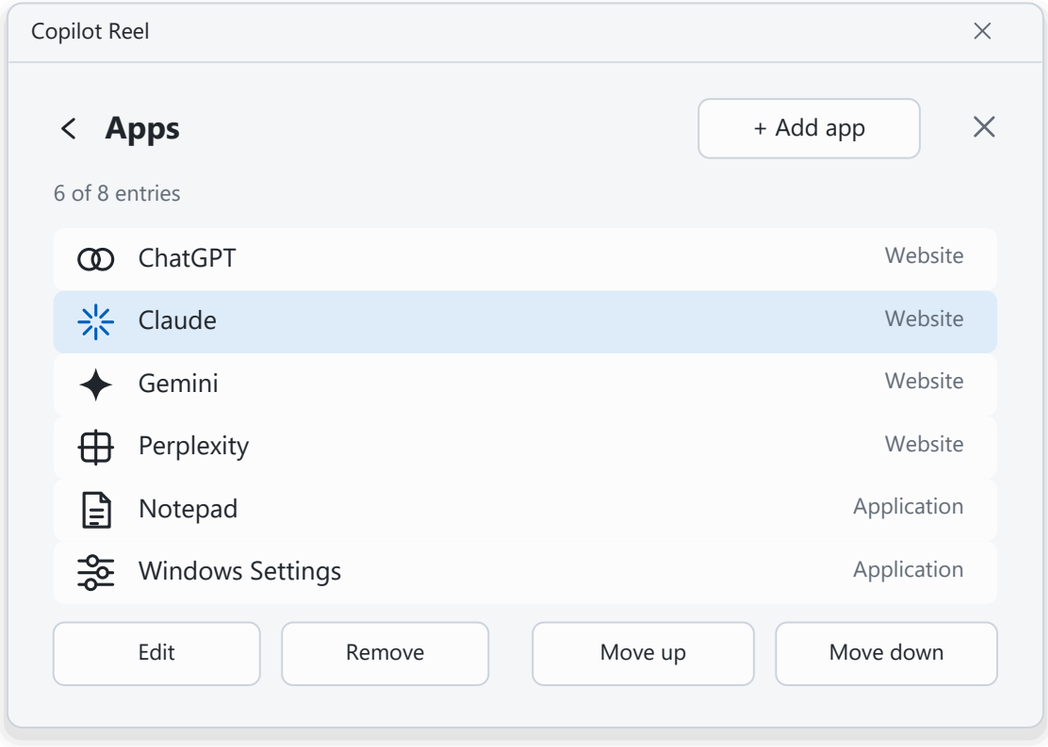

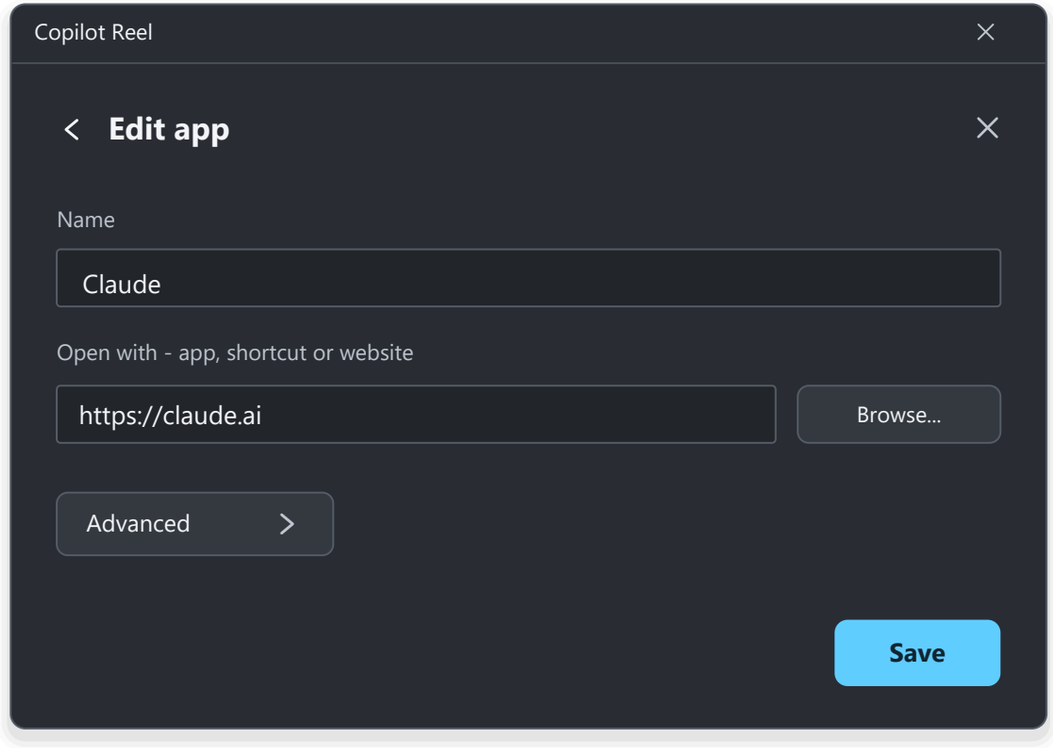

APPS


Shared monochrome symbols retain familiar app identities. The native list and buttons support add, edit, reorder, and remove.

APP DETAILS


Browse chooses an executable or shortcut. Advanced holds launch method, arguments, and working directory; Back preserves the draft.

Follow Windows without duplicating its controls.

The material policy and application language are separate decisions.

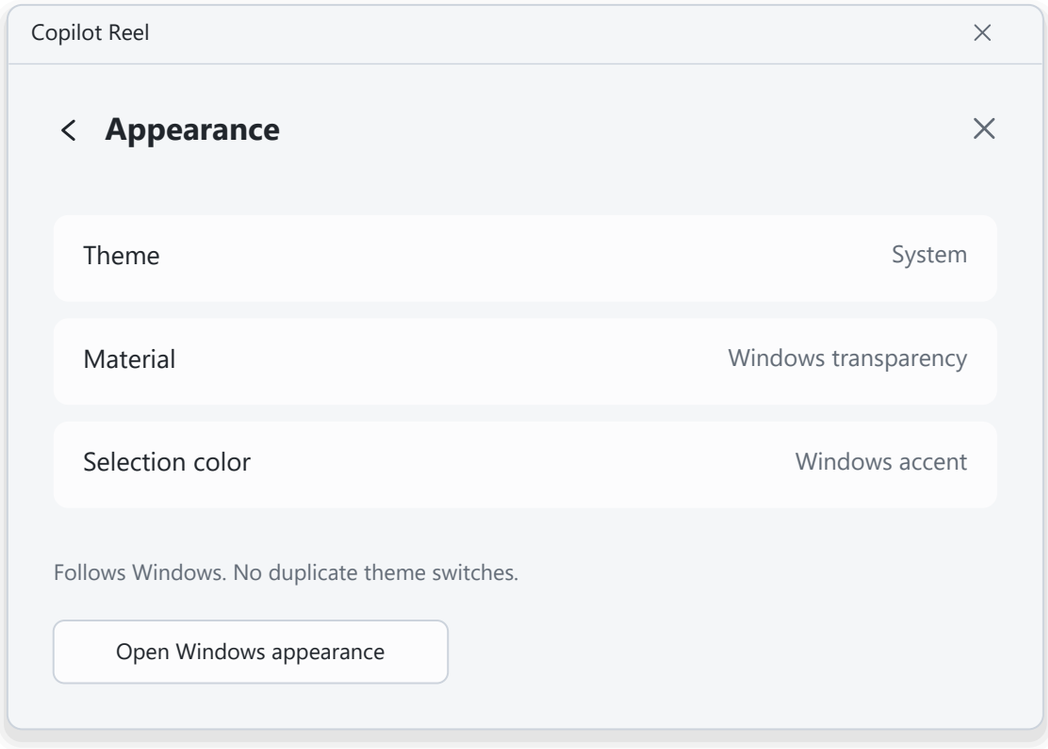


Light/dark controls the neutral surface. Transparency controls frost versus solid. Accent is reserved for selection.

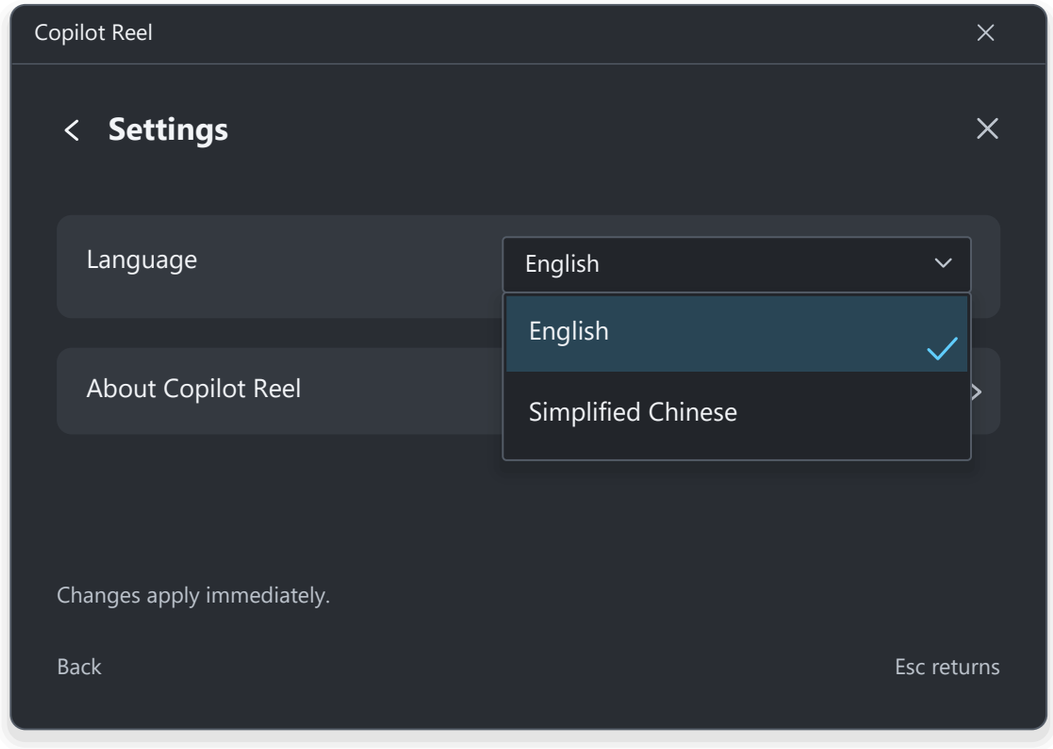

The native language combo lives inside Settings. Preference storage is independent of app targets; app names remain user data.

Keep the circle. Move only what must move.

Preserve every slot, angle, radius, and icon size. Shift the complete reel only enough to fit.

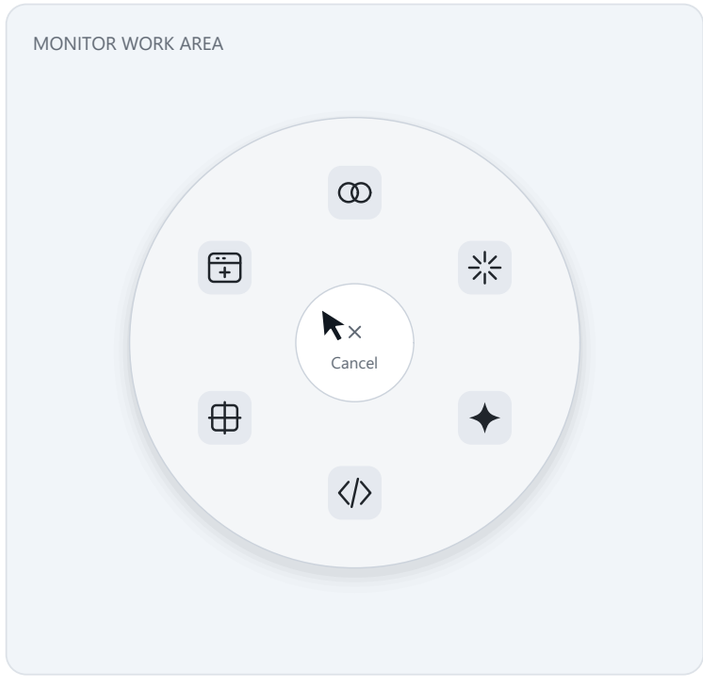


Interior

Open around the pointer.



Screen edge

Shift the whole circle inward.

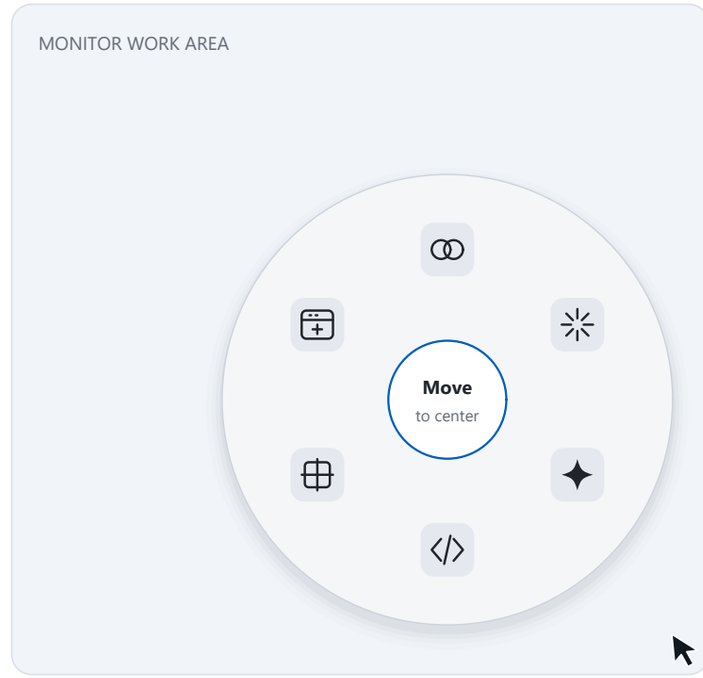

Screen corner

Shift the same circle on both axes.

If the pointer starts outside the relocated center zone, keep every item unselected until the pointer enters that zone. Releasing before entry cancels. No timer silently changes the hit-test origin.

One visual system across the reel and OSD.

Project geometry in DIP, shared with native rendering. These are not Windows radial-menu specifications.



Copilot Reel

Segoe UI Variable

14 DIP body / 12 DIP hints / 17 DIP panel title


Surface	Text	Accent	Selected
#F4F6F8	#20252B	#005FB8	#DEECFA

Every app uses native vector artwork: matching line weight, optical size, and neutral tile. Selection uses the Windows accent; unknown targets use an app-window symbol.

Reel diameter	**336**
Cancel diameter	**88**
Icon tile / symbol	**40 / 28**
Symbol stroke	**1.75**
OSD client area	**560 x 360**
Outer frame	**Native**
Row height	**47**
Content inset	**24**

Cache content. Animate properties.

Native vector geometry and DirectWrite text remain independent of optional optical effects.

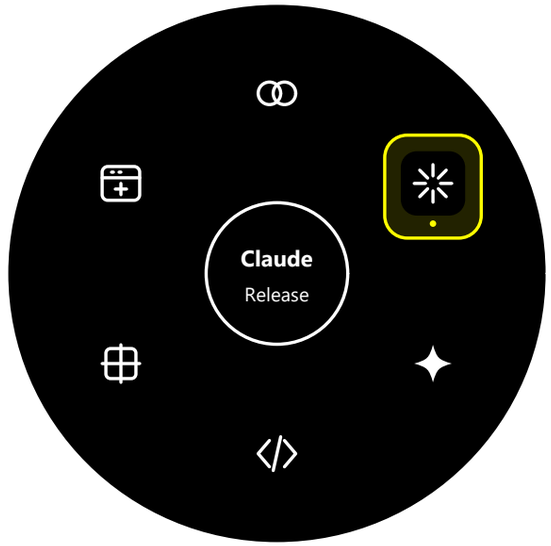

High-contrast illustration

Use actual Windows system colors.

MATERIAL POLICY

Respect the user setting

High contrast takes priority. Transparency off uses an opaque neutral surface. Transparency on enables frost only when the platform can supply it.

TIMING

Short and interruptible

Implemented: 100 ms reel appearance; immediate selection and OSD page changes. Reduced motion applies the final state. Future transitions must remain short.

RENDERING

No animation image sequence

Reuse device resources, text formats, and surfaces. Redraw vector content only on state changes; animate compositor properties and stop hidden work.

Implemented UI, with explicit validation boundaries.

Application v0.2.0 now shares one symbol system across the reel and OSD.

Implemented in v0.2.0

Shared vector symbols; OSD home and secondary pages; native semantic controls; focused editor and Advanced sheet; whole-circle clamping and center-entry guard; scrollable OSD fallback for small work areas.

Validation remains explicit

Eight edge/corner positions passed automated checks on the current monitor. Language regression, mixed DPI, physical-key timing, native blur, and high-refresh performance require their own evidence. See docs/validation.md.

Windows materials

learn.microsoft.com/en-us/windows/apps/design/signature-experiences/materials

Windows motion

learn.microsoft.com/en-us/windows/apps/design/signature-experiences/motion

Windows geometry

learn.microsoft.com/en-us/windows/apps/design/signature-experiences/geometry

Windows theme support

learn.microsoft.com/en-us/windows/apps/desktop/modernize/ui/apply-windows-themes

Windows typography

learn.microsoft.com/en-us/windows/apps/design/signature-experiences/typography

Apple materials

developer.apple.com/design/human-interface-guidelines/materials

Review date: 2026-10-19. Native UI supports English and Simplified Chinese; all development specifications use English.

Preserve the layout. Be explicit about the pointer.

Research favors a complete radial layout; the input-origin policy is a separate design decision.

Kando + Fly-Pie

Whole-menu repositioning

Both clamp the complete radial menu inside the display. Their implementations can move the system pointer by the same offset. This aligns the visible and logical centers, but the pointer moves.

Blender

Recenter timeout

Blender keeps the complete pie inside the window. A temporary original-center phase supports quick gestures before using the relocated center. A time-driven center change needs care for release-to-launch.

Maya

Direction memory

Autodesk documents fast selection through familiar item positions. This supports stable slots. It does not establish a specific screen-edge algorithm, so none is attributed here.

What we adopt

The full circle stays intact and receives the smallest translation needed to fit the current monitor work area. No half-circle, fan, rotation, or per-item radius change.

What we change


Do not warp the cursor. When needed, explicitly wait for center entry before arming selection. This is our implemented policy, not a claimed Kando or Blender feature.

References: kando.menu/config-files/#warpmouse | github.com/Schneegans/Fly-Pie

Blender Manual: Interface / Pie Menus / Recenter Timeout | Autodesk Maya: Marking Menus


No surprise selection after repositioning.

Only require center entry when the initial pointer falls outside the relocated cancellation zone.

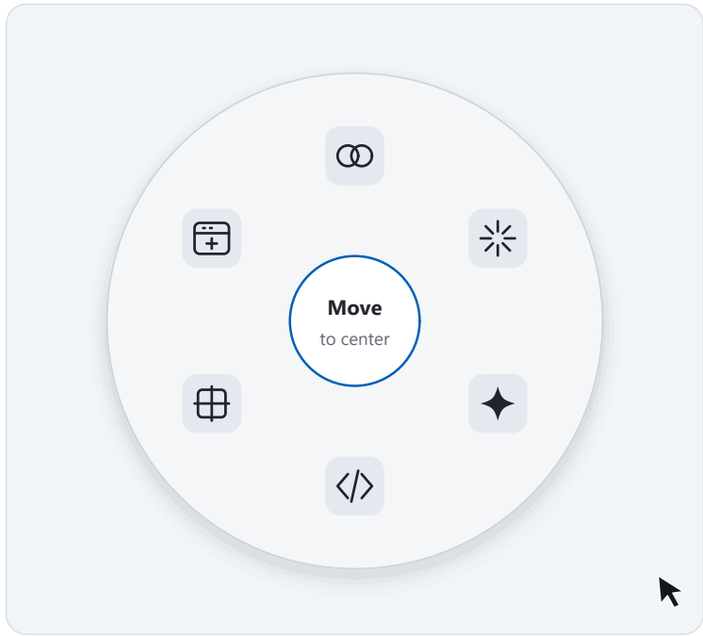


Await center

Release cancels. Nothing is selected.

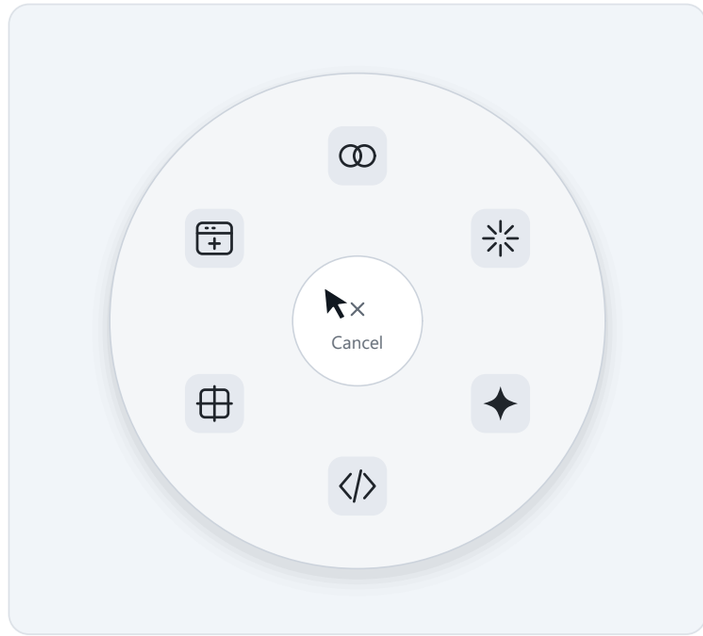

Armed at center

The center is still a cancellation zone.

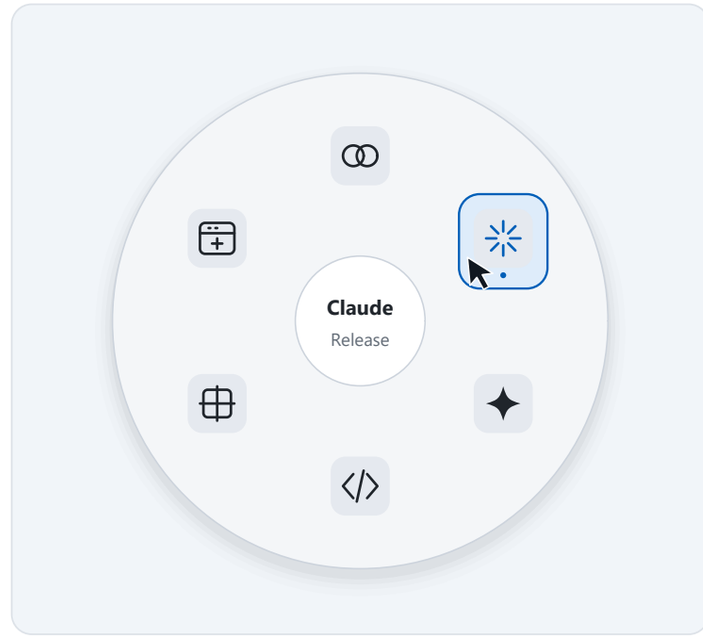

Choose a direction

Release opens the chosen application.

Trade-off: at a physical edge or corner, the user first moves inward to the center, then toward the target. This is more predictable than an invisible origin switch, but slower than a single blind flick.

The pointer stays untouched. A work area too small for the reel opens the native OSD with overflow scrollbars.