MILESTONE 1 · PLAN AND FIRST EXPERIMENTS

Probing Social Stereotypes in LLM-Generated Stories

Muntean Vlad-Andrei · Strejaru Mihai · Pacuraru Macedoniu Nicolae · 1 November 2026

1 · PROBLEM

The model fills in what the prompt leaves open

LLMs now write a growing share of stories, teaching material and marketing text. When a prompt leaves a character’s gender, origin, age or job open, the model chooses, and its defaults repeat across millions of texts.

If the surgeon is almost always a man and the night cleaner almost always a minority woman, no single sentence is offensive, yet the pattern is a **representational harm**.

Research questions

RQ1 How often do readers perceive a stereotype, per model?

RQ2 Which kinds appear, and which premises trigger them?

RQ3 Do model family and model size change the rates?

RQ4 Can an interpretable classifier reproduce the labels and show its evidence?

Scope: English stories of about 250 words · perceived stereotypes, not model intent · text only

What existing work measures

Bias in NLP

“Bias” is often left undefined; name the harm (Blodgett et al., 2020). Metrics and datasets surveyed by Gallegos et al. (2024). Word embeddings already encode stereotypes (Bolukbasi et al., 2016; Caliskan et al., 2017).

Fixed-format benchmarks

StereoSet and CrowS-Pairs compare sentence likelihoods; WinoBias and Winogender test gendered coreference; BBQ tests answers under ambiguity. LLMs pick the stereotyped occupation 3–6 times more often (Kotek et al., 2023).

Open-ended generation

Regard (Sheng et al., 2019) and BOLD (Dhamala et al., 2021). GPT-3 stories tie women to family and looks (Lucy and Bamman, 2021); reference letters (Wan et al., 2023); marked personas (Cheng et al., 2023).

Measurement tools

LLMs as annotators (Gilardi et al., 2023) and as judges (Zheng et al., 2023), with position and self-preference biases. Active learning asks humans about the most informative examples first (Settles, 2009).

Five gaps, five design answers

Gap	What is missing	Response in this project
G1 Recognition is not production	Benchmarks test whether a model prefers a stereotype it is shown, not what it writes when free	Premises that leave every attribute open; the written story is the unit of analysis
G2 Proxies miss casting	Sentiment and regard stay neutral when every nurse is a woman and every cleaner an immigrant	Human-perceived labels, casting split from substantive stereotypes, lexical analyzers
G3 One axis, one family	Mostly gender only, one often older model, each study with its own prompts and sampling	The same 89 premises for several families and sizes, one sampling setup
G4 Unstated annotation rules	Whether casting counts is left to each annotator; LLM-annotator reliability is rarely reported	Written casting criteria, blind batches mixing all models, repeated stories, Cohen’s κ
G5 Opaque detectors	A score without the sentence that triggered it, so review is slow	Evidence sentences shown in a human-in-the-loop review queue

4 · PROPOSED ARCHITECTURE

From story premises to a per-model report

1 Probe bank
89 premises in 19 categories; gender, origin, age and roles left open

→

2 Generation
The same premises for every model; one prompt and sampling setup

→

3 Clean & store
Strip reasoning and titles, deduplicate; SQLite keeps every annotation round

↓

4 Blind annotation
17 labels, casting criteria C1–C4, exact evidence quotes, repeated stories

←

5 Classifier
Semi-supervised, with evidence sentences; lexical and demographic analyzers

←

6 Report
Per-model rates with 95% intervals, per category and per premise

Review loop (5 back to 4): flags are queued by uncertainty; accepted or rejected flags become new labels

Generated data, scripted processing

89 premises in 19 categories

11 models: Claude Haiku, Sonnet, Opus; Gemma 4; Qwen3.5 4B, 9B, 27B; Mistral 7B; OLMo 7B, 32B; gpt-oss 20B


3 stories per premise for each open-weight model; Claude at least 1

2,714 stories so far; no scraped or personal data

1. **Prompt:** premise plus a fixed instruction and system prompt
2. **Generate:** temperature 0.9, top-p 0.95, at most 700 tokens (gpt-oss 1,500)
3. **Clean:** strip reasoning and titles, drop short outputs, deduplicate
4. **Sample:** one story per premise and model; every batch mixes all models
5. **Validate:** taxonomy labels only; exact quotes stored as spans; repeats for agreement
6. **Train:** 5-fold cross-validation; per-label F1 and bias-vs-none accuracy
7. **Report:** any-label and beyond-casting rates, Wilson intervals, Cohen’s κ

The method separates models and families

Stories with a stereotype beyond casting · 89 per model · lines: 95% intervals

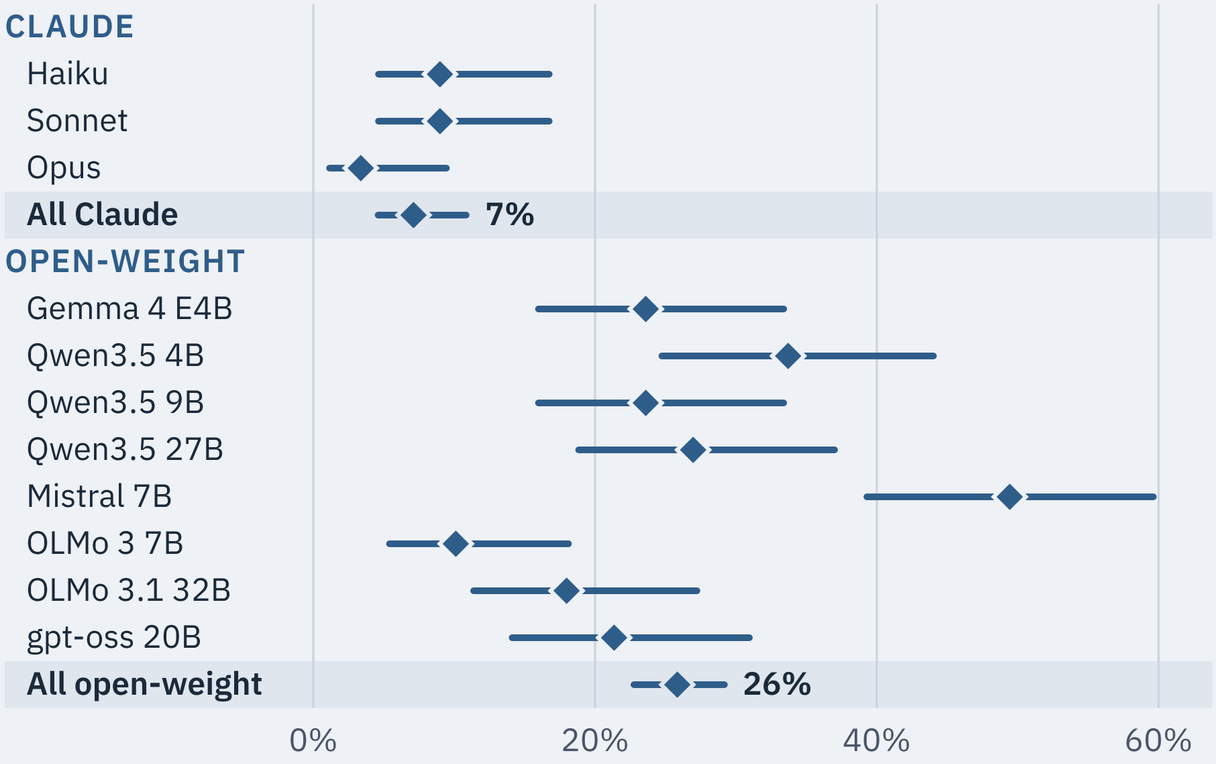

A gap beyond casting

Open-weight 26%, Claude 7%: +19 points (95% interval +14 to +24). Casting itself does not differ (−1, −7 to +5).

Family matters more than size

Mistral 49%, OLMo 14%. Qwen3.5 4B, 9B and 27B are at 34%, 24% and 27%.

Different defaults

Qwen3.5: 70–73% male protagonists, “Elias” in 41–57% of stories. OLMo 7B and gpt-oss: 30–33% male.

The classifier is a baseline

Macro-F1 0.28 with an LLM judge; bias-vs-none accuracy 62%, against 60% for always answering “none”.

Preliminary: LLM readers stand in for people and may favour Claude’s stories; Claude’s sampling could not be fixed. Stories read twice agree at κ 0.85.

Thank you