Administrating and Configuring Security in Power BI



Agenda

- User Authentication and Identity
- Power BI Tenant Administration
- Data Security
- Row Level Security
- Dynamic Row Level Security




Power BI Built on Azure Active Directory

- Azure AD manages identity in Microsoft cloud
 - Organization creates user accounts & groups in Azure AD
 - Users accounts and groups created in scope of tenant
 - Azure AD provides user authentication service
- Azure AD manages licensing and permissions
 - Provides users authorized access to Office 365
 - Provides users authorized access to SharePoint Online
 - Provides users authorized access to Dynamics 365
 - Provides users authorized access to Power BI



Azure AD User Accounts and Licensing


- User account created within scope of tenant
 - Office 365 admin create accounts and assigns licenses

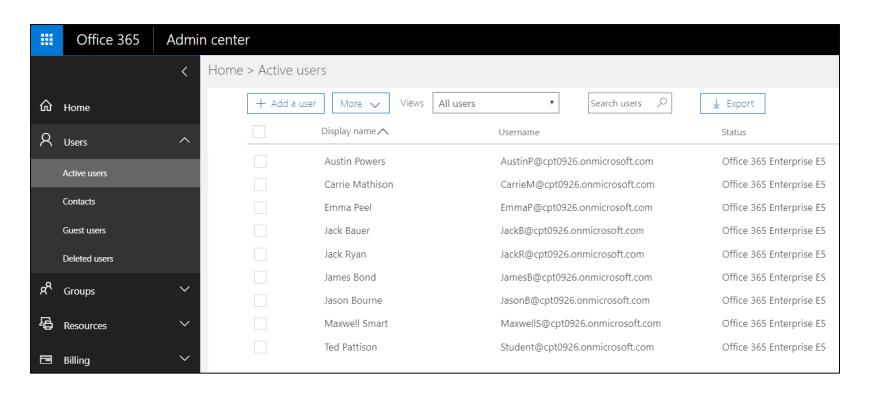



Multifactor Authentication

- Enabled through admin portal
 - Requires Office 365 or Azure AD Premium

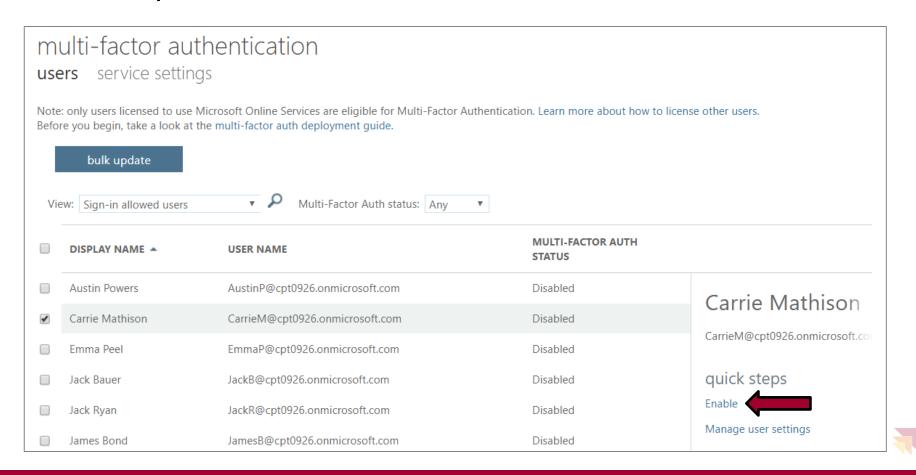


Agenda


- ✓ User Authentication and Identity
- Power BI Tenant Administration
- Data Security
- Row Level Security
- Dynamic Row Level Security



Power BI Admin Portal


- Power BI Admins control tenant-level settings
 - Control whether users can self-register for Power BI
 - Control who can publish to web
 - Control who can export & share content
 - Control who can create content packs




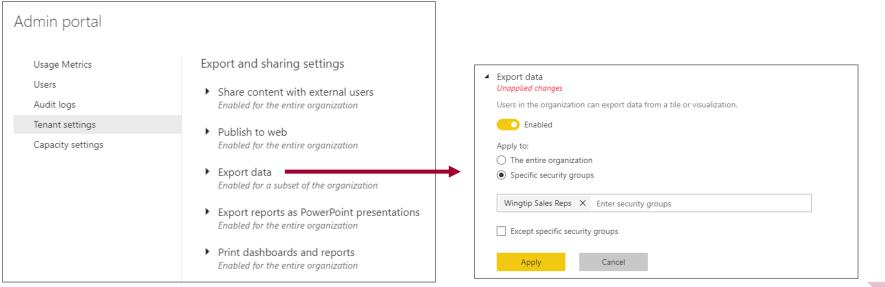



Power BI Audit Log

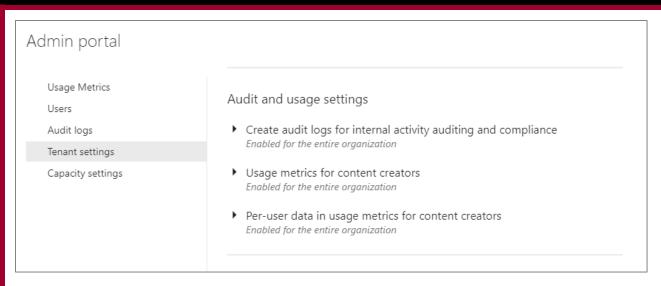

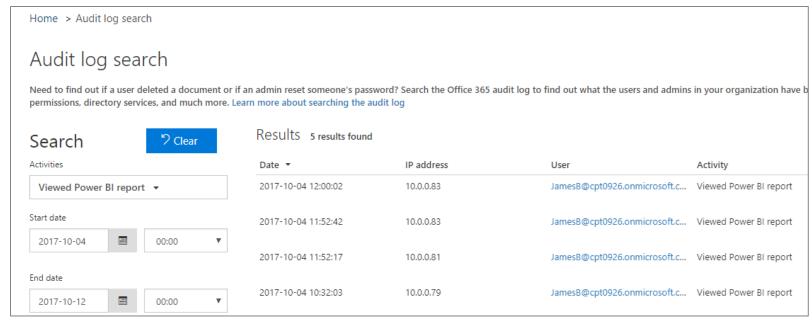




Agenda

- User Authentication and Identity
- ✓ Power BI Tenant Administration
- Data Security
- Row Level Security
- Dynamic Row Level Security



Types of Data

- Imported Data (aka ETL Data)
 - Data cached in Power BI and refreshed using saved credentials
- Live Connection or Direct Query
 - Data pulled into Power BI at query time using saved credentials
- Pushed Data
 - Data pushed into Power BI by external application

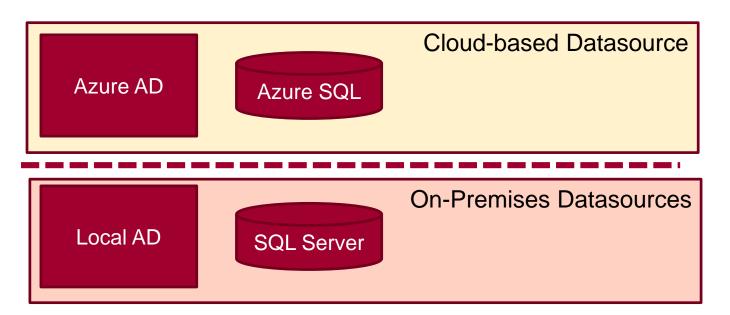



Power BI Data Encryption

- Data can be In Transit
 - Moving between data source, Power BI and client
 - Data is always encrypted using HTTPS or Azure Service Bus

- Data can be At Rest
 - Data stored in cloud-based storage
 - Data encrypted using internally managed encryption keys



Storage of Data At Rest

- What types of data must be stored at rest?
 - Data (i.e. Dataset)
 - Credentials
 - Metadata for report and dashboard layouts

Data source	Data	Metadata	Credentials
Imported Data	Azure Blob Storage	Azure Blob Storage	Azure SQL
Direct Query	Nothing	Azure Blob Storage	Azure SQL
Live Connection	Nothing	Azure Blob Storage	Azure SQL
Push Dataset	Azure SQL	Azure Blob Storage	N/A



Data Encryption

- Power BI uses encryption keys for blob storage
 - Keys stored in separate location from Power BI service
 - Fully managed by internal Microsoft service
- Azure SQL manages encryption internally
 - Power BI relies on Azure SQL TDE Technology
 - Used to encrypt credentials to cloud-based sources
- For credentials to access on-premises sources
 - Encryption key created in on-premises data gateway
 - Encryption key used to encrypt creds stored in cloud




Agenda

- User Authentication and Identity
- ✓ Power BI Tenant Administration
- ✓ Data Security
- Row Level Security
- Dynamic Row Level Security




What Is Row-level Security (RLS)

- Security Scheme based on Named Roles
 - Roles are defined using Power BI Desktop
 - Each role is scoped to the dataset within a PBIX project
- Role defined using one or more DAX expressions
 - DAX expressions restrict which rows are accessible

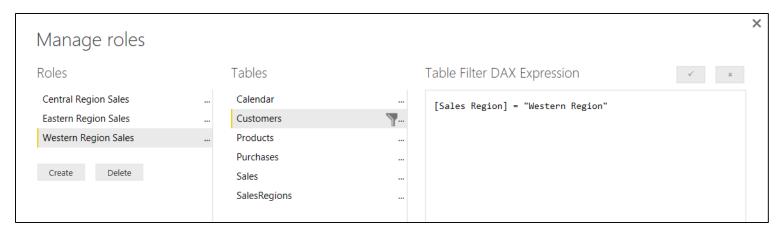




Common RLS Scenario

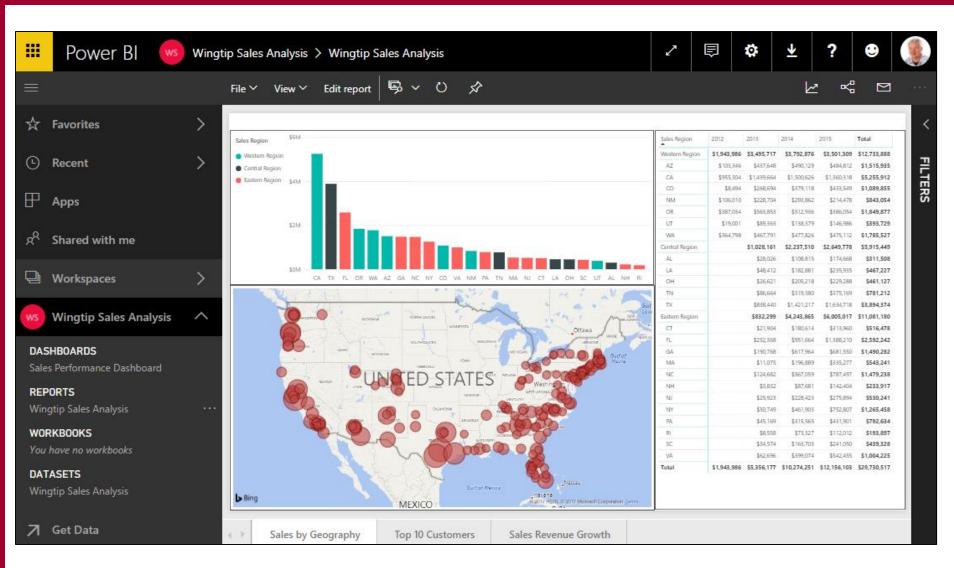





Configuring RLS in the Power BI Desktop

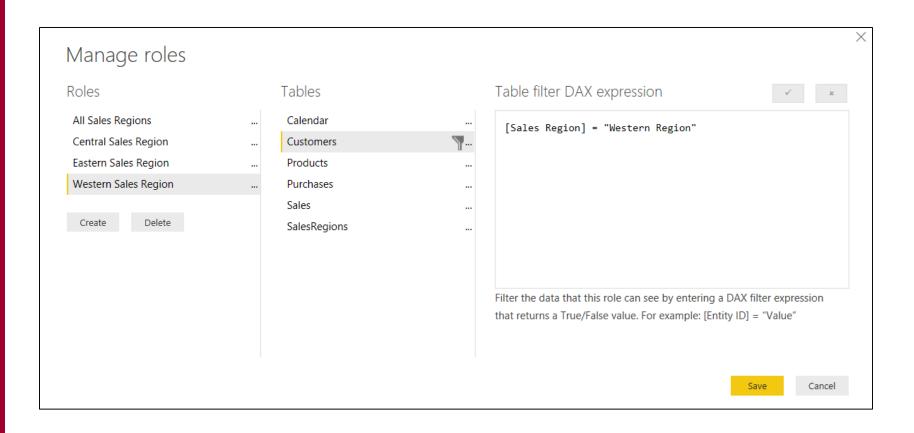




Configuring RLS in the Power BI Service

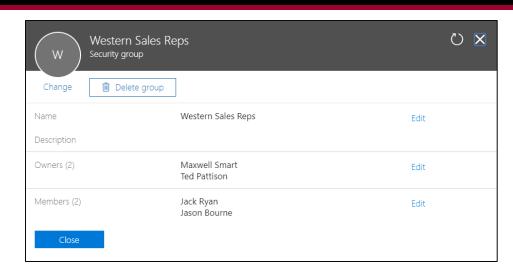

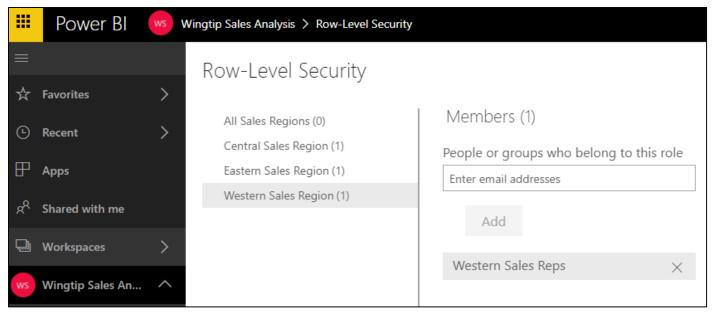



RLS Enforcement

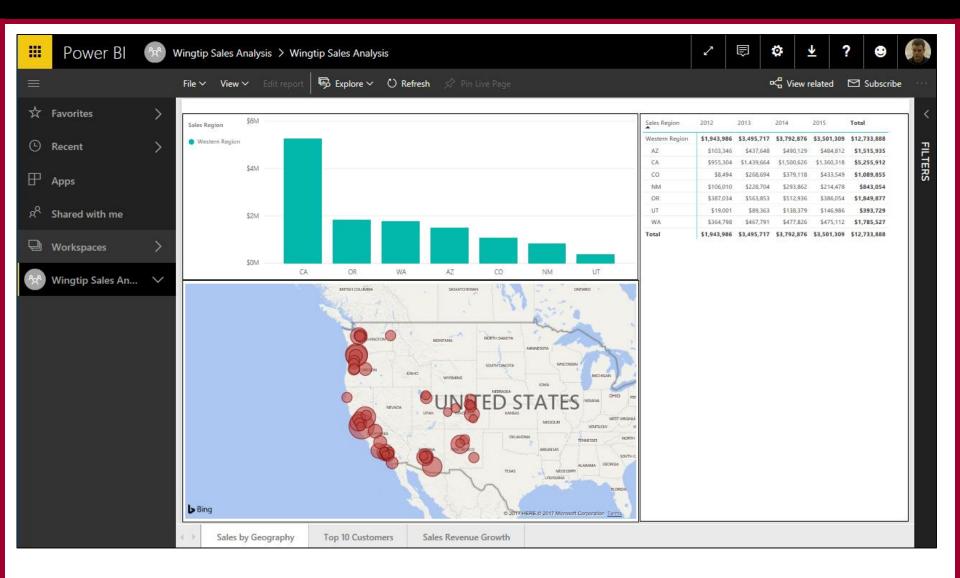






Agenda

- User Authentication and Identity
- ✓ Power BI Tenant Administration
- ✓ Data Security
- ✓ Row Level Security
- Dynamic Row Level Security




Dynamic RLS

- Design pattern for data-driven security
 - RLS set up to use login name of current user
 - Permission assignments are included as part of dataset
 - Implemented using bi-directional cross-filtering

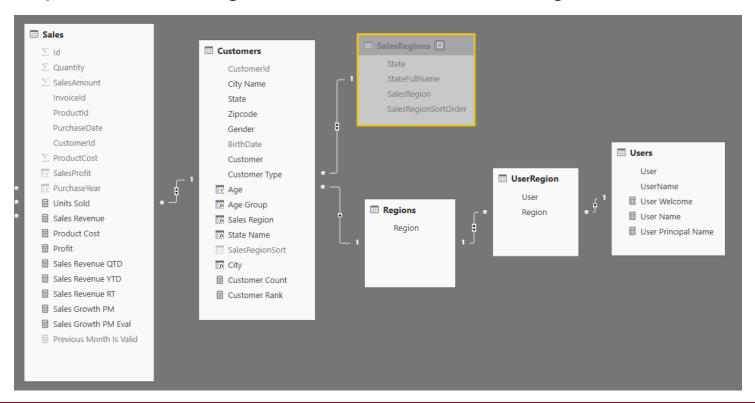




Configuring Cross-direction Filtering

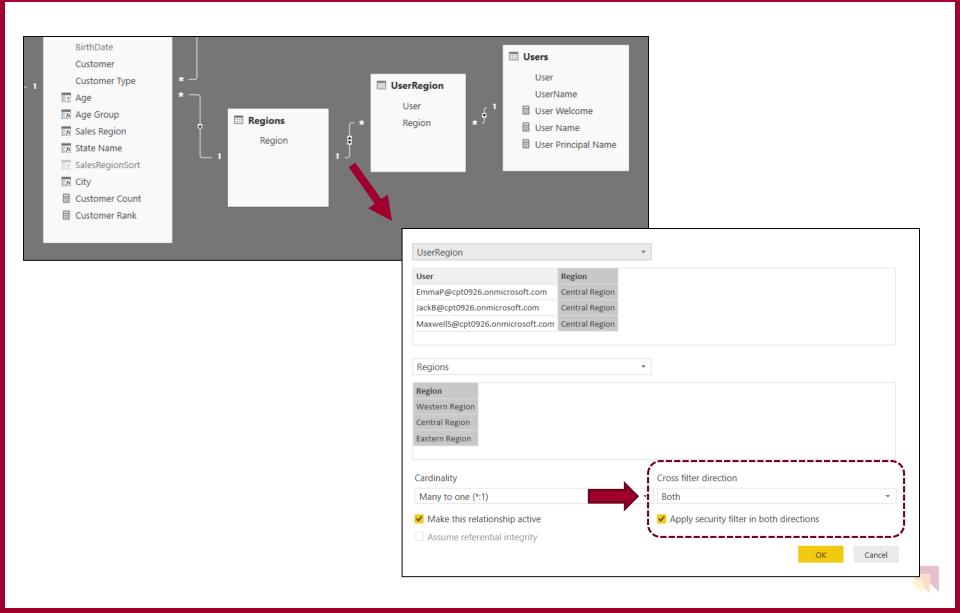


Dynamically Tracking the Current User

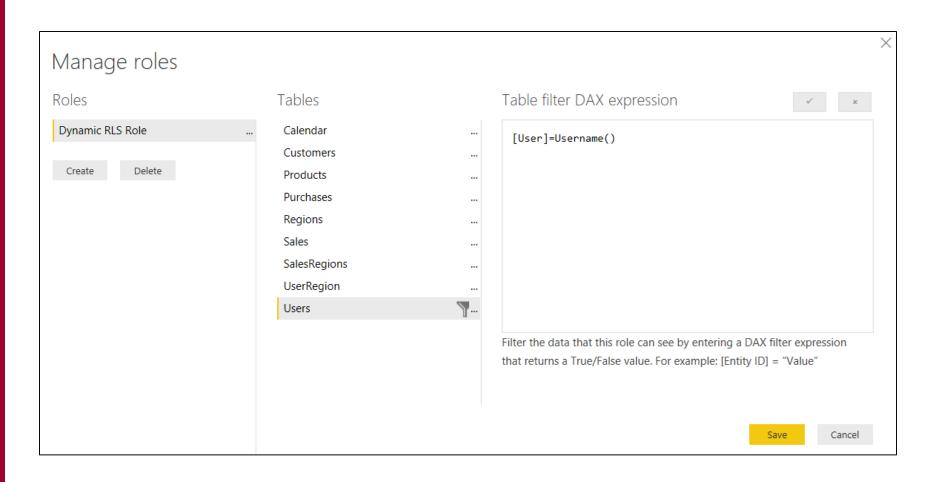





All Users Must Be Added To a Role

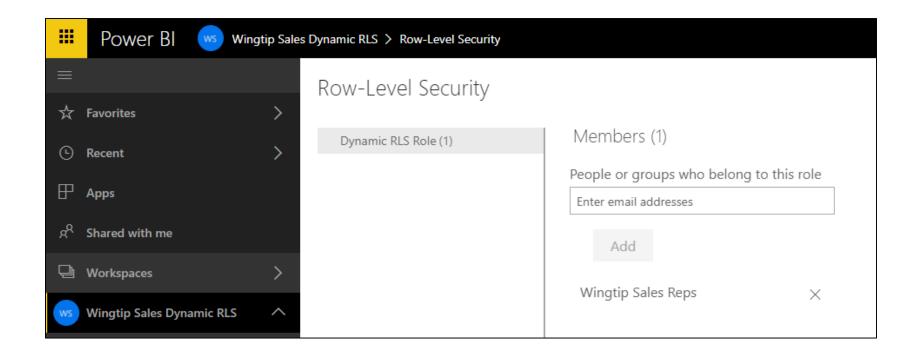




Dynamic RLS Table Filtering

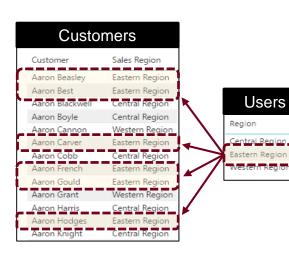




Western Region Student@cpt0926.onmicrosoft.com

UserRegion

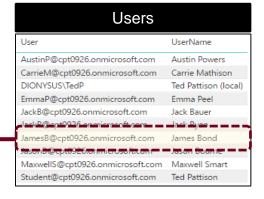



Dynamic RLS Enforcement

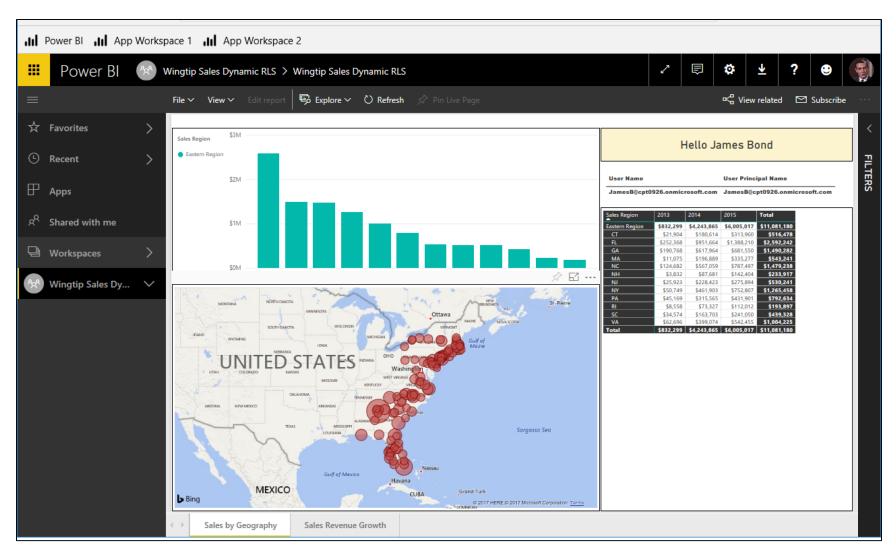





Summary

- User Authentication and Identity
- ✓ Power BI Tenant Administration
- ✓ Data Security
- ✓ Row Level Security
- ✓ Dynamic Row Level Security

