


Ethan Krul

ISIN 325

3/4/2026

SQL2

1. Display the count of the number of rows in a table.

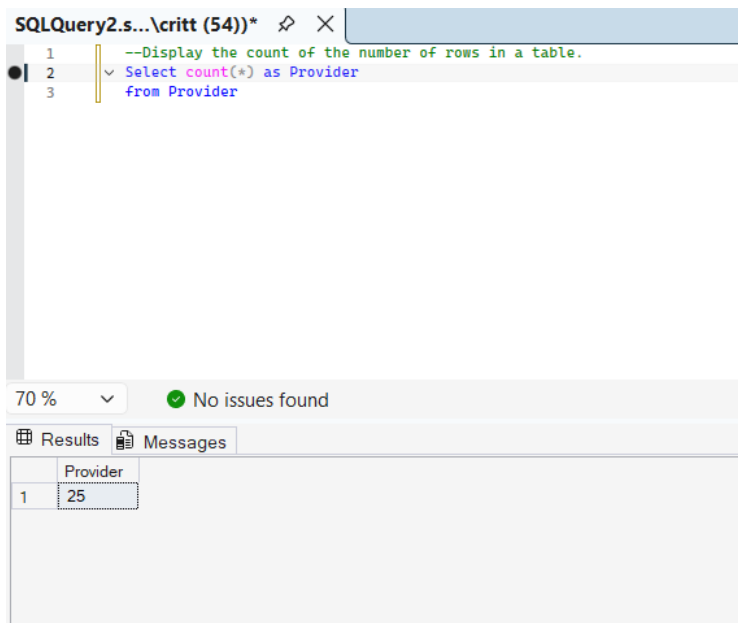

The screenshot shows a SQL query window titled "SQLQuery2.s... \critt (54))*". The query is as follows:


```
1 --Display the count of the number of rows in a table.  
2 Select count(*) as Provider  
3 from Provider
```

Below the query window, the "Results" tab is active, displaying a single row with the value 25 under the column header "Provider".

Provider
25

2. Delete a specified record in a table and prove that it is deleted.

Before deleting

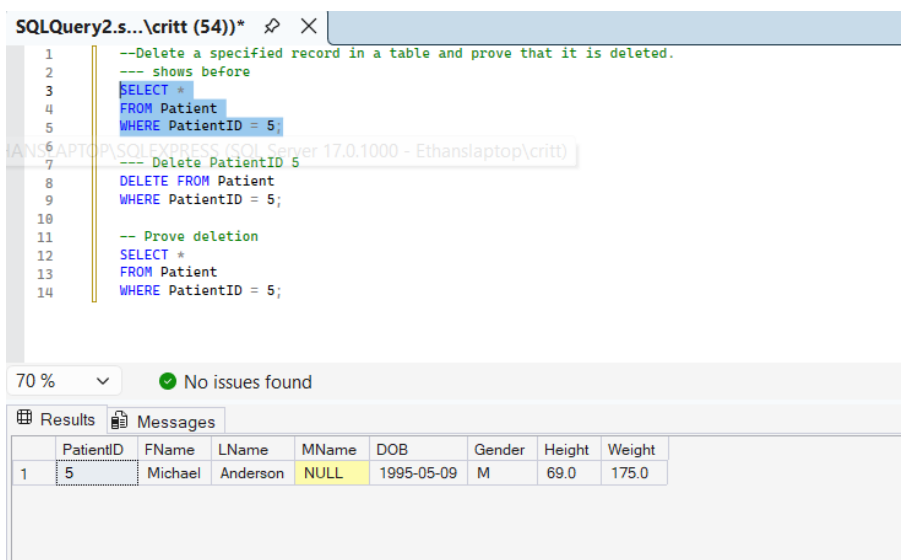

The screenshot shows a SQL query window titled "SQLQuery2.s... \critt (54))*". The query is as follows:

```
1 --Delete a specified record in a table and prove that it is deleted.  
2 --- shows before  
3 SELECT *  
4 FROM Patient  
5 WHERE PatientID = 5;  
6  
7 --- Delete PatientID 5  
8 DELETE FROM Patient  
9 WHERE PatientID = 5;  
10  
11 -- Prove deletion  
12 SELECT *  
13 FROM Patient  
14 WHERE PatientID = 5;
```

Below the query window, the "Results" tab is active, displaying a single row with the following data:

PatientID	FName	LName	MName	DOB	Gender	Height	Weight
5	Michael	Anderson	NULL	1995-05-09	M	69.0	175.0

Deleting

```
SQLQuery2.s... \critt (54))*
4      FROM Patient
5      WHERE PatientID = 5;
6
7      -- Step 2: Delete dependent ailments first
8      DELETE FROM PatientAilment
9      WHERE PatientID = 5;
10
11     -- Step 3: Now delete the patient
12     DELETE FROM Patient
13     WHERE PatientID = 5;
14
15     -- Step 4: Prove deletion
16     SELECT *
17     FROM Patient
18     WHERE PatientID = 5;
```

70 % ✓ No issues found

Messages

(1 row affected)

Completion time: 2026-03-04T18:45:26.6929809-05:00

After deleting

```
SQLQuery2.s... \critt (54))*
4      FROM Patient
5      WHERE PatientID = 5;
6
7      -- Step 2: Delete dependent ailments first
8      DELETE FROM PatientAilment
9      WHERE PatientID = 5;
10
11     -- Step 3: Now delete the patient
12     DELETE FROM Patient
13     WHERE PatientID = 5;
14
15     -- Step 4: Prove deletion
16     SELECT *
17     FROM Patient
18     WHERE PatientID = 5;
```

70 % ✓ No issues found

Results Messages

PatientID	FName	LName	MName	DOB	Gender	Height	Weight
-----------	-------	-------	-------	-----	--------	--------	--------

3. Two table join that creates a view.

SQLQuery2.s...\critt (54))*

```

1  -- Two table join that creates a view.
2  --DROP VIEW vw_GetProviderAndType; -- deletes the view, not the data
3  CREATE VIEW vw_GetProviderAndType AS -- create view, name it, as
4  SELECT ProviderID, FName, LName, ProviderType
5  FROM Provider P, ProviderType Pt
6  WHERE P.ProviderTypeID = Pt.ProviderTypeID -- join condition
7
8  Select ProviderID, FName from vw_GetProviderAndType --selects first name from the view
9
10
11

```

70 % 1 0

Results Messages

	ProviderID	FName
1	1	James
2	2	Emily
3	3	Michael
4	4	Sarah
5	5	David
6	6	Laura
7	7	Robert
8	8	Jessica
9	9	Daniel
10	10	Amanda

4. Three table join qualified with a key value from **one view** and one other table.

SQLQuery3.s...\critt (89))* SQLQuery2.sq...P\critt (54))*

```

1  -- 4. Three table join qualified with a key value from one view and one other table.
2  Select LName, ProviderType, Ailment
3  From vw_GetProviderAndType V, PatientAilment PA, Ailment A --- pulls from view, PatienAilment, and Ailment
4  Where V.ProviderID = PA.ProviderID -- join condition
5  and A.AilmentID = PA.AilmentID -- join condition

```

70 % No issues found

Results Messages

	ProviderType	LName	Ailment
1	Physician	Wilson	Hypertension
2	Physician	Reed	Migraine
3	Registered Nurse	Carter	Diabetes Mellitus
4	Physician	Patel	Seasonal Allergies
5	Physical Therapist	Nguyen	Asthma
6	Registered Nurse	Hernandez	Chronic Back Pain
7	Phlebotomist	Kim	Depression
8	Physical Therapist	Morris	Eczema
9	Physician	Sanders	Anxiety Disorder
10	Physical Therapist	Price	Vertigo

5. Use five SQL functions (such as SUM). This should be five queries with at least one function for each query and not the same functions as you used in previous assignments.

SQLQuery3.s... \critt (89))* SQLQuery2.sq... P\critt (54))*

```

1  -- 5. Use five SQL functions (such as SUM). This should be five queries with at least one function for each query and not the same functions as you used in previous assignments.
2
3  -- Count the number of distinct patients who have ailments
4  SELECT COUNT(DISTINCT PatientID) AS PatientsWithAilments
5  FROM PatientAilment;
6
7  -- Find the latest end date among all patient ailments
8  SELECT MAX(EndDate) AS LatestEndDate
9  FROM PatientAilment;
10
11 -- Find the earliest start date among all patient ailments
12 SELECT MIN(StartDate) AS EarliestStartDate
13 FROM PatientAilment;
14
15 -- Calculate the average height of all patients
16 SELECT AVG(Height) AS AvgHeight
17 FROM Patient;
18
19 -- Calculate the sum of all AilmentIDs (just a numeric sum)
20 SELECT SUM(AilmentID) AS SumOfAilmentIDs
21 FROM PatientAilment;

```

50 % No issues found

Results Messages

PatientsWithAilments	
1	26

LatestEndDate	
1	2023-02-10

EarliestStartDate	
1	2015-02-17

AvgHeight	
1	67.750000

SumOfAilmentIDs	
1	626

6. Create a SQL stored procedure to insert values into a row using variables passed in on execution.

SQLQuery3.s... \critt (89))* SQLQuery2.sq... P\critt (54))*

```

1  -- 6. Create a SQL stored procedure to insert values into a row using variables passed in on execution.
2  CREATE PROC spu_InsertProviderTypeDynamic
3  @ProviderType NVARCHAR(50), -- variable for ProviderType
4  @ProTypeDesc NVARCHAR(MAX) -- variable for Provider Type Description
5  AS
6  -- Insert the values into ProviderType table
7  INSERT INTO ProviderType
8  (ProviderType, ProTypeDesc)
9  VALUES
10 (@ProviderType, @ProTypeDesc);
11
12 -- Execute the stored procedure with example values
13 EXEC spu_InsertProviderTypeDynamic 'Cardiovascular Surgeon', 'Heart Doctor';

```


70 % No issues found

Messages


(1 row affected)

Completion time: 2026-03-04T19:29:43.2359538-05:00

7. Write the SQL to create a table, key, and index. This must not be generated SQL. Example after #12.

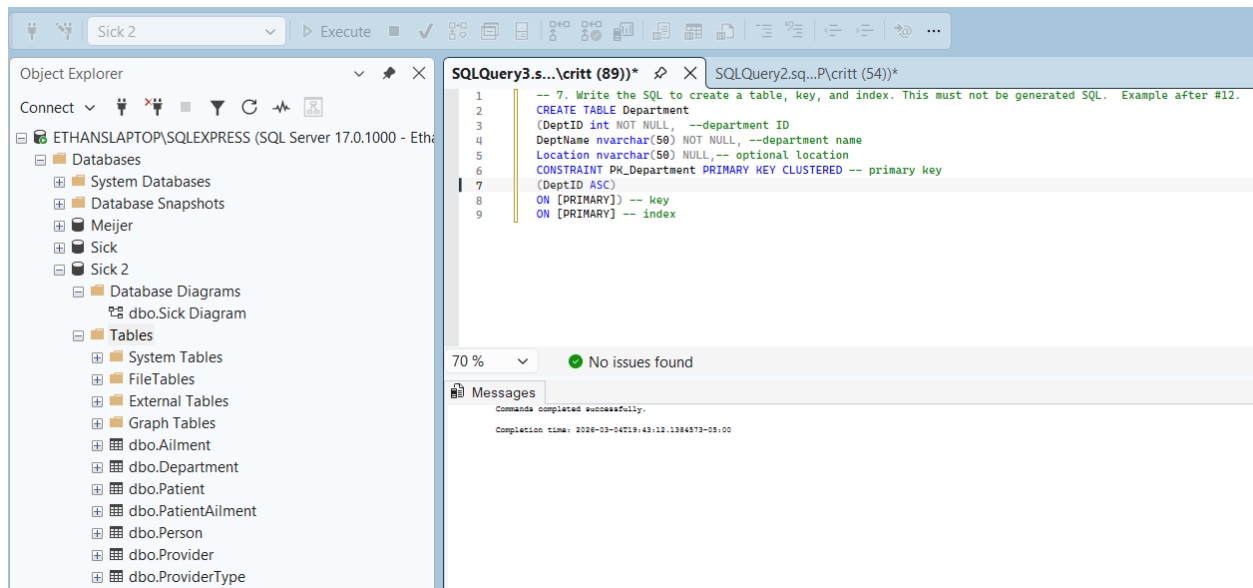

8. Create a query that uses Group By

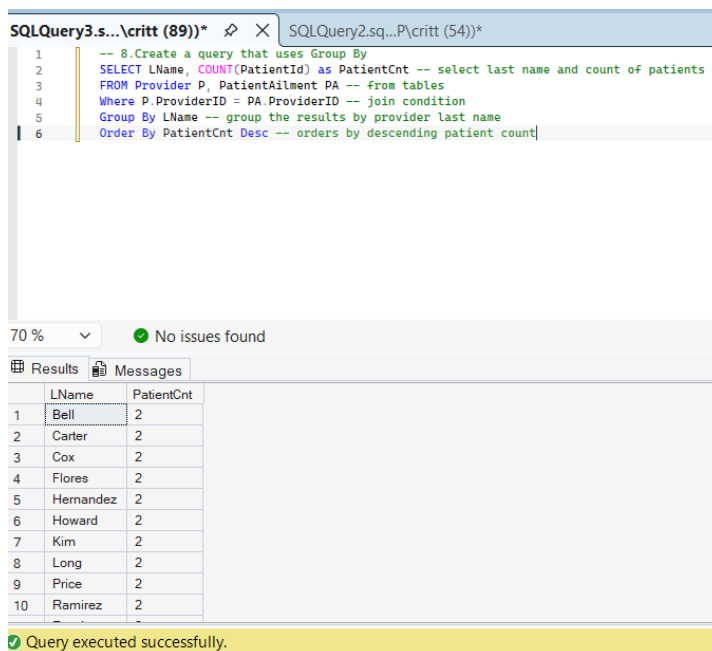

9. Demonstrate the use of distinct, ascending, descending in a query. The result set must have at least 7 rows.

SQLQuery3.s... \critt (89))* SQLQuery2.sq... P\critt (54))*

```

1  -- 9.Demonstrate the use of distinct, ascending, descending in a query. The result set must have
2  SELECT DISTINCT FName, LName      -- DISTINCT removes duplicates, selecting first and last name
3  FROM Provider
4  ORDER BY LName ASC, FName DESC;  -- LName ascending, FName descending

```

70 % No issues found

Results Messages

	FName	LName
1	Andrew	Bell
2	Victoria	Bennett
3	Amanda	Brooks
4	Emily	Carter
5	Steven	Coleman
6	Brian	Cox
7	Kevin	Flores
8	Laura	Hernandez
9	Christopher	Howard
10	Robert	Kim

Query executed successfully.

10. Create a query that demonstrates an inner join (includes join in statement)

SQLQuery3.s... \critt (89))* SQLQuery2.sq... P\critt (54))*

```

1  --10.Create a query that demonstrates an inner join (includes join in statement)
2  Select LName, ProviderType
3  From Provider P
4      join ProviderType PT -- inner join with ProviderType Table
5  on P.ProviderTypeID = PT.ProviderTypeID -- join condition

```

70 % No issues found

Results Messages

	LName	ProviderType
1	Wilson	Physician
2	Carter	Registered Nurse
3	Reed	Physician
4	Nguyen	Physical Therapist
5	Patel	Physician
6	Hernandez	Registered Nurse
7	Kim	Phlebotomist
8	Morris	Physical Therapist
9	Lopez	Physician
10	Brooks	Registered Nurse

Query executed successfully.

11. Create a query that demonstrates a left outer join (includes join in statement)

SQLQuery3.s... \critt (89))* SQLQuery2.sq...P\critt (54))*

```
1 --11.Create a query that demonstrates a left outer join (includes join in statement)
2 Select LName, ProviderType
3 From Provider P
4 left join ProviderType PT -- left outer join: returns all rows from Provider, and matching rows from ProviderType (NULL if no match)
5 on P.ProviderTypeID = PT.ProviderTypeID -- join condition
```

70 % No issues found

Results Messages

	LName	ProviderType
1	Wilson	Physician
2	Carter	Registered Nurse
3	Reed	Physician
4	Nguyen	Physical Therapist
5	Patel	Physician
6	Hernandez	Registered Nurse
7	Kim	Phlebotomist
8	Morris	Physical Therapist
9	Lopez	Physician
10	Brooks	Registered Nurse

Query executed successfully. ETHANSLAPTOP\SQLEXPRESS (17... | E

12. Create a query that demonstrates a right outer join (includes join in statement)

SQLQuery3.s... \critt (89))* SQLQuery2.sq...P\critt (54))*

```
1 --12.Create a query that demonstrates a right outer join (includes join in statement)
2 SELECT LName, ProviderType
3 FROM Provider P
4 RIGHT JOIN ProviderType PT -- right outer join: returns all rows from ProviderType, and matching rows from Provider (NULL if no match)
5 ON P.ProviderTypeID = PT.ProviderTypeID -- join condition
```

70 % No issues found

Results Messages

	LName	ProviderType
17	Morris	Physical Therap...
18	Price	Physical Therap...
19	Ward	Physical Therap...
20	Russell	Physical Therap...
21	Bennett	Physical Therap...
22	Kim	Phlebotomist
23	Bell	Phlebotomist
24	Flores	Phlebotomist
25	Powell	Phlebotomist
26	NULL	CardioVascular ...