```
Location bottomLeft1, topRight1,
    bottomLeft2, topRight2;
```

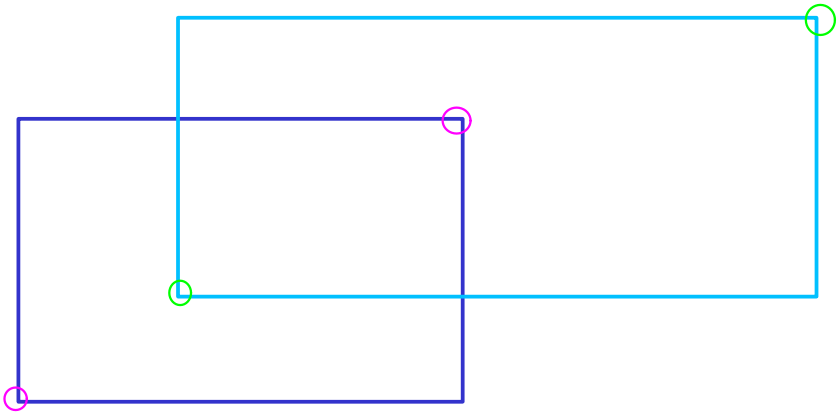

```
VectorLocation locations,        // VectorLocation with all the locations
    selectedLocations1,          // first vector of selected locations
    selectedLocations2;          // second vector of selected locations
```

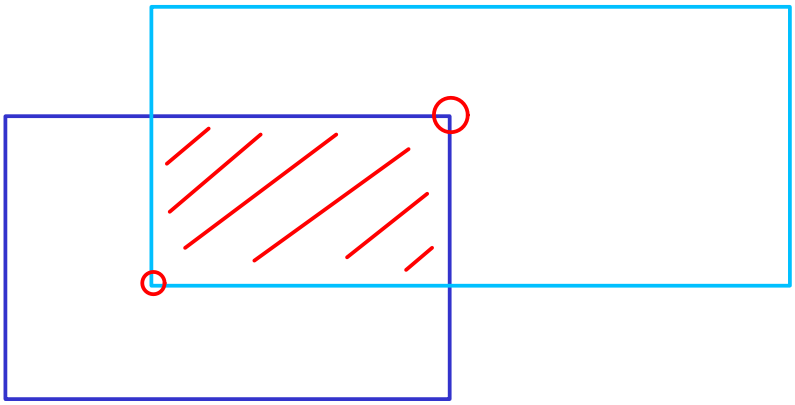

```
Location arrayLocations[MAX_NLOCATIONS], // array used to read all the input locations
```

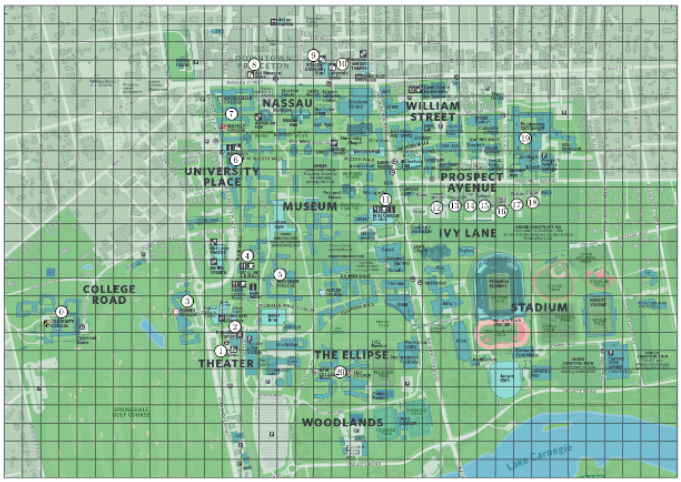


```
int nLocs, // number of locations in arrayLocations
    nUnionLocs; // number of locations in arrayUnionLocations
```