The effect of stimulus duration on directed forgetting for pictures

Patrick Ihejirika<sup>1</sup>

 $^{1}$  Brooklyn College of CUNY

Author Note

- This paper is submitted as partial fulfillment for PSYC 5001.
- Correspondence concerning this article should be addressed to Patrick Ihejirika, Postal address. E-mail: pihej121@gmail.com

29

Abstract

How useful would it be for you to selectively forget events that you choose to forget? Directed forgetting research is a tool used to investigate limitations on deliberate forgetting 10 abilities. In a directed forgetting task people encode individual items and are instructed 11 (cued) to either remember or forget them. A directed forgetting effect is observed when 12 performance on a memory test is higher for remember-cued items than forget-cued items. 13 Directed forgetting effects have been reproduced numerous times, and are commonly 14 demonstrated in tasks using lists of words as the items to be remembered and forgotten 15 (Epstein, 1969). Much less is known about directed forgetting for more memorable stimuli 16 like images, pictures, and visual scenes. Ahmad, Tan & Hockley showed that a weak directed 17 forgetting effect can in fact be observed for image stimuli (2019). This poster investigates a general memory strength hypothesis of directed forgetting for pictures. According to this 19 hypothesis, pictures are difficult to intentionally forget because they are encoded so well that attempts to forget the information are ineffective. I propose that weakening the encoding 21 strength of images could allow intentional forgetting processes to operate more effectively, causing an increased directed forgetting effect. My experiments used the same general procedures as Ahmad, Tan, and Hockley (2019). In two experiments (n=45 each), I reduced 24 encoding strength by manipulating stimulus duration during encoding (2000 ms [original 25 amount, 1000ms, or 500 ms per picture. I predicted that greater directed forgetting would 26 be observed as stimulus duration decreased. I discuss the results of my two experiments in 27 relation to the general memory strength hypothesis. 28

Keywords: Directed Forgetting, Picture Memory

The effect of stimulus duration on directed forgetting for pictures

Introduction

What is memory and how is it altered? Memory is often inaccurately defined as the
ability to encode, store and retrieve information. A more accurate definition separates
memory into two separate processes. Process one is characterized by remembering
information and is defined as successfully encoding, storing and retrieving information.

Process two is characterized by forgetting information. This definition allows for the
conceptual introduction of intentionally controlling ones memory by selectively forgetting
information details. The process by which information is forgotten can be explored using a
directed forgetting procedure.

## What is Directed Forgetting?

The directed forgetting procedure instructs participants to selectively remember or forget specific events and measures the accuracy with which participants are able to do so (for a review see, MacLeod, 1998). The design of a directed forgetting procedure consists of an encoding phase and a testing phase. The encoding phase presents participants with a series which is then followed by the presentation of instructional cues, directing participants to either remember or forget the previously presented stimulus. After the participants have been presented with all available stimuli, the testing phase begins. This testing phase then presents the same stimuli of the encoding phase against previously unseen stimuli, and tasks participants to accurately identify the stimulus presented in the encoding phase.

Significantly lower accuracy in the recognition of forget-cued encoding stimuli is an indication of the presence of a phenomenon known as the directed forgetting effect.

### A classic demonstration of directed forgetting

 $_{53}$  Bjork (1972) provides a description of traditional directed forgetting procedures.

Generally, these procedures present participants with a series of items and cues. There are a

number of ways to cue various item sets, including intraserial cuing, posting and pre-input cuing. The most common method of cuing item sets throughout traditional directed forgetting procedures is intraserial cuing. Intra-serial cuing sequentially presents 57 participants with a set of items and directs them to either forget or remember said item using the cue's instruction. Though the item presented during such experiments may vary, traditional directed-forgetting procedures discussed throughout this paper use word stimuli as the presented items. Traditional directed forgetting procedures also determine the presence and magnitude of a directed forgetting effect using either recognition or recall based testing conditions. Testing conditions which operationalize the directed forgetting effect as the accurate recall of "Forget-cued" stimuli do so by having participants recall as many wordage items as possible, without regard to the cue instructions. Previous research employing this recall-based directed forgetting procedure has identified a directed forgetting effect of 10-15\% for F- cued wordage stimuli, compared to the R- cued wordage stimuli (Weiner & Reed, 1969). Testing conditions which operationalize the directed forgetting effect as the accurate recognition of "Forget-cued" stimuli do so by having participants identify as many previously seen wordage items as possible, without regard to the cue instructions.

# 71 What do we empirically know about directed forgetting?

MacLeod (1998) has identified 38 factors with the potential to influence the
directed-forgetting effect. This paper will specifically focus on 4 of these 38 factors. These 4
factors include cue presentation time, stimulus presentation time, stimulus detail and
stimulus type.

Wetzel (1977) used a directed forgetting procedure to explore the effects of cue
duration on the participant recall accuracy of word stimuli. This exploration required the
manipulation of both the stimuli presentation duration and the cue presentation duration
during the encoding phase, creating two separate experimental conditions. These
experimental conditions are known as the long delay condition and the short delay condition.

The long-delay condition presents the word stimuli for a duration of 2, 4 or 8 seconds and
the cue for a duration of 1 second, while the short-delay condition presents the word stimuli
for a duration of 1 second and the cue for a duration of 2, 4 or 8 seconds. The result of this
experiment indicates that short delay conditions, specifically conditions with short stimulus
duration and long cue duration lead to an increased directed forgetting effect. These results
serve as a motivation for the factorial manipulation of stimuli presentation duration within
my experiment.

Ahmad, Tan, and Hockley (2019) used a directed forgetting procedure which explored 88 the effects of stimuli details on accuracy of participant recognition of encoding phase stimuli. This was done through the introduction of novel testing conditions and exemplar conditions into the testing phase. Novel conditions present the same stimuli from the encoding phase against previously unseen stimuli, completely different to that of the encoding stimuli. Exemplar conditions present the same stimuli from the encoding phase against previously 93 unseen stimuli similar to that of the encoding stimuli. Both conditions task participants to accurately identify the stimulus presented in the encoding phase. The results of this 95 experiment indicate the existence of a significantly lower directed forgetting effect for novel testing conditions. This indication of significantly higher accuracy in participant recognition 97 for novel testing conditions than exemplar testing conditions serves as a motivation for my experiment.

Traditional directed forgetting experiments employed both recall-based testing
procedures and verbage stimuli to determine the existence of a directed forgetting effect
amongst participants. Epstein (1972) defines the directed forgetting effect from the more
traditional perspective as a significant decrease in participant ability to accurately recall the
verbage stimuli presented during the encoding phase from memory. The issue with
recall-based directed forgetting procedures, is that they fail to consider inherently more
memorable stimuli. Standing (1973) shows that people possess the ability to remember

thousands of pictures, along with the object details within said pictures (MacLeod, 1998).

Ahmad, Moscovitch, and Hockley (2017) considers this in his experiment through the use of
a recognition-based directed forgetting procedure and pictorial stimuli throughout the
encoding phase. The results of this experiment indicate that although directed forgetting for
pictures and their objects, its effects are extremely small. These results and the memorable
ability of images as opposed to word stimuli serves as the motivation for the use of image
stimuli throughout my experiment.

### Testing a general trace strength account of directed forgetting

The purpose of this honors thesis is to test our general trace strength account of directed forgetting for pictures. The general trace strength account suggests that directed forgetting for highly memorably stimuli like pictures will increase as a function of manipulations that degrade encoding quality. This section explains the theoretical account and generates predictions for our experiments

### The trace strength account

The general trace strength account operates under several assumptions. The first is that Individual experiences are encoded as memory traces. The strength of these traces refer to the quality with which the experiences are encoded to memory traces. In other words, low strength means the trace is noisy and missing information and high strength means the trace contains detailed information about the experience. The final assumption made by our general trace strength account is that traces which surpass a strength threshold can be remembered, but traces that are below the threshold will be forgotten.

### What happens to trace quality/strength in a directed forgetting experiment?

We currently have two separate explanations for what happens to the strength of a trace during a directed forgetting experiment. These explanations are the Active Inhibition Account and the Passive Decay Account. The Active Inhibition Account proposes that the

instruction to forget causes a reduction of trace strength. If the trace is weakened below the threshold, then directed forgetting will be observed. Alternatively, if the trace is well 133 encoded with high strength and if the instruction to forget causes a small decrement in 134 encoding strength, the trace will not be forgotten because it was not weakened enough. On 135 another hand, the Passive Decay Account proposes that the instruction to forget does not 136 actively weaken the memory trace, instead the instruction to remember does actively 137 strengthen the memory trace. Memory traces strengthened enough to surpass the threshold 138 will be remembered. Alternatively, traces that are really well encoded will be difficult to 139 forget as they are not weakened enough to fall below the threshold. 140

### The trace strength account and directed forgetting for pictures

Due to pictures being very memorable stimuli, we expect minimal directed forgetting 142 for pictures because trace strengths for pictures in both instruction conditions will be high 143 and above threshold. This could partly explain the limited directed forgetting effects yielded 144 by Ahmad, Tan and Hockley. According to the trace strength account, directed forgetting 145 for pictures should increase as presentation duration (or encoding time for each picture) 146 decreases. Meaning that short encoding durations should cause weaker trace strengths which 147 are closer to the remembering threshold. Traces close to the threshold may be pushed 148 beneath or above the threshold by the instructional manipulation, allowing the directed 140 forgetting effect to be expressed in performance 150

### Experiment 1

Experiment 1 quite similarly resembles the traditional directed forgetting procedural technique used by Bjork, Laberge, and Legrand (1968) to explore participant recognition of previously seen encoding stimuli when randomly presented with distractors throughout the testing phase. Deviations from Bjork's experimental procedure include (1) the factorial manipulation of stimuli presentation duration by 500 milliseconds, 1 second and 2 seconds (2) the randomized presentation of novel and exemplar distractors throughout the testing

phase (3) the use of inherently more memorable stimuli -images- throughout both the encoding and testing phase, instead of word stimuli.

### 160 Method

Participants. A total of 47 participants were recruited from Amazon's Mechanical
Turk. Mean age was 34.90 (range = 22 to 60). There were 23 females, and 24 males. There
were 41 right-handed participants, and NA left or both handed participants. 37 participants
reported normal vision, and 10 participants reported corrected-to-normal vision. 37
participants reported English as a first language, and 10 participants reported English as a
second language.

There were 120 images from a total of 16 categorical Stimuli and Apparatus. 167 scenes presented throughout the encoding phase of this experiment. These sixteen 168 categorical scenes were further classified as being either outdoor scenes or indoor scenes. The 169 eight of sixteen outdoor visual scenes consisted of settings which included bedrooms, 170 churches, classrooms, offices, dining rooms, conference rooms, hair salons & empty rooms. 171 The eight of sixteen indoor visual scenes consisted of settings such as airports, bridges, 172 beaches, castles, cemeteries, houses, tents and playgrounds. These 120 images were of the 173 same database of 320 total images of 24 different categorical scenes created by Isola, Xiao, 174 Torralba, and Oliva (2011). Brady, Konkle, Alvarez, and Oliva (2008) and Ahmad et al. 175 (2019) made similar use of this image dataset in earlier experiments.

Alongside the initial 120 images presented during the encoding phase, another 120 images were selected as distractors throughout the testing phase. Sixty of these images were of the same visual scene categories as the images presented during the encoding phase.

These images were presented as exemplar distractor testing conditions. The other half of the 120 distractor images were of completely new visual scene categories as the images presented throughout the encoding phase. These distractor images were presented as novel distractor testing conditions. This experiment was programmed in JavaScript using Jspsych and was

served onto the web using Jatos. The results of this experiment were analyzed using Rcode.

We used R (Version 4.0.2; R Core Team, 2021) and the R-packages data.table (Version 185 1.14.0; Dowle & Srinivasan, 2021), dplyr (Version 1.0.7; Wickham et al., 2021), fontawesome 186 (Iannone, 2021), forcats (Version 0.5.0; Wickham, 2021a), qqplot2 (Version 3.3.5; Wickham, 187 2016), jsonlite (Version 1.7.2; Ooms, 2014), pacman (Version 0.5.1; Rinker & Kurkiewicz, 188 2018), papaja (Version 0.1.0.9997; Aust & Barth, 2020), purr (Version 0.3.4; Henry & 189 Wickham, 2020), readr (Version 2.1.1; Wickham & Hester, 2021), stringr (Version 1.4.0; 190 Wickham, 2019), tibble (Version 3.1.6; Müller & Wickham, 2021), tidyr (Version 1.1.4; 191 Wickham, 2021b), tidyverse (Version 1.3.0; Wickham, Averick, et al., 2019), tinylabels 192 (Version 0.2.1; Barth, 2021), and xtable (Version 1.8.4; Dahl, Scott, Roosen, Magnusson, & 193 Swinton, 2019) for all our analyses. We collected five subjects worth of pilot data. For each 194 subject we computed mean recognition accuracy in each condition of the design. Figure 1 shows mean recognition accuracy in each condition, collapsed across each subject. 196

This experiment consisted of a 2x2x3 completely within-subjects 197 experimental design, with the manipulated variables including the Distractor Test, Cue & 198 picture encoding time. The distractor testing condition variable possessed two distinct 190 manipulations, being novel testing conditions and exemplar testing conditions. Novel testing 200 conditions display images with previously unseen or unrelated visual scene categories as 201 distractors during the testing phase. Exemplar testing conditions display images with similar 202 visual scene categories as distractors during the testing phase. The picture presentation time 203 variable possessed three distinct manipulations to the duration of images presented during the encoding phase of the experiment. These three manipulations included durations of 500 milliseconds, 1 second and 2 seconds. The cue presentation variable possessed two distinct manipulations. These two manipulations included the "Remember" cue and the "Forget" cue. 207 The Remember cue instructs participants to remember the upcoming image stimuli, while 208 the "Forget" cue instructs participants to selectively forget the upcoming image stimuli. 209

### 210 Procedure

Participants used the Just Another Tool for Online Studies (JAVOS) site to access the experiment. As stated earlier, there are two major phases of the experiment. These phases are the encoding phase and the testing phase. Prior to the encoding phase however, participants were presented with a consent form. Upon completion of the consent form, they were presented with encoding phase instructions.

During the encoding phase, participants are presented with the cue instructions 216 followed by the images. The cues instruct participants to either selectively remember or 217 selectively forget the upcoming image stimuli at random. There are a total of 120 cue 218 instructions, which are presented for a duration of (XXXX) seconds. The image stimuli 219 presented during the encoding phase are composed of the 120 images from a total of 16 220 categorical scenes subsetted from the larger database of 320 images with a total of 24 221 categorical scenes. These 120 images are presented at random at durations of either 500 222 milliseconds, 1 second or 2 seconds. The presentation times of the images will also be 223 displayed at random. Seeing as how the presentation of a single cue instruction followed by a 224 single image consists of a single trial, and there are 120 cue instructions and 120 images to 225 be presented, then there will be 120 trials throughout the encoding phase of this experiment.

Upon completion of the encoding phase, participants were then taken to the testing phase. Similarly to the encoding phase, during the beginning of the testing phase participants were given instructions of completing the testing phase. During the testing phase, participants are given a series of trials where they are shown either an exemplar distractor image or a novel distractor image alongside an image previously seen during the encoding phase and are tasked with selecting the encoding image. There are 60 novel distractor images and 60 exemplar distractor images, each of which were presented at random throughout the testing procedure.


### Data-Exclusion

Our participants were recruited online and completed the experiment from a web 236 browser. Our experiment script requests that participants attempt the task to the best of 237 their ability. Nevertheless, it is possible that participants complete the experiment and 238 submit data without attempting to complete the task as directed. We developed a set of 239 criteria to exclude participants whose performance indicated they were not attempting the 240 task as instructed. These criteria also allowed us to confirm that the participants we 241 included in the analysis did attempt the task as instructed to the best of their ability. We 242 adopted the following five criteria: 243

First, during the encoding phase participants responded to each instructional cue (to remember or forget the picture on each trial) by pressing "R" or "F" on the keyboard. This 245 task demand further served as an attentional check. We excluded participants who scored 246 lower than 75% correct on instructional cue identification responses. Second, participants 247 who did not respond on more than 25% of trials in the recognition test were excluded. Third, 248 we measured response bias (choosing the left or right picture) during the recognition test, 249 and excluded participants who made 75\% of their responses to one side (indicating they were 250 repeatedly pressing the same button on each trial). Fourth, we excluded participants whose 251 mean reaction time during the recognition test was less than 300ms, indicating they were 252 pressing the buttons as fast as possible without making a recognition decision. Finally, we 253 computed mean accuracy for the novel lure condition for all participants, and excluded 254 participants whose mean accuracy was less than 55% for those items. All together 13 255 participants were excluded. 256

### 257 Results

Proportion Correct. The proportion of accurately recognized encoding stimuli was
collected for each of the subjects who participated in the pilot study. The recorded
proportions were then averaged according to the conditions present in this 2x2x3 within

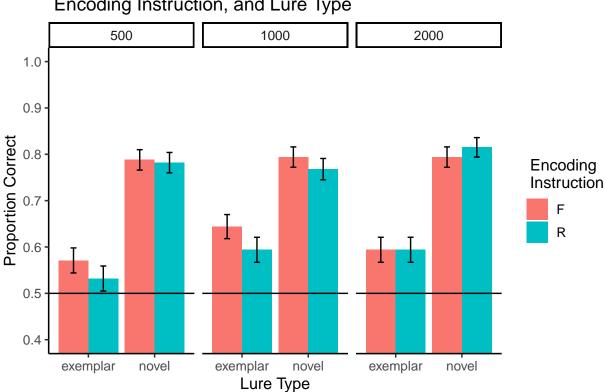

# E1: Proportion Correct by Stimulus Encoding Duration, Encoding Instruction, and Lure Type

Figure 1. Mean proportion correct as a function of encoding duration, encoding cue, and lure type.

subjects experimental design. Mean proportion correct for each subject was then submitted to a 2: Cue instruction conditions (R vs F), by 2: Test conditions (Novel vs Exemplar), by 3: Stimulus duration conditions (500ms vs 1000ms vs 2000ms), repeated measures analysis of variance.

Proportion correct for each subject in each condition was submitted to a 3 (Encoding Duration: 500ms, 1000ms, 2000ms) x 2 (Encoding Instruction: Forget vs. Remember) x 2 (Lure type: Novel vs. Exemplar) fully repeated measures ANOVA. For completeness, each main effect and higher-order interaction is described in turn.

The main effect of encoding duration was not significant, F(2,66) = 2.62, p = .080,

```
\hat{\eta}_G^2 = .007, 90\% CI [.000, .048]. Proportion correct was similar across the 500 ms (M = 0.668, SEM = 0.013), 1000 ms (M = 0.7, SEM = 0.012), and 2000 ms (M = 0.699, SEM = 0.012) stimulus durations.
```

The main effect of encoding instruction was not significant, F(1, 33) = 1.95, p = .171,  $\hat{\eta}_G^2 = .002$ , 90% CI [.000, .005]. Proportion correct was similar for remember cues (M = 0.681, SEM = 0.01) and forget cues (M = 0.698, SEM = 0.01).

The main effect of lure type was significant, F(1, 33) = 133.34, p < .001,  $\hat{\eta}_G^2 = .257$ , 90% CI [.070, .444]. Proportion correct was higher for novel lures (M = 0.79, SEM = 0.009) than exemplar lures (M = 0.588, SEM = 0.011).

The main question of interest was whether directing forgetting would vary across the encoding duration times. The interaction between encoding instruction and encoding duration was, F(2,66) = 0.95, p = .393,  $\hat{\eta}_G^2 = .003$ , 90% CI [.000, .024].

Paired sample t-tests were used to assess the directed forgetting effect at each encoding duration. The directed forgetting effect is taken as the difference between proportion correct for remember minus forget items. At 500 ms, the directed forgetting effect was reversed and not significant, M = -0.02, 95% CI [-0.07, 0.03], t(33) = -0.86, p = .398. At 1000ms, the directed forgetting effect was reversed and not significant, M = -0.04, 95% CI [-0.09, 0.01], t(33) = -1.61, p = .118. And, at 2000 ms, the directed forgetting effect was again not detected, M = 0.01, 95% CI [-0.03, 0.06], t(33) = 0.47, p = .643.

The encoding duration by lure type interaction was, F(2,66) = 2.99, p = .057,  $\hat{\eta}_G^2 = .008$ , 90% CI [.000, .049]. In the 500 ms condition, proportion correct was higher for novel than exemplar lures, M = 0.23, 95% CI [0.19, 0.28], t(33) = 10.00, p < .001. The advantage for novel over exemplar items was smaller in the 1000 ms condition, M = 0.16, 95% CI [0.11, 0.21], t(33) = 6.80, p < .001, and 2000 ms condition M = 0.21, 95% CI [0.16, 0.26], t(33) = 7.91, p < .001.

The encoding instruction by lure type interaction was not significant, F(1, 33) = 1.24, p = .273,  $\hat{\eta}_G^2 = .001$ , 90% CI [.000, .069]. Similarly, the interaction between encoding duration, instruction, and lure type was not significant, F(2, 66) = 0.01, p = .988,  $\hat{\eta}_G^2 = .000$ , 90% CI [.000, .000].

# E1: Mean RT by Stimulus Encoding Duration, Encoding Instruction, and Lure Type

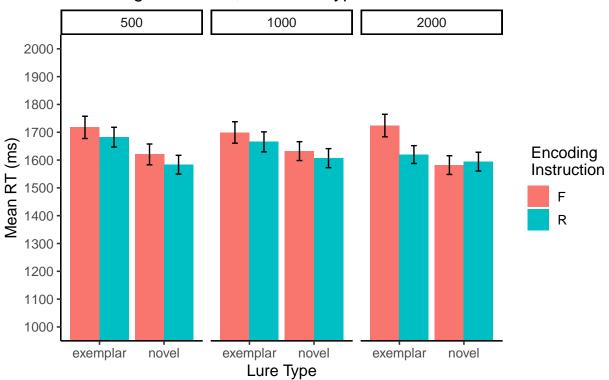


Figure 2. Mean reaction times as a function of encoding duration, encoding instruction, and test lure type.

Reaction times. Mean reaction times on correct trials for each subject in each condition were submitted to a 3 (Encoding Duration: 500ms, 1000ms, 2000ms) x 2

[Encoding Instruction: Forget vs. Remember) x 2 (Lure type: Novel vs. Exemplar) fully repeated measures ANOVA. For brevity we report only the significant effects. The full analysis is contained in supplementary materials.

The main effect of encoding instruction was significant, F(1, 33) = 5.44, p = .026,

 $\hat{\eta}_G^2 = .003, 90\%$  CI [.000, .092]. Mean reaction times were faster for choosing remember cued items (M = 1625.191, SEM = 13.987) than forget cued items (M = 1662.582, SEM = 15.328).

The main effect of lure type was significant,  $F(1, 33) = 6.74, p = .014, \hat{\eta}_G^2 = .011, 90\%$ 

CI [.000, .130]. Mean reaction times were faster in the novel lure condition (M = 1603.181, SEM = 14.07) than exemplar lure condition (M = 1684.996, SEM = 15.225).

The remaining main effects and interactions were not significant.

#### 11 Discussion

310

Resulting analysis of data gathered fails to identify several main effects between the 312 experimental conditions of Stimuli Duration and Encoding Instruction on the mean 313 proportion of correctly recognized visual scenes, yet identifies a main effect of lure condition. 314 There also appears to be a strong interaction effect between encoding duration and lure 315 condition. Results of experiment 1 fails to replicate the findings of Ahmad et al. (2019) at 316 2000ms, and also fails to support the initial prediction of increased effect magnitudes for 317 exemplar conditions from 2000ms to 1000ms to finally 500ms. Several reversed directed 318 forgetting effects were observed for exemplar lures at 1000ms and 500ms conditions. 319 Potential explanations of the reversed directed forgetting effect observed in Experiment 1 320 were explored. These explanations included experimental programming errors and noise 321 vielded from the random encoding image durations. Potential proramming errors includes 322 the mislabeling of remember-cued and forget-cued encoding instructions for the 1000ms 323 encoding duration condition. After revising the code however, this explanation is shown to be incorrect. According to the previous research exploring the effects of suprise on memory, 325 noise yielded from the random presentation of images at 2000ms, 1000ms and 500ms 326 durations would make more difficult for participants to reliably process the encoding cues. 327 This explanation is explored in experiment 2, as I present identical visual scenes in blocks of 328 500ms, 1000ms and 2000ms. The incorporation of a blocked procedure will allow me to 329

further replicate experimental conditions of Ahmad et al. (2019), to observe whether we will receive similar results. Additional data of reaction time was also recorded and analyzed. Significant main effects of encoding instuctions and lure conditions were the only observed main effects.

### Experiment 2

A potential explanation of experiment 1's failure to replicate Ahamd, Tan & Hockley () 335 is the randomized manipulations to stimulus presentation duration from 500ms, 1000ms and 336 2000ms. Experiment 2 resolves this using block stimulus encoding conditions with three total 337 blocks. Stimulus encoding duration consists of 500ms, 1000ms and 2000ms for 1/3 of block 338 conditions each. These blocks are randomized across participants. Block designs allow 339 attempted replications of both Ahmad Tan & Hockley and Experiment 1. By doing this, one 340 can determine whether effects detailed by Ahmad Tan and Hockley, and experiment 1 are observed only in conditions specific to each experiment, thus reducing the generalizability of 342 their results. 343 A directed forgetting effect intensity similar to that observed by Ahmad et al. is 344

expected for 2000ms blocked conditions, as it is an identical replication of their methodology.

Similarly, we expect to find progressive lower DFE magnitudes from 2000ms blocks to

1000ms blocks to 500ms blocks. Finally, we expect to observe higher DFE magnitudes for

novel test conditions than exemplar test conditions, as novel conditions require the

recognition of the lowest gistidual details.

#### Method

334

Participants. A total of 45 participants were recruited from Amazon's Mechanical
Turk. Mean age was 37.90 (range = 25 to 65). There were 11 females, and 34 males. There
were 42 right-handed participants, and NA left or both handed participants. 36 participants
reported normal vision, and 8 participants reported corrected-to-normal vision. 41

participants reported English as a first language, and 4 participants reported English as a second language.

Stimuli and Apparatus. The stimuli and apparatus were the same as Experiment
1, except for the following changes (if any).

This experiment consisted of a 2x2x3 completely within-subjects 359 experimental design, with the manipulated variables including the Distractor Test, Cue Instruction & Picture encoding time. The distractor testing condition variable possessed two distinct manipulations, being novel testing conditions and exemplar testing conditions. Novel testing conditions display images with previously unseen or unrelated visual scene categories 363 as distractors during the testing phase. Exemplar testing conditions display images with 364 similar visual scene categories as distractors during the testing phase. The picture 365 presentation time variable possessed three distinct manipulations to the duration of images 366 presented during the encoding phase of the experiment. These three manipulations included 367 durations of 500 milliseconds, 1 second and 2 seconds. The cue presentation variable 368 possessed two distinct manipulations. These two manipulations included the "Remember" 369 cue and the "Forget" cue. The Remember cue instructs participants to remember the 370 upcoming image stimuli, while the "Forget" cue instructs participants to selectively forget 371 the upcoming image stimuli. 372

### 3 Procedure

The procedure for Experiment 2 was the same as Experiment 1, except for the
presentation of image stimuli in blocks of 500ms, 1000ms and 2000ms. Participants used the
Just Another Tool for Online Studies (JAVOS) site to access the experiment. As stated
earlier, there are two major phases of the experiment. These phases are the encoding phase
and the testing phase. Prior to the encoding phase however, participants were presented
with a consent form. Upon completion of the consent form, they were presented with
encoding phase instructions.

During the encoding phase, participants are presented with the cue instructions 381 followed by the images. The cues instruct participants to either selectively remember or 382 selectively forget the upcoming image stimuli at random. There are a total of 120 cue 383 instructions. The image stimuli presented during the encoding phase are composed of the 384 120 images from a total of 16 categorical scenes subsetted from the larger database of 320 385 images with a total of 24 categorical scenes. These 120 images are presented in blocks at 386 durations of either 500 milliseconds, 1 second or 2 seconds. The presentation times of the 387 images will also be displayed at random. Seeing as how the presentation of a single cue instruction followed by a single image consists of a single trial, and there are 120 cue 380 instructions and 120 images to be presented, then there will be 120 trials throughout the 390 encoding phase of this experiment. 391


Upon completion of the encoding phase, participants were then taken to the testing
phase. Similarly to the encoding phase, during the beginning of the testing phase
participants were given instructions of completing the testing phase. During the testing
phase, participants are given a series of trials where they are shown either an exemplar
distractor image or a novel distractor image alongside an image previously seen during the
encoding phase and are tasked with selecting the encoding image. There are 60 novel
distractor images and 60 exemplar distractor images, each of which were presented at
random throughout the testing procedure.

### 400 Data-exclusions

We used the same exclusion criteria as set of Experiment 1. 6 participants were excluded from the analysis in Experiment 2.

#### 403 Results

Proportion Correct. Proportion correct for each subject in each condition was submitted to a 3 (Encoding Duration: 500ms, 1000ms, 2000ms) x 2 (Encoding Instruction:



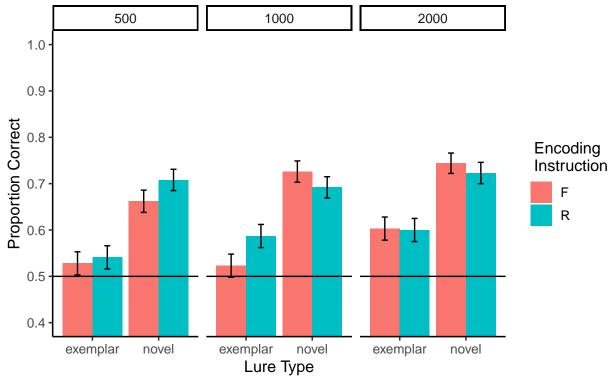


Figure 3. Mean proportion correct as a function of encoding duration, encoding cue, and lure type for Experiment 2.

- Forget vs. Remember) x 2 (Lure type: Novel vs. Exemplar) fully repeated measures ANOVA.
- For completeness, each main effect and higher-order interaction is described in turn.
- The main effect of encoding duration was significant, F(2,76) = 5.54, p = .006,  $\hat{\eta}_G^2 = .017$ , 90% CI [.000, .074]. Proportion correct was lowest for the 500 ms duration (M = 0.61, SEM = 0.012), and higher for the 1000 ms (M = 0.632, SEM = 0.012), and 2000 ms
  (M = 0.667, SEM = 0.012) stimulus durations.
- The main effect of encoding instruction was not significant, F(1,38) = 0.65, p = .425,  $\hat{\eta}_G^2 = .001$ , 90% CI [.000, .055]. Proportion correct was similar for remember cues (M = 0.642, SEM = 0.01) and forget cues (M = 0.631, SEM = 0.01).

The main effect of lure type was significant, F(1,38) = 79.66, p < .001,  $\hat{\eta}_G^2 = .137$ , 90% CI [.014, .312]. Proportion correct was higher for novel lures (M = 0.709, SEM = 0.009) than exemplar lures (M = 0.564, SEM = 0.01).

The main question of interest was whether directing forgetting would vary across the encoding duration times. The interaction between encoding instruction and encoding duration was not significant, F(2,76) = 0.83, p = .441,  $\hat{\eta}_G^2 = .002$ , 90% CI [.000, .013].

Paired sample t-tests were used to assess the directed forgetting effect at each encoding duration. The directed forgetting effect is taken as the difference between proportion correct for remember minus forget items. At 500 ms, the directed forgetting effect was not significant, M = 0.03, 95% CI [-0.01, 0.07], t(38) = 1.36, p = .181. At 1000ms, the directed forgetting effect was not significant, M = 0.02, 95% CI [-0.03, 0.06], t(38) = 0.63, p = .531. And, at 2000 ms, the directed forgetting effect was again not detected, M = -0.01, 95% CI [-0.06, 0.04], t(38) = -0.49, p = .629.

The encoding duration by lure type interaction was not significant, F(2,76) = 0.26, p = .775,  $\hat{\eta}_G^2 = .001$ , 90% CI [.000, .000]. The encoding instruction by lure type interaction was not significant, F(1,38) = 1.13, p = .295,  $\hat{\eta}_G^2 = .001$ , 90% CI [.000, .065]. Similarly, the interaction between encoding duration, instruction, and lure type was not significant, F(2,76) = 2.42, p = .095,  $\hat{\eta}_G^2 = .005$ , 90% CI [.000, .037].

Reaction times. Mean reaction times on correct trials for each subject in each condition were submitted to a 3 (Encoding Duration: 500ms, 1000ms, 2000ms) x 2 (Encoding Instruction: Forget vs. Remember) x 2 (Lure type: Novel vs. Exemplar) fully repeated measures ANOVA. For brevity we report only the significant effects. The full analysis is contained in supplementary materials.

The main effect of lure type was significant, F(1,38) = 7.32, p = .010,  $\hat{\eta}_G^2 = .014$ , 90% CI [.000, .128]. Mean reaction times were faster in the novel lure condition (M = 1644.224,

# E2: Mean RT by Stimulus Encoding Duration, Encoding Instruction, and Lure Type

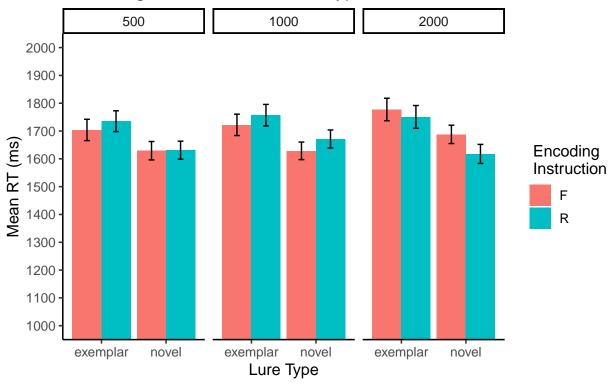


Figure 4. Mean reaction times as a function of encoding duration, encoding instruction, and test lure type.

SEM = 13.401) than exemplar lure condition (M = 1741.122, SEM = 15.939).

The remaining main effects and interactions were not significant.

## Discussion

### General Discussion

Overall, we failed to replicate the findings of Ahmad et al. (2019) across both 444 experiments for 2000ms. We also failed to obtain experimental results which support initial 445 predictions of an increased directed forgetting effect magnitude for exemplar conditions from 446 2000ms to 1000ms to 500ms. A potential explanation of this lies in the number of 447 participants ran across both experiments. Initial power analyses estimated that nearly 200 448 participants would be required for the predicted results to occur, yet only 47 and 45 449 participants were ran in experiments 1 and 2 respectively. Higher proportions of correctly 450 recognized images were observed during experiment 1 for Forget-cues than Remember-cues 451 for exemplar conditions at 500ms and 1000ms, and novel lure conditions at 1000ms. Directed 452 forgetting effects could be observed during experiment 2 for novel conditions at 500ms and 453 for exemplar conditions at 1000ms conditions, while a reversed directed forgetting effect can 454 be observed for novel conditions at 1000ms and 2000ms conditions. 455

456 Conclusion

References

- Ahmad, F. N., Moscovitch, M., & Hockley, W. E. (2017). Effects of varying presentation
  time on long-term recognition memory for scenes: Verbatim and gist representations.

  Memory & Cognition, 45(3), 390–403. https://doi.org/10/gmgg4q
- Ahmad, F. N., Tan, P., & Hockley, W. E. (2019). Directed forgetting for categorised pictures: Recognition memory for perceptual details versus gist. *Memory*, 27(7), 894–903. https://doi.org/10/gmgg3g
- Aust, F., & Barth, M. (2020). papaja: Prepare reproducible APA journal articles with R

  Markdown. Retrieved from https://github.com/crsh/papaja
- Barth, M. (2021). tinylabels: Lightweight variable labels. Retrieved from https://github.com/mariusbarth/tinylabels
- Bjork, R. A. (1972). Theoretical implications of directed forgetting. In A. W. Melton & E.

  Martin (Eds.), Coding processes in human memory (pp. 217–235). Washington, DC:

  Winston.
- Bjork, R. A., Laberge, D., & Legrand, R. (1968). The modification of short-term memory
  through instructions to forget. *Psychonomic Science*, 10(2), 55–56.

  https://doi.org/10/gmt488
- Brady, T. F., Konkle, T., Alvarez, G. A., & Oliva, A. (2008). Visual long-term memory has
  a massive storage capacity for object details. *Proceedings of the National Academy of*Sciences, 105(38), 14325–14329. https://doi.org/10/c268jz
- Dahl, D. B., Scott, D., Roosen, C., Magnusson, A., & Swinton, J. (2019). *Xtable: Export*tables to latex or html. Retrieved from https://CRAN.R-project.org/package=xtable
- Dowle, M., & Srinivasan, A. (2021). Data.table: Extension of 'data.frame'. Retrieved from

- https://CRAN.R-project.org/package=data.table
- Epstein, D. W. W., William. Massaro. (1972). Selective search in directed forgetting.
- Journal of Experimental Psychology, 94(1), 18-24. https://doi.org/10.1037/h0032791
- Henry, L., & Wickham, H. (2020). Purrr: Functional programming tools. Retrieved from
- https://CRAN.R-project.org/package=purrr
- <sup>485</sup> Iannone, R. (2021). Fontawesome: Easily work with 'font awesome' icons. Retrieved from
- https://CRAN.R-project.org/package=fontawesome
- Isola, P., Xiao, J., Torralba, A., & Oliva, A. (2011). What makes an image memorable?
- 488 IEEE conference on computer vision and pattern recognition (cvpr), 145–152.
- MacLeod, C. M. (1998). Directed forgetting. In J. M. Golding & C. M. MacLeod (Eds.),
- Intentional forgetting: Interdisciplinary approaches (pp. 1–57). Mahwah, NJ:
- Lawrence Erlbaum Associates.
- Müller, K., & Wickham, H. (2021). Tibble: Simple data frames. Retrieved from
- https://CRAN.R-project.org/package=tibble
- Ooms, J. (2014). The jsonlite package: A practical and consistent mapping between json
- data and r objects. arXiv:1403.2805 [stat.CO]. Retrieved from
- https://arxiv.org/abs/1403.2805
- R Core Team. (2021). R: A language and environment for statistical computing. Vienna,
- 498 Austria: R Foundation for Statistical Computing. Retrieved from
- https://www.R-project.org/
- Rinker, T. W., & Kurkiewicz, D. (2018). pacman: Package management for R. Buffalo, New
- York. Retrieved from http://github.com/trinker/pacman

- Standing, L. (1973). Learning 10000 pictures. The Quarterly Journal of Experimental

  Psychology, 25(2), 207–222. https://doi.org/10/fnjhs5
- Wetzel, R. E., Douglas C. Hunt. (1977). Cue delay and the role of rehearsal in directed
  forgetting. Journal of Experimental Psychology: Human Learning and Memory, 3(2),
  233–245. https://doi.org/10.1037/0278-7393.3.2.233
- Wickham, H. (2016). *Ggplot2: Elegant graphics for data analysis*. Springer-Verlag New York.

  Retrieved from https://ggplot2.tidyverse.org
- Wickham, H. (2019). Stringr: Simple, consistent wrappers for common string operations.

  Retrieved from https://CRAN.R-project.org/package=stringr
- Wickham, H. (2021a). Forcats: Tools for working with categorical variables (factors).

  Retrieved from https://CRAN.R-project.org/package=forcats
- Wickham, H. (2021b). *Tidyr: Tidy messy data*. Retrieved from https://CRAN.R-project.org/package=tidyr
- Wickham, H., Averick, M., Bryan, J., Chang, W., McGowan, L. D., François, R., . . . Yutani, H. (2019). Welcome to the tidyverse. *Journal of Open Source Software*, 4(43), 1686. https://doi.org/10.21105/joss.01686
- Wickham, H., François, R., Henry, L., & Müller, K. (2021). Dplyr: A grammar of data manipulation. Retrieved from https://CRAN.R-project.org/package=dplyr
- Wickham, H., & Hester, J. (2021). Readr: Read rectangular text data. Retrieved from https://CRAN.R-project.org/package=readr