The effect of stimulus duration on directed forgetting for pictures

Patrick Ihejirika<sup>1</sup>

 $^{1}$  Brooklyn College of CUNY

Author Note

- This paper is submitted as partial fulfillment for PSYC 5001.
- Correspondence concerning this article should be addressed to Patrick Ihejirika, Postal address. E-mail: pihej121@gmail.com

8

29

Abstract

How useful would it be for you to selectively forget events that you choose to forget? Directed forgetting research is a tool used to investigate limitations on deliberate forgetting 10 abilities. In a directed forgetting task people encode individual items and are instructed 11 (cued) to either remember or forget them. A directed forgetting effect is observed when 12 performance on a memory test is higher for remember-cued items than forget-cued items. 13 Directed forgetting effects have been reproduced numerous times, and are commonly 14 demonstrated in tasks using lists of words as the items to be remembered and forgotten 15 (Epstein, 1969). Much less is known about directed forgetting for more memorable stimuli 16 like images, pictures, and visual scenes. Ahmad, Tan & Hockley showed that a weak directed 17 forgetting effect can in fact be observed for image stimuli (2019). This poster investigates a general memory strength hypothesis of directed forgetting for pictures. According to this 19 hypothesis, pictures are difficult to intentionally forget because they are encoded so well that attempts to forget the information are ineffective. I propose that weakening the encoding 21 strength of images could allow intentional forgetting processes to operate more effectively, causing an increased directed forgetting effect. My experiments used the same general procedures as Ahmad, Tan, and Hockley (2019). In two experiments (n=45 each), I reduced 24 encoding strength by manipulating stimulus duration during encoding (2000 ms [original 25 amount, 1000ms, or 500 ms per picture. I predicted that greater directed forgetting would 26 be observed as stimulus duration decreased. I discuss the results of my two experiments in 27 relation to the general memory strength hypothesis. 28

Keywords: Directed Forgetting, Picture Memory

30

The effect of stimulus duration on directed forgetting for pictures

Introduction

What is memory and how is it altered? Memory is often inaccurately defined as the
ability to encode, store and retrieve information. A more accurate definition separates
memory into two separate processes. Process one is characterized by remembering
information and is defined as successfully encoding, storing and retrieving information.

Process two is characterized by forgetting information. This definition allows for the
conceptual introduction of intentionally controlling ones memory by selectively forgetting
information details. The process by which information is forgotten can be explored using a
directed forgetting procedure.

### What is Directed Forgetting?

The directed forgetting procedure instructs participants to selectively remember or forget specific events and measures the accuracy with which participants are able to do so (for a review see, MacLeod, 1998). The design of a directed forgetting procedure consists of an encoding phase and a testing phase. The encoding phase presents participants with a series which is then followed by the presentation of instructional cues, directing participants to either remember or forget the previously presented stimulus. After the participants have been presented with all available stimuli, the testing phase begins. This testing phase then presents the same stimuli of the encoding phase against previously unseen stimuli, and tasks participants to accurately identify the stimulus presented in the encoding phase.

Significantly lower accuracy in the recognition of forget-cued encoding stimuli is an indication of the presence of a phenomenon known as the directed forgetting effect.

#### A classic demonstration of directed forgetting

 $_{53}$  Bjork (1972) provides a description of traditional directed forgetting procedures.

Generally, these procedures present participants with a series of items and cues. There are a

number of ways to cue various item sets, including intraserial cuing, posting and pre-input cuing. The most common method of cuing item sets throughout traditional directed forgetting procedures is intraserial cuing. Intra-serial cuing sequentially presents 57 participants with a set of items and directs them to either forget or remember said item using the cue's instruction. Though the item presented during such experiments may vary, traditional directed-forgetting procedures discussed throughout this paper use word stimuli as the presented items. Traditional directed forgetting procedures also determine the presence and magnitude of a directed forgetting effect using either recognition or recall based testing conditions. Testing conditions which operationalize the directed forgetting effect as the accurate recall of "Forget-cued" stimuli do so by having participants recall as many wordage items as possible, without regard to the cue instructions. Previous research employing this recall-based directed forgetting procedure has identified a directed forgetting effect of 10-15\% for F- cued wordage stimuli, compared to the R- cued wordage stimuli (Weiner & Reed, 1969). Testing conditions which operationalize the directed forgetting effect as the accurate recognition of "Forget-cued" stimuli do so by having participants identify as many previously seen wordage items as possible, without regard to the cue instructions.

## 71 What do we empirically know about directed forgetting?

MacLeod (1998) has identified 38 factors with the potential to influence the
directed-forgetting effect. This paper will specifically focus on 4 of these 38 factors. These 4
factors include cue presentation time, stimulus presentation time, stimulus detail and
stimulus type.

Wetzel (1977) used a directed forgetting procedure to explore the effects of cue
duration on the participant recall accuracy of word stimuli. This exploration required the
manipulation of both the stimuli presentation duration and the cue presentation duration
during the encoding phase, creating two separate experimental conditions. These
experimental conditions are known as the long delay condition and the short delay condition.

The long-delay condition presents the word stimuli for a duration of 2, 4 or 8 seconds and
the cue for a duration of 1 second, while the short-delay condition presents the word stimuli
for a duration of 1 second and the cue for a duration of 2, 4 or 8 seconds. The result of this
experiment indicates that short delay conditions, specifically conditions with short stimulus
duration and long cue duration lead to an increased directed forgetting effect. These results
serve as a motivation for the factorial manipulation of stimuli presentation duration within
my experiment.

Ahmad, Tan, and Hockley (2019) used a directed forgetting procedure which explored 88 the effects of stimuli details on accuracy of participant recognition of encoding phase stimuli. This was done through the introduction of novel testing conditions and exemplar conditions into the testing phase. Novel conditions present the same stimuli from the encoding phase against previously unseen stimuli, completely different to that of the encoding stimuli. Exemplar conditions present the same stimuli from the encoding phase against previously 93 unseen stimuli similar to that of the encoding stimuli. Both conditions task participants to accurately identify the stimulus presented in the encoding phase. The results of this 95 experiment indicate the existence of a significantly lower directed forgetting effect for novel testing conditions. This indication of significantly higher accuracy in participant recognition 97 for novel testing conditions than exemplar testing conditions serves as a motivation for my experiment.

Traditional directed forgetting experiments employed both recall-based testing
procedures and verbage stimuli to determine the existence of a directed forgetting effect
amongst participants. Epstein (1972) defines the directed forgetting effect from the more
traditional perspective as a significant decrease in participant ability to accurately recall the
verbage stimuli presented during the encoding phase from memory. The issue with
recall-based directed forgetting procedures, is that they fail to consider inherently more
memorable stimuli. Standing (1973) shows that people possess the ability to remember

thousands of pictures, along with the object details within said pictures (MacLeod, 1998).

Ahmad, Moscovitch, and Hockley (2017) considers this in his experiment through the use of
a recognition-based directed forgetting procedure and pictorial stimuli throughout the
encoding phase. The results of this experiment indicate that although directed forgetting for
pictures and their objects, its effects are extremely small. These results and the memorable
ability of images as opposed to word stimuli serves as the motivation for the use of image
stimuli throughout my experiment.

#### Experiment 1

Experiment 1 quite similarly resembles the traditional directed forgetting procedural 115 technique used by Bjork, Laberge, and Legrand (1968) to explore participant recognition of 116 previously seen encoding stimuli when randomly presented with distractors throughout the 117 testing phase. Deviations from Bjork's experimental procedure include (1) the factorial 118 manipulation of stimuli presentation duration by 500 milliseconds, 1 second and 2 seconds 119 (2) the randomized presentation of novel and exemplar distractors throughout the testing 120 phase (3) the use of inherently more memorable stimuli-images- throughout both the 121 encoding and testing phase, instead of word stimuli. 122

#### 123 Method

130

131

132

114

Participants. A total of 47 participants were recruited from Amazon's Mechanical
Turk. Mean age was 34.90 (range = 22 to 60). There were 23 females, and 24 males. There
were 41 right-handed participants, and NA left or both handed participants. 37 participants
reported normal vision, and 10 participants reported corrected-to-normal vision. 37
participants reported English as a first language, and 10 participants reported English as a
second language.

Stimuli and Apparatus. There were 120 images from a total of 16 categorical scenes presented throughout the encoding phase of this experiment. These sixteen categorical scenes were further classified as being either outdoor scenes or indoor scenes. The

eight of sixteen outdoor visual scenes consisted of settings which included bedrooms,
churches, classrooms, offices, dining rooms, conference rooms, hair salons & empty rooms.
The eight of sixteen indoor visual scenes consisted of settings such as airports, bridges,
beaches, castles, cemeteries, houses, tents and playgrounds. These 120 images were of the
same database of 320 total images of 24 different categorical scenes created by Isola, Xiao,
Torralba, and Oliva (2011). Brady, Konkle, Alvarez, and Oliva (2008) and Ahmad et al.
(2019) made similar use of this image dataset in earlier experiments.

Alongside the initial 120 images presented during the encoding phase, another 120 images were selected as distractors throughout the testing phase. Sixty of these images were of the same visual scene categories as the images presented during the encoding phase.

These images were presented as exemplar distractor testing conditions. The other half of the 120 distractor images were of completely new visual scene categories as the images presented throughout the encoding phase. These distractor images were presented as novel distractor testing conditions. This experiment was programmed in JavaScript using Jspsych and was served onto the web using Jatos. The results of this experiment were analyzed using Rcode.

We used R (Version 4.0.2; R Core Team, 2021) and the R-packages data.table (Version 148 1.14.0; Dowle & Srinivasan, 2021), dplyr (Version 1.0.7; Wickham et al., 2021), fontawesome 149 (Iannone, 2021), forcats (Version 0.5.0; Wickham, 2021a), ggplot2 (Version 3.3.5; Wickham, 150 2016), jsonlite (Version 1.7.2; Ooms, 2014), pacman (Version 0.5.1; Rinker & Kurkiewicz, 151 2018), papaja (Version 0.1.0.9997; Aust & Barth, 2020), purr (Version 0.3.4; Henry & 152 Wickham, 2020), readr (Version 2.1.1; Wickham & Hester, 2021), stringr (Version 1.4.0; Wickham, 2019), tibble (Version 3.1.6; Müller & Wickham, 2021), tidyr (Version 1.1.4; Wickham, 2021b), tidyverse (Version 1.3.0; Wickham, Averick, et al., 2019), tinylabels 155 (Version 0.2.1; Barth, 2021), and xtable (Version 1.8.4; Dahl, Scott, Roosen, Magnusson, & 156 Swinton, 2019) for all our analyses. We collected five subjects worth of pilot data. For each 157 subject we computed mean recognition accuracy in each condition of the design. Figure 1 158

shows mean recognition accuracy in each condition, collapsed across each subject.

This experiment consisted of a 2x2x3 completely within-subjects 160 experimental design, with the manipulated variables including the Distractor Test, Cue & 161 picture encoding time. The distractor testing condition variable possessed two distinct 162 manipulations, being novel testing conditions and exemplar testing conditions. Novel testing 163 conditions display images with previously unseen or unrelated visual scene categories as 164 distractors during the testing phase. Exemplar testing conditions display images with similar 165 visual scene categories as distractors during the testing phase. The picture presentation time variable possessed three distinct manipulations to the duration of images presented during the encoding phase of the experiment. These three manipulations included durations of 500 milliseconds, 1 second and 2 seconds. The cue presentation variable possessed two distinct manipulations. These two manipulations included the "Remember" cue and the "Forget" cue. 170 The Remember cue instructs participants to remember the upcoming image stimuli, while 171 the "Forget" cue instructs participants to selectively forget the upcoming image stimuli. 172

#### 173 Procedure

Participants used the Just Another Tool for Online Studies (JAVOS) site to access the experiment. As stated earlier, there are two major phases of the experiment. These phases are the encoding phase and the testing phase. Prior to the encoding phase however, participants were presented with a consent form. Upon completion of the consent form, they were presented with encoding phase instructions.

During the encoding phase, participants are presented with the cue instructions followed by the images. The cues instruct participants to either selectively remember or selectively forget the upcoming image stimuli at random. There are a total of 120 cue instructions, which are presented for a duration of (XXXX) seconds. The image stimuli presented during the encoding phase are composed of the 120 images from a total of 16 categorical scenes subsetted from the larger database of 320 images with a total of 24

categorical scenes. These 120 images are presented at random at durations of either 500 milliseconds, 1 second or 2 seconds. The presentation times of the images will also be displayed at random. Seeing as how the presentation of a single cue instruction followed by a single image consists of a single trial, and there are 120 cue instructions and 120 images to be presented, then there will be 120 trials throughout the encoding phase of this experiment.

Upon completion of the encoding phase, participants were then taken to the testing 190 phase. Similarly to the encoding phase, during the beginning of the testing phase 191 participants were given instructions of completing the testing phase. During the testing 192 phase, participants are given a series of trials where they are shown either an exemplar 193 distractor image or a novel distractor image alongside an image previously seen during the 194 encoding phase and are tasked with selecting the encoding image. There are 60 novel 195 distractor images and 60 exemplar distractor images, each of which were presented at 196 random throughout the testing procedure. 197

#### 198 Data-Exclusion

Our participants were recruited online and completed the experiment from a web 199 browser. Our experiment script requests that participants attempt the task to the best of 200 their ability. Nevertheless, it is possible that participants complete the experiment and 201 submit data without attempting to complete the task as directed. We developed a set of 202 criteria to exclude participants whose performance indicated they were not attempting the 203 task as instructed. These criteria also allowed us to confirm that the participants we 204 included in the analysis did attempt the task as instructed to the best of their ability. We 205 adopted the following five criteria: 206

First, during the encoding phase participants responded to each instructional cue (to remember or forget the picture on each trial) by pressing "R" or "F" on the keyboard. This task demand further served as an attentional check. We excluded participants who scored

lower than 75% correct on instructional cue identification responses. Second, participants who did not respond on more than 25% of trials in the recognition test were excluded. Third, 211 we measured response bias (choosing the left or right picture) during the recognition test, 212 and excluded participants who made 75% of their responses to one side (indicating they were 213 repeatedly pressing the same button on each trial). Fourth, we excluded participants whose 214 mean reaction time during the recognition test was less than 300ms, indicating they were 215 pressing the buttons as fast as possible without making a recognition decision. Finally, we 216 computed mean accuracy for the novel lure condition for all participants, and excluded 217 participants whose mean accuracy was less than 55% for those items. All together 13 218 participants were excluded. 219

#### $_{20}$ Results

Proportion Correct. The proportion of accurately recognized encoding stimuli was collected for each of the subjects who participated in the pilot study. The recorded proportions were then averaged according to the conditions present in this 2x2x3 within subjects experimental design. Mean proportion correct for each subject was then submitted to a 2: Cue instruction conditions (R vs F), by 2: Test conditions (Novel vs Exemplar), by 3: Stimulus duration conditions (500ms vs 1000ms vs 2000ms), repeated measures analysis of variance.

Proportion correct for each subject in each condition was submitted to a 3 (Encoding Duration: 500ms, 1000ms, 2000ms) x 2 (Encoding Instruction: Forget vs. Remember) x 2 (Lure type: Novel vs. Exemplar) fully repeated measures ANOVA. For completeness, each main effect and higher-order interaction is described in turn.

The main effect of encoding duration was not significant, F(2, 66) = 2.62, p = .080,  $\hat{\eta}_G^2 = .007$ , 90% CI [.000, .048]. Proportion correct was similar across the 500 ms (M = 0.668, SEM = 0.013), 1000 ms (M = 0.7, SEM = 0.012), and 2000 ms (M = 0.699, SEM = 0.012)

# E1: Proportion Correct by Stimulus Encoding Duration, Encoding Instruction, and Lure Type 500 1000 2000

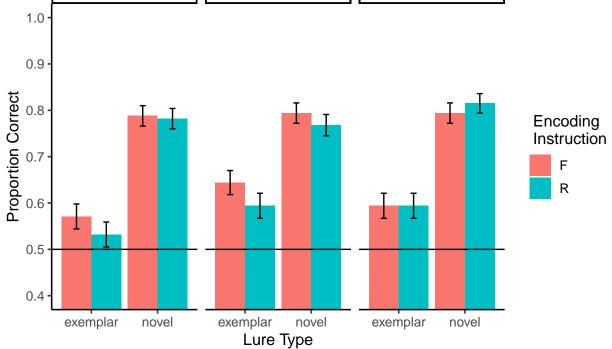


Figure 1. Mean proportion correct as a function of encoding duration, encoding cue, and lure type.

235 stimulus durations.

The main effect of encoding instruction was not significant, F(1,33) = 1.95, p = .171,  $\hat{\eta}_G^2 = .002$ , 90% CI [.000, .005]. Proportion correct was similar for remember cues (M = 0.681, SEM = 0.01) and forget cues (M = 0.698, SEM = 0.01).

The main effect of lure type was significant, F(1, 33) = 133.34, p < .001,  $\hat{\eta}_G^2 = .257$ , 90% CI [.070, .444]. Proportion correct was higher for novel lures (M = 0.79, SEM = 0.009) than exemplar lures (M = 0.588, SEM = 0.011).

The main question of interest was whether directing forgetting would vary across the encoding duration times. The interaction between encoding instruction and encoding

duration was, F(2,66) = 0.95, p = .393,  $\hat{\eta}_G^2 = .003$ , 90% CI [.000, .024].

Paired sample t-tests were used to assess the directed forgetting effect at each encoding duration. The directed forgetting effect is taken as the difference between proportion correct for remember minus forget items. At 500 ms, the directed forgetting effect was reversed and not significant, M = -0.02, 95% CI [-0.07, 0.03], t(33) = -0.86, p = .398. At 1000ms, the directed forgetting effect was reversed and not significant, M = -0.04, 95% CI [-0.09, 0.01], t(33) = -1.61, p = .118. And, at 2000 ms, the directed forgetting effect was again not detected, M = 0.01, 95% CI [-0.03, 0.06], t(33) = 0.47, p = .643.


The encoding duration by lure type interaction was, F(2,66) = 2.99, p = .057,  $\hat{\eta}_G^2 = .008$ , 90% CI [.000, .049]. In the 500 ms condition, proportion correct was higher for novel than exemplar lures, M = 0.23, 95% CI [0.19, 0.28], t(33) = 10.00, p < .001. The advantage for novel over exemplar items was smaller in the 1000 ms condition, M = 0.16, 95% CI [0.11, 0.21], t(33) = 6.80, p < .001, and 2000 ms condition M = 0.21, 95% CI [0.16, 0.26], t(33) = 7.91, p < .001.

The encoding instruction by lure type interaction was not significant, F(1, 33) = 1.24, p = .273,  $\hat{\eta}_G^2 = .001$ , 90% CI [.000, .069]. Similarly, the interaction between encoding duration, instruction, and lure type was not significant, F(2, 66) = 0.01, p = .988,  $\hat{\eta}_G^2 = .000$ , 90% CI [.000, .000].

Reaction times. Mean reaction times on correct trials for each subject in each condition were submitted to a 3 (Encoding Duration: 500ms, 1000ms, 2000ms) x 2

(Encoding Instruction: Forget vs. Remember) x 2 (Lure type: Novel vs. Exemplar) fully repeated measures ANOVA. For brevity we report only the significant effects. The full analysis is contained in supplementary materials.

The main effect of encoding instruction was significant, F(1,33) = 5.44, p = .026,  $\hat{\eta}_G^2 = .003, 90\%$  CI [.000, .092]. Mean reaction times were faster for choosing remember cued

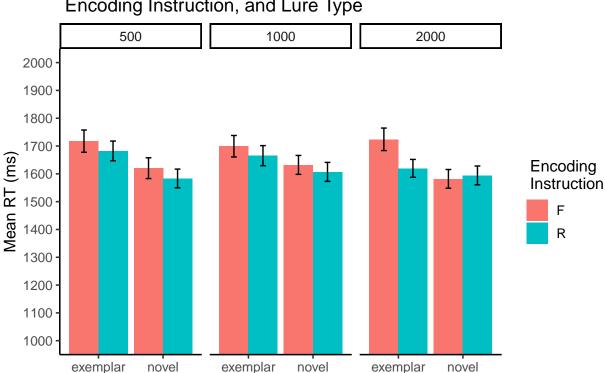

# E1: Mean RT by Stimulus Encoding Duration. **Encoding Instruction, and Lure Type**

Figure 2. Mean reaction times as a function of encoding duration, encoding instruction, and test lure type.

Lure Type

novel

items (M = 1625.191, SEM = 13.987) than forget cued items (M = 1662.582, SEM = 15.328).

The main effect of lure type was significant, F(1,33) = 6.74, p = .014,  $\hat{\eta}_G^2 = .011$ , 90% 270 CI [.000, .130]. Mean reaction times were faster in the novel lure condition (M = 1603.181, 271 SEM = 14.07) than exemplar lure condition (M = 1684.996, SEM = 15.225). 272

The remaining main effects and interactions were not significant.

#### Discussion

273

274

Resulting analysis of data gathered fails to identify several main effects between the 275 experimental conditions of Stimuli Duration and Encoding Instruction on the mean 276 proportion of correctly recognized visual scenes, yet identifies a main effect of lure condition. 277

297

There also appears to be a strong interaction effect between encoding duration and lure condition. Results of experiment 1 fails to replicate the findings of Ahmad et al. (2019) at 270 2000ms, and also fails to support the initial prediction of increased effect magnitudes for 280 exemplar conditions from 2000ms to 1000ms to finally 500ms. Several reversed directed 281 forgetting effects were observed for exemplar lures at 1000ms and 500ms conditions. 282 Potential explanations of the reversed directed forgetting effect observed in Experiment 1 283 were explored. These explanations included experimental programming errors and noise 284 yielded from the random encoding image durations. Potential proramming errors includes 285 the mislabeling of remember-cued and forget-cued encoding instructions for the 1000ms 286 encoding duration condition. After revising the code however, this explanation is shown to 287 be incorrect. According to the previous research exploring the effects of suprise on memory, 288 noise yielded from the random presentation of images at 2000ms, 1000ms and 500ms durations would make more difficult for participants to reliably process the encoding cues. This explanation is explored in experiment 2, as I present identical visual scenes in blocks of 500ms, 1000ms and 2000ms. The incorporation of a blocked procedure will allow me to further replicate experimental conditions of Ahmad et al. (2019), to observe whether we will 293 receive similar results.

Additional data of reaction time was also recorded and analyzed. Significant main effects of encoding instuctions and lure conditions were the only observed main effects.

## Experiment 2

A potential explanation of experiment 1's failure to replicate Ahamd, Tan & Hockley () is the randomized manipulations to stimulus presentation duration from 500ms, 1000ms and 2000ms. Experiment 2 resolves this using block stimulus encoding conditions with three total blocks. Stimulus encoding duration consists of 500ms, 1000ms and 2000ms for 1/3 of block conditions each. These blocks are randomized across participants. Block designs allow attempted replications of both Ahmad Tan & Hockley and Experiment 1. By doing this, one

can determine whether effects detailed by Ahmad Tan and Hockley, and experiment 1 are
observed only in conditions specific to each experiment, thus reducing the generalizability of
their results.

A directed forgetting effect intensity similar to that observed by Ahmad et al. is
expected for 2000ms blocked conditions, as it is an identical replication of their methodology.
Similarly, we expect to find progressive lower DFE magnitudes from 2000ms blocks to
1000ms blocks to 500ms blocks. Finally, we expect to observe higher DFE magnitudes for
novel test conditions than exemplar test conditions, as novel conditions require the
recognition of the lowest gistidual details.

#### 313 Method

Participants. A total of 45 participants were recruited from Amazon's Mechanical
Turk. Mean age was 37.90 (range = 25 to 65). There were 11 females, and 34 males. There
were 42 right-handed participants, and NA left or both handed participants. 36 participants
reported normal vision, and 8 participants reported corrected-to-normal vision. 41
participants reported English as a first language, and 4 participants reported English as a
second language.

Stimuli and Apparatus. The stimuli and apparatus were the same as Experiment 1, except for the following changes (if any).

Design. This experiment consisted of a 2x2x3 completely within-subjects
experimental design, with the manipulated variables including the Distractor Test, Cue
Instruction & Picture encoding time. The distractor testing condition variable possessed two
distinct manipulations, being novel testing conditions and exemplar testing conditions. Novel
testing conditions display images with previously unseen or unrelated visual scene categories
as distractors during the testing phase. Exemplar testing conditions display images with
similar visual scene categories as distractors during the testing phase. The picture
presentation time variable possessed three distinct manipulations to the duration of images

presented during the encoding phase of the experiment. These three manipulations included durations of 500 milliseconds, 1 second and 2 seconds. The cue presentation variable possessed two distinct manipulations. These two manipulations included the "Remember" cue and the "Forget" cue. The Remember cue instructs participants to remember the upcoming image stimuli, while the "Forget" cue instructs participants to selectively forget the upcoming image stimuli.

#### 336 Procedure

The procedure for Experiment 2 was the same as Experiment 1, except for the
presentation of image stimuli in blocks of 500ms, 1000ms and 2000ms. Participants used the
Just Another Tool for Online Studies (JAVOS) site to access the experiment. As stated
earlier, there are two major phases of the experiment. These phases are the encoding phase
and the testing phase. Prior to the encoding phase however, participants were presented
with a consent form. Upon completion of the consent form, they were presented with
encoding phase instructions.

During the encoding phase, participants are presented with the cue instructions 344 followed by the images. The cues instruct participants to either selectively remember or selectively forget the upcoming image stimuli at random. There are a total of 120 cue 346 instructions. The image stimuli presented during the encoding phase are composed of the 120 images from a total of 16 categorical scenes subsetted from the larger database of 320 348 images with a total of 24 categorical scenes. These 120 images are presented in blocks at durations of either 500 milliseconds, 1 second or 2 seconds. The presentation times of the images will also be displayed at random. Seeing as how the presentation of a single cue instruction followed by a single image consists of a single trial, and there are 120 cue 352 instructions and 120 images to be presented, then there will be 120 trials throughout the 353 encoding phase of this experiment. 354

Upon completion of the encoding phase, participants were then taken to the testing
phase. Similarly to the encoding phase, during the beginning of the testing phase
participants were given instructions of completing the testing phase. During the testing
phase, participants are given a series of trials where they are shown either an exemplar
distractor image or a novel distractor image alongside an image previously seen during the
encoding phase and are tasked with selecting the encoding image. There are 60 novel
distractor images and 60 exemplar distractor images, each of which were presented at
random throughout the testing procedure.

#### 363 Data-exclusions

We used the same exclusion criteria as set of Experiment 1. 6 participants were excluded from the analysis in Experiment 2.

#### 366 Results


378

Proportion Correct. Proportion correct for each subject in each condition was submitted to a 3 (Encoding Duration: 500ms, 1000ms, 2000ms) x 2 (Encoding Instruction: Forget vs. Remember) x 2 (Lure type: Novel vs. Exemplar) fully repeated measures ANOVA. For completeness, each main effect and higher-order interaction is described in turn.

The main effect of encoding duration was significant, F(2,76) = 5.54, p = .006,  $\hat{\eta}_G^2 = .017$ , 90% CI [.000, .074]. Proportion correct was lowest for the 500 ms duration (M = 0.61, SEM = 0.012), and higher for the 1000 ms (M = 0.632, SEM = 0.012), and 2000 ms (M = 0.667, SEM = 0.012) stimulus durations.

The main effect of encoding instruction was not significant, F(1,38) = 0.65, p = .425,  $\hat{\eta}_G^2 = .001$ , 90% CI [.000, .055]. Proportion correct was similar for remember cues (M = 0.642,
SEM = 0.01) and forget cues (M = 0.631, SEM = 0.01).

The main effect of lure type was significant, F(1,38) = 79.66, p < .001,  $\hat{\eta}_G^2 = .137$ , 90%

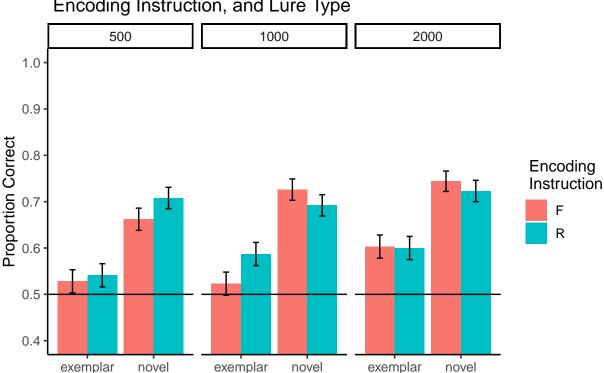

# E2: Proportion Correct by Stimulus Encoding Duration, Encoding Instruction, and Lure Type

Figure 3. Mean proportion correct as a function of encoding duration, encoding cue, and lure type for Experiment 2.

Lure Type

CI [.014, .312]. Proportion correct was higher for novel lures (M = 0.709, SEM = 0.009) than exemplar lures (M = 0.564, SEM = 0.01).

The main question of interest was whether directing forgetting would vary across the encoding duration times. The interaction between encoding instruction and encoding duration was not significant, F(2,76) = 0.83, p = .441,  $\hat{\eta}_G^2 = .002$ , 90% CI [.000, .013].

Paired sample t-tests were used to assess the directed forgetting effect at each encoding duration. The directed forgetting effect is taken as the difference between proportion correct for remember minus forget items. At 500 ms, the directed forgetting effect was not significant, M = 0.03, 95% CI [-0.01, 0.07], t(38) = 1.36, p = .181. At 1000ms, the directed

forgetting effect was not significant, M = 0.02, 95% CI [-0.03, 0.06], t(38) = 0.63, p = .531.

And, at 2000 ms, the directed forgetting effect was again not detected, M = -0.01, 95% CI [-0.06, 0.04], t(38) = -0.49, p = .629.

The encoding duration by lure type interaction was not significant, F(2,76) = 0.26, p = .775,  $\hat{\eta}_G^2 = .001$ , 90% CI [.000, .000]. The encoding instruction by lure type interaction was not significant, F(1,38) = 1.13, p = .295,  $\hat{\eta}_G^2 = .001$ , 90% CI [.000, .065]. Similarly, the interaction between encoding duration, instruction, and lure type was not significant, F(2,76) = 2.42, p = .095,  $\hat{\eta}_G^2 = .005$ , 90% CI [.000, .037].

# E2: Mean RT by Stimulus Encoding Duration, Encoding Instruction, and Lure Type

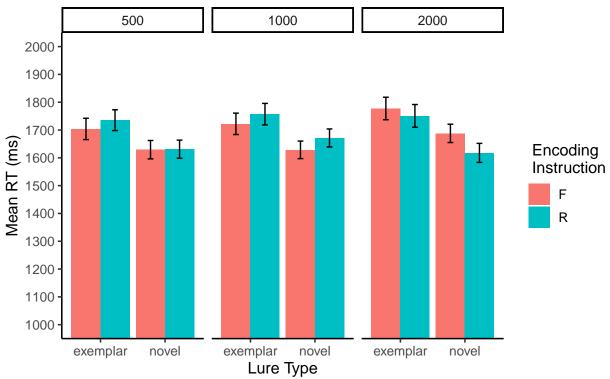


Figure 4. Mean reaction times as a function of encoding duration, encoding instruction, and test lure type.

Reaction times. Mean reaction times on correct trials for each subject in each condition were submitted to a 3 (Encoding Duration: 500ms, 1000ms, 2000ms) x 2

- (Encoding Instruction: Forget vs. Remember) x 2 (Lure type: Novel vs. Exemplar) fully repeated measures ANOVA. For brevity we report only the significant effects. The full analysis is contained in supplementary materials.
- The main effect of lure type was significant, F(1,38) = 7.32, p = .010,  $\hat{\eta}_G^2 = .014$ , 90% CI [.000, .128]. Mean reaction times were faster in the novel lure condition (M = 1644.224, SEM = 13.401) than exemplar lure condition (M = 1741.122, SEM = 15.939).
- The remaining main effects and interactions were not significant.

#### Discussion

406

#### General Discussion

Overall, we failed to replicate the findings of Ahmad et al. (2019) across both 407 experiments for 2000ms. We also failed to obtain experimental results which support initial 408 predictions of an increased directed forgetting effect magnitude for exemplar conditions from 409 2000ms to 1000ms to 500ms. A potential explanation of this lies in the number of 410 participants ran across both experiments. Initial power analyses estimated that nearly 200 411 participants would be required for the predicted results to occur, yet only 47 and 45 412 participants were ran in experiments 1 and 2 respectively. Higher proportions of correctly 413 recognized images were observed during experiment 1 for Forget-cues than Remember-cues 414 for exemplar conditions at 500ms and 1000ms, and novel lure conditions at 1000ms. Directed 415 forgetting effects could be observed during experiment 2 for novel conditions at 500ms and 416 for exemplar conditions at 1000ms conditions, while a reversed directed forgetting effect can 417 be observed for novel conditions at 1000ms and 2000ms conditions. 418

419 Conclusion

References

- Ahmad, F. N., Moscovitch, M., & Hockley, W. E. (2017). Effects of varying presentation
- time on long-term recognition memory for scenes: Verbatim and gist representations.
- 423 Memory & Cognition, 45(3), 390–403. https://doi.org/10/gmgg4q
- Ahmad, F. N., Tan, P., & Hockley, W. E. (2019). Directed forgetting for categorised
- pictures: Recognition memory for perceptual details versus gist. Memory, 27(7),
- 894-903. https://doi.org/10/gmgg3g
- <sup>427</sup> Aust, F., & Barth, M. (2020). papaja: Prepare reproducible APA journal articles with R
- Markdown. Retrieved from https://github.com/crsh/papaja
- Barth, M. (2021). tinylabels: Lightweight variable labels. Retrieved from
- https://github.com/mariusbarth/tinylabels
- Bjork, R. A. (1972). Theoretical implications of directed forgetting. In A. W. Melton & E.
- Martin (Eds.), Coding processes in human memory (pp. 217–235). Washington, DC:
- Winston.
- Bjork, R. A., Laberge, D., & Legrand, R. (1968). The modification of short-term memory
- through instructions to forget. Psychonomic Science, 10(2), 55–56.
- https://doi.org/10/gmt488
- Brady, T. F., Konkle, T., Alvarez, G. A., & Oliva, A. (2008). Visual long-term memory has
- a massive storage capacity for object details. Proceedings of the National Academy of
- Sciences, 105(38), 14325–14329. https://doi.org/10/c268jz
- Dahl, D. B., Scott, D., Roosen, C., Magnusson, A., & Swinton, J. (2019). Xtable: Export
- tables to latex or html. Retrieved from https://CRAN.R-project.org/package=xtable
- Dowle, M., & Srinivasan, A. (2021). Data.table: Extension of 'data.frame'. Retrieved from

- https://CRAN.R-project.org/package=data.table
- Epstein, D. W. W., William. Massaro. (1972). Selective search in directed forgetting.
- Journal of Experimental Psychology, 94(1), 18–24. https://doi.org/10.1037/h0032791
- Henry, L., & Wickham, H. (2020). Purr: Functional programming tools. Retrieved from
- https://CRAN.R-project.org/package=purrr
- <sup>448</sup> Iannone, R. (2021). Fontawesome: Easily work with 'font awesome' icons. Retrieved from
- https://CRAN.R-project.org/package=fontawesome
- 450 Isola, P., Xiao, J., Torralba, A., & Oliva, A. (2011). What makes an image memorable?
- 451 IEEE conference on computer vision and pattern recognition (cvpr), 145–152.
- 452 MacLeod, C. M. (1998). Directed forgetting. In J. M. Golding & C. M. MacLeod (Eds.),
- Intentional forgetting: Interdisciplinary approaches (pp. 1–57). Mahwah, NJ:
- Lawrence Erlbaum Associates.
- Müller, K., & Wickham, H. (2021). Tibble: Simple data frames. Retrieved from
- https://CRAN.R-project.org/package=tibble
- 457 Ooms, J. (2014). The jsonlite package: A practical and consistent mapping between json
- data and r objects. arXiv:1403.2805 [stat.CO]. Retrieved from
- https://arxiv.org/abs/1403.2805
- 460 R Core Team. (2021). R: A language and environment for statistical computing. Vienna,
- 461 Austria: R Foundation for Statistical Computing. Retrieved from
- https://www.R-project.org/
- Rinker, T. W., & Kurkiewicz, D. (2018). pacman: Package management for R. Buffalo, New
- York. Retrieved from http://github.com/trinker/pacman

- Standing, L. (1973). Learning 10000 pictures. The Quarterly Journal of Experimental

  Psychology, 25(2), 207–222. https://doi.org/10/fnjhs5
- Wetzel, R. E., Douglas C. Hunt. (1977). Cue delay and the role of rehearsal in directed

  forgetting. Journal of Experimental Psychology: Human Learning and Memory, 3(2),

  233–245. https://doi.org/10.1037/0278-7393.3.2.233
- Wickham, H. (2016). *Ggplot2: Elegant graphics for data analysis*. Springer-Verlag New York.

  Retrieved from https://ggplot2.tidyverse.org
- Wickham, H. (2019). Stringr: Simple, consistent wrappers for common string operations.

  Retrieved from https://CRAN.R-project.org/package=stringr
- Wickham, H. (2021a). Forcats: Tools for working with categorical variables (factors).

  Retrieved from https://CRAN.R-project.org/package=forcats
- Wickham, H. (2021b). *Tidyr: Tidy messy data*. Retrieved from https://CRAN.R-project.org/package=tidyr
- Wickham, H., Averick, M., Bryan, J., Chang, W., McGowan, L. D., François, R., . . . Yutani,
  H. (2019). Welcome to the tidyverse. *Journal of Open Source Software*, 4(43), 1686.
  https://doi.org/10.21105/joss.01686
- Wickham, H., François, R., Henry, L., & Müller, K. (2021). Dplyr: A grammar of data manipulation. Retrieved from https://CRAN.R-project.org/package=dplyr
- Wickham, H., & Hester, J. (2021). Readr: Read rectangular text data. Retrieved from https://CRAN.R-project.org/package=readr