

# ERP Data Architecture Technical Documentation

Sazerac Company · VMI & Inventory Planning

Version 1.0 · May 2026

## SQL Server Endpoint

\_\_\_\_\_

Database: XXXXXXXXXX

# 1. Purpose & Scope

---

This document describes the data objects, source systems, integration flows and view logic that make up the ERP data architecture accessible via the Fabric SQL endpoint. It is intended as a technical reference for developers and analysts building on or querying this environment and is structured to be readable by both humans and AI tools operating in this project context.

The document covers: external source systems that feed the database, the integration and staging layer that moves data between systems, the core fact and master data tables and the six analytical views derived from those tables. For each object the document describes its purpose, grain, row counts, key columns and how it joins to other objects.

**What this document does not cover:** downstream pipeline automation, planning tool configuration, or any business process outside of data architecture.

## 2. System Landscape

---

### 2.1 Two ERP Tracks: Open State and Bailment

Sazerac operates two parallel ERP environments that reflect distinct regulatory models for spirit distribution in the United States.

**Open State (Oracle Cloud SCM):** In open states, Sazerac sells directly to licensed distributors. Oracle Cloud SCM manages the Open State order and inventory lifecycle. Ownership of product transfers at the shipping dock.

**Bailment / Control State (System21):** In control states, product is held in state-owned or state-controlled warehouses. Sazerac retains ownership until a consumer purchases from a retail outlet. System21 (SYS21) is the ERP for this environment and is more heavily regulated.

Both tracks feed into the ERP database via separate pipelines, but share common master data objects — primarily ItemMaster and CustomerMaster — maintained by Informatica MDM.

### 2.2 Informatica MDM as the Master Data Hub

Informatica MDM is the system of record for all BuyList, Item and Customer master data. It receives feeds from Oracle Cloud SCM, System21 and secondary sources (SouthTrade, JDPL\_EBA and OneStream), consolidates them, applies governance rules, and publishes the authoritative record to the ERP database.

MDM uses `HUB_STATE_IND` as its soft-delete flag. A value of `-1` indicates a record has been deactivated or deleted in MDM. This is relevant to BuyList view selection and is discussed in Section 6.0.

### 2.3 Oracle Integration Cloud (OIC)

OIC is the middleware layer between System21 and Oracle Cloud SCM. All `SAZ_` prefixed staging tables in the ERP database are OIC-managed. They carry an `OIC_INSTANCE_ID` column and represent event streams — inventory transactions, ship confirmations and receipt confirmations — flowing bidirectionally between the two ERP systems.

### 2.4 Atlas Planning Software

Atlas is a third-party demand and inventory planning platform. The VMI team provides Atlas with a daily inventory upload. Atlas processes this data and writes planning outputs — forecasts, replenishment parameters, VMI flags — back to two tables in the ERP database: `tbl_demand_master` and `tbl_supply_master`. These tables are queryable via SQL and contain the same field names used within the Atlas user interface.

## 3. External Source Systems

---

### 3.1 Informatica MDM

| Attribute          | Value                                                                                                               |
|--------------------|---------------------------------------------------------------------------------------------------------------------|
| Role               | Master Data Hub — primary governing source for BuyList, Item and Customer data                                      |
| Feeds into         | ItemMaster (97K of 112K records), CustomerMaster, BuyList staging tables, MDM direct tables                         |
| Integration method | Publishes event streams to SAZ_* staging tables via OIC; also populates MDM direct tables (dbo_X_PKG_MDM_BUYLIST_*) |
| Key identifier     | ROWID_OBJECT (MDM surrogate key), HUB_STATE_IND (deletion flag: -1 = deleted, 1 = active)                           |

## 3.2 Oracle Cloud SCM

| Attribute          | Value                                                                                                                       |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Role               | Open State ERP — source for item attributes, org structure, open orders and subinventory mapping                            |
| Feeds into         | Informatica MDM (via OracleCommonItemExtract batch files, 426K rows), vw_Orders_Base, vw_SubInventoryMapping                |
| Integration method | Daily batch export to OracleCommonItemExtract and 9 supporting Oracle SCM extract tables; does NOT feed ItemMaster directly |
| Note               | Oracle Cloud SCM data reaches ItemMaster only after processing through Informatica MDM                                      |

## 3.3 System21 (SYS21)

| Attribute          | Value                                                                                                                        |
|--------------------|------------------------------------------------------------------------------------------------------------------------------|
| Role               | Bailment ERP — source for Bailment inventory, open orders, ship confirmations and item planning data                         |
| Feeds into         | ItemMaster (10K records via Informatica), S21_InventoryBalance, SYS21_InventoryBalance, SYS21_OpenOrders, PIMPlanningDetails |
| Integration method | Direct feed to SYS21/S21 operational tables; event streams to Oracle via OIC for cross-system transactions                   |
| Key identifiers    | COMPANY (e.g. CD, SA) + STOCKROOM code; raw codes translated to OrgCode via vw_SubInventoryMapping                           |

## 3.4 Oracle Integration Cloud (OIC)

| Attribute  | Value                                                                                                           |
|------------|-----------------------------------------------------------------------------------------------------------------|
| Role       | Middleware layer managing all data flows between System21 and Oracle Cloud SCM                                  |
| Feeds into | All SAZ_* staging tables (11 tables covering inventory transactions, ship confirmations, receipt confirmations) |
| Identifier | OIC_INSTANCE_ID column present on all SAZ_* staging tables                                                      |

## 3.5 Atlas Planning Software

| Attribute  | Value                                                                                                                              |
|------------|------------------------------------------------------------------------------------------------------------------------------------|
| Role       | Third-party demand and supply planning platform; receives daily VMI inventory upload from the planning team                        |
| Feeds into | tbl_demand_master (27.6M rows), tbl_supply_master (29.2M rows) — Atlas writes planning outputs back to these SQL tables            |
| Note       | Column names in these tables match Atlas field names exactly, enabling SQL-based analysis of planning data without Atlas UI access |

## 3.6 Secondary Sources

| Source         | Role                                               | Feeds into                       |
|----------------|----------------------------------------------------|----------------------------------|
| SouthTrade     | International distribution partner                 | ItemMaster (via Informatica MDM) |
| JDPL_EBA       | External buying entity                             | ItemMaster (via Informatica MDM) |
| OneStream      | Financial planning system                          | ItemMaster (via Informatica MDM) |
| Brand Managers | Manual SKU transition requests via web application | BuylistTransitionWebApp table    |

## 4. Integration & Staging Layer

### 4.1 BuyList Staging Tables

Three OIC-managed tables capture every BuyList change event published by Informatica MDM. They represent the ordered audit trail from which the BuyList fact tables are built.

| Table                                         | Rows | Purpose                                                                                    |
|-----------------------------------------------|------|--------------------------------------------------------------------------------------------|
| SAZ_BUYLIST_TO_ITEM_STAGING_TBL               | 9.9M | BuyList item change events — ordered by LAST_UPDATE_DATE. Source for Buylist_Item via ETL. |
| SAZ_BUYLIST_HEADER_STAGING_TBL                | —    | BuyList header change events. Source for Buylist_Header.                                   |
| SAZ_CUSTOMER_BUYLIST_RELATIONSHIP_STAGING_TBL | —    | Customer-to-BuyList relationship events. Source for Buylist_Customer.                      |

### 4.2 MDM Direct Tables

Four tables populated directly by Informatica MDM, bypassing the staging ETL pipeline. These are the source tables for `vw_BuyList_DetailInfo_MDM` and are filtered using `HUB_STATE_IND != -1` to exclude soft-deleted records.

| Table                        | Rows       | Notes                                                                                          |
|------------------------------|------------|------------------------------------------------------------------------------------------------|
| dbo_X_PKG_MDM_BUYLIST_ITEM   | 391K total | Core MDM BuyList items. HUB_STATE_IND: 1=active (386K), -1=deleted (4.7K). ROWID_OBJECT is PK. |
| dbo_X_PKG_MDM_BUYLIST_HEADER | —          | MDM BuyList headers. ROWID_OBJECT joins to item table via X_BUY_LIST_FK.                       |

| Table                          | Rows | Notes                                                                                              |
|--------------------------------|------|----------------------------------------------------------------------------------------------------|
| dbo_X_PKG_MDM_BUYLIST_CUSTOMER | —    | MDM BuyList customer relationships. X_BL_HEADER_FK joins to header.                                |
| dbo_X_PKG_MDM_BUYLIST_AM_ITEM  | 390K | Active Management layer. Contains X_SUPERSEDES and X_SUPERSEDED_BY fields for transition tracking. |

### 4.3 Oracle SCM Extract Tables

Nine tables populated by Oracle Cloud SCM daily batch exports. [OracleCommonItemExtract](#) (426K rows) is the primary item extract that feeds into Informatica MDM for ItemMaster population. Supporting tables cover trading partner items, pricing, locations, org parameters and subinventory details.

### 4.4 OIC Integration Tables

Eleven SAZ\_ prefixed tables managed by OIC, covering bidirectional transactions between SYS21 and Oracle Cloud SCM.

| Table Group                                                    | Rows       | Direction                                                                                 |
|----------------------------------------------------------------|------------|-------------------------------------------------------------------------------------------|
| SAZ_BAILMENT_DIRECT_INVENTORY_TBL                              | 1.5M       | SYS21 → Oracle — bailment inventory consumption events (INVEQTY, OBO classes)             |
| SAZ_INV_TRANSACTIONS_HEADER (Cloud + Legacy)                   | 7.6M total | SYS21 → Oracle — inventory transaction confirmations (Cloud: current, Legacy: historical) |
| SAZ_SYS21_SHIPCONF_H1 / D2 / D3                                | 220K (H1)  | SYS21 → Oracle — ASN ship confirmations. D2 (line) and D3 (lot) currently empty.          |
| SAZ_SYS21_RECEIPT_CONF (Header + Lines + Lots, Cloud + Legacy) | ~2.2M      | Oracle → SYS21 — receipt confirmations. Six-table set spanning cloud and legacy eras.     |

## 5. Core Fact Tables

### 5.1 Buylist\_Item

| Attribute   | Value                                          |
|-------------|------------------------------------------------|
| Rows        | 535K                                           |
| Grain       | One row per BuyList + Item combination         |
| Source      | SAZ_BUYLIST_TO_ITEM_STAGING_TBL → ETL pipeline |
| Primary key | BUYLISTKEY (joins to Buylist_Header)           |
| Foreign key | ITEMKEY (joins to ItemMaster)                  |

| Column Name                      | Data Type | Description / Notes                        |
|----------------------------------|-----------|--------------------------------------------|
| <a href="#">COMPANY_CODE</a>     | varchar   | Company identifier (e.g. SA = Sazerac)     |
| <a href="#">BUYING_LIST_CODE</a> | varchar   | BuyList code — natural business identifier |
| <a href="#">ITEM_CODE</a>        | varchar   | Item/SKU code                              |

| Column Name              | Data Type | Description / Notes                                                           |
|--------------------------|-----------|-------------------------------------------------------------------------------|
| STATUS                   | varchar   | A = Active · D = Deactivated · maps to BuylistItemStatus in views             |
| ORDER_TYPE               | varchar   | L = standard · B = Blocked · Z = Excluded from ordering                       |
| CUSTOMER_CROSS_REFERENCE | varchar   | Distributor-specific item reference (maps to CustomerCrossReference in views) |
| SHIP_POINT1              | varchar   | Primary ship point code                                                       |
| COMPLIANCE_STATUS        | varchar   | State compliance approval status                                              |
| START_DATE / END_DATE    | varchar   | BuyList item effective date range                                             |
| BUYLISTKEY               | varchar   | Surrogate join key to Buylist_Header. Format: COMPANY_CODE + BUYING_LIST_CODE |
| ITEMKEY                  | varchar   | Surrogate join key to ItemMaster. Format: COMPANY_CODE + ITEM_CODE            |

## 5.2 Buylist\_Header

| Attribute     | Value                                         |
|---------------|-----------------------------------------------|
| Rows          | 2,123                                         |
| Grain         | One row per BuyList                           |
| Source        | SAZ_BUYLIST_HEADER_STAGING_TBL → ETL pipeline |
| Primary key   | BUYLISTKEY                                    |
| Status filter | STATUS = 1 for active headers                 |

| Column Name           | Data Type | Description / Notes                                                               |
|-----------------------|-----------|-----------------------------------------------------------------------------------|
| BUYLISTKEY            | varchar   | Surrogate primary key — used for all joins from Buylist_Item and Buylist_Customer |
| BUYING_LIST_CODE      | varchar   | Natural business BuyList identifier                                               |
| COMPANY_CODE          | varchar   | Company identifier                                                                |
| STATUS                | varchar   | 1 = Active. Views typically filter STATUS = 1.                                    |
| BuylistHeaderFromDate | varchar   | Effective from date for this BuyList                                              |
| BuylistToDate         | varchar   | Effective to date for this BuyList                                                |

## 5.3 Buylist\_Customer

| Attribute | Value                                                        |
|-----------|--------------------------------------------------------------|
| Rows      | 3,948                                                        |
| Grain     | One row per BuyList + Customer combination                   |
| Source    | SAZ_CUSTOMER_BUYLIST_RELATIONSHIP_STAGING_TBL → ETL pipeline |
| Join keys | BUYLISTKEY → Buylist_Header · CUSTOMERKEY → CustomerMaster   |

| Attribute | Value                                                                                                   |
|-----------|---------------------------------------------------------------------------------------------------------|
| Note      | One BuyList can have multiple customers. This is the source of row fan-out in the BuyList detail views. |

## 5.4 BuylistTransitionWebApp

| Attribute     | Value                                                                                                                   |
|---------------|-------------------------------------------------------------------------------------------------------------------------|
| Rows          | 2,140                                                                                                                   |
| Grain         | One row per manual SKU transition request                                                                               |
| Source        | Brand manager entries via web application — manual input since 2016                                                     |
| Status filter | BLAStatus IN ('Published', 'Submit')                                                                                    |
| Usage         | Source for vw_SKUTransition_ManualAdditon (filtered EffectiveDate >= 2025) and MTSKU CTE in vw_SKUTransition_OpenOrders |

| Column Name    | Data Type | Description / Notes                                                  |
|----------------|-----------|----------------------------------------------------------------------|
| OldProductIdNo | varchar   | Old SKU being transitioned from — joins to ItemMaster.SKU via TRIM() |
| NewProductIdNo | varchar   | New SKU being transitioned to — joins to ItemMaster.SKU via TRIM()   |
| EffectiveDate  | datetime  | Date the transition takes effect                                     |
| BLAStatus      | varchar   | Published / Submit = active requests used in views                   |
| RequestedBy    | varchar   | Brand manager who submitted the request                              |
| Comments       | varchar   | Free-text transition notes                                           |

## 5.5 ItemMaster

| Attribute           | Value                                                                                             |
|---------------------|---------------------------------------------------------------------------------------------------|
| Rows                | 112K                                                                                              |
| Grain               | One row per Company + SKU combination                                                             |
| Sources             | Informatica MDM (97K primary) · System21 (10K) · SouthTrade / JDPL_EBA / OneStream (~5K combined) |
| Source confirmation | SourceSystemName column identifies the contributing system per record                             |
| Self-join field     | TransitionSKU — references another SKU in the same CompanyCode; used by all SKUTransition views   |

| Column Name    | Data Type | Description / Notes                                      |
|----------------|-----------|----------------------------------------------------------|
| SKU            | varchar   | Primary item identifier. Joins to Buylist_Item.ITEM_CODE |
| CompanyCode    | varchar   | Company identifier — used in all cross-table joins       |
| SKUDescription | varchar   | Full item description                                    |

| Column Name      | Data Type | Description / Notes                                                                                                           |
|------------------|-----------|-------------------------------------------------------------------------------------------------------------------------------|
| ItemType         | varchar   | Finished Goods / Raw Material etc — views typically filter ItemType = Finished Goods                                          |
| StatusFlag       | varchar   | Item status: 2=Active · 4=Active · 5=Active · 8=Active · others=inactive. Views use StatusFlag IN (2,4,5,8) for active items. |
| TransitionSKU    | varchar   | Points to the replacement SKU (same CompanyCode). Used as self-join key in all SKU transition views.                          |
| SourceSystemName | varchar   | Identifies the upstream system that contributed this record to Informatica MDM                                                |
| BottlesPerCase   | int       | Used in inventory CTE calculations to convert bottle quantities to case quantities                                            |
| LocalSKU         | varchar   | State/distributor-specific local item reference                                                                               |

## 5.6 CustomerMaster

| Attribute   | Value                                                                                    |
|-------------|------------------------------------------------------------------------------------------|
| Rows        | 37K                                                                                      |
| Grain       | One row per Customer + DeliveryAddressCode combination                                   |
| Source      | Informatica MDM pipeline (confirmed) — SourceSystemName column not present on this table |
| Natural key | ERPCustomerNumber + DeliveryAddressCode                                                  |
| Primary key | CustomerKey (surrogate)                                                                  |

| Column Name                     | Data Type | Description / Notes                                                            |
|---------------------------------|-----------|--------------------------------------------------------------------------------|
| CustomerKey                     | varchar   | Surrogate primary key — used for all joins from Buylist_Customer               |
| ERPCustomerNumber               | varchar   | Natural customer identifier from ERP                                           |
| DeliveryAddressCode             | varchar   | Delivery location — combined with ERPCustomerNumber as natural key             |
| CustomerName / CustomerFullName | varchar   | Customer display names                                                         |
| VMIIndicator                    | varchar   | Y = this customer is on VMI program. Used as a filter in BuyList view queries. |
| CustomerStatus                  | varchar   | Active/inactive status of the customer record                                  |

## 5.7 S21\_InventoryBalance

| Attribute       | Value                                                                                                          |
|-----------------|----------------------------------------------------------------------------------------------------------------|
| Rows            | 432K                                                                                                           |
| Grain           | One row per Company + OrgCode + SKU                                                                            |
| Source          | System21 (SYS21) direct feed                                                                                   |
| Key distinction | Pre-translated: OrgCode and OrganizationName already resolved via vw_SubInventoryMapping. No lot-level detail. |



| Attribute   | Value                                                                                                  |
|-------------|--------------------------------------------------------------------------------------------------------|
| When to use | General inventory queries and SKU transition views. Use when lot detail or cost data are not required. |

| Column Name      | Data Type | Description / Notes                                                     |
|------------------|-----------|-------------------------------------------------------------------------|
| Company          | varchar   | Company identifier                                                      |
| OrgCode          | varchar   | Oracle organization code — already translated from SYS21 stockroom code |
| OrganizationName | varchar   | Human-readable organization name — pre-resolved                         |
| SKU              | varchar   | Item identifier — joins to ItemMaster.SKU                               |
| UOM              | varchar   | Unit of measure (CS = Case)                                             |
| Quantity         | decimal   | On-hand quantity in stated UOM                                          |

## 5.8 SYS21\_InventoryBalance

| Attribute       | Value                                                                                                                                   |
|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| Rows            | 153K                                                                                                                                    |
| Grain           | One row per Company + Stockroom + SKU + Lot                                                                                             |
| Source          | System21 (SYS21) direct feed                                                                                                            |
| Key distinction | Raw lot-level detail. STOCKROOM uses raw SYS21 codes (not translated). Includes frozen quantity and standard cost.                      |
| When to use     | When lot-level detail, frozen quantity, or cost data are required. Requires joining to vw_SubInventoryMapping for location translation. |

| Column Name              | Data Type | Description / Notes                                                        |
|--------------------------|-----------|----------------------------------------------------------------------------|
| COMPANY                  | varchar   | Company identifier (e.g. CD, SA)                                           |
| STOCKROOM                | varchar   | Raw SYS21 stockroom code — requires vw_SubInventoryMapping for translation |
| SKU                      | varchar   | Item identifier                                                            |
| LOT                      | varchar   | Lot number — lot-controlled inventory                                      |
| UOM                      | varchar   | Unit of measure                                                            |
| QTY                      | decimal   | On-hand quantity                                                           |
| FROZENQTY                | decimal   | Frozen / reserved quantity — not available in S21_InventoryBalance         |
| STANDARDCOSTPERSTOCKUNIT | decimal   | Standard cost per unit — not available in S21_InventoryBalance             |
| FILESOURCE               | varchar   | SYS21 file/transaction source code (e.g. INP60)                            |

## 5.9 SYS21\_OpenOrders

| Attribute | Value                                                                                                                                            |
|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| Rows      | 53K                                                                                                                                              |
| Grain     | One row per Order + Line + SKU + Customer                                                                                                        |
| Source    | System21 (SYS21) direct feed                                                                                                                     |
| Scope     | Bailment / Control State open orders only                                                                                                        |
| Usage     | Base source for S21Orders CTE in vw_SKUTransition_OpenOrders. Deduplication logic in that view prevents double-counting with Oracle open orders. |

## 5.10 PIMPlanningDetails

| Attribute  | Value                                                                                                |
|------------|------------------------------------------------------------------------------------------------------|
| Rows       | 158K                                                                                                 |
| Grain      | One row per ItemNumber + Company + Stockroom                                                         |
| Source     | System21 (SYS21) direct feed                                                                         |
| Key filter | PrimaryPlantCheckmark = Y — used in views to return one planning record per item (the primary plant) |
| Usage      | IPlanner CTE in vw_SKUTransition_OpenOrders to surface planner assignments per SKU                   |

| Column Name           | Data Type | Description / Notes                                                                           |
|-----------------------|-----------|-----------------------------------------------------------------------------------------------|
| ItemNumber            | varchar   | Joins to ItemMaster.SKU                                                                       |
| InventoryCompany      | varchar   | Company code — joins to ItemMaster.CompanyCode                                                |
| Stockroom             | varchar   | SYS21 stockroom code                                                                          |
| PrimaryPlantCheckmark | varchar   | Y = primary planning location for this item. Filter used in views to get one record per item. |
| Planner               | varchar   | Assigned inventory planner name                                                               |
| OrderPolicy           | varchar   | Replenishment order policy                                                                    |
| SafetyStock           | decimal   | Safety stock quantity                                                                         |

## 5.11 tbl\_demand\_master

| Attribute | Value                                                                                                                                    |
|-----------|------------------------------------------------------------------------------------------------------------------------------------------|
| Rows      | 27.6M                                                                                                                                    |
| Grain     | One row per planning period + Customer + Product combination                                                                             |
| Source    | Atlas Planning Software — written back after processing the daily VMI upload                                                             |
| Note      | Column names match Atlas field names exactly. Start Date (YYYY-MM) column is not populated; use SystemCreationDate for freshness checks. |

| Column Name        | Data Type | Description / Notes                         |
|--------------------|-----------|---------------------------------------------|
| Dpl_Customer (key) | varchar   | Atlas customer key — distributor identifier |

| Column Name        | Data Type | Description / Notes                                      |
|--------------------|-----------|----------------------------------------------------------|
| Product            | varchar   | CATN32 / SKU identifier — joins to ItemMaster            |
| Final Fcst         | decimal   | Final forecast quantity output by Atlas                  |
| VMI Planner Ovr    | varchar   | VMI planner override assignment                          |
| Buy List Status    | varchar   | BuyList status as visible in Atlas                       |
| VMI Customer (Y/N) | varchar   | Y = this demand record relates to a VMI-managed customer |

## 5.12 tbl\_supply\_master

| Attribute | Value                                                                                        |
|-----------|----------------------------------------------------------------------------------------------|
| Rows      | 29.2M                                                                                        |
| Grain     | One row per planning period + Company + ShipPoint + Product                                  |
| Source    | Atlas Planning Software — written back after processing the daily VMI upload                 |
| Usage     | Paired with tbl_demand_master for supply-demand analysis. Contains replenishment parameters. |

| Column Name         | Data Type | Description / Notes                                          |
|---------------------|-----------|--------------------------------------------------------------|
| CompanyCode-ShipPt  | varchar   | Combined company and ship point identifier                   |
| VMI Replenish Flag  | varchar   | Indicates whether Atlas is actively replenishing this record |
| VMI Buy List Status | varchar   | BuyList status from supply perspective                       |
| Organization        | varchar   | Planning organization                                        |

## 5.13 SKUTransition\_OpenOrders

| Attribute | Value                                                                                             |
|-----------|---------------------------------------------------------------------------------------------------|
| Rows      | 46K                                                                                               |
| Grain     | Matches vw_SKUTransition_OpenOrders exactly                                                       |
| Source    | Pre-computed snapshot of vw_SKUTransition_OpenOrders — periodically refreshed                     |
| Purpose   | Query performance alternative to the live view, which involves multiple complex CTEs              |
| Note      | Schema matches vw_SKUTransition_OpenOrders exactly. See Section 6.6 for full field documentation. |

# 6. Views

### ERD Source Files

High-resolution versions of all six lineage diagrams are available as standalone PNG files at the following location:

[Click Here for ERD High Solution Images](#)

Files are named 01 through 06 corresponding to Figures 6.1–6.6 in this document. Access requires a Sazerac Company OneDrive account.

## 6.0 BuyList Detail Views — Understanding the Difference

Two views serve the same general purpose — providing a denormalized, query-ready view of active BuyList data — but they read from different layers of the architecture. This section documents the structural difference and the data validation performed to characterize it.

### Source Layer

|                                                    | vw_BuyList_DetailInfo                                                      | vw_BuyList_DetailInfo_MDM                                                      |
|----------------------------------------------------|----------------------------------------------------------------------------|--------------------------------------------------------------------------------|
| Reads from                                         | Buylist_Item, Buylist_Header, Buylist_Customer (ETL-processed fact tables) | dbo_X_PKG_MDM_BUYLIST_* tables (MDM direct)                                    |
| Deletion filtering                                 | None — depends on ETL correctly propagating deactivations from MDM         | HUB_STATE_IND != -1 — excludes records MDM has marked as deleted at the source |
| Total rows                                         | 942K                                                                       | 665K                                                                           |
| SA + Active rows (confirmed)                       | 593,400                                                                    | 665,816                                                                        |
| Known issues                                       | None at this filter level                                                  | Duplicate rows present — see notes below                                       |
| Distinct BuyList+Item combos SA+Active (confirmed) | 226,219                                                                    | 225,434                                                                        |

### What the Data Shows

The two views differ by 72,416 rows when filtered to Company=SA and Status=Active. SQL validation confirmed this gap is driven by different customer join behavior — the MDM view connects to more customers per BuyList+Item combination — not by a difference in BuyList+Item coverage. Distinct BuyList+Item combinations differ by only 785 records (< 0.35%).

The 785 extra combinations in the fact table path that are not in the MDM active set are records that exist in Buylist\_Item as active but carry HUB\_STATE\_IND = -1 in the MDM source — meaning MDM has marked them deleted. The MDM direct view correctly excludes these.

The MDM table (dbo\_X\_PKG\_MDM\_BUYLIST\_ITEM) contains 4,728 records with HUB\_STATE\_IND = -1, of which approximately 785 intersect the SA + Active scope.

### Which View to Use

Both views are structurally valid for most use cases. The choice depends on the tolerance for the 785-record discrepancy:

- vw\_BuyList\_DetailInfo is the view currently in use across the team and is appropriate for the majority of operational queries.
- vw\_BuyList\_DetailInfo\_MDM applies source-level deletion filtering and excludes the ~785 records that MDM has marked as deleted. It is the appropriate choice when strict alignment to MDM's active record set is required. Note: this view requires an additional filter of HeaderCompanyStatus = 'A' to exclude inactive header-company relationships — without it, duplicate rows are produced. After applying that filter, 979 residual duplicate rows remain due to ship point sub-table fan-out in the MDM join; apply SELECT DISTINCT on required columns if a clean grain is needed.

## 6.1 vw\_BuyList\_DetailInfo

| Attribute        | Value                                                                                                                                                                     |
|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Total rows       | 942K                                                                                                                                                                      |
| Grain            | BuyListCode + ItemCode + Customer + DeliveryAddressCode                                                                                                                   |
| Column count     | 193                                                                                                                                                                       |
| Source path      | SAZ_BUYLIST_*_STAGING_TBL → ETL → Buylist_Item / Header / Customer + ItemMaster + CustomerMaster                                                                          |
| Row count note   | Row count exceeds Buylist_Item (535K) because Buylist_Customer fans out one row per customer per BuyList. One BuyList with 3 delivery customers produces 3 rows per item. |
| BuyListDetailKey | Computed field: CONCAT(ItemCode, Customer, Company, DeliveryAddressCode, ShipPoint1). Used to join with vw_Orders_Base.                                                   |


Figure 6.1 — vw\_BuyList\_DetailInfo Source Lineage



## 6.2 vw\_BuyList\_DetailInfo\_MDM

| Attribute       | Value                                                                                         |
|-----------------|-----------------------------------------------------------------------------------------------|
| Total rows      | 665K                                                                                          |
| Grain           | BuyListCode + ItemCode + Customer + DeliveryAddressCode                                       |
| Source path     | dbo_X_PKG_MDM_BUYLIST_* (MDM direct) + ItemMaster + CustomerMaster                            |
| Deletion filter | HUB_STATE_IND != -1 applied to dbo_X_PKG_MDM_BUYLIST_ITEM — excludes MDM soft-deleted records |
| MDM join keys   | ITEM: X_BUY_LIST_FK → HEADER: ROWID_OBJECT · CUSTOMER: X_BL_HEADER_FK → HEADER: ROWID_OBJECT  |

Figure 6.2 — vw\_BuyList\_DetailInfo\_MDM Source Lineage

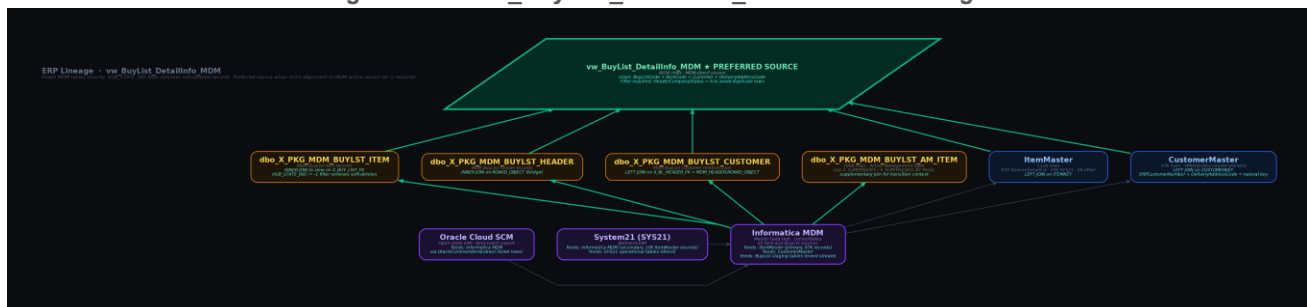

## 6.3 vw\_SKUTransition\_BuyList

| Attribute            | Value                                                                                                                      |
|----------------------|----------------------------------------------------------------------------------------------------------------------------|
| Rows                 | 19,838                                                                                                                     |
| Purpose              | Gap analysis — identifies BuyLists where the original SKU exists but the replacement transition SKU has not yet been added |
| Grain                | CompanyCode + Original SKU + BuyListCode                                                                                   |
| Header filter        | STATUS = 1 (active BuyList headers only) via BL360 CTE                                                                     |
| ItemMaster self-join | IM_O.TransitionSKU = IM_T.SKU (same CompanyCode) — TSKU CTE. Filters IM_T to StatusFlag IN (2,4,5,8).                      |
| Inventory CTE        | S21_InventoryBalance joined for on-hand quantity for both old and new SKU                                                  |


Figure 6.3 — vw\_SKUTransition\_BuyList Source Lineage



## 6.4 vw\_SKUTransition\_Item

| Attribute            | Value                                                                                                                                    |
|----------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| Rows                 | 251                                                                                                                                      |
| Purpose              | Identifies items where a TransitionSKU is defined but the new SKU is not yet active — no BuyList or order context                        |
| Grain                | CompanyCode + Original SKU + Transition SKU                                                                                              |
| ItemMaster self-join | IM_O.TransitionSKU = IM_T.SKU. IM_T filtered: StatusFlag NOT IN (2,4,5,8) AND TransitionSKU must be empty (end-of-chain only).           |
| Inventory            | S21_InventoryBalance joined twice — once for old SKU, once for new SKU. Joins ItemMaster for BottlesPerCase to convert to case quantity. |


Figure 6.4 — vw\_SKUTransition\_Item Source Lineage

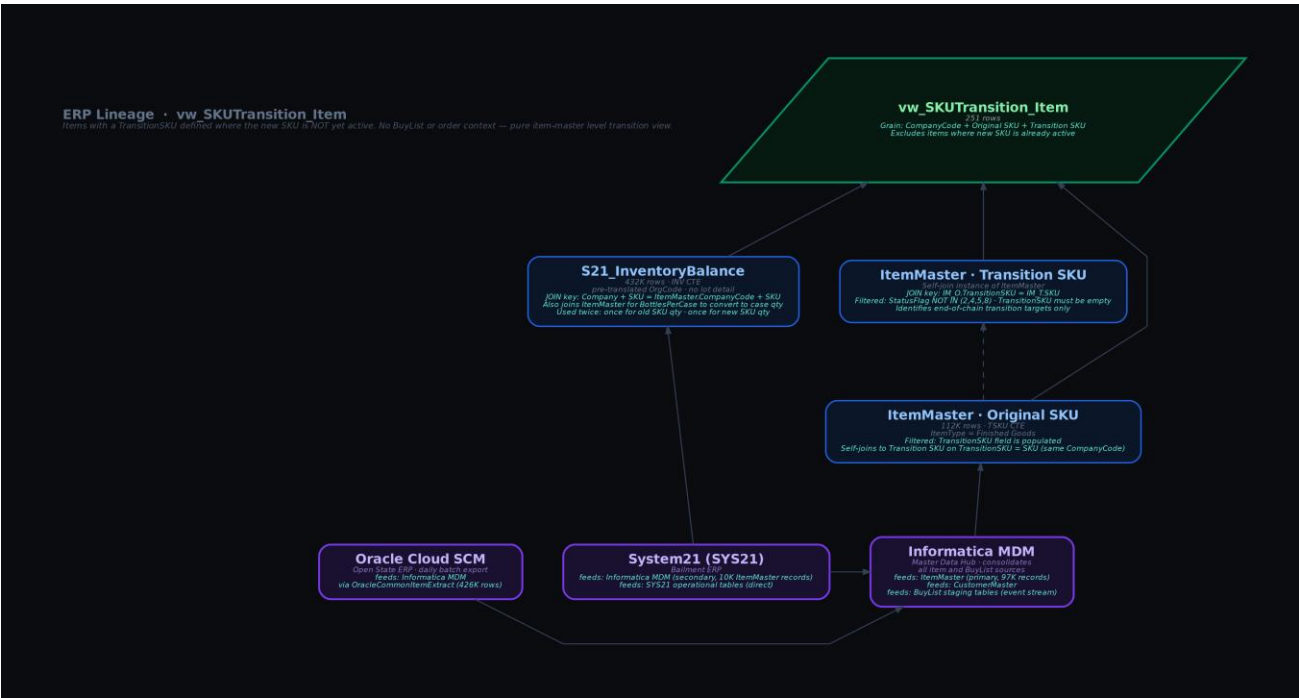

### 6.5 vw\_SKUTransition\_ManualAdditon

| Attribute        | Value                                                                                                                                              |
|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| Rows             | 11                                                                                                                                                 |
| Purpose          | Manual SKU transitions submitted by brand managers via web application, filtered to EffectiveDate >= 2025                                          |
| Source           | BuylistTransitionWebApp (base) joined to ItemMaster twice — once for old SKU, once for new SKU                                                     |
| ItemMaster joins | INNER JOIN on TRIM(OldProductIdNo) = SKU and TRIM(NewProductIdNo) = SKU. Both must share same CompanyCode.                                         |
| Database note    | "Additon" in the object name is a typo in the database — preserved here as-is to match the actual object name                                      |
| Coverage note    | Only 11 rows as of documentation date. Full BuylistTransitionWebApp history has 2,140 entries; the >= 2025 filter isolates recent manual requests. |

Figure 6.5 — vw\_SKUTransition\_ManualAdditon Source Lineage

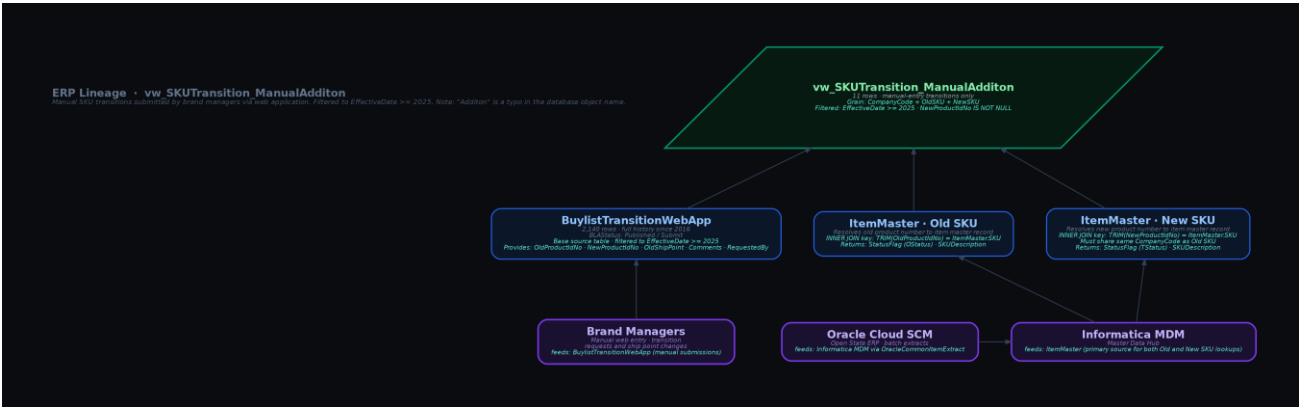


## 6.6 vw\_SKUTransition\_OpenOrders

| Attribute | Value                                                                                                                                                                           |
|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Rows      | 52,520                                                                                                                                                                          |
| Purpose   | Comprehensive transition + open order view. Combines SYS21 and Oracle open orders with transition SKU context, BuyList setup status, location inventory and planner assignment. |
| Grain     | Order + Line + SKU + Customer (both SYS21 and Oracle orders)                                                                                                                    |
| Snapshot  | SKUTransition_OpenOrders (46K rows) is a pre-computed snapshot of this view — use for performance-sensitive queries                                                             |

| CTE Name  | Source                                            | Purpose                                               |
|-----------|---------------------------------------------------|-------------------------------------------------------|
| S21Orders | SYS21_OpenOrders                                  | SYS21 Bailment open orders                            |
| OOrders   | vw_Orders_Base                                    | Oracle open orders not already in S21Orders           |
| TSKU      | ItemMaster (self-join)                            | Identifies items with TransitionSKU populated         |
| MTSKU     | BuylistTransitionWebApp + ItemMaster              | Manual transitions (EffectiveDate >= 2025)            |
| BL360     | Buylist_Item + Header + Customer + CustomerMaster | BuyList setup check for old and new SKU per customer  |
| INV       | SYS21_InventoryBalance + vw_SubInventoryMapping   | On-hand qty at location and network level             |
| IPlanner  | PIMPlanningDetails                                | Planner assignment — PrimaryPlantCheckmark = Y filter |

Figure 6.6 — vw\_SKUTransition\_OpenOrders Source Lineage

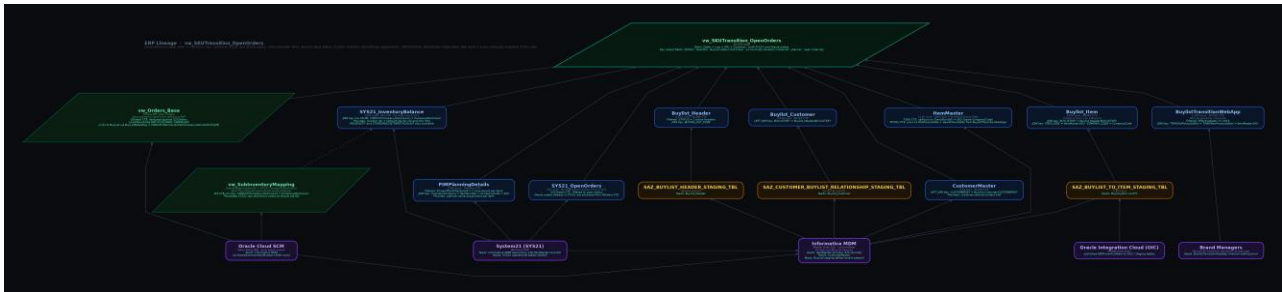

## 7. Supporting Views

### 7.1 vw\_Orders\_Base

Oracle ERP open order view covering Open State orders. Filters to active lines (LineStatusCode NOT IN CLOSED, CANCELED). Joins to the BuyList layer via a computed key:

`BuyListDetailKey = CONCAT(ItemCode, Customer, Company, DeliveryAddressCode, ShipPoint1)`

This key structure matches the BuyListDetailKey column in both BuyList detail views, enabling order-to-BuyList joins. Used as the OOrders CTE source in vw\_SKUTransition\_OpenOrders.

### 7.2 vw\_SubInventoryMapping



Translates between Oracle OrganizationID and System21 CompanyStockroom codes. Built from OracleCustomSubInventoryDetails and OracleCommonLookupValues.

This view is what allows S21\_InventoryBalance to present pre-translated OrgCode values instead of raw SYS21 stockroom codes. It is also used directly in the INV CTE of vw\_SKUTransition\_OpenOrders when joining SYS21\_InventoryBalance.

Join key: `CONCAT(Company, Stockroom) = CompanyStockroom`

## 8. Key Join Relationships

All joins below are confirmed through view definition inspection and data validation.

| From Object            | To Object              | Join Type  | Key Columns                                                                            |
|------------------------|------------------------|------------|----------------------------------------------------------------------------------------|
| Buylist_Item           | Buylist_Header         | INNER JOIN | BUYLISTKEY = BUYLISTKEY                                                                |
| Buylist_Item           | ItemMaster             | LEFT JOIN  | ITEMKEY = ItemKey                                                                      |
| Buylist_Customer       | Buylist_Header         | JOIN       | BUYLISTKEY = BUYLISTKEY                                                                |
| Buylist_Customer       | CustomerMaster         | LEFT JOIN  | CUSTOMERKEY = CustomerKey                                                              |
| MDM_BUYLIST_ITEM       | MDM_BUYLIST_HEADER     | INNER JOIN | X_BUY_LIST_FK = ROWID_OBJECT                                                           |
| MDM_BUYLIST_CUSTOMER   | MDM_BUYLIST_HEADER     | LEFT JOIN  | X_BL_HEADER_FK = ROWID_OBJECT                                                          |
| S21_InventoryBalance   | ItemMaster             | JOIN       | Company + SKU = CompanyCode + SKU                                                      |
| SYS21_InventoryBalance | vw_SubInventoryMapping | JOIN       | CONCAT(Company, Stockroom) = CompanyStockroom                                          |
| ItemMaster             | ItemMaster (self)      | JOIN       | TransitionSKU = SKU (same CompanyCode)                                                 |
| vw_Orders_Base         | vw_BuyList_DetailInfo  | JOIN       | BuyListDetailKey =<br>CONCAT(ItemCode, Customer,<br>Company, DeliveryAddr, ShipPoint1) |
| PIMPlanningDetails     | ItemMaster             | JOIN       | InventoryCompany + ItemNumber =<br>CompanyCode + SKU<br>(PrimaryPlantCheckmark = Y)    |
| vw_SubInventoryMapping | SYS21_InventoryBalance | JOIN       | CompanyStockroom =<br>CONCAT(Company, Stockroom)                                       |