


get_applicable_candidates

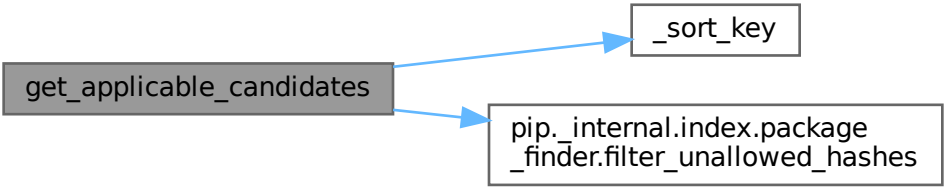

```
graph LR; A[get_applicable_candidates] --> B[_sort_key]; A --> C["pip._internal.index.package_finder.filter_unallowed_hashes"]
```

The diagram illustrates the dependencies of the `get_applicable_candidates` function. It is represented by a grey rectangular box on the left. Two blue arrows originate from the right side of this box. The upper arrow points to a white rectangular box containing the text `_sort_key`. The lower arrow points to a larger white rectangular box containing the text `pip._internal.index.package_finder.filter_unallowed_hashes`.

_sort_key

pip._internal.index.package
finder.filter_unallowed_hashes