


`pip._internal.utils.logging.
RichPipStreamHandler.emit`

`emit`

`render_message`

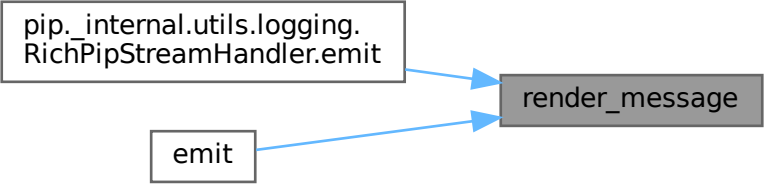

```
graph LR; A["pip._internal.utils.logging.  
RichPipStreamHandler.emit"] --> C[render_message]; B[emit] --> C;
```

The diagram illustrates two function calls to `render_message`. A light gray box on the left contains the full module path `pip._internal.utils.logging.RichPipStreamHandler.emit`. A smaller white box below it contains the method name `emit`. Blue arrows point from both boxes to a dark gray box on the right labeled `render_message`, indicating that both functions call this target.